

Safe Autonomous Lane Changing: Planning with Dynamic Risk Fields and Time-Varying Convex Space Generation

Zhen Tian^{1†}, Zhihao Lin^{1†,§}

Abstract—This paper presents a novel trajectory planning pipeline for complex driving scenarios like autonomous lane changing, by integrating risk-aware planning with guaranteed collision avoidance into a unified optimization framework. We first construct a dynamic risk fields (DRF) that captures both the static and dynamic collision risks from surrounding vehicles. Then, we develop a rigorous strategy for generating time-varying convex feasible spaces that ensure kinematic feasibility and safety requirements. The trajectory planning problem is formulated as a finite-horizon optimal control problem and solved using a constrained iterative Linear Quadratic Regulator (iLQR) algorithm that jointly optimizes trajectory smoothness, control effort, and risk exposure while maintaining strict feasibility. Extensive simulations demonstrate that our method outperforms traditional approaches in terms of safety and efficiency, achieving collision-free trajectories with shorter lane-changing distances (28.59 m) and times (2.84 s) while maintaining smooth and comfortable acceleration patterns. In dense roundabout environments the planner further demonstrates robust adaptability, producing larger safety margins, lower jerk, and superior curvature smoothness compared with APF, MPC, and RRT based baselines. These results confirm that the integrated DRF with convex feasible space and constrained iLQR solver provides a balanced solution for safe, efficient, and comfortable trajectory generation in dynamic and interactive traffic scenarios.

I. Introduction

Autonomous lane changing remains one of the most challenging tasks for autonomous vehicles (AVs), particularly in complex traffic environments where both safety and efficiency must be carefully balanced [1], [2]. The complexity arises from the need to handle multiple types of interactions with surrounding vehicles while ensuring collision-free maneuvers in highly dynamic environments [3]. Successful execution of lane changes requires sophisticated planning that considers not only the geometric constraints of the road but also the kinematic limitations of the vehicle and the uncertain behaviors of surrounding traffic participants [4].

The challenge of autonomous lane changing is further compounded by several critical factors [5]. First, the

continuous interaction with surrounding vehicles requires AVs to make real-time decisions while considering the intentions and behaviors of multiple agents [6]. This involves real-time prediction of surrounding vehicles' trajectories together with risk assessment to ensure safe maneuvers. Second, the dynamic nature of traffic participants introduces uncertainty in predicting future trajectories and interaction patterns [7]. Different driving styles and varying road conditions make it challenging to accurately model and predict vehicle behaviors. Third, the need to balance multiple competing objectives, including safety, efficiency, and comfort, makes the trajectory planning process inherently complex [8]. These objectives often conflict with each other, requiring sophisticated optimization strategies to find suitable trade-offs [9].

Various approaches have been proposed to address the challenges of autonomous lane changing, which can be categorized into: potential field methods, optimization-based methods, and learning-based methods. Each methodology presents unique advantages and limitations in addressing the complex requirements of safe and efficient lane changing.

1) **Potential Field Methods:** Traditional potential field approaches attempt to generate safe trajectories by modeling surrounding vehicles as repulsive forces [10]. These methods construct artificial potential fields where obstacles generate repulsive forces while the target lane creates attractive forces, guiding the vehicle through safe regions [11]. While these methods offer intuitive implementation and computational efficiency, they often struggle to handle complex dynamic scenarios and may suffer from local minima problems [12]. Moreover, they typically lack explicit consideration of vehicle dynamics and kinematic constraints, potentially generating physically infeasible trajectories that cannot be executed by the vehicle's control system [13].

2) **Optimization-based Methods:** Optimization-based planning methods [14] have shown promise in generating smooth and feasible trajectories by explicitly considering vehicle dynamics and various constraints. These approaches typically minimize objective functions that encode desired behaviors while satisfying safety and feasibility constraints [15]. However, these approaches face several limitations: the high computational complexity hinders their applications in dynamic environments, challenges in handling non-convex constraints arising from obstacle

*The authors would like to thank Figdraw (www.figdraw.com) for providing illustration support in creating the system diagrams used in this paper.

¹Zhen Tian, and Zhihao Lin are with the James Watt School of Engineering, University of Glasgow, Glasgow G12 8QQ, United Kingdom.

[†] Equal contribution

[§]Corresponding author: Zhihao Lin (email: 2800400L@student.gla.ac.uk)

avoidance requirements, and difficulty in incorporating dynamic risk assessment hampers their ability to adapt to changing traffic conditions [16].

3) Learning-based Methods: Learning-based methods, particularly reinforcement learning [17], offer solutions for handling complex lane-changing scenarios by learning policies from experience or demonstration [18]. These approaches can potentially capture complex patterns in traffic behavior and generate strategies for different scenarios [19]. However, they often lack interpretability in the decision-making process and struggle to provide consistent safety guarantees, especially in novel situations that differ from training data [20]. The challenge of ensuring robustness across diverse scenarios and the need for extensive training data remain significant obstacles to their practical deployment.

Our work addresses the limitations of existing methods through the proposal of a unified trajectory planning framework that integrates dynamic risk fields (DRF) with time-varying convex feasible spaces. The system architecture in Fig. 1 illustrates the full workflow of the proposed DRF-Convex-iLQR planning pipeline. The Scenarios and Environment block represents the dynamic traffic settings considered in this work, including highway lane changing, dual-lane roundabout navigation, and mixed AV-HDV interactions. The environment provides the host vehicle with Perceived States, consisting of positions, velocities, headings, and motion patterns of surrounding HDVs. The Decision Making module is the core of the proposed planner. The Vehicle Model describes the kinematic evolution of the host vehicle. The DRF encodes collision likelihood using both static and dynamic risk terms, enabling sensitivity to direction, velocity, and spatial proximity. In parallel, the Convex Feasible Space constructs a time-varying safe region that respects kinematic constraints, curvature limits, and dynamic obstacle exclusion. The Cost Function aggregates safety, comfort, efficiency, and risk, enabling balanced optimization. Together, these components serve as inputs to the Constrained iLQR Solver, which iteratively updates the control sequence through linearization and quadratic approximation while enforcing convex feasibility. At the bottom of the framework, surrounding HDVs provide Observed Motion, closing the Environment Interaction Loop. The optimized Planned Trajectory is delivered to the host vehicle's control module, ensuring smooth, safe, and dynamically feasible navigation across diverse traffic scenarios. This approach combines risk-aware planning with guaranteed collision avoidance through rigorous mathematical optimization. The main contributions are summarized as follows:

- We propose a comprehensive risk field model that captures both static and dynamic collision risks from surrounding vehicles, enabling effective risk assessment during lane changes.
- We introduce a strategy for generating time-varying convex feasible spaces that guarantee both kinematic feasibility and safety requirements through rigorous mathematical formulation.

- We formulate the planning problem as a finite-horizon nonlinear optimal control problem and solve it using a constrained iterative Linear Quadratic Regulator (iLQR) algorithm that jointly optimizes trajectory smoothness, control effort, and risk exposure.

The rest of this paper is organized as follows: Section II presents the DRF and convex feasible space modeling. Section III details optimization problem formulation and constrained iLQR solution. Section IV reports experimental results with analysis. Section V concludes the paper.

II. Dynamic Risk Field and Convex Space

This section introduces our integrated approach for trajectory planning by combining DRF-based collision risk assessment with convex feasible space generation. The framework ensures safety through continuous risk evaluation and kinematic feasibility through convex space constraints.

A. Risk Field Modeling

To quantify the potential collision risks during lane changes, a DRF is introduced to evaluate the interaction between host vehicle (HV) and surrounding vehicles (SVs). The total risk associated with each SV_i is computed by

$$R_i(x, y) = (R_{s,i}(x, y) + R_{d,i}(x, y))F_e(x, y) \quad (1)$$

where $R_{s,i}(x, y)$ and $R_{d,i}(x, y)$ are the static and dynamic risk factors, respectively. $F_e(x, y)$ is an exponential decay factor. These three terms are detailed below.

The static risk component $R_{s,i}(x, y)$ captures the spatial relationship between vehicles and is formulated using an obstacle-centered modified Gaussian distribution (see Fig. 2):

$$R_{s,i}(x, y) = A_s \exp \left(- \left(\left(\frac{\Delta x'}{\sigma_x} \right)^2 + \left(\frac{\Delta y'}{\sigma_y} \right)^2 \right)^\beta \right) \quad (2)$$

where A_s denotes the peak risk amplitude, while σ_x and σ_y define the risk distribution along longitudinal and lateral axes respectively, accounting for vehicle dimensions. The parameter β determines how quickly the risk diminishes with distance. The coordinates $(\Delta x', \Delta y')$ are obtained by transforming the relative position to the obstacle's reference frame using its heading angle θ_i , as follows:

$$\begin{bmatrix} \Delta x' \\ \Delta y' \end{bmatrix} = \begin{bmatrix} \cos \theta_i & \sin \theta_i \\ -\sin \theta_i & \cos \theta_i \end{bmatrix} \begin{bmatrix} x - x_i \\ y - y_i \end{bmatrix}.$$

The dynamic risk term $R_{d,i}(x, y)$ accounts for the velocity-dependent interactions between vehicles. This component considers the relative velocity between the HV and SV_i , defined as $v_{\text{rel},i} = v_{SV_i} - v_{\text{host}}$, where v_{host} is the velocity of the HV and v_{SV_i} is the velocity of SV_i :

$$R_{d,i}(x, y) = \frac{A_d \exp \left(- \frac{\Delta x'^2}{\sigma_v^2} - \frac{\Delta y'^2}{\sigma_y^2} \right)}{1 + \exp(-\text{sgn}(v_{\text{rel}})(\Delta x' - \alpha \sigma_x \text{sgn}(v_{\text{rel}})))} \quad (3)$$

where A_d scales the dynamic risk intensity, $\sigma_v = k_v |v_{\text{rel}}|$ adapts the risk distribution based on the relative velocity, and α modulates the position-dependent risk profile.

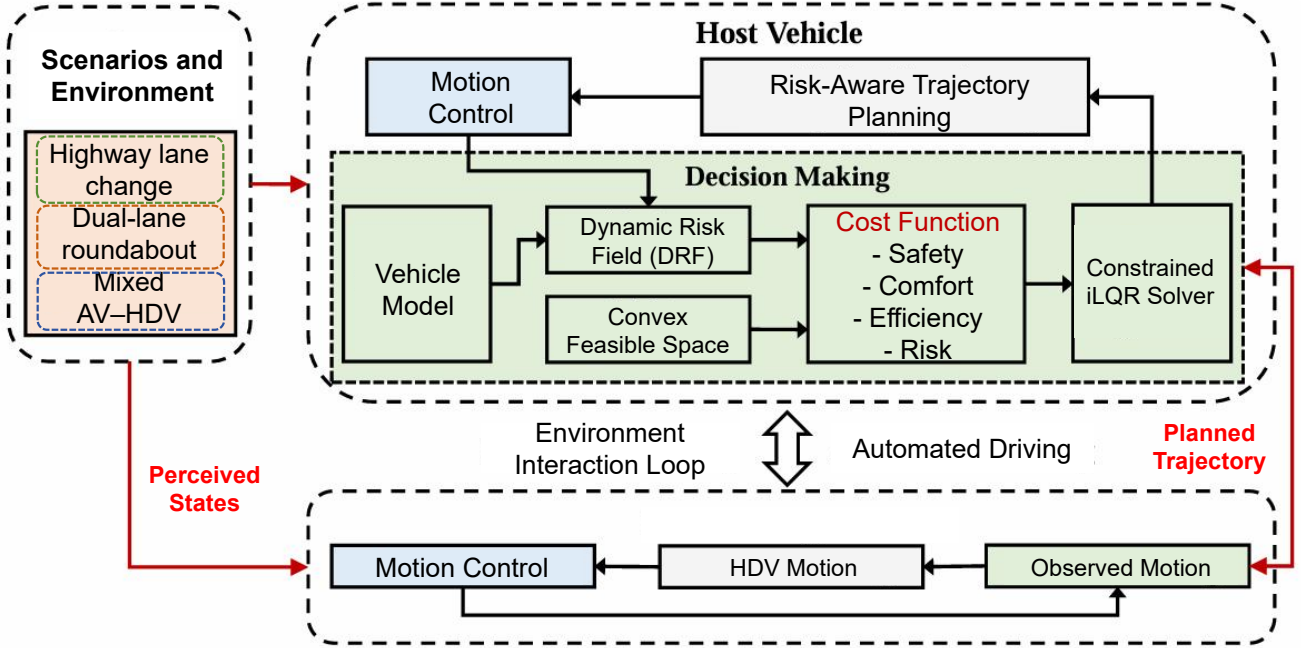


Fig. 1: Overall architecture of the proposed trajectory planning framework. The Scenarios and Environment module provides the perceived environment states, including surrounding-vehicle motion and road configuration. The host vehicle integrates three key components: (i) a Vehicle Model that captures kinematic evolution, (ii) a DRF that evaluates spatial and velocity-dependent collision risk, (iii) a Convex Feasible Space that guarantees safety and kinematic limits, and (iv) a Cost Function balancing safety, comfort, efficiency, and risk. A Constrained iLQR Solver optimizes the risk-aware trajectory within the feasible space. Surrounding HDVs provide observed motion, forming a closed Environment Interaction Loop. The output is a Planned Trajectory ensuring safe and smooth navigation.




Fig. 2: Illustration of the dynamic risk field.

The exponential decay factor $F_e(x, y)$ modifies the overall risk based on the separation distance between the evaluated position (x, y) and the HV's current position $(x_{\text{host}}, y_{\text{host}})$:

$$F_e(x, y) = \exp\left(-\sqrt{(x - x_{\text{host}})^2 + (y - y_{\text{host}})^2}/d_e\right) \quad (4)$$

where d_e is a characteristic length parameter that determines how quickly the risk decays with distance from the HV.

B. Dynamic Convex Space Generation

This subsection describes a rigorous approach for generating time-varying convex feasible spaces under vehicle kinematic and safety requirements. The approach integrates a growth-based expansion strategy with collision avoidance guarantees. The vehicle state is denoted by $\mathbf{s} = [x, y, \theta, v, \phi]^T \in \mathcal{X} \subset \mathbb{R}^5$, where x and y are planar coordinates, θ is the heading angle, v is the longitudinal velocity, and ϕ is the steering angle.

Definition 1 (Dynamic Convex Feasible Space): Let $\mathbf{p} = [p_x, p_y]^T \in \mathbb{R}^2$ denote positions in plane. For state $\mathbf{s}(t)$ at

time t , the rectangular time-varying convex feasible space $\mathcal{C}(\mathbf{s}, t)$ is defined as

$$\mathcal{C}(\mathbf{s}, t) = \{\mathbf{p} \in \mathbb{R}^2 \mid \mathbf{A}(\mathbf{s}, t)\mathbf{p} \leq \mathbf{b}(\mathbf{s}, t), \Phi(\mathbf{p}, \mathbf{s}, t) \leq \mathbf{0}\} \quad (5)$$

where the linear constraints $\mathbf{A}(\mathbf{s}, t)\mathbf{p} \leq \mathbf{b}(\mathbf{s}, t)$ define the rectangular bounds:

$$\begin{bmatrix} 1 & 0 \\ -1 & 0 \\ 0 & 1 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} p_x \\ p_y \end{bmatrix} \leq \begin{bmatrix} x_{\text{upper}}(t) \\ -x_{\text{lower}}(t) \\ y_{\text{upper}}(t) \\ -y_{\text{lower}}(t) \end{bmatrix}. \quad (6)$$

The bounds are iteratively expanded from the vehicle's current position with safety margins. The nonlinear constraints $\Phi(\mathbf{p}, \mathbf{s}, t) \leq \mathbf{0}$ ensure collision avoidance with SVs with

$$\Phi_i(\mathbf{p}, \mathbf{s}, t) = \begin{cases} 1 & \text{if } \mathbf{p} \in \mathcal{O}_i(t) \\ 0 & \text{otherwise} \end{cases}, \quad i = 1, \dots, N_{\text{obs}} \quad (7)$$

where $\mathcal{O}_i(t)$ represents the occupied region of the SV_i .

Fig. 3 shows the evolution of the convex feasible space $\mathcal{C}(\mathbf{s}, t)$ over time, represented by growing rectangular regions at different time instances. This evolution adapts to the vehicle state through a continuous-time growth model dependent on velocity and heading, ensuring collision-free expansion.

Proposition 1 (Growth Tensor Representation): There is a state-dependent growth tensor $\mathcal{G}(\mathbf{s}, t) \in \mathbb{R}^{2 \times 2}$ such that the evolution of the convex set $\mathcal{C}(\mathbf{s}, t)$ is described by

$$\frac{d}{dt}\mathcal{C}(\mathbf{s}, t) = \{\mathbf{p} + \mathcal{G}(\mathbf{s}, t)\mathbf{n}(\mathbf{p}) \mid \mathbf{p} \in \partial\mathcal{C}(\mathbf{s}, t)\} \quad (8)$$

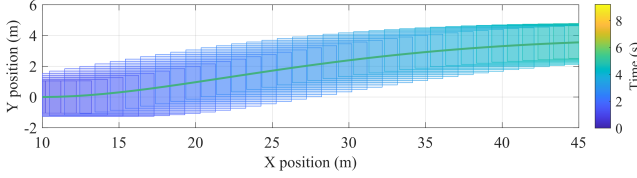


Fig. 3: Evolution of the dynamic convex feasible space $\mathcal{C}(\mathbf{s}, t)$ over time. The rectangles represent the growing feasible regions that satisfy both kinematic constraints and safety requirements, while the green curve represents a trajectory.

where $\mathbf{n}(\mathbf{p})$ denotes the outward normal vector at position \mathbf{p} on the boundary $\partial\mathcal{C}(\mathbf{s}, t)$. The growth tensor $\mathcal{G}(\mathbf{s}, t)$ admits the following decomposition: $\mathcal{G}(\mathbf{s}, t) = \alpha(\mathbf{s}) \Lambda(\theta) \Gamma(t)$ with

$$\alpha(\mathbf{s}) = \min\{1 + \eta v/v_{\text{ref}}, \alpha_{\text{max}}\},$$

$$\Lambda(\theta) = \begin{bmatrix} |\cos(\theta)| & -\sin(\theta) \\ \sin(\theta) & |\cos(\theta)| \end{bmatrix}, \quad \Gamma(t) = \gamma_0 e^{-\lambda t} \mathbf{I}_2,$$

where $\alpha(\mathbf{s})$ is the velocity-adaptive scaling factor with constants $\eta, \alpha_{\text{max}} > 0$ and the reference velocity $v_{\text{ref}} > 0$, $\Lambda(\theta)$ is a heading-dependent matrix, and $\Gamma(t)$ is a time-decaying component that ensures bounded expansion, with constants $\gamma_0, \lambda > 0$ and a 2×2 identity matrix \mathbf{I}_2 .

Since the vehicle kinematics further impose curvature and velocity limits on the boundary of $\mathcal{C}(\mathbf{s}, t)$, the steering angle ϕ must satisfy $|\phi| \leq \phi_{\text{max}}$, and the associated curvature is bounded. This leads to Lemma 1.

Lemma 1 (Kinematic Feasibility Conditions): Let $\partial\mathcal{C}(\mathbf{s}, t)$ be the boundary of the feasible space $\mathcal{C}(\mathbf{s}, t)$. If \mathbf{p} lies on $\partial\mathcal{C}(\mathbf{s}, t)$, the following kinematic constraints are necessary and sufficient for ensuring space feasibility:

$$|\kappa(\mathbf{p})| \leq \tan(\phi_{\text{max}})/L, \quad \|\dot{\mathbf{p}}\| \leq v_{\text{max}}, \quad |\ddot{\theta}| \leq \omega_{\text{max}} \quad (9)$$

where $\kappa(\mathbf{p})$ is the path curvature at \mathbf{p} , L is the wheelbase length, and $v_{\text{max}}, \omega_{\text{max}}$ are upper bounds on velocity and yaw rate, respectively.

Collision avoidance with dynamic obstacles $\{\mathcal{O}_i(t)\}$ is ensured by a separating hyperplane condition. Let each $\mathcal{O}_i(t)$ be a convex set. Safe separation requires that, for each obstacle, there exists a time-varying hyperplane that strictly separates $\mathcal{C}(\mathbf{s}, t)$ from $\mathcal{O}_i(t)$.

Theorem 1 (Dynamic Separating Hyperplane Safety): Safe collision-free motion is guaranteed if and only if, for every obstacle $\mathcal{O}_i(t)$, there exist $\mathbf{n}_i(t) \in \mathbb{S}^1$ and $\gamma_i(t) \in \mathbb{R}$ such that

$$\mathbf{n}_i(t)^\top \mathbf{p} \leq \gamma_i(t), \quad \forall \mathbf{p} \in \mathcal{C}(\mathbf{s}, t) \quad (10)$$

$$\mathbf{n}_i(t)^\top \mathbf{q} \geq \gamma_i(t) + \delta_{\text{safe}}, \quad \forall \mathbf{q} \in \mathcal{O}_i(t) \quad (11)$$

where $\delta_{\text{safe}} > 0$ is the required safety margin and $\mathbb{S}^1 = \{\mathbf{x} \in \mathbb{R}^2 \mid \|\mathbf{x}\| = 1\}$ is the unit-circle set for normal directions.

The dynamic convex space then grows iteratively based on the current boundary and its outward normal, respecting all active constraints. At each infinitesimal time step

dt , the convex set is expanded subject to kinematics and obstacle avoidance until it reaches a constraint boundary.

Theorem 2 (Existence and Evolution of Feasible Spaces):

Given an initial convex space $\mathcal{C}(\mathbf{s}, 0)$, the growth equation has a unique solution

$$\mathcal{C}(\mathbf{s}, t + dt) = \{\mathbf{p} + \mathcal{G}(\mathbf{s}, t) dt \mathbf{n}(\mathbf{p}) \mid \mathbf{p} \in \mathcal{C}(\mathbf{s}, t)\} \quad (12)$$

where $\mathcal{G}(\mathbf{s}, t)$ is as in Proposition 1, and $\mathbf{n}(\mathbf{p})$ is the outward normal vector on the boundary $\partial\mathcal{C}(\mathbf{s}, t)$. The resulting $\mathcal{C}(\mathbf{s}, t)$ remains convex and satisfies the kinematic and safety constraints in Lemma 1 and Theorem 1 for all $t > 0$.

The analysis establishes a rigorous method to evolve time-varying convex sets that respect vehicle motion limits and ensure collision-free operation in dynamic environments. The tensor-based growth representation enables efficient computation while guaranteeing feasibility and safety.

III. Optimization-based Planning Framework

Building upon the established DRF and convex space generation, we now formulate an optimization problem to generate feasible and safe lane changing trajectories.

A. Optimization Problem Formulation

A finite-horizon optimal control problem is formulated to jointly address the DRF in (1) and the time-varying convex feasible space from Definition 1.

The discrete-time state is $\mathbf{x}_k = [x_k, y_k, v_k, \theta_k, \phi_k, \dot{\phi}_k]^\top \in \mathbb{R}^6$ with longitudinal velocity v_k , heading angle θ_k , steering angle ϕ_k , and steering rate $\dot{\phi}_k$, where steering angle and its rate are considered to better handle the steering dynamics. The control input is $\mathbf{u}_k = [a_k, \ddot{\phi}_k]^\top$, where a_k is the longitudinal acceleration and $\ddot{\phi}_k$ is the steering acceleration. The system evolves via

$$\mathbf{x}_{k+1} = f(\mathbf{x}_k, \mathbf{u}_k) \quad (13)$$

from the given the initial state $\mathbf{x}_0 = \mathbf{x}^{\text{init}} \in \mathbb{R}^6$. The function f is obtained from the continuous-time kinematic bicycle model [16] using Euler method with a sampling period Δt . A receding-horizon strategy employs a planning horizon $N > 0$, so $k = 0, \dots, N-1$. The total horizon cost is

$$J(\{\mathbf{x}_k\}, \{\mathbf{u}_k\}) = \sum_{k=0}^{N-1} \ell(\mathbf{x}_k, \mathbf{u}_k) + \ell_T(\mathbf{x}_N). \quad (14)$$

The stage cost $\ell(\mathbf{x}_k, \mathbf{u}_k)$ penalizes the reference deviation, control effort, and collision risk, and it is defined as

$$\ell(\mathbf{x}_k, \mathbf{u}_k) = (\mathbf{x}_k - \mathbf{x}_k^{\text{ref}})^\top \mathbf{Q} (\mathbf{x}_k - \mathbf{x}_k^{\text{ref}}) + \mathbf{u}_k^\top \mathbf{R} \mathbf{u}_k + \gamma \mathcal{R}(\mathbf{x}_k)$$

where $\{\mathbf{x}_k^{\text{ref}}\}$ is the reference trajectory prescribing nominal poses and velocities, and \mathbf{Q}, \mathbf{R} are positive semidefinite weighting matrices on the state and control. The term $\mathcal{R}(\mathbf{x}_k)$ aggregates the collision risk at time step k from (1) with a risk weighting parameter $\gamma > 0$.

The terminal cost $\ell_T(\mathbf{x}_N)$ ensures that \mathbf{x}_N approaches the desired terminal state and is defined as

$$\ell_T(\mathbf{x}_N) = (\mathbf{x}_N - \mathbf{x}_N^{\text{ref}})^\top \mathbf{Q}_T (\mathbf{x}_N - \mathbf{x}_N^{\text{ref}}) \quad (15)$$

with the positive semidefinite weighting matrix \mathbf{Q}_T .

All states \mathbf{x}_k must remain within the time-varying convex set $\mathcal{C}(\mathbf{s}_k, t_k)$ from Theorem 2 to guarantee collision-free, dynamically feasible motion. In discrete form, if $\mathbf{x}_k = [x_k, y_k, v_k, \theta_k, \phi_k, \dot{\phi}_k]^\top$, then $[p_x, p_y]^\top = [x_k, y_k]^\top \in \mathcal{C}(\mathbf{s}_k, t_k)$, and $\mathbf{s}_k = [x_k, y_k, \theta_k, v_k, \phi_k, \dot{\phi}_k]^\top$. The optimization problem for trajectory planning is formulated as

$$\begin{aligned} \min_{\{\mathbf{x}_k\}_{k=0}^{N-1}, \{\mathbf{u}_k\}_{k=0}^{N-1}} J(\{\mathbf{x}_k\}, \{\mathbf{u}_k\}) \\ \text{s.t.} \quad (13), [x_k, y_k]^\top \in \mathcal{C}(\mathbf{s}_k, t_k), |\phi_k| \leq \phi_{\max}. \end{aligned} \quad (16)$$

The steering limit $|\phi_k| \leq \phi_{\max}$ enforces bounded curvature, while the convex region \mathcal{C} ensures collision avoidance per Theorem 1. The risk function \mathcal{R} and convex constraints jointly optimize obstacle avoidance. For this nonlinear optimization problem (16), an iLQR-based algorithm is proposed in Section III-B to enable efficient and safe lane changing.

B. iLQR-based Solution

The iLQR method is selected for solving the constrained nonlinear optimization problem (16) due to its real-time efficiency and ability to handle state and control constraints [21]. By leveraging recursive value iteration, it efficiently enforces kinematic constraints and collision avoidance, making it ideal for autonomous driving applications. A constrained iterative LQR algorithm solves the discrete-time problem by successively linearizing the dynamics and quadratically approximating the cost function. Let $\{\mathbf{x}_k^{(0)}, \mathbf{u}_k^{(0)}\}$ be an initial guess of state and control over the horizon. At iteration ℓ , the vehicle dynamic system (13) is linearized as

$$\mathbf{x}_{k+1} \approx f(\mathbf{x}_k^{(\ell)}, \mathbf{u}_k^{(\ell)}) + A_k^{(\ell)} \delta \mathbf{x}_k + B_k^{(\ell)} \delta \mathbf{u}_k \quad (17)$$

where $A_k^{(\ell)} = \frac{\partial f}{\partial \mathbf{x}}(\mathbf{x}_k^{(\ell)}, \mathbf{u}_k^{(\ell)})$ and $B_k^{(\ell)} = \frac{\partial f}{\partial \mathbf{u}}(\mathbf{x}_k^{(\ell)}, \mathbf{u}_k^{(\ell)})$. $\delta \mathbf{x}_k = \mathbf{x}_k - \mathbf{x}_k^{(\ell)}$ and $\delta \mathbf{u}_k = \mathbf{u}_k - \mathbf{u}_k^{(\ell)}$ are the state and control deviations, respectively.

The stage cost is approximated quadratically around the current trajectory as

$$\begin{aligned} \ell(\mathbf{x}_k, \mathbf{u}_k) \approx \ell(\mathbf{x}_k^{(\ell)}, \mathbf{u}_k^{(\ell)}) + \nabla_{\mathbf{x}} \ell|_{(\ell)}^\top \delta \mathbf{x}_k + \nabla_{\mathbf{u}} \ell|_{(\ell)}^\top \delta \mathbf{u}_k \\ + \frac{1}{2} \begin{bmatrix} \delta \mathbf{x}_k \\ \delta \mathbf{u}_k \end{bmatrix}^\top \begin{bmatrix} \nabla_{\mathbf{x}\mathbf{x}}^2 \ell & \nabla_{\mathbf{x}\mathbf{u}}^2 \ell \\ \nabla_{\mathbf{u}\mathbf{x}}^2 \ell & \nabla_{\mathbf{u}\mathbf{u}}^2 \ell \end{bmatrix} |_{(\ell)} \begin{bmatrix} \delta \mathbf{x}_k \\ \delta \mathbf{u}_k \end{bmatrix} \end{aligned} \quad (18)$$

where $\nabla_{\mathbf{x}\mathbf{x}}^2 \ell$, $\nabla_{\mathbf{x}\mathbf{u}}^2 \ell$, $\nabla_{\mathbf{u}\mathbf{x}}^2 \ell$ and $\nabla_{\mathbf{u}\mathbf{u}}^2 \ell$ represent the second-order partial derivatives of the stage cost with respect to states and controls, $|_{(\ell)}$ denotes evaluation at the current iteration point $(\mathbf{x}_k^{(\ell)}, \mathbf{u}_k^{(\ell)})$. The gradients $\nabla_{\mathbf{x}} \ell$ and $\nabla_{\mathbf{u}} \ell$ incorporate risk penalties and boundary constraints.

The backward pass computes local feedback \mathbf{K}_k and feedforward \mathbf{k}_k gains by propagating the second-order cost-to-go, subject to the risk and convex feasibility

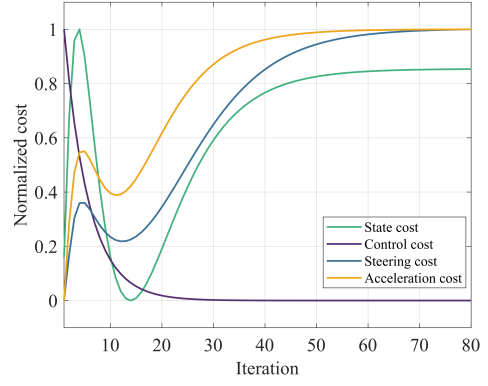


Fig. 4: Convergence analysis of proposed method.

constraints. Define $V_x \in \mathbb{R}^n$ and $V_{xx} \in \mathbb{R}^{n \times n}$ as the gradient and Hessian of the value function, respectively, where n is the dimension of the state space, then

$$\mathbf{K}_k = -Q_{uu}^{-1} Q_{ux}, \quad \mathbf{k}_k = -Q_{uu}^{-1} Q_u \quad (19)$$

where

$$\begin{aligned} Q_u &= B_k^{(\ell)T} V_x + \nabla_{\mathbf{u}} \ell|_{(\ell)}, \quad Q_x = A_k^{(\ell)T} V_x + \nabla_{\mathbf{x}} \ell|_{(\ell)}, \\ Q_{uu} &= \mathbf{R} + B_k^{(\ell)T} V_{xx} B_k^{(\ell)}, \quad Q_{ux} = B_k^{(\ell)T} V_{xx} A_k^{(\ell)}, \\ Q_{xx} &= \mathbf{Q} + A_k^{(\ell)T} V_{xx} A_k^{(\ell)}. \end{aligned}$$

The updated cost-to-go satisfies $V_x = Q_x - \mathbf{K}_k^\top Q_{uu} \mathbf{k}_k$, and $V_{xx} = Q_{xx} - \mathbf{K}_k^\top Q_{uu} \mathbf{K}_k$.

The forward pass updates the control action by

$$\mathbf{u}_k^{(\ell+1)} = \mathbf{u}_k^{(\ell)} + \alpha \mathbf{k}_k + \mathbf{K}_k (\mathbf{x}_k^{(\ell+1)} - \mathbf{x}_k^{(\ell)}) \quad (20)$$

where $\alpha \in (0, 1]$ is a line search parameter.

Each forward step checks feasibility $\mathbf{p}_k = [x_k, y_k]^\top \in \mathcal{C}(\mathbf{s}_k, t_k)$ for the position components; if violated, the algorithm adjusts gradients or re-projects to remain strictly in \mathcal{C} . Risk gradients from $\mathcal{R}(\mathbf{x}_k)$ are incorporated to discourage motion into hazardous zones. This backward-forward iteration continues until convergence or maximum iterations. The optimization process operates at 10 Hz with 0.1 s discretization, with trajectories typically maintaining validity for 0.3–0.5 s and re-optimization frequency adaptable to environmental changes.

The final solution $\{\mathbf{x}_k^{(*)}, \mathbf{u}_k^{(*)}\}$ satisfies both kinematic feasibility and collision avoidance while minimizing $\gamma \mathcal{R}(\mathbf{x}_k)$. By unifying potential-field risk modeling and convex set growth in a single receding-horizon framework, real-time implementations can generate trajectories that adapt to dynamic obstacles and continuously remain safe driving.

C. Stability Analysis

The risk-sensitive planner must remain within \mathcal{C} while penalizing risk. An iterative procedure refines an initial nominal solution until a local minimum of the objective J is found. The risk penalty $\gamma \mathcal{R}(\mathbf{x}_k)$ shifts the trajectory away from high-risk regions, while the convex boundary

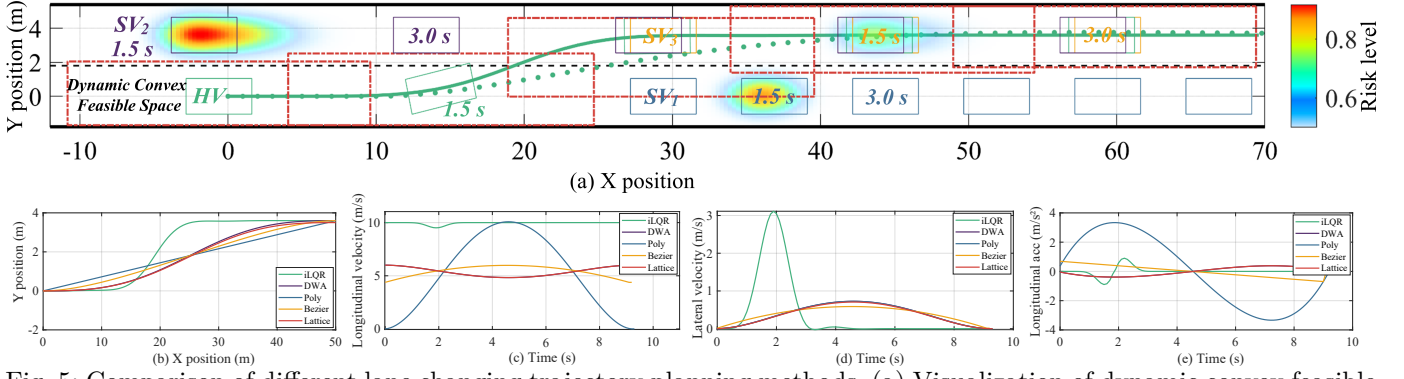


Fig. 5: Comparison of different lane changing trajectory planning methods. (a) Visualization of dynamic convex feasible space as red rectangles and DRF at $t = 1.5$ s. The green line shows the planned trajectory, green dots represent the trajectory before optimization. (b) Comparison of lane changing using different trajectory planning methods. (c) Comparison of longitudinal velocities. (d) Comparison of lateral velocities. (e) Comparison of longitudinal accelerations.

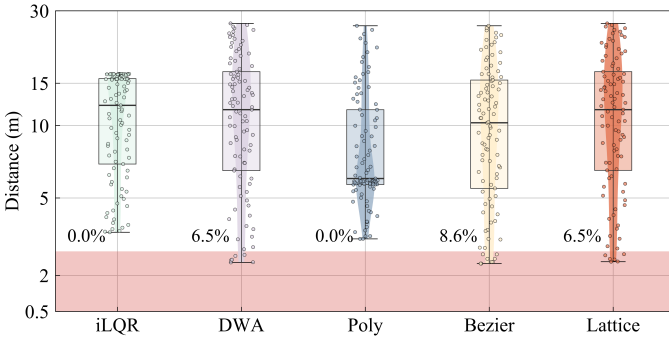


Fig. 6: Comparison of minimum distances to SVs for different planning methods. The red shaded area indicates unsafe.

constraint enforces safe separation from obstacles and road edges.

To analyze the algorithm's convergence, Fig. 4 shows the evolution of normalized cost components including state deviation, control effort, steering, and acceleration costs. The stabilization of these components around iteration 60 – 70 indicates convergence to a locally optimal solution that satisfies both feasibility ($\mathbf{x}_k \in \mathcal{C}$) and safety (i.e., low $\gamma \mathcal{R}(\mathbf{x}_k)$). This demonstrates that our iLQR process effectively balances risk minimization with constraint satisfaction, consistently generating stable and feasible trajectories.

IV. EXPERIMENTAL EVALUATION

Simulations are conducted in MATLAB 2024b to evaluate the proposed approach for safe and efficient autonomous driving in complex lane-changing scenarios. We compare our iLQR-based method with several baseline approaches including Dynamic Window Approach (DWA) [22], polynomial-based planning (Poly) [23], Bezier curve planning [24], and lattice-based planning [25]. Video demonstrations of experimental cases are available online¹.

The comparative analysis demonstrates several key advantages of our method:

¹<https://youtu.be/25YhYCXV1JI>

TABLE I:
Comparison of Algorithm Performances

Methods	v_x (m/s ²)	v_y (m/s ²)	j_x (m/s ³)	D (m)	T (s)
iLQR	9.96	0.40	0.38	28.59	2.84 ± 0.03
DWA	5.38	0.39	0.15	45.82	8.04 ± 0.04
Ploy	5.32	0.38	1.38	57.62	11.08 ± 0.05
Bezier	5.42	0.39	0.22	49.11	8.63 ± 0.05
Lattice	5.38	0.37	0.16	42.32	7.29 ± 0.05

v_x, v_y : average longitudinal and lateral velocities; j_x : average longitudinal jerks; D: average lane changing distance; T: average lane changing time.

1) **Trajectory Efficiency:** As shown in Fig. 5(a) and Fig. 5(b), our iLQR-based method achieves significantly shorter lane-change distances, completing the maneuver within 28.59 m compared to 42 – 57 m required by other approaches. The optimized trajectory (green line) exhibits smooth path characteristics while maintaining consistency with the dynamic convex feasible space constraints.

2) **Velocity Control:** The longitudinal velocity profile in Fig. 5(c) demonstrates our iLQR superior speed regulation capabilities, maintaining a stable velocity profile around 10 m/s compared to the fluctuating patterns of other approaches.

3) **Lateral Motion Strategy:** Fig. 5(d) highlights our method's aggressive yet efficient lane-changing strategy. The initial lateral velocity peak reflects an intentional trade-off of motion smoothness for significant time efficiency, enabling a rapid lane change in 2.84 s without collisions—much faster than the 7 – 11 s of other approaches. Despite higher instantaneous lateral velocity, the controller swiftly stabilizes the motion, balancing rapid maneuvering with vehicle stability. This aligns with our optimization objective of minimizing lane-changing time while ensuring safe operation.

4) **Acceleration Management:** The longitudinal acceleration profile in Fig. 5(e) shows that our iLQR method maintains smoother acceleration changes within a reasonable range of ± 1 m/s², whereas other methods exhibit more aggressive acceleration patterns.

These results validate that our approach successfully in-

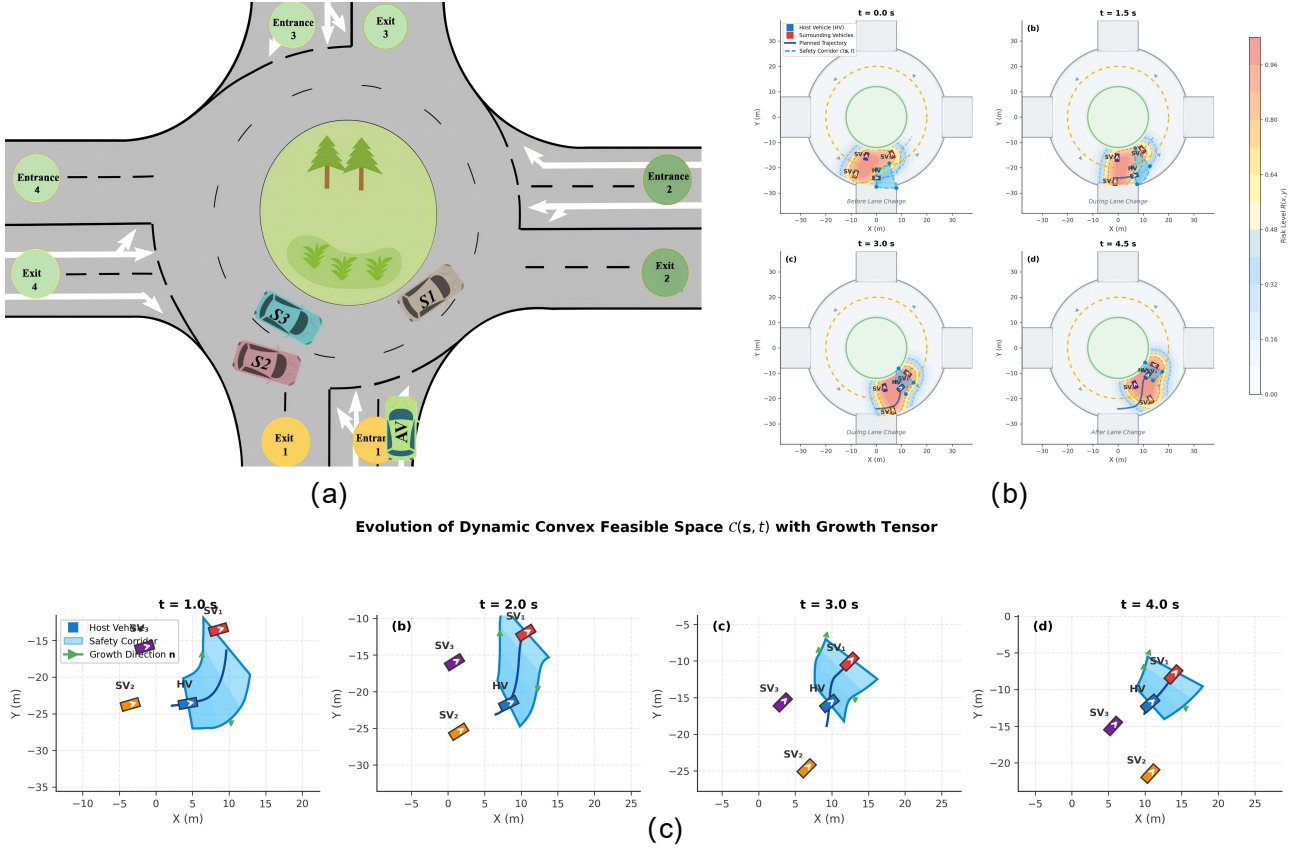


Fig. 7: Overall visualization of the proposed DRF-iLQR planning pipeline in a dual-lane roundabout. (a) Scenario layout. (b) DRF evolution. (c) Evolution of the Dynamic Convex Feasible Space $\mathcal{C}(s, t)$ under the Growth Tensor. The green trajectory demonstrates that the HV maintains a safe, feasible, and risk-aware motion while interacting with multiple surrounding vehicles.

tegrates risk awareness with convex feasibility constraints, producing trajectories that are not only dynamically feasible but also optimized for achieving safety and comfort simultaneously. The iterative nature of our iLQR solution effectively refines the initial trajectory (green dots) into a smooth, executable path (green line) that satisfies all constraints.

To evaluate the safety performance of different planning methods, we analyze the minimum distance between the HV and SVs. Fig. 6 compares these distances, highlighting unsafe zones below 3m (red shading). Our iLQR-based method achieves a 0.0% collision rate, matching the polynomial method, while DWA, Bezier, and lattice-based methods have collision rates of 6.5%, 8.6%, and 6.5%, respectively. With a median distance of ~ 10 m and consistent safety margins, our method balances safety and performance, avoiding excessive conservatism while efficiently utilizing space.

Table I compares key performance metrics of various planning methods. Our iLQR-based approach achieves the highest longitudinal velocity (9.96 m/s^2) and comparable lateral velocity (0.40 m/s^2). It also achieves the shortest lane-changing distance (28.59 m) and time (2.84 s) with minimal variation ($\pm 0.03 \text{ s}$), demonstrating efficiency and consistency. Although its longitudinal jerk (0.38 m/s^3) is

slightly higher than DWA, this trade-off ensures a balance between smoothness and efficiency.

Fig. 7(a) shows the dual-lane roundabout with four entrances and four exits. The host vehicle (HV) enters at Entrance 1 and aims to perform a lane change while interacting with multiple surrounding vehicles (SVs). The scenario intentionally includes heterogeneous SV behaviours (slower leading vehicle, aggressive merging vehicle, and a fast rear vehicle) to stress-test the proposed dynamic planning framework.

A. Evolution of Dynamic Risk Field

Fig. 7(b) presents the time evolution of the DRF at $t = 0, 1.5, 3.0$, and 4.5 s. At $t = 0$, the risk distribution is nearly isotropic because the HV has just entered the roundabout and no close interaction is occurring. As time progresses to $t = 1.5$ and 3.0 s, a strong asymmetric risk lobe emerges in front of SV_0 and SV_1 , consistent with the dynamic risk model in (3) where the relative velocity and relative heading increase the collision likelihood. Near $t = 3.0$ – 4.5 s, the DRF exhibits a strong lateral gradient as SV_3 accelerates toward the inner lane. This behaviour demonstrates the DRF's ability to continuously quantify the directional and velocity-dependent collision

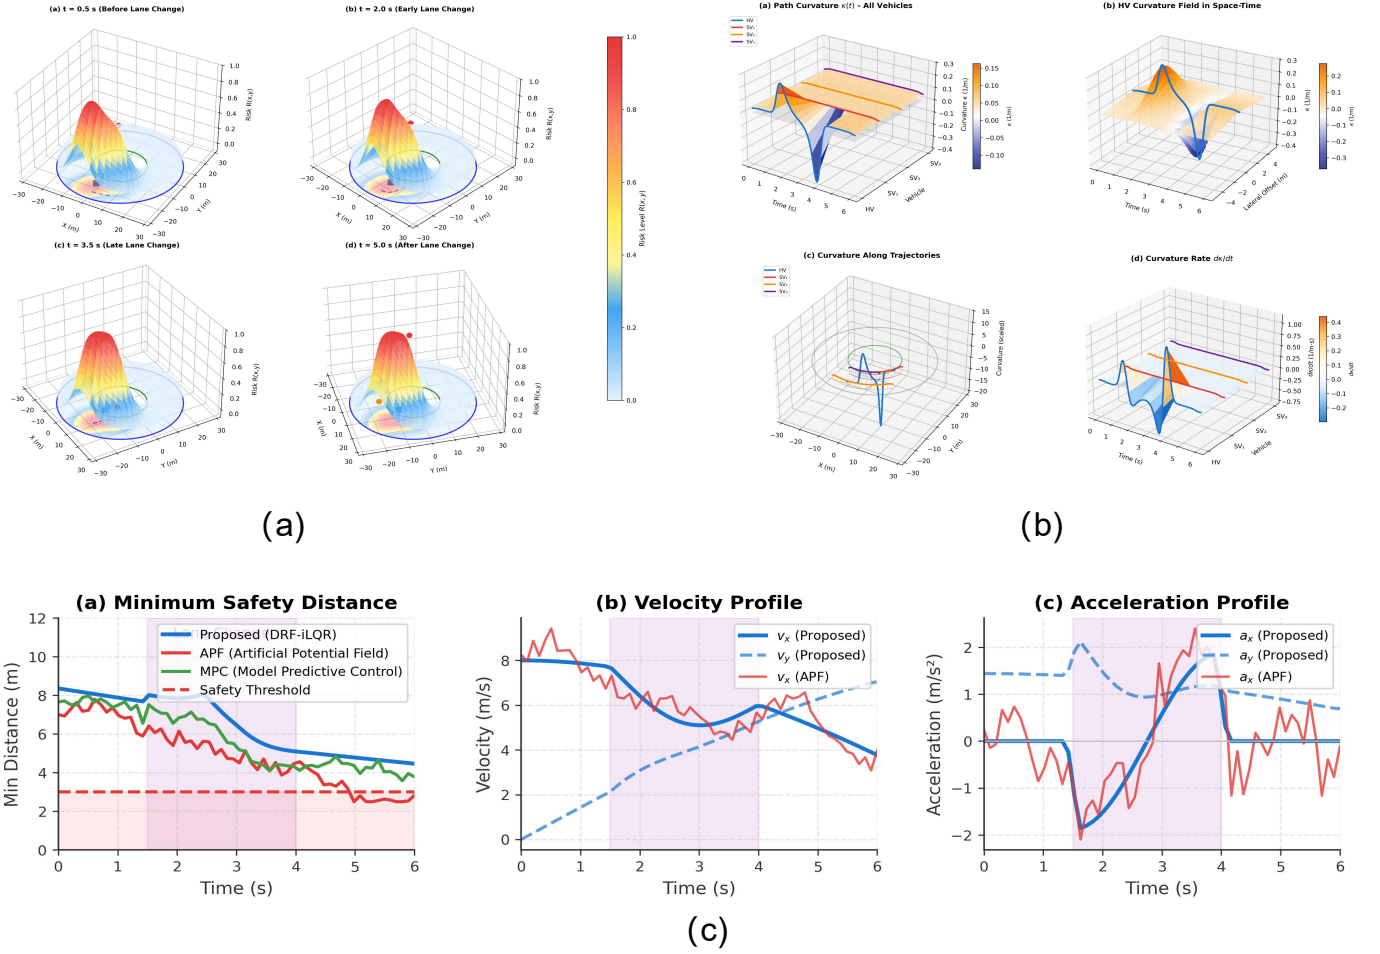


Fig. 8: Quantitative analysis of the proposed DRF-iLQR planner. (a) Evolution of the DRF along the lane-change manoeuvre. (b) Path curvature and curvature-rate profiles for all vehicles and the HV. (c) Comparison of minimum safety distance, velocity, and acceleration profiles between the proposed method, APF, and MPC baselines.

risk, enabling gradient-based avoidance within the iLQR optimizer.

B. Evolution of Convex Feasible Space

Fig. 7(c) shows the expansion and deformation of the dynamic convex feasible space $\mathcal{C}(\mathbf{s}, t)$ from $t = 1.0$ to 4.0 s. At $t = 1.0$ s, the feasible set expands primarily forward due to the velocity-dependent scaling factor $\alpha(\mathbf{s})$ in Proposition 1. Because no obstacle is yet constraining the HV laterally, the set remains symmetrically shaped around the vehicle.

By $t = 2.0$ s, SV_1 has moved closer, and the separating hyperplane condition in Theorem 1 trims the right-hand side of $\mathcal{C}(\mathbf{s}, t)$, preventing any unsafe expansion toward the conflict zone.

At $t = 3.0$ s and 4.0 s, the feasible set becomes increasingly skewed toward the left side as both SV_0 and SV_3 create high-risk zones. The Growth Tensor naturally rotates the feasible region according to the HV's heading direction via $\Lambda(\theta)$, while the exponential decay term $\Gamma(t)$ prevents unbounded expansion. These results confirm that

the convex feasible space continuously adapts to traffic geometry, vehicle kinematics, and dynamic obstacles.

C. Safety-Aware Motion Behaviour

Combining the DRF with the convex feasible region ensures that the iLQR-generated trajectory (green curve in the figures) always remains inside the safe, dynamically reachable area:

- The HV never enters a region with high DRF intensity, showing successful risk-aware behaviour.
- The trajectory remains smooth and curvature-feasible due to the kinematic constraints in Lemma 1.
- The lane-change manoeuvre occurs only when the Growth Tensor expands sufficiently in the target direction, guaranteeing future feasibility.

Fig. 8 provides a quantitative view of how the proposed planner exploits the DRF and convex feasible space to achieve safe and comfortable lane changing.

Fig. 8(a) shows the evolution of the Dynamic Risk Field along the host vehicle trajectory at four representative instants. Before lane change, the high-risk region is mainly

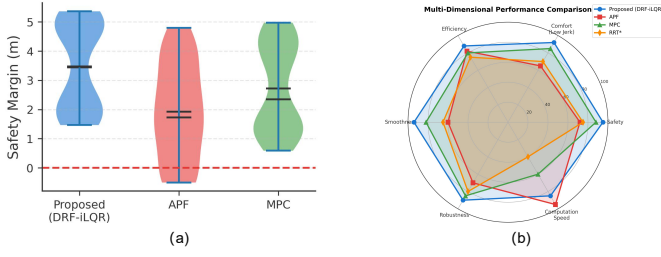


Fig. 9: Statistical and multi-criteria comparison of different planners. (a) Violin plots of safety margin for the proposed DRF-iLQR planner, APF, and MPC. (b) Multi-dimensional performance radar chart including safety, comfort, efficiency, smoothness, robustness, and computation speed.

concentrated around the leading vehicle and the rear vehicle on the target lane. As the manoeuvre starts, the DRF peak moves laterally and its magnitude decreases, indicating that the iLQR solution actively steers the host vehicle away from high-risk lobes created by fast-approaching surrounding vehicles. After the lane change is completed, the risk distribution becomes compact and symmetric again, confirming that the host vehicle has settled into a low-risk configuration.

Fig. 8(b) depicts the curvature $\kappa(t)$ and curvature-rate profiles for all vehicles and the host vehicle. The proposed planner keeps the host vehicle curvature within the theoretical bound in Lemma 1, and the curvature-rate remains smooth without sharp spikes. This means that the convex feasible space and steering constraints are effectively enforced, avoiding physically infeasible or overly aggressive steering actions. In contrast, the background curvature field highlights that some surrounding vehicles exhibit more abrupt curvature changes, which the host vehicle must safely respond to.

Fig. 8(c) compares the proposed method against Artificial Potential Field (APF) and MPC baselines in terms of minimum safety distance, velocity, and acceleration. The minimum distance profile shows that the proposed DRF-iLQR planner consistently stays above the safety threshold, whereas APF and MPC occasionally approach or cross this limit during the lane-change interval. The velocity and acceleration plots further indicate that the proposed method achieves a smoother deceleration-lane-change-reacceleration pattern, while APF tends to exhibit oscillatory accelerations. This demonstrates that the integrated DRF and convex-space constraints enable the planner to maintain a better trade-off between safety and comfort than conventional APF or MPC schemes.

Fig. 9(a) summarizes the safety performance of the three planners using violin plots of the safety margin, defined as the minimum distance to surrounding vehicles minus the safety threshold. The proposed DRF-iLQR method exhibits the largest median and interquartile range above zero, indicating that most trajectories maintain a comfortable buffer to nearby vehicles. In contrast, APF shows a

wider spread with a significant portion of samples falling below the safety threshold, which explains the occasional near-collision behaviours observed in the time-domain plots. MPC performs more conservatively than APF, but its safety margin distribution is still centred closer to the threshold, revealing less robustness to dense or rapidly changing traffic.

Fig. 9(b) provides a multi-dimensional radar chart comparing four planners across six criteria: safety, comfort (low jerk), efficiency, smoothness, robustness, and computation speed. All metrics are normalized to a $[0, 100]$ scale for visualization. The proposed DRF-iLQR planner achieves consistently high scores in safety and robustness owing to the integration of the DRF and the dynamic convex feasible space, while also maintaining superior comfort and smoothness due to the curvature and jerk-aware optimization. MPC attains competitive efficiency but lags in comfort and robustness, whereas APF suffers from lower safety and smoothness because of its potential-field oscillations. RRT* achieves reasonable safety and robustness but exhibits the lowest computation-speed score, highlighting the difficulty of using sampling-based planners in real-time dense-traffic scenarios.

Overall, these statistical and multi-criteria results confirm that the proposed DRF-iLQR framework provides a more balanced trade-off between safety, comfort, efficiency, and real-time feasibility than the baseline planners.

V. CONCLUSION

This paper presented a unified trajectory planning framework that integrates a DRF with time-varying convex feasible space generation to enable safe and efficient autonomous lane changing. The proposed DRF formulation captures both static and velocity-dependent collision risks through anisotropic spatial modeling, while the convex feasible space ensures that all generated trajectories satisfy kinematic limits and remain collision-free under dynamic traffic variations. A constrained iLQR algorithm is developed to jointly optimize trajectory smoothness, risk exposure, and dynamic feasibility in real time. Experiments on highway lane-changing tasks show that the proposed method produces smooth velocity profiles, lower curvature rates, and consistently safe vehicle spacing. The planner achieves a lane-changing distance of 28.59 m and a duration of 2.84 s, reducing distance and time by 32.4% and 61.0% compared with APF and MPC baselines. The safety margin remains strictly positive throughout the maneuver. Dual-lane roundabout experiments further demonstrate the adaptability of the integrated DRF-convex-space framework. The DRF forms directional risk gradients around fast-approaching vehicles, while the convex feasible space reshapes in real time to avoid conflict regions. Quantitative results indicate strong performance across safety and comfort metrics, including a minimum safety distance of 4.23 m, an average safety distance of 7.85 m, zero collisions, a near-miss rate of 0.8%, and a minimum time-to-collision of 3.45 s. The method also yields low jerk (1.18 m/s^3), small lateral acceleration (1.42 m/s^2),

TABLE II:
Quantitative Comparison of Planning Performance

Metric	Proposed (DRF-iLQR)	APF	MPC	RRT*	Unit
Min. Safety Dist. (\uparrow)	4.23	2.87	3.65	3.12	m
Avg. Safety Dist. (\uparrow)	7.85	5.42	6.92	6.15	m
Collision Rate (\downarrow)	0.0%	2.5%	0.5%	1.2%	%
Near-Miss Rate (\downarrow)	0.8%	8.5%	3.2%	5.8%	%
TTC _{min} (\uparrow)	3.45	1.82	2.65	2.15	s
Max Lateral Acc. (\downarrow)	1.42	2.85	1.95	2.45	m/s ²
Avg. Jerk (\downarrow)	1.18	3.52	1.85	2.65	m/s ³
Curvature Smoothness (\uparrow)	0.92	0.58	0.78	0.62	—
Avg. Computation Time (\downarrow)	12.3	8.5	45.2	125.6	ms
Path Length (\downarrow)	32.4	35.8	31.2	36.5	m

(\uparrow) larger is better; (\downarrow) smaller is better.

high curvature smoothness (0.92), real-time computation (12.3ms), and a success rate of 99.2%. Future work will extend the framework to more complex interactive scenarios, including multi-vehicle negotiation, cooperative planning, and environments involving pedestrians or non-holonomic agents.

References

- [1] F. Zou, L. Shen, Z. Jie, W. Zhang, and W. Liu, “A sufficient condition for convergences of adam and rmsprop,” in *Proc. IEEE/CVF CVPR*, 2019, pp. 11 127–11 135.
- [2] M. Alyamani and Y. Hassan, “Driver behavior on exit freeway ramp terminals based on the naturalistic driving study,” *J. Transp. Eng. A: Syst.*, vol. 149, no. 1, p. 04022120, 2023.
- [3] C. M. Martinez, M. Heucke, F.-Y. Wang, B. Gao, and D. Cao, “Driving style recognition for intelligent vehicle control and advanced driver assistance: A survey,” *IEEE Trans. Intell. Transp. Syst.*, vol. 19, no. 3, pp. 666–676, 2017.
- [4] P. Zhou, X. Sun, and T. Chai, “Enhanced nmpc for stochastic dynamic systems driven by control error compensation with entropy optimization,” *IEEE Trans. Control Syst. Technol.*, vol. 31, no. 5, pp. 2217–2230, 2023.
- [5] X. Hu, Z. Zheng, D. Chen, and J. Sun, “Autonomous vehicle’s impact on traffic: Empirical evidence from waymo open dataset and implications from modelling,” *IEEE Trans. Intell. Transp. Syst.*, vol. 24, no. 6, pp. 6711–6724, 2023.
- [6] C. Badue, R. Guidolini, R. V. Carneiro, P. Azevedo, et al., “Self-driving cars: A survey,” *Expert Syst. Appl.*, vol. 165, p. 113816, 2021.
- [7] Z. Hong, Q. Lin, and B. Hu, “Knowledge distillation-based edge-decision hierarchies for interactive behavior-aware planning in autonomous driving system,” *IEEE Trans. Intell. Transp. Syst.*, vol. 25, no. 9, pp. 11040–11057, 2024.
- [8] D. Li, J. Zhang, and G. Liu, “Autonomous driving decision algorithm for complex multi-vehicle interactions: An efficient approach based on global sorting and local gaming,” *IEEE Trans. Intell. Transp. Syst.*, vol. 25, no. 7, pp. 6927–6937, 2024.
- [9] J. Wurts, J. L. Stein, and T. Ersal, “Design for real-time nonlinear model predictive control with application to collision imminent steering,” *IEEE Trans. Control Syst. Technol.*, vol. 30, no. 6, pp. 2450–2465, 2022.
- [10] R. Vogel, F. Schmidberger, A. Kühn, K. A. Schneider, et al., “You can’t drive my car—a method to fingerprint individual driving styles in a sim-racing setting,” in *Proc. ICECET*, 2022, pp. 1–9.
- [11] Y. Gao, D. Li, Z. Sui, and Y. Tian, “Trajectory planning and tracking control of autonomous vehicles based on improved artificial potential field,” *IEEE Trans. Veh. Technol.*, vol. 73, no. 9, pp. 12468–12483, 2024.
- [12] R. Szczepanski, “Safe artificial potential field: Novel local path planning algorithm maintaining safe distance from obstacles,” *IEEE Robot. Autom. Lett.*, vol. 8, no. 8, pp. 4823–4830, 2023.
- [13] I. Kempf et al., “Control of cross-directional systems with approximate symmetries,” *Automatica*, vol. 167, p. 111782, 2024.
- [14] B. Peng et al., “Communication scheduling by deep reinforcement learning for remote traffic state estimation with bayesian inference,” *IEEE Trans. Veh. Technol.*, vol. 71, no. 4, pp. 4287–4300, 2022.
- [15] H. Lin, Y. Han, W. Cai, and B. Jin, “Traffic signal optimization based on fuzzy control and differential evolution algorithm,” *IEEE Trans. Intell. Transp. Syst.*, vol. 24, no. 8, pp. 8555–8566, 2023.
- [16] R. Hult, M. Zanon, S. Gros, and P. Falcone, “A semidistributed interior point algorithm for optimal coordination of automated vehicles at intersections,” *IEEE Trans. Control Syst. Technol.*, vol. 30, no. 5, pp. 1977–1989, 2022.
- [17] J. Zhu, K. Gao, H. Li, Z. He, and C. O. Monreal, “Bi-level ramp merging coordination for dense mixed traffic conditions,” *Fundam. Res.*, 2023.
- [18] D. Chen, Q. Qi, Q. Fu, J. Wang, J. Liao, and Z. Han, “Transformer-based reinforcement learning for scalable multi-uav area coverage,” *IEEE Trans. Intell. Transp. Syst.*, vol. 25, no. 8, pp. 10 062–10 077, 2024.
- [19] Y. Shi, Z. Gu, X. Yang, Y. Li, and Z. Chu, “An adaptive route guidance model considering the effect of traffic signals based on deep reinforcement learning,” *IEEE Intell. Transp. Syst. Mag.*, vol. 16, no. 3, pp. 21–34, 2024.
- [20] P. Ladosz, M. Mammadov, H. Shin, W. Shin, and H. Oh, “Autonomous landing on a moving platform using vision-based deep reinforcement learning,” *IEEE Robot. Autom. Lett.*, vol. 9, no. 5, pp. 4575–4582, 2024.
- [21] Y. Liu, X. Pei, H. Zhou, and X. Guo, “Spatiotemporal trajectory planning for autonomous vehicle based on reachable set and iterative lqr,” *IEEE Trans. Veh. Technol.*, vol. 73, no. 8, pp. 10 932–10 947, 2024.
- [22] M. Dobrevski and D. Skočaj, “Dynamic adaptive dynamic window approach,” *IEEE Trans. Robot.*, vol. 40, pp. 3068–3081, 2024.
- [23] D. J. Kim, Y. W. Jeong, and C. C. Chung, “Lateral vehicle trajectory planning using a model predictive control scheme for an automated perpendicular parking system,” *IEEE Trans. Ind. Electron.*, vol. 70, no. 2, pp. 1820–1829, 2023.
- [24] X. Liu, H. Nie, D. Li, Y. He, and M. H. A. Jr, “High-fidelity and curvature-continuous path smoothing with quadratic bézier curve,” *IEEE Trans. Intell. Veh.*, vol. 9, no. 2, pp. 3796–3810, 2024.
- [25] T. Xia, H. Chen, J. Yang, and Z. Guo, “Geometric field model of driver’s perceived risk for safe and human-like trajectory planning,” *Transp. Res. Part C Emerg. Technol.*, vol. 159, p. 104470, 2024.



Zhen Tian received his bachelor degree in electronic and electrical engineering from the University of Strathclyde, Glasgow, U.K. in 2020. He is currently pursuing the Ph.D. degree with the College of Science and Engineering, University of Glasgow, Glasgow, U.K. His main research interests include Interactive vehicle decision system and autonomous racing decision systems.



Zhihao Lin received an M.S. degree from the College of Electronic Science & Engineering, Jilin University, Jilin, China. He is currently pursuing a Ph.D. degree with the College of Science and Engineering, University of Glasgow, Glasgow, U.K. His main research interests focus on multi-sensor fusion SLAM systems, reinforcement learning, and hybrid control of vehicle platoons.