

Mixing by offshore wind infrastructure: Resolving the density stratified wakes past vertical cylinders

Charlie J. Lloyd & Robert M. Dorrell

*School of Architecture, Building and Civil Engineering, Loughborough University,
Loughborough LE11 3TU*

Dec 2025

Abstract

This work is focussed on understanding the fundamental fluid dynamics of tidal wakes generated by offshore wind infrastructure in stratified waters, using direct numerical simulations. The tidal flows past the structures are approximated by a uniform quiescent background flow with a two-layer density profile, interacting with a vertically oriented cylinder. Through these simulations we identify the processes through which turbulence generated in the wake of the structures leads to vertical mixing across the thermocline. We identify two fundamentally different flow regimes, dependent on both the stratification strength and the flow Reynolds number. The ‘weakly stratified’ wake is characterised by a highly energetic wake and a dominance of horizontal shear. As a result, vertical mixing occurs much further downstream than the region of maximum turbulent kinetic energy production. In contrast, the ‘strongly stratified’ wake regime is characterised by a large-scale recirculation region that develops across the thermocline which generates significant vertical shearing. This subsequently leads to time-independent standing waves which account for up to 10% of the total energy budget, and have characteristics similar to ‘mode 2’ internal solitary waves. The vertical shear introduced near the edges of the thermocline is highly efficient at local mixing, but vertical fluctuations are quickly suppressed as the wake propagates further downstream. We speculate that the emergence of this flow regime may explain discrepancies in previous field observations, which have been unable to detect a coherent wake far downstream of offshore wind infrastructure. Future work should focus on bridging the scale gaps between idealised simulations and the field.

1 Introduction

The offshore wind industry is exponentially expanding across the globe [1], motivated by net-zero carbon targets and enabled by rapid innovation. Due to spatial constraints in shallow water regions, large-scale developments are now occurring in relatively deep, seasonally stratified, shelf seas, for the first time [2]. Density stratification is a critical control on transport processes in shelf seas, which are disproportionately important for tidal energy dissipation [3], ocean biological production [4], and the global carbon budget

[5]. This control on transport processes arises through the suppressive nature of buoyancy forces on vertical motion, which can subsequently lead to significant barriers to transport when buoyancy gradients are sufficiently large. Unlike in shallow water sites, where background tidal/wind-driven processes are able to effectively mix the water column, offshore wind infrastructure pose a new risk to shelf sea oceanography as a source of anthropogenic turbulence [2, 6, 7] which may interfere with the delicate balance between restorative surface heating and water column mixing processes. There is a growing body of evidence that large-scale build out of offshore wind may enhance water column mixing through either atmospheric effects [8–10] or directly from tidal flows past infrastructure [11–14]. Here we focus on the latter mechanism, where wakes shed by tidal flows past infrastructure are a direct source of turbulent motions within the water column.

There have been several field campaigns targeting the potential impacts of offshore wind infrastructure on water column mixing [13–16]. Through water property transects, Floeter et al. [15] detected a significant weakening of stratification near the centre of two German Bight wind farms (BARD and Global Tech I), which extended up to half the diameter of the ambient tidal excursion. Similarly Schultze et al. [13] detected a 65% decrease in the potential energy anomaly in the wake of a 6 m monopile at the German Bight DanTysk wind farm. The wake spread to a width approximately 10 times the monopile diameter, but the full extent of the turbulent wake was not captured by this survey, even at a distance over 50 times the monopile diameter [13]. Field measurements were also obtained by Hendriks et al. [14] at the Norther Offshore Wind Farm (Belgian North Sea), in reasonable agreement with the dataset of Schultze et al. [13]; TKE measurements were 50% higher in the wake of a monopile when compared against ambient conditions, and enhanced vertical mixing could be detected in temperature/salinity transects as their vessel passed through the monopile wake.

The survey of Schultze et al. [13] was complimented by Large Eddy Simulations (LES) that revealed a turbulent kinetic energy (TKE) dissipation rate two orders of magnitude higher in the thermocline than when the monopile was not present; a greater contribution to energy dissipation than the bottom boundary layer. Measurements taken by Austin et al. [16] verified the dramatic enhancement of energy dissipation in the water column, who measured an order of magnitude increase in TKE dissipation rate downstream of a 4.7 m monopile in the Liverpool Bay Rhyl Flats wind farm, when compared against ambient conditions. Austin et al. [16] also estimated the vertical eddy diffusivity, which increased by an order of magnitude in the monopile wake.

These surveys provide evidence that offshore wind infrastructure leads to enhanced mixing in their energetic wakes, although the variability between these datasets, associated with structure design and size, location, ambient stratification strength, and background turbulence/tidal velocities, leads to a challenge regarding data consolidation. Even within individual studies, issues have arisen regarding the separation between structure-induced mixing processes and natural variability [15], and between repeat surveys, where Schultze et al. [13] could not detect a clear signal in temperature transects when revisiting the DanTysk wind farm during a period of stronger stratification. There is a critical need for a better understanding of the physical mechanisms that control infrastructure-induced mixing processes, to reconcile differences between field measurements.

Modelling efforts to understand impacts of offshore wind structures on oceanography have mainly focussed on the use of oceanographic models. The studies of Christiansen et al. [8], Rennau et al. [11], Cazenave et al. [12], and Christiansen et al. [17] highlight there are potential regional scale changes to the physical environment induced by flows past offshore wind infrastructure; Christiansen et al. [17] predict a 10% change in current velocities and stratification due to the presence of wind farms. However, these studies highlight a large degree of uncertainty regarding parameterisation of infrastructure wakes, which occur on sub-grid-

scales. The parameterisation of infrastructure wakes is based on the model of Rennau et al. [11], which incorporates physics through a momentum sink proportional to the drag acting on individual piles, and as source terms in the (Reynolds Averaged Navier-Stokes) turbulence closure: A TKE source term proportional to the power loss to drag, and a corresponding source of TKE dissipation rate. Subsequently, the closure requires a choice to be made regarding the drag coefficient, and tuning of additional turbulence closure coefficients. It is unclear how these coefficients should be constrained, due to their dependence on structure design and background flow/stratification conditions. It should also be noted that this strategy effectively averages out the energetic, relatively narrow wakes across the grid cells that contain infrastructure. It is unclear whether appropriate parameterisation of offshore wind wakes should include this sub-grid-scale intermittency, given the observed order-of-magnitude difference between TKE dissipation rate within the narrow wakes, when compared against the ambient. Original calibration by Rennau et al. [11] was carried out by performing structure-resolved small-scale simulations of flows past monopile foundations, using a RANS closure. Simulating stratified turbulence is a key challenge in physical oceanography, due to the role buoyancy forces play on turbulent structures and mixing dynamics, leading to highly anisotropic, intermittent, and anti-diffusive flows [18]. There is therefore a critical need to develop robust datasets of stratified-flow interactions with infrastructure, to develop our understanding of the physical processes that lead to vertical mixing, their dependence on flow and structure properties, and how these learnings can constrain regional-scale model closures to reduce uncertainty.

In this work, we perform the first fundamental study of mixing dynamics induced by vertical cylinders in a two-layer density (temperature) stratified flow, as a model for offshore wind monopiles. While there are numerous studies investigating stratified-flow interactions with horizontal cylinders [19–21], which induce vertical shear directly in the flow, only Meunier [22], Bosco and Meunier [23] have performed experiments with vertical cylinders, as part of their studies investigating the effects of cylinder inclination on the onset of two- and three-dimensional instability (i.e. at low Reynolds numbers). Vertical cylinders introduce primarily horizontal shearing in the water column, and hence, vertical vorticity. Coherent vertical vortices are known to lead to an efficient route to turbulence in linearly stratified flows, through spontaneous layering [18, 23–26]. However, the vertical vortices introduced by offshore wind infrastructure are of a similar diameter to that of the thermocline width, both of order 10 m. This is in contrast to previous experiments, where the cylinder diameter is orders of magnitude smaller than the buoyancy gradient length scale [24]. Offshore wind infrastructure in stratified flows may therefore lead to fundamentally different flow mixing processes when compared to previous studies.

We therefore aim to answer three key questions in this work: How does the horizontal shear produced by two-layer stratified flows lead to vertical mixing? How are these mixing processes affected by the flow Reynolds number and stratification strength? And what are the energy pathways that lead to irreversible mixing in such flows? These questions are answered using Direct Numerical Simulations at moderate cylinder Reynolds numbers and varying degrees of stratification strength. The paper is structured as follows: First, we introduce the methodology in Section 2. In Section 3 we present our results, including analysis of the instantaneous flow structure, the time-averaged flow field, the spatial dependence of key transport budgets, and finally assessment of volume-integrated energy budgets. We conclude this study with a discussion in the context of offshore wind marine impacts in Section 4.

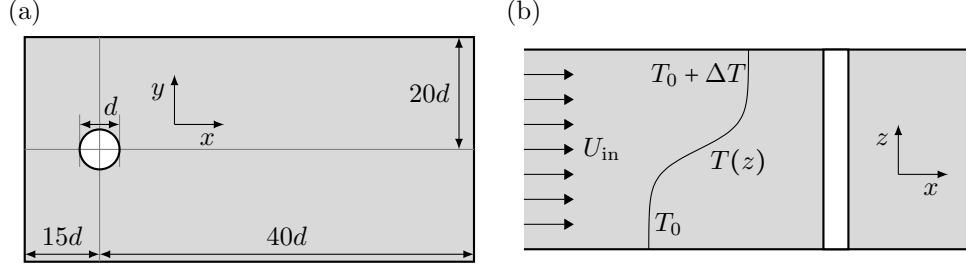


Figure 1: Plan view (a) and side view (b) of the fluid domain and inflow conditions.

2 Methodology

The fluid domain is sketched in Figure 1, with x the streamwise coordinate, y the spanwise coordinate, and z the vertical coordinate. The cylinder is vertically oriented and placed at the origin $(x, y) = (0, 0)$. The domain extends $15d$ upstream, $40d$ downstream, and $20d$ in the positive and negative spanwise directions. The domain height is set to $10d$ such that the domain coordinates, made dimensionless by the cylinder diameter, are bounded by $x \in [-15, 40]$, $y \in [-20, 20]$, and $z \in [-5, 5]$.

We solve the divergence free, dimensionless and Boussinesq momentum and continuity equations, with a scalar transport equation for a temperature field:

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\nabla p + Ri_d(\theta - \theta_{\text{in}})\mathbf{e}_z + \frac{1}{Re_d} \nabla^2 \mathbf{u}, \quad (1)$$

$$\nabla \cdot \mathbf{u} = 0, \quad (2)$$

and

$$\frac{\partial \theta}{\partial t} + (\mathbf{u} \cdot \nabla) \theta = \frac{1}{Pr Re_d} \nabla^2 \theta. \quad (3)$$

Here, \mathbf{u} represents the three-dimensional velocity vector, and $\theta = (T - T_{\text{ref}})/\Delta T$ is the dimensionless temperature field related to the dimensional temperature T , a reference temperature T_{ref} , and the temperature difference between the upper and lower layers of the flow, ΔT . p represents the pressure once the approximate hydrostatic pressure has been subtracted, which will be discussed shortly. The governing equations have been made dimensionless by the uniform inflow streamwise velocity, U_{∞} , the cylinder diameter d , and the temperature difference between the upper and lower layer, ΔT , leading to three dimensionless parameters governing flow dynamics: The cylinder Reynolds number Re_d , cylinder Richardson number Ri_d , and the Prandtl number Pr :

$$Re_d = \frac{U_{\text{in}} d}{\nu}, \quad Ri_d = \frac{\alpha \Delta T g d}{U_{\text{in}}^2}, \quad \text{and} \quad Pr = \frac{\nu}{\kappa}, \quad (4)$$

where α is the thermal expansion coefficient, g represents gravitational acceleration, κ is the diffusivity of temperature, and ν is the kinematic viscosity. This work presents six simulations carried out at two Reynolds numbers ($Re_d = 500$ and $Re_d = 2000$), one Prandtl number ($Pr = 1$), and three levels of stratification strength ($Ri_d = 0.05, 0.5$, and 2.0). The six cases are termed Re500Ri005, Re500Ri050, Re500Ri200, Re2000Ri005, Re2000Ri050, and Re2000Ri200, respectively.

At the upstream (negative x) boundary we prescribe $\mathbf{u} = (1, 0, 0)$ and $\theta = \theta_{\text{in}} = \frac{1}{2} \tanh(z(d/h))$, where h represents the thermocline thickness, which here is set equal to the cylinder diameter: $d/h = 1$. At the downstream (positive x) boundary we apply an open boundary condition [27] and no-slip conditions at the

cylinder surface, $\mathbf{u} = 0$. Note that the pressure field p has been constructed to be in approximate hydrostatic balance by subtracting θ_{in} from the buoyancy forcing in equation (1). The full pressure field is recovered by $\tilde{p} = p + \Pi(z)$, where the potential $\Pi(z) = \int_z Ri_d \theta_{\text{in}} dz$. The remaining boundaries are treated with mixed shear-free boundary conditions: $n_i \partial_i u_j = 0$, and $u_i n_i = 0$, where n_i represents the surface-normal vector. The temperature field is treated as insulated on all boundaries other than the upstream x -normal boundary: $\partial_i \theta n_i = 0$.

We adopt an overlapping Schwarz-Spectral-Element-Method (SSEM) to discretise the governing equations, implemented in NEK5000 [28]. The SSEM framework is based on the principles of the overlapping Schwarz method for solving PDEs on overlapping domains [29]. In this way a grid of significantly reduced resolution can be adopted in the freestream of the flow, while a high-quality and high-resolution hexahedral mesh can be adopted in the cylinder wake. The domain of Figure 1 (a) and (b) is therefore split into two regions: an inner domain and an outer domain, each of which are decomposed into spectral elements on which the governing equations are discretised using a Galerkin method. The inner domain is bounded by $x \in [-4.39, 40]$, $y \in [-5.01, 5.01]$, and $z \in [-5, 5]$, and discretised using $E_{xy} \times E_z = 3784 \times 40$ elements, while the outer domain is bounded by $x \in [-15, 40]$, $y \in [-20, 20]$, and $z \in [-5, 5]$, using $E_{xy} \times E_z = 1584 \times 20$ elements. The two sub-domains overlap by approximately one element which enables interpolation between the two domains at run-time. Equations are solved by means of local approximations based on a high-order tensor-product polynomial basis located at Gauss-Lobatto-Legendre (GLL) nodes. We adopt 8^3 GLL nodes in each element (7th order polynomials), which is sufficient to fully resolve turbulent scales for the cases with $Re_d = 500$. In the cylinder wake of the $Re_d = 500$ flows, the ratio between the GLL point spacing and the local Kolmogorov length scale has a maximum value of 2.2, with only 15 % of GLL points with a spacing greater than the local Kolmogorov scale in the inner sub-domain, and none in the outer sub-domain. At the cylinder wall of the $Re_d = 500$ flows, the maximum element size is approximately 4.5 wall-units, with a mean element size of approximately 2 wall units. These equate to maximum and mean wall-normal GLL node spacings of approximately 0.29 and 0.13 wall units, respectively.

We adopt this same grid for the higher Reynolds number flows ($Re_d = 2000$), although note that this resolution is too coarse to resolve all turbulent scales. In these cases, we adopt modal based explicit filtering to account for unresolved dissipation (See Lloyd et al. [30] and references therein for validation of this technique for stratified turbulent flows). Unresolved turbulent scales account for approximately 10% of the volume integrated turbulent kinetic energy dissipation. Therefore the higher Reynolds number flows are primarily used as a qualitative comparison and speculation as to how dynamics scale with Reynolds number.

The unsteady governing equations (1) to (3) are solved in the velocity-pressure form using the \mathbb{P}_n - \mathbb{P}_n scheme, where all variables are represented by the same polynomial order [31]. Equations are solved simultaneously on the two overlapping sub-domains using semi-implicit BDF3/EXT3 timestepping [32], with a dimensionless timestep of 1e-3. Non-linear terms are de-aliased using the 3/2 rule [33, 34]. Boundary data are exchanged between the two overlapping sub-domains by spectral interpolation and 2nd order temporal extrapolation. At the end of each timestep, a Schwarz iterations is carried out to ensure consistency in the solution in the overlapping region of the two sub-domains.

Cases are initialised with $\mathbf{u} = 0$ and $\theta = \theta_{\text{in}}$, and time-stepped until the flow is statistically steady (approximately 500 time units). Subsequent data collection occurs over 1000 time units to ensure convergence of turbulent kinetic energy and buoyancy variance budgets.

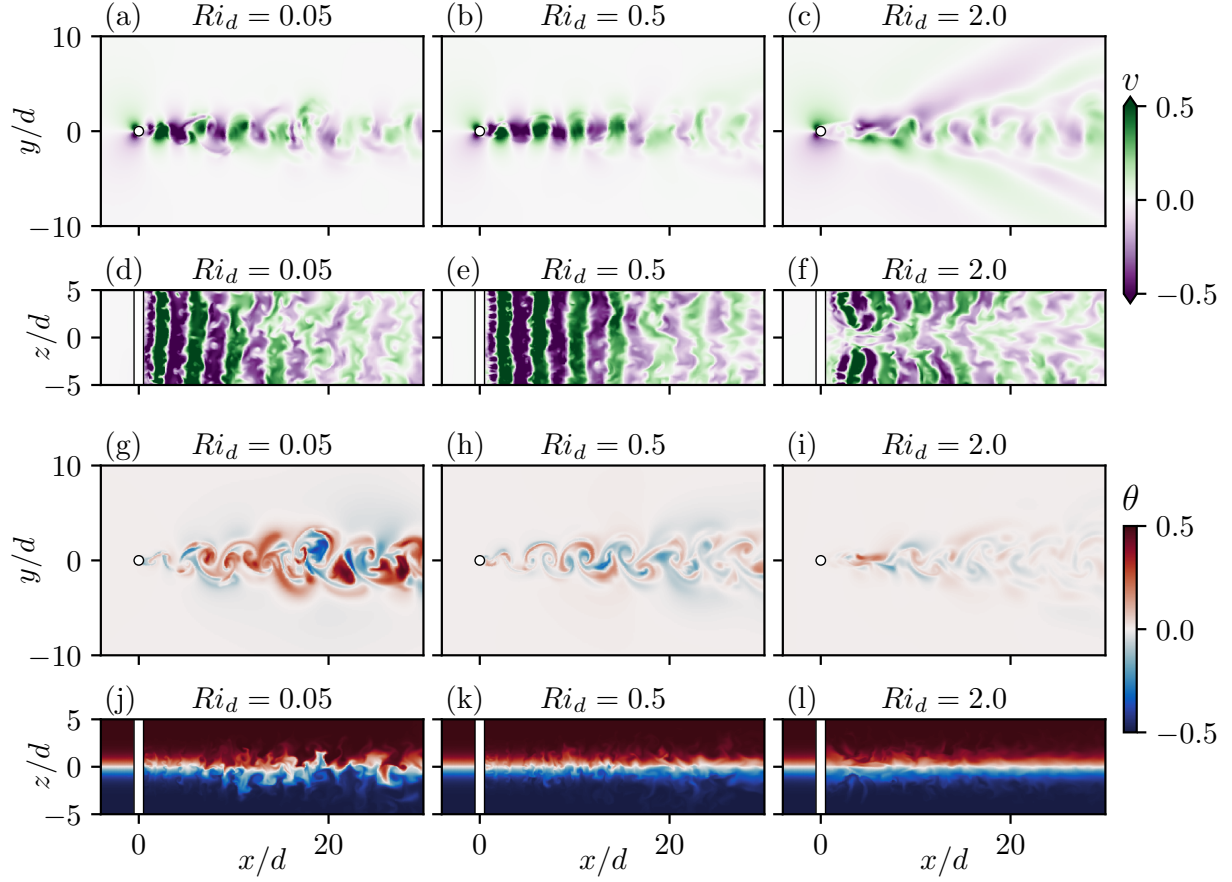


Figure 2: Visualisation of instantaneous spanwise velocity (a to f) and temperature (g to l). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a, d, g, j); $Ri_d = 0.5$ in panels (b, e, h, k); and $Ri_d = 2.0$ in panels (c, f, i, l). Panels (a) to (c) and (g) to (i) show a z -normal slice at $z = 0$, and panels (d) to (f) and (j) to (l) show a y -normal slice at $y = 0$.

3 Results

We begin analysis by assessing instantaneous snapshots of the low Reynolds number simulations. Visualisations of spanwise velocity and temperature are shown on y - and z -normal slices at the origin of the domain, in Figure 2. The cylinder wake is clearly distinct from the uniform background flow. The Karman vortex (KV) street is most clear in the spanwise velocity signal, which decays in strength for $x \gtrsim 10$. Qualitatively, the $Ri_d = 0.05$ and $Ri_d = 0.5$ flows are very similar, although mixing of the temperature field is clearly suppressed by the higher Ri_d ; the large scale vertical mixing structures present in the temperature field for $Ri_d = 0.05$ are reduced as Ri_d increases. Note that for low stratification, mixing of the temperature field appears to grow in strength downstream, while the higher Ri_d cases suppress vertical motion as the wake evolves. The temperature perturbations are at their maximum at a streamwise location closer to the cylinder as Ri_d increases.

The strongest stratification case ($Ri_d = 2.0$) shows dramatically different behaviour when compared to

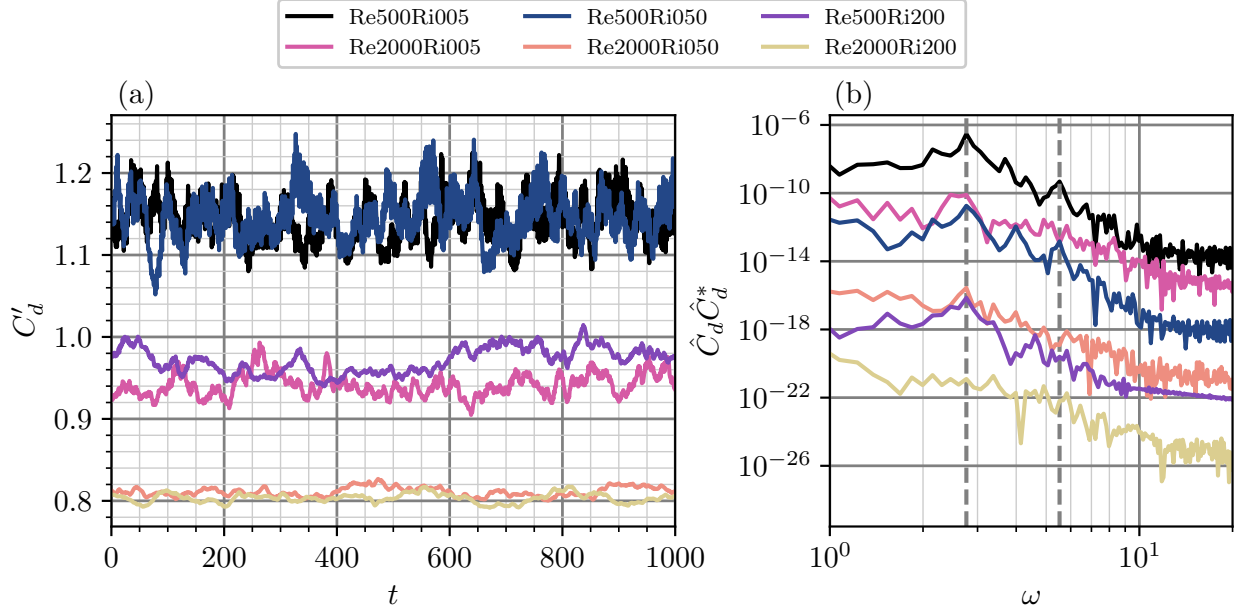


Figure 3: Drag coefficient time series for all simulations over the full data acquisition time (a). Panel (b) shows the power spectral density associated to each drag coefficient time series, with successive cases shifted downward by two orders of magnitude, for clarity. Vertical dashed lines of (b) highlight the dominant vortex shedding frequency (ω_{peak}) for case Re500Ri005, and twice this frequency ($2\omega_{\text{peak}}$).

the other cases. While the KV is still present, it is nearly entirely suppressed over the thermocline, and it appears detached from the cylinder surface. Aside from strong initial fluctuations, the temperature variations for $Ri_d = 2.0$ are quickly suppressed beyond $x \approx 20$. A key and interesting feature of the $Ri_d = 2.0$ flow regime is the large but relatively weak coherent wave-like structures that propagate downstream and away from the energetic KV, most clear in the spanwise velocity signal. As we shall show, this is a statistically steady coherent structure (a standing internal wave) that appears due to the presence of strong statistically steady vertical motions in the lee of the stratified cylinder wake.

The instantaneous data are qualitatively similar for the high Re_d cases, although the large-scale standing internal waves appear for $Ri_d = 0.5$, indicating that the transition between flow regimes is controlled by both Re_d and Ri_d . The higher Reynolds number cases are more susceptible to the suppression of vertical motion by buoyancy forces due to the earlier emergence and higher importance of three-dimensional flow structures.

The time-dependence of the drag coefficient is presented in Figure 3, defined by

$$C'_d = \frac{1}{\frac{1}{2}A_{\text{ref}}u_\infty^2} \int_{\Omega_w} \left(pn_x - \frac{1}{Re_d} \frac{\partial u}{\partial x_j} n_j \right) \partial\Omega, \quad (5)$$

where n_x is the x -component of the surface-normal pointing vector (pointing out of the fluid domain), Ω_w represents the cylinder surface, and the (dimensionless) normalisation parameters are the reference area $A_{\text{ref}} = 10$ and the freestream velocity $u_\infty = 1$. Both the Reynolds number and Richardson number have a strong influence on the drag coefficient. In agreement with literature data [35] the drag coefficient and its fluctuations are reduced as Re_d increases from 500 to 2000. The reduced fluctuations are reflective of the reduced relative strength of the KV, which is identified by the clear dominant frequency in the power spectral density of the drag coefficient (Figure 3 (b)) at low Richardson numbers, where \hat{C}_d represents the

Fourier transform of C_d' once it's mean has been removed, and the superscript $*$ represents the complex conjugate. At low Re_d and Ri_d there is also evidence of a secondary peak at twice the frequency of the dominant frequency, associated with mode-mode interactions. These data also clearly show that as Ri_d is increased, the drag coefficient and its fluctuations are reduced. At $Re_d = 2000$ and $Ri_d = 2.0$ there is no convincing peak associated to the KV, and the spectra appears much flatter. While the KV is still present in the spanwise velocity signal of the $Re_d = 2000$ and $Ri_d = 2.0$ case, it develops further downstream of the cylinder when compared to the other cases, and hence its presence is much weaker in the drag measurements.

3.1 Time-averaged statistics

This paper is primarily concerned with the time-averaged (here denoted ‘mean’) flow properties, particularly how the cylinder wake impacts the time-averaged kinetic and potential energy balance. Before assessing the simulation data we detail the key transport equations that govern the time-averaged energy fields, where we adopt an overbar to denote a time-averaged variable, and a prime to denote the fluctuation away from the time-average. For example $\mathbf{u} = \bar{\mathbf{u}} + \mathbf{u}'$. Adopting summation notation, the transport equation for mean kinetic energy, ($E_k = \frac{1}{2}\bar{u}_i\bar{u}_i$), per unit volume, is obtained from the dot-product of the velocity field and the momentum equation (1):

$$0 = \underbrace{-\frac{1}{Re_d} \frac{\partial \bar{u}_i}{\partial x_j} \frac{\partial \bar{u}_i}{\partial x_j}}_{\text{KE dissipation}} + \underbrace{\bar{w}(\bar{b} - b_{\text{in}})}_{\text{KE buoyancy flux}} + \underbrace{\overline{u'_i u'_j} \frac{\partial \bar{u}_i}{\partial x_j}}_{\text{TKE production}} - \underbrace{\frac{\partial}{\partial x_j} \left(\bar{u}_j E_k + \bar{u}_i \bar{p} \delta_{ij} - \frac{1}{Re_d} \frac{\partial E_k}{\partial x_j} + \bar{u}_i \overline{u'_i u'_j} \right)}_{\text{KE transport}}, \quad (6)$$

$-\mathcal{E} \qquad -\mathcal{B}_{\text{KE}} \qquad -\mathcal{P} \qquad +\mathcal{T}_{\text{KE}}$

where the buoyancy $b = Ri_d \theta$ with a reference inflow buoyancy $b_{\text{in}} = Ri_d \theta_{\text{in}}$. The first term, \mathcal{E} represents viscous destruction of mean kinetic energy (KE), and is typically negligible for high Reynolds number flows [36]. The second term, \mathcal{B}_{KE} represents the mean buoyancy flux, which is neglected (or identically zero) in most flows concerning mixing of stratified flows where there is no mean vertical velocity. As we shall show, when stratification is strong the two-layer flow generates large-scale vertical mean flow structures, and hence \mathcal{B}_{KE} is a key component of the KE and mean potential energy (PE) budgets. The third term \mathcal{P} represents production of turbulent kinetic energy (TKE), and the final term \mathcal{T}_{KE} groups the various transport terms of the KE budget.

The KE transport equation is coupled to the transport of mean potential energy (PE), per unit volume, defined as $E_p = -\bar{b}z$. PE transport is governed by

$$0 = \underbrace{-\bar{w}(\bar{b} - b_{\text{in}})}_{\text{KE buoyancy flux}} + \underbrace{-\overline{b'w'}}_{\text{TKE buoyancy flux}} + \underbrace{\frac{\partial}{\partial x_j} \left(-\bar{u}_j E_p - \bar{u}_j \Pi + \overline{z b' u'_j} + \frac{1}{Pr Re_d} \frac{\partial E_p}{\partial x_j} + \frac{2}{Pr Re_d} b \hat{z}_j \right)}_{\text{PE transport}}, \quad (7)$$

$+\mathcal{B}_{\text{KE}} \qquad +\mathcal{B}_{\text{TKE}} \qquad +\mathcal{T}_{\text{PE}}$

where \mathcal{B}_{TKE} represents the turbulent buoyancy flux and \mathcal{T}_{PE} groups the PE transport terms. It is worth noting here that the potential Π in the transport term arises due to our definition of the KE buoyancy flux, where the mean buoyancy has its inflow reference subtracted. This is similarly reflected in the KE budget where Π is implicit in our definition of pressure p (see Section 2). We find this form convenient when assessing energy budgets; without removal of the reference buoyancy from \mathcal{B}_{KE} , small variations in \bar{w} lead

to large buoyancy fluxes due to the rapid changes in \bar{b} across the thermocline, which are simply balanced by large variations in the PE and KE transport terms, dominating over other variations in the flow (particularly for KE).

KE and PE transport are coupled to the transport of turbulent kinetic energy (TKE), defined as $e_k = \frac{1}{2}\overline{u'_i u'_i}$:

$$0 = \underbrace{-\overline{u'_i u'_j} \frac{\partial \bar{u}_i}{\partial x_j}}_{\text{TKE production}} + \underbrace{\overline{b' w'}}_{\text{TKE buoyancy flux}} - \underbrace{\frac{1}{Re} \overline{\frac{\partial u'_i}{\partial x_j} \frac{\partial u'_i}{\partial x_j}}}_{\text{TKE dissipation}} - \underbrace{\frac{\partial}{\partial x_i} \left(\bar{u}_i e_k + \frac{1}{2} \overline{u'_j u'_j u'_i} + \overline{u'_i p'} - \frac{1}{Re} \frac{\partial e_k}{\partial x_i} \right)}_{\text{TKE transport}}, \quad (8)$$

$\quad \quad \quad +\mathcal{P} \quad \quad \quad -\mathcal{B}_{\text{TKE}} \quad \quad \quad -\varepsilon \quad \quad \quad +\mathcal{T}_{\text{TKE}}$

where TKE transport terms are grouped into \mathcal{T}_{TKE} and ε represents the TKE dissipation rate. This system of transport equations (6) to (8) is a closed system, with the buoyancy flux and turbulent production terms transferring energy between the different budgets. However, a well recognised issue with these energy budgets is that mixing of the potential energy field cannot be discerned from the generally reversible fluxes \mathcal{B}_{KE} and \mathcal{B}_{TKE} . For this reason, we further assess budgets of the appropriately scaled buoyancy variance ($\frac{1}{2}\overline{b'b'}$) transport equation, the destruction rate of which is commonly adopted for diagnosing mixing of stratified flows [18, 37–39]:

$$0 = \underbrace{-\overline{w'b'}}_{\text{TKE buoyancy flux}} - \underbrace{\frac{1}{N^2} \overline{u'b'} \frac{\partial \bar{b}}{\partial x} - \frac{1}{N^2} \overline{v'b'} \frac{\partial \bar{b}}{\partial y}}_{\text{horizontal TKE buoyancy flux}} - \underbrace{\frac{1}{N^2 Pr Re} \overline{\frac{\partial b'}{\partial x_j} \frac{\partial b'}{\partial x_j}}}_{\text{SBV destruction rate}} + \underbrace{\frac{1}{N^2} \frac{\partial}{\partial x_j} \left[-\bar{u}_j \frac{1}{2} \overline{b'b'} + \frac{1}{Pr Re} \frac{\partial}{\partial x_j} \left(\frac{1}{2} \overline{b'b'} \right) - \frac{1}{2} \overline{b'b' u'_j} \right]}_{\text{SBV transport}}, \quad (9)$$

$\quad \quad \quad +\mathcal{B}_{\text{TKE}} \quad \quad \quad +\mathcal{B}_{\text{TKE}}^{xy} \quad \quad \quad -\mathcal{X} \quad \quad \quad +\mathcal{T}_{\text{SBV}}$

where $N^2 = \bar{b}_z$ is the buoyancy frequency. The scaled buoyancy variance (SBV) transport equation is balanced by the TKE buoyancy flux \mathcal{B}_{TKE} , a spanwise turbulent buoyancy flux term $\mathcal{B}_{\text{TKE}}^{xy}$, the SBV (irreversible) destruction rate \mathcal{X} , and transport terms \mathcal{T}_{SBV} . This form of the buoyancy variance transport is consistent with that of Caulfield [18], although several terms are present that can usually be neglected. In particular, the $x-y$ component of the turbulent buoyancy flux ($\mathcal{B}_{\text{TKE}}^{xy}$) is usually identically zero in stratified mixing problems (where $\bar{b}_z \gg \bar{b}_x, \bar{b}_y$) but is non-negligible in this flow due to inhomogeneity in the near cylinder wake, and subsequent emergence of relatively strong streamwise and spanwise buoyancy gradients. In a closed system, non-zero $\mathcal{B}_{\text{TKE}}^{xy}$ will result in $\mathcal{X} > \mathcal{B}_{\text{TKE}}$, which requires consideration when assessing mixing of the mean buoyancy field. Nevertheless, \mathcal{X} provides a local estimation of irreversible mixing. Subsequently, the four transport budgets (6) to (9) will be used to assess how energy is conserved in the two-layer cylinder wake flow. We will first assess the spatial dependence of the time-averaged fields and key transport terms, before assessing surface- and volume-integrated energy budgets.

3.2 The mean flow

The vertical dependence of the time-averaged temperature and velocity fields are visualised in Figure 4, where data are sampled on a y -normal plane at $y = 0$. Here we report the mean temperature field $\bar{\theta}$ with the

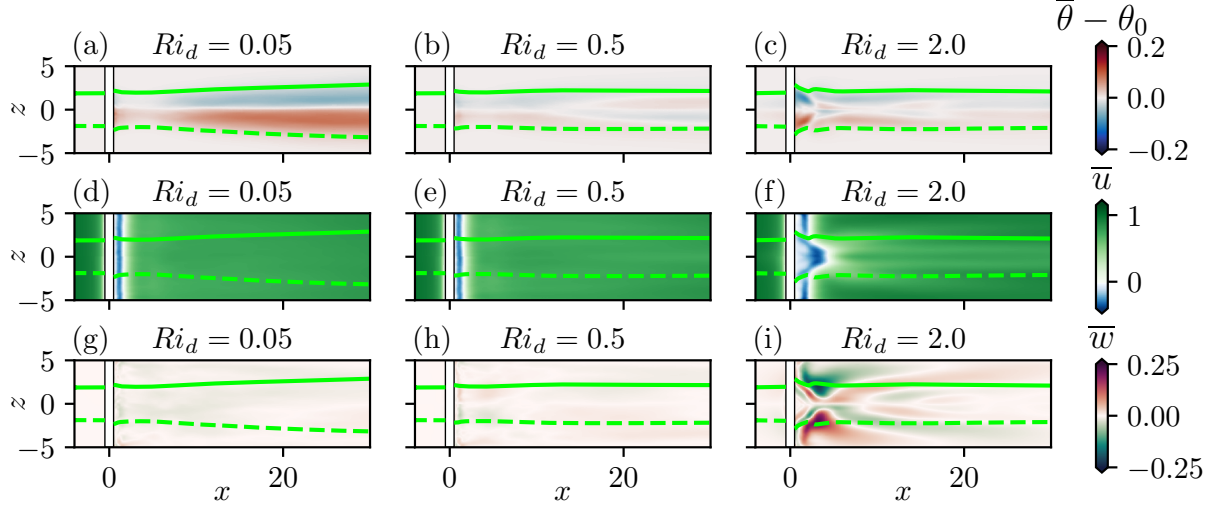


Figure 4: Time-averaged temperature (a to c), streamwise velocity (d to f) and vertical velocity (g to i) on a y -normal slice at $y = 0$. $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a, d, g); $Ri_d = 0.5$ in panels (b, e, h); and $Ri_d = 2.0$ in panels (c, f, i). Temperature data are presented as a perturbation from the spatially varying background field $\theta_0(x, z)$. Lines represent the thermocline bounds, quantified by the contours $\bar{\theta} = \pm 0.475$.

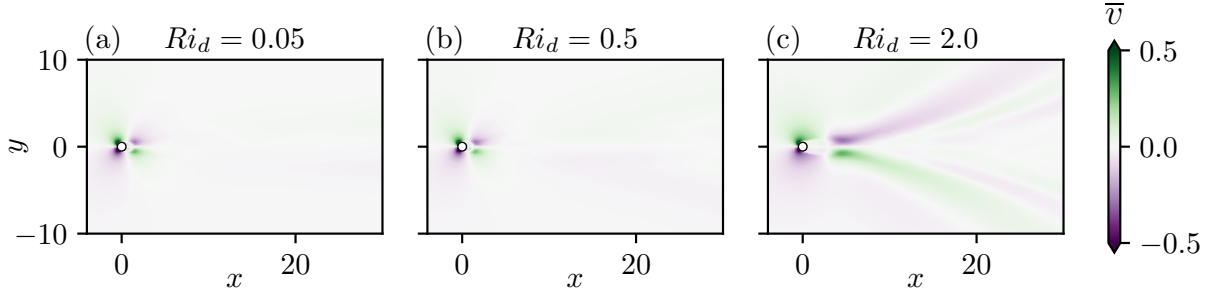


Figure 5: Time-averaged spanwise velocity on a z -normal slice at $z = 0$. $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panel (a); $Ri_d = 0.5$ in panel (b); and $Ri_d = 2.0$ in panel (c).

spatially varying background field $\theta_0(x, z)$ subtracted. θ_0 is the temperature field that would arise due to diffusive processes, if there were no obstacle in the flow (obtained by solving the subsequent 2D temperature advection-diffusion equation). We find that removing this spatially varying reference field enables easier interpretation of temperature perturbations, since any deviations from θ_0 must arise due to the presence of the obstacle.

The $Ri_d = 0.05$ and $Ri_d = 0.5$ cases appear qualitatively similar for these variables, aside from a stronger broadening of the thermocline for the weakest stratification strength. The weakest stratification case sees the thermocline broadening over the full domain extent, while the stronger stratification cases appear to suppress thermocline growth. When stratification is strong ($Ri_d = 2.0$) there is an intricate recirculation region that develops across the thermocline. Above/below the recirculation region there is strong downward/upward moving fluid, towards the thermocline, which subsequently leads to a standing wave downstream, observed in the mean vertical velocity, and the temperature deviation. The presence of this standing wave is also clear in Figure 5, where the mean spanwise velocity is visualised on a central z -normal slice at $z = 0$. As a result of this wave, strong vertical shearing in the streamwise velocity field (Figure 4) also develops; as we shall

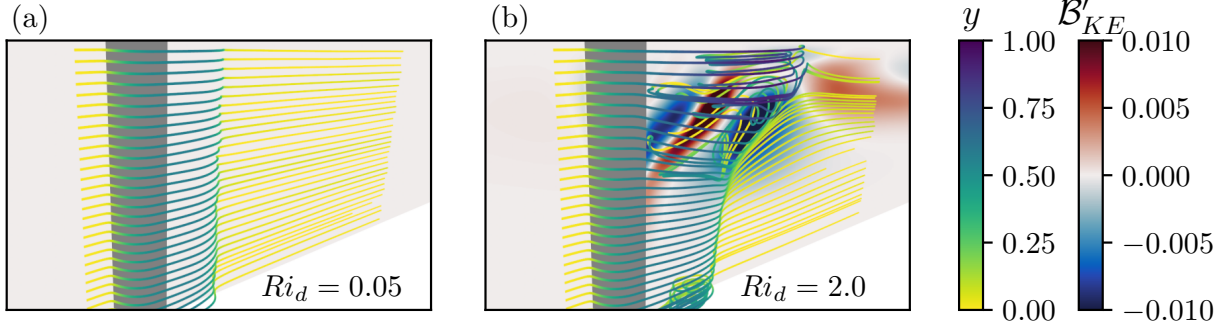


Figure 6: 3D Visualisation of mean flow streamlines in the lower half of the flow, coloured by the spanwise coordinate. $Re_d = 500$ for all panels with: $Ri_d = 0.05$ (a) and $Ri_d = 2.0$ (b). A y -normal slice at $y = 0$ is added to visualise the mean buoyancy flux.

show, this leads to a different source of turbulent production when compared to the horizontally sheared weakly stratified cylinder flows.

It is also interesting to note the sign-changes in the temperature deviation $\bar{\theta} - \theta_0$ (Figure 4) as the flow advects downstream for both the $Ri_d = 0.5$ and $Ri_d = 2.0$ cases. This is indicative of reversible energy transfer between the PE and KE fields, and shows that, while much weaker in magnitude, there is evidence of mean-flow wave-like structures developing in the wake of the $Ri_d = 0.5$ case, similar too but much weaker and further downstream when compared to the $Ri_d = 2.0$ case.

The recirculating flow region is well visualised by the streamlines of Figure 6. While the weak stratification case shows a uniform separation region as the flow passes downstream of the cylinder, the streamlines of the strong stratification case move further laterally in the thermocline, and the recirculation region approximately doubles in size at $z = 0$. The KE buoyancy flux is also reported here, where strong negative flux is associated with the upward flow of dense fluid. We see that, in the recirculation region, we get alternating patterns of positive/negative mean buoyancy flux associated with downward/upward backflow. This has a strong local effect on the temperature field (Figure 4), although much of the strong changes in temperature are reversed as the flow is convected downstream. However, this strong local temperature change, and associated vertical motions, are the source of the large-scale standing internal wave.

The spatial distribution of the local pressure and viscous drag coefficients over cylinder surface are presented in Figure 7, for the three cases with $Re_d = 500$. Here, the local drag coefficient is defined as

$$c_d = c_p + c_\nu = \frac{F_p}{\frac{1}{2}A_{\text{ref}}u_\infty^2} + \frac{F_\nu}{\frac{1}{2}A_{\text{ref}}u_\infty^2}, \quad (10)$$

where F_p and F_ν are, respectively, the streamwise pressure and viscous forces acting on the cylinder:

$$F_p = (\bar{p} - p_\infty)n_x, \quad F_\nu = -\frac{1}{Re_d} \frac{\partial \bar{u}}{\partial x_j} n_j, \quad (11)$$

where p_∞ is the reference inflow pressure, equal to the average pressure on the negative x bounding surface Ω_x^- , and n_j is the surface-normal vector pointing out of the fluid volume. The spatial distributions of the local drag coefficients are presented as a function of the vertical coordinate z and the angular position $\alpha = \arctan y/x$. At this low Reynolds number we see that viscous contributions to drag are important, and are approximately 15% of the pressure contributions. Pressure drag is largest at the upstream and

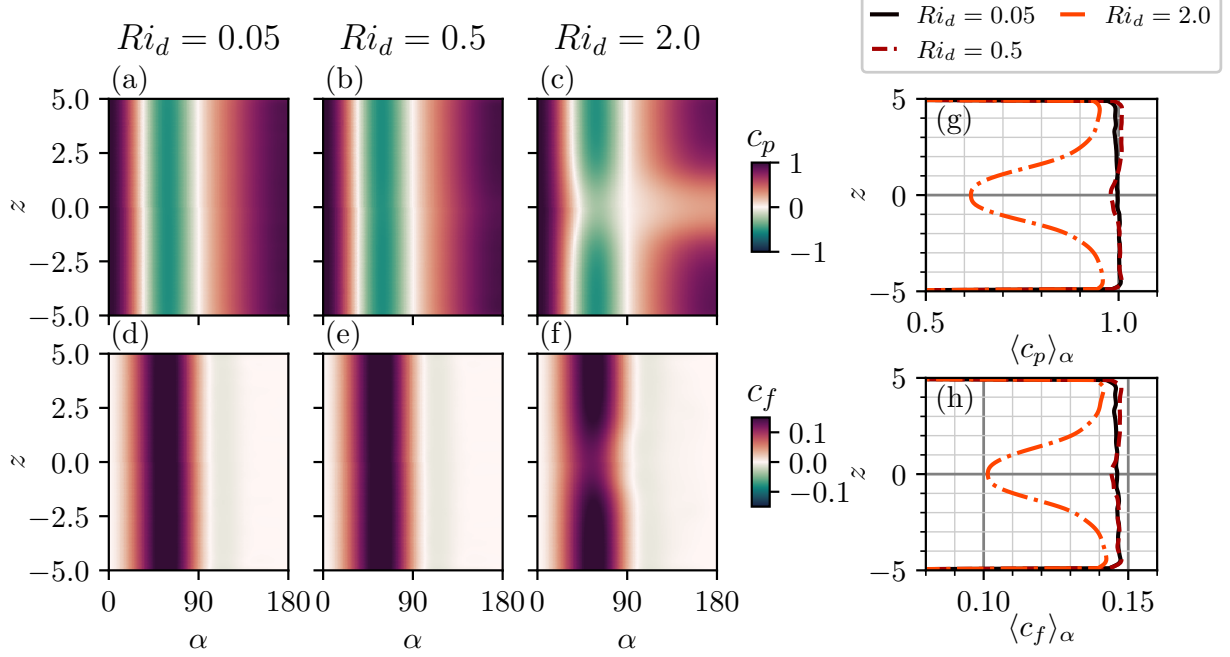


Figure 7: Spatial dependence of the pressure (a to c) and viscous (d to f) contributions to the drag coefficient as a function of vertical coordinate (z) and angular position on the cylinder surface ($\alpha = \arctan y/x$). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ (a and d); $Ri_d = 0.5$ (b and e); and $Ri_d = 2.0$ (c and f). Panels (g) and (h) show the pressure and viscous drag coefficients integrated over α (measured in degrees).

downstream edges of the cylinder surface, while viscous drag peaks at $\alpha \approx 60$ degrees. Strong stratification affects both contributions in similar ways when integrated over the angular position shown in Figure 7 (j,k,l). However, the local effects differ: The upstream side of the cylinder is unaffected by stratification, but the pressure force is significantly reduced across the thermocline. In addition, the viscous contributions over the thermocline are reduced, and the region of $c_\nu = 0$ occurs at an earlier angular position, indicative of earlier flow separation and therefore a wider and longer recirculation region (consistent with Figure 5). It is also clear from Figure 7 that the effects of stratification are felt in the constant density regions, leading to a reduced drag over all z . This effect would be expected to reduce if the vertical domain height was increased. We hypothesise that the local drag reduction across the thermocline is due to the suppression of the KV, and subsequent suppression of spanwise momentum transport, by the large-scale recirculation region that is generated through the strong buoyancy forces across the thermocline.

The effect of the cylinder on the potential energy field is expressed as a change in the potential energy anomaly (PEA) in Figure 8. Here the PEA is defined as the depth-integrated E_p with the spatially varying background potential energy E_{p0} subtracted, where $E_{p0} = -Ri_d \theta_0(x, z)z$:

$$\Delta \text{PEA} = \frac{\int_{-2}^2 (E_p - E_{p0}) \partial z}{\left| \int_{-2}^2 E_{p0} \partial z \right|}. \quad (12)$$

Note that we integrate only over the region where the background temperature field has some appreciable vertical dependence: $-2 \leq z \leq 2$. This choice is taken since the cylinder cannot affect the fluid E_p in the regions of constant temperature (i.e where the fluid is already mixed), unless the thermocline width has grown

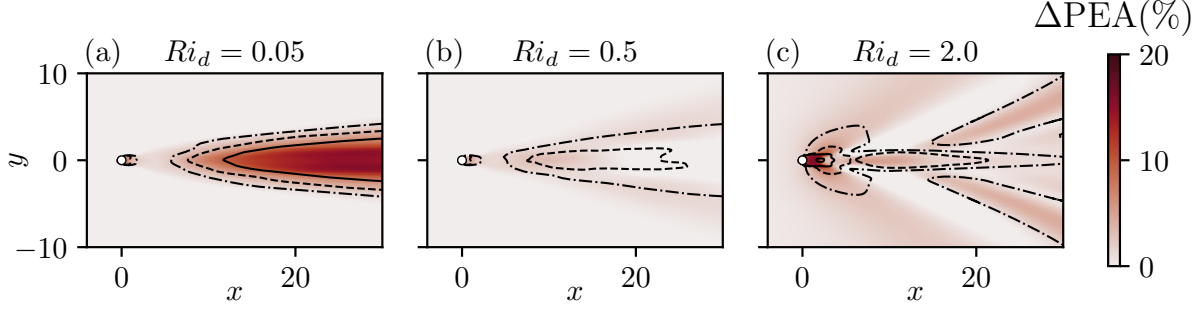


Figure 8: Change in the Potential Energy Anomaly, defined as $\int_{-2}^2 (E_p - E_{p0}) \partial z / \left| \int_{-2}^2 E_{p0} \partial z \right|$. E_{p0} represents the spatially varying PE based upon the background temperature field $\theta_0(x, z)$. Contours represent the relative changes in thermocline width, defined as the vertical distance between the contours $\bar{\theta} = \pm 0.475$, relative to respective spatially varying background values. Linestyles represent a thermocline width change of 5% (dash-dotted), 10% (dashed), and 20% (solid). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ (a); $Ri_d = 0.5$ (b); and $Ri_d = 2.0$ (c).

sufficiently. Contours of the relative thermocline thickness have also been added to Figure 8: $(\delta_{\text{ref}}^{95} - \delta_{\text{ref}}^{95}) / \delta_{\text{ref}}^{95}$, where δ_{ref}^{95} represents the vertical distance between the contours $\bar{\theta} = \pm 0.475$, and δ_{ref}^{95} represents the distance between the contours $\theta_0 = \pm 0.475$. In other words, the thermocline thickness is quantified by the vertical bounds over which 95% of the total temperature difference is captured.

With $Ri_d = 0.05$ we see that both ΔPEA and the relative thermocline thickness grow as the turbulent wake is advected downstream, reaching maximum values of $\Delta\text{PEA} \approx 20\%$ and an approximate relative thermocline width of 50%, although the domain bounds are not large enough to fully capture these true maxima. Similar trends are observed when $Ri_d = 0.5$, although with a weaker magnitude. In addition, the region of maximum PEA and thermocline thickness is reached approximately 10-15 cylinder diameters downstream, before slightly reducing further downstream as the wake width increases. At the strongest level of stratification ($Ri_d = 2.0$), we see the standing waves imprinted on the thermocline thickness and PEA, which are at their maximum directly behind the cylinder, although these maxima are quickly reversed downstream of the recirculation region. When stratification is strong, the presence of the obstacle increases the PEA in the far wake ($x \gtrsim 10$) by approximately 5-10%, locally much lower than when stratification is weaker, although this difference is not restricted to just the narrow energetic wake, and is instead more widespread due to the standing waves.

Both ΔPEA and δ^{95} are unsurprisingly strongly correlated, but a key insight from δ^{95} is that, when stratification is strong ($Ri_d = 2.0$), the thermocline swells and contracts as the standing wave propagates downstream. This is indicative of ‘mode 2’ internal gravity waves, which are thought to be highly efficient at transporting scalars [40, 41].

The strength of turbulent fluctuations in the wake is visualised in Figure 9, where we report spatial integrals of turbulent kinetic and turbulent potential energies (TKE and TPE), which we define as $e_k = \frac{1}{2} \overline{u'_i u'_i}$ and $e_p = \frac{1}{2} \frac{\overline{b' b'}}{N^2}$. Panels (a) and (b) show integrals of TKE and TPE, respectively, over x -normal slices through the full domain as a function of the slices streamwise position x_S . The streamwise slice-integrated TKE peaks close to the cylinder surface, where the KV is most dominant. This occurs slightly further downstream and with a weaker magnitude for the cases where, across the thermocline, the large-scale recirculation region develops and the KV is suppressed: Re500Ri200, Re2000Ri050, and Re2000Ri200. Note that data for Re500Ri005 and Re500Ri050 nearly collapse for the TKE integrals. Slice-integrated TPE shows much

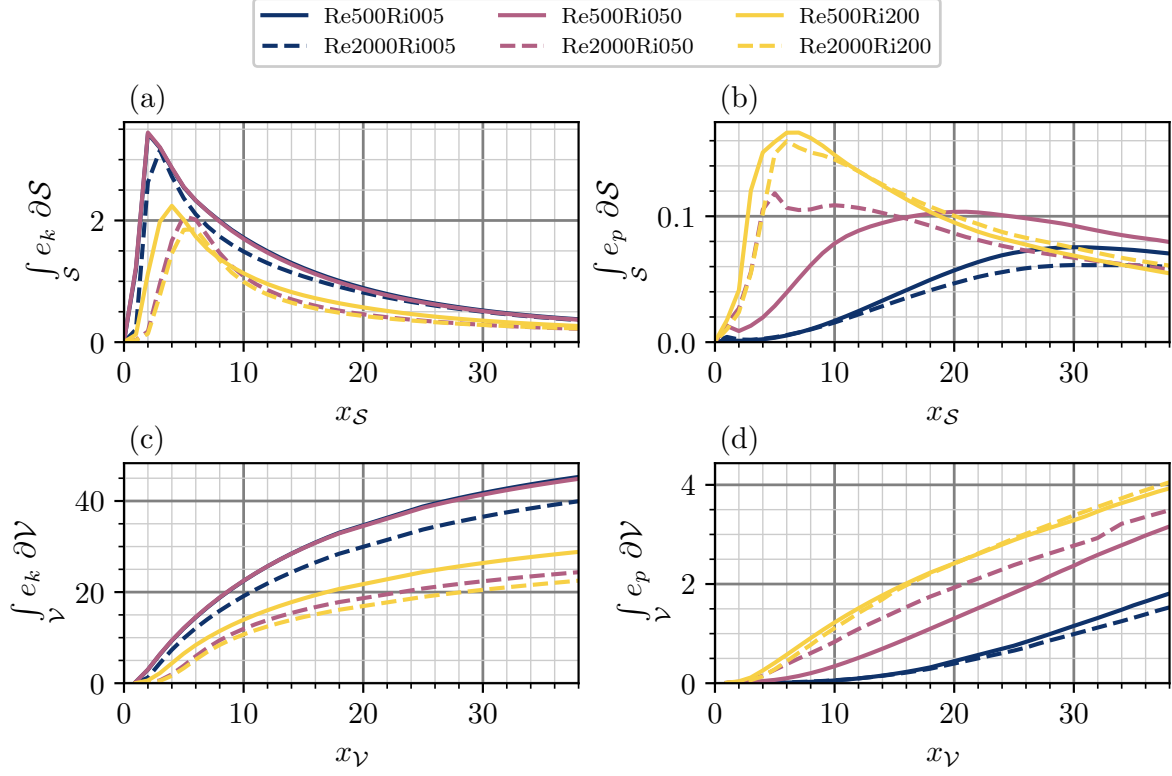


Figure 9: Spatial integrals of turbulent kinetic (panels a and c) and potential (panels b and d) energies, as a function of streamwise position. Panels (a) and (b) show integrals over x -normal slices at position x_S . Panels (c) and (d) show volume integrals over the full domain with a streamwise position less than or equal to x_V .

stronger variation between the six cases. The strength of the slice-integrated TPE peaks scale with Ri_d , with maximum values increasing with increasing Ri_d . The cases with $Ri_d = 0.05$ reach a local slice-integrated TPE maximum at $x_S \approx 30 - 35$, and do not decay appreciably before the wake leaves the numerical domain. In contrast, while qualitatively similar, case Re500Ri050 peaks much earlier at $x_S \approx 20$, before decaying as the wake propagates further. A key feature of these flows is that TPE does not peak in the same region as TKE when stratification is weak (Re500Ri005, Re500Ri050, and Re2000Ri005).

The strong-stratification regime of cases Re500Ri200, Re2000Ri050, and Re2000Ri200, characterised by the vertical recirculation regions and mean-flow standing waves, is clearly identified by the rapid increase in slice-integrated TPE at $x_S \lesssim 4$, reaching their maximum values at $x_S \approx 6$. This peak then quickly decays as the wake propagates further, although note that there is still a reasonable level of TPE downstream. Interestingly, the slice-integrated TPE values are similar for all cases for $x_S \gtrsim 30$, although differences are likely to emerge if the streamwise domain extent were larger.

Panels (c) and (d) of Figure 9 show the TKE and TPE integrated over the domain volume which is bounded by $[x_{\min}, x_V]$ in the streamwise direction. The plateau of these various curves gives an indication of the required domain size for fluctuating processes in the cylinder wake to be fully captured. The rate of change of these volume integrals with respect to x_V of course corresponds to the slice-integrals of panels (a) and (b).

The volume integrated TKE rapidly increases in the near-cylinder wake, where the KV is present, before beginning to flatten out further downstream. While the domain extent is not long enough to capture the

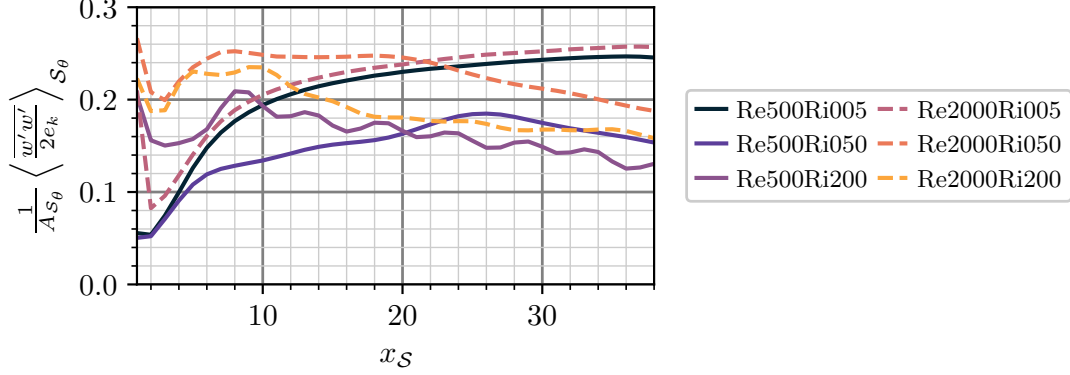


Figure 10: Anisotropy in the stratified cylinder wake, visualised by the ratio between the vertical component of TKE against the sum of all three components. This anisotropy measure is computed and spatially averaged on x -normal slices at the streamwise locations x_S , within the thermocline bounds $-0.475 \leq \bar{\theta} \leq 0.475$. This surface is denoted S_θ with an area A_{S_θ} .

full turbulent wake (which would be identified by an invariant TKE volume integral with respect to x_V), it does capture the most energetic regions. The total TKE decreases with both increasing Re_d and increasing Ri_d , the latter at least partly due to the suppression of the KV. This is also consistent with the reduction in drag coefficient with both Re_d and Ri_d (see Figure 3).

The volume-integrated TPE (Figure 9 (d)) increases with increasing Ri_d , and shows only a small degree of convergence as x_V increases, and only for the strongest stratification cases. From slice- and volume-integrated data it is clear that significant TPE changes are present further downstream in the wake than TKE, relative to respective maxima. This is due to the substantially stronger near-cylinder peak for TKE when compared to TPE. As a result, slice-integrated TKE decreases by approximately a factor of six over the domain extent while TPE only decreases by approximately a factor of two. The subsequent effect of this is that the rate of change of TKE, with respect to downstream distance changes much more significantly, and exhibits some degree of convergence, while TPE is still increasing substantially over the chosen domain length.

A key result here is that, particularly for weaker levels of stratification, fluctuations in potential energy peak much further from the cylinder than TKE, and therefore the volume-integrated TPE is far from convergence when compared to TPE. We hypothesise that this is associated with the transition between horizontally oriented turbulent fluctuations to isotropic turbulence further downstream, which is more readily able to mix the vertically oriented buoyancy field. To support this argument we inspect the ratio $\overline{w'w'}/2e_k$ as a measure of flow anisotropy. This ratio is reported in Figure 10, averaged over x -normal slices as a function of streamwise position, x_S , within the thermocline bounds $-0.475 \leq \bar{\theta} \leq 0.475$. The behaviour of flow anisotropy is different for both flow regimes. In the weak stratification regime (Re500Ri005, Re500Ri050, and Re2000Ri005) we see that vertical fluctuations contribute little to TKE, but they slowly grow, as the wake advects downstream. This approximately correlates to the growth of TPE (Figure 9 (b)), and confirms that as anisotropy in the wake decreases, temperature fluctuations increase in strength. Note that, in this numerical domain, isotropic turbulence is never reached, with vertical fluctuations contributing at most 25% of the total TKE (with 33% representing an equal contribution to horizontal components). In contrast, when stratification is strong (Re500Ri200, Re2000Ri050, and Re2000Ri200) the TKE has a much stronger contribution from vertical fluctuations in the near-cylinder wake. This is due to the strong shearing generated

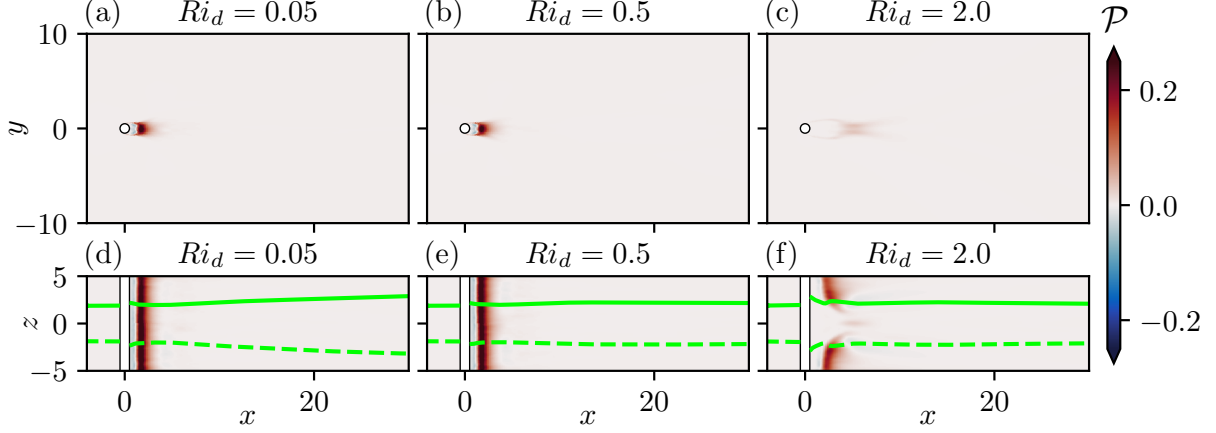


Figure 11: Visualisation of turbulent kinetic energy production on a z -normal slice at $z = 0$ (panels a to c) and a y -normal slice at $y = 0$ (panels d to f). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a) and (d); $Ri_d = 0.5$ in panels (b) and (e); and $Ri_d = 2.0$ in panel (c) and (f).

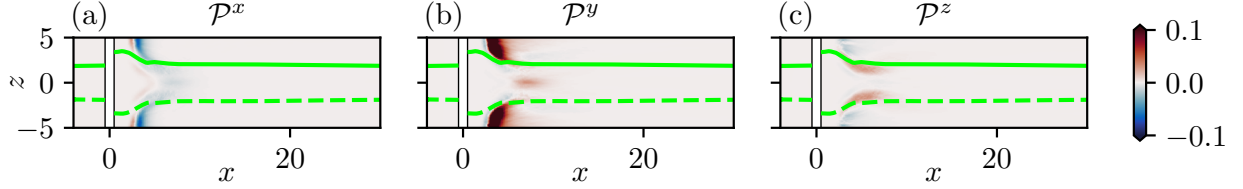


Figure 12: Components of turbulent kinetic energy production, split by the direction of shear, for $Re_d = 2000$ and $Ri_d = 2.0$. Panel (a) reports the streamwise shear term \mathcal{P}^x , panel (b) reports the spanwise shear term \mathcal{P}^y , and panel (c) reports the vertical shear term \mathcal{P}^z .

in and near the recirculation region. This then decays due to suppression from buoyancy forces as the wake advects downstream, correlating to the decrease in TPE (Figure 9 (b)). These results demonstrate the close connection between the ability for the flow to suppress vertical fluctuations in the wake, and fluctuations in the buoyancy field.

3.3 Local energy budgets

Production of TKE, defined in (6), is shown on spanwise and vertical slices for the three cases $Re500Ri005$, $Re500Ri050$, and $Re500Ri200$, in Figure 11. TKE production is localised to the near-cylinder wake, and peaks where the KV is strongest. For $Ri_d = 0.05$ and $Ri_d = 0.5$ this occurs within the first few diameters downstream of the cylinder. For $Ri_d = 2.0$, TKE production varies with depth, and is small within the thermocline bounds. TKE production is primarily associated with spanwise shear due to the z -invariant cylinder cross section. Indeed, for cases $Re500Ri005$ and $Re500Ri050$ the spanwise shear dominates over other contributions to \mathcal{P} , particularly since there is no mean vertical shear. However, there is a transition away from this dominance of spanwise shear when the large-scale recirculation region forms in the thermocline of $Re500Ri200$, as we show in Figure 12. Here we have split $\mathcal{P} = -\overline{u'_i u'_j} \partial_i \overline{u}_j$ into three contributions which respectively group the nine terms containing streamwise (x), spanwise (y), and vertical (z) spatial derivatives (e.g. $\mathcal{P}^x = -\overline{u' u'_j} \partial_x \overline{u}_j$). In the unstratified regions, spanwise shear terms dominate over other sources of TKE production. However, within the thermocline bounds, \mathcal{P}^y reduces significantly and \mathcal{P}^z becomes important.

For this particular case ($Re2000Ri200$), vertical shear terms contribute more to TKE production than

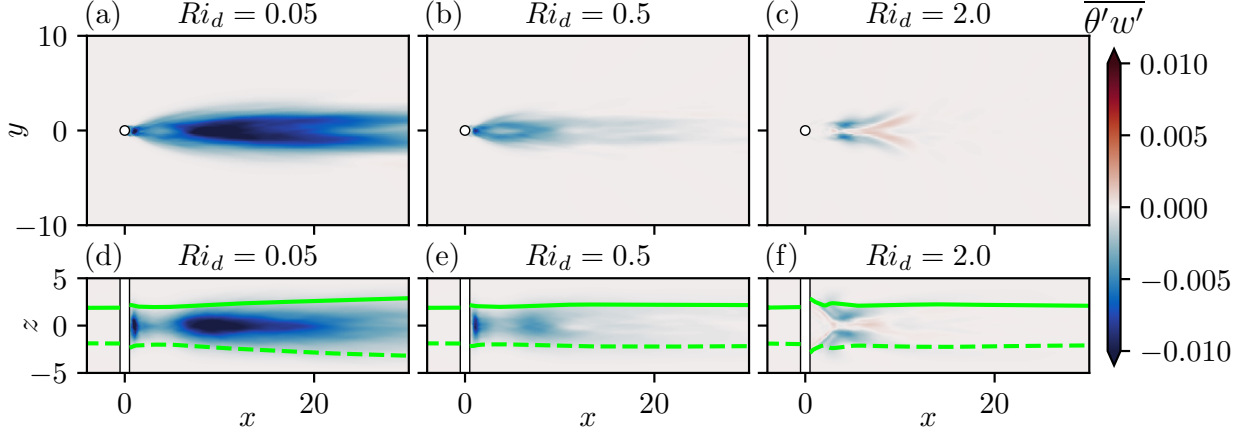


Figure 13: Visualisation of the vertical temperature flux on a z -normal slice at $z = 0$ (panels a to c) and a y -normal slice at $y = 0$ (panels d to f). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a) and (d); $Ri_d = 0.5$ in panels (b) and (e); and $Ri_d = 2.0$ in panel (c) and (f).

spanwise shear terms, within the thermocline. This importance of \mathcal{P}^z is consistent across all ‘strongly stratified’ wake cases (Re500Ri200, Re2000Ri050, and Re2000Ri200) although we note that this effect is most pronounced for Re2000Ri200. These results indicate that there is a transition in how turbulence is produced within the thermocline, as a function of stratification strength. If stratification is strong enough to generate a large-scale recirculation region, then this can lead to a new mechanism, via vertical shearing, for turbulence production.

The vertical temperature flux ($\overline{\theta'w'}$) is shown in Figure 13. This is related to the turbulent buoyancy flux by $\mathcal{B}_{TKE} = -Ri_d \overline{\theta'w'}$. For Re500Ri005, the temperature flux peaks much further downstream ($x \approx 10$) than \mathcal{P} , although the peak is less localised. There is also a small local peak in $\overline{\theta'w'}$ in the recirculation region near the cylinder surface, although most temperature flux occurs further downstream. There are similarities between the temperature flux variations for Re500Ri005 and Re500Ri050, although the peak occurs closer to the cylinder when stratification is stronger. We hypothesise that, for these two cases, where spanwise shear dominates over other sources of TKE production, there requires some transition from spanwise motion to vertical motion as the wake propagates downstream in order for the temperature field to mix. Indeed, this is reflected in the anisotropy discussions of Figure 10, where vertical fluctuations grow as the wake propagates downstream. For this reason, the turbulent buoyancy flux peaks much further downstream than TKE production.

In contrast, $\overline{\theta'w'}$ is much more localised when stratification is strong, peaking in the region where \mathcal{P} is large, particularly \mathcal{P}^z (Figures 11 and 12). We hypothesise that this arises due to the strong vertical shearing that produces turbulence for this case, which is more efficiently able to generate vertical motions and therefore buoyancy flux. Note, however, that at this level of stratification, despite the buoyancy flux being much larger, the overall influence on the thermocline thickness (Figure 8) is weaker due to the strong buoyancy forces. However, there are clear regions of negative buoyancy flux downstream of the local peaks for Re500Ri200. Subsequently, some energy lost to potential energy is transferred back to TKE further downstream. In other words, there are reversible processes within \mathcal{B}_{TKE} .

The destruction rate of TKE is visualised in Figure 14. ε is primarily focused in the near-cylinder wake with $x \lesssim 5$ (note the log-scaled colourbar), and concentrated in a narrow region downstream. The strong stratification of Re500Ri200 weakens the maximum of the dissipation rate and shifts it further downstream,

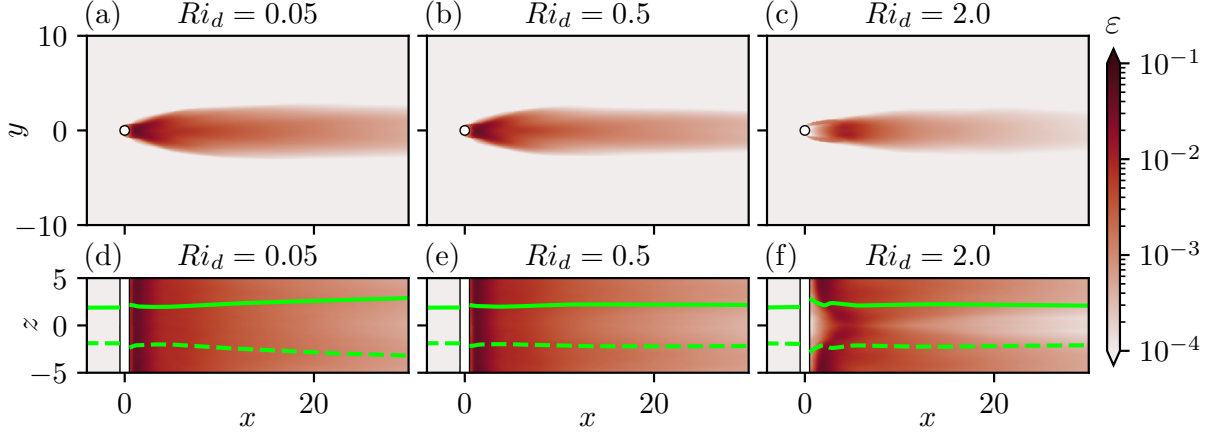


Figure 14: Visualisation of turbulent kinetic energy dissipation on a z -normal slice at $z = 0$ (panels a to c) and a y -normal slice at $y = 0$ (panels d to f). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a) and (d); $Ri_d = 0.5$ in panels (b) and (e); and $Ri_d = 2.0$ in panel (c) and (f).

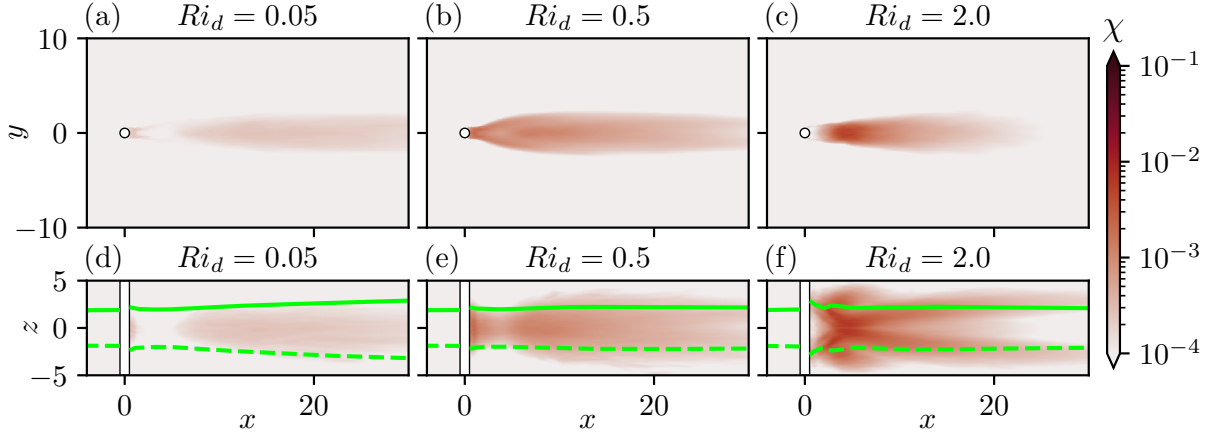


Figure 15: Visualisation of turbulent potential energy destruction rate on a z -normal slice at $z = 0$ (panels a to c) and a y -normal slice at $y = 0$ (panels d to f). $Re_d = 500$ for all panels with: $Ri_d = 0.05$ in panels (a) and (d); $Ri_d = 0.5$ in panels (b) and (e); and $Ri_d = 2.0$ in panel (c) and (f).

due to the recirculation region. Vertical dependence of ε develops, where it is suppressed in the thermocline as the wake advects downstream. The destruction rate of buoyancy variance, \mathcal{X} , shows similar behaviour to ε , as shown in Figure 15. Of course, \mathcal{X} increases with increasing Ri_d , but more interestingly it does not peak in the same regions as the TKE dissipation rate when stratification is weak; for $Re500Ri005$, \mathcal{X} rises slowly as the wake propagates and doesn't reach an appreciable maximum. For $Re500Ri050$, the maximum is reached at $x \approx 10$ before \mathcal{X} decays downstream. When stratification is stronger ($Re500Ri200$), there is a more clear correlation between ε and \mathcal{X} , which both peak near the recirculation region and decay downstream, leading to a far-wake regime ($x \gtrsim 20$) where most TKE and TPE destruction occurs near the bounds of the thermocline.

Mixing in stratified flows is often parameterised as a function of three dimensionless parameters (excluding the Prandtl number Pr): Ri_g , Fr_h , and Re_b , which respectively represent the gradient Richardson number,

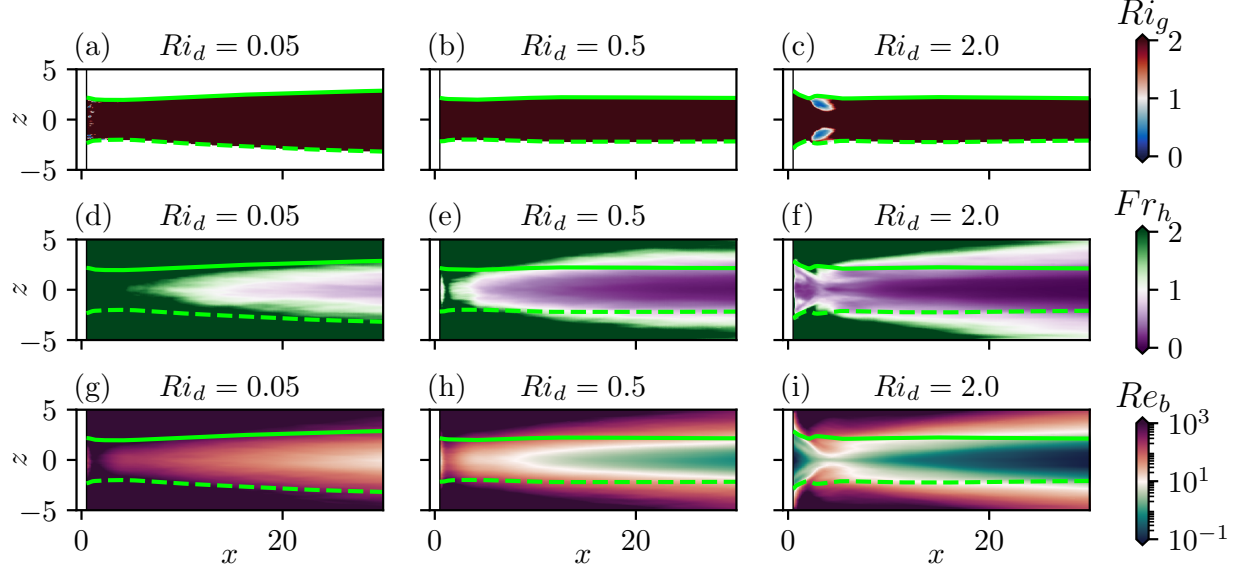


Figure 16: Key dimensionless parameters for parameterising mixing in stratified flows on a y -normal slice at $y = 0$. Panels (a to c) show the gradient Richardson number, panels (d to f) show the horizontal Froude number, and panels (g to i) show the buoyancy Reynolds number, all defined in Equation (13). Panels (a,d,g) show data for $Ri_d = 0.05$, panels (b,e,h) show data for $Ri_d = 0.5$, and panels (c,f,i) show data for $Ri_d = 2.0$. Lines represent the approximate thermocline width with contours of $\bar{\theta} = \pm 0.475$.

the horizontal Froude number, and the buoyancy Reynolds number [18]:

$$Ri_g = \frac{N^2}{S^2}, \quad Fr_h = \frac{\varepsilon}{Nu_{rms}^2}, \quad \text{and} \quad Re_b = Re_d \frac{\varepsilon}{N^2}. \quad (13)$$

Here, $S = \partial_z \bar{u}$ represents vertical shearing in the streamwise flow. Ri_g represents the ratio between buoyancy forces and mean vertical shear, and is a measure of a flows susceptibility to shear instability. The horizontal (turbulent) Froude number characterizes the effect of stratification on turbulent structures. Large values indicate that buoyancy has little influence while small values ($Fr_h \ll 1$) indicate that stratification suppresses vertical motions, leading to strongly anisotropic, layer-like “pancake” structures. The buoyancy Reynolds number represents the ratio of the turbulent kinetic energy dissipation to the damping effects of viscosity and stratification. It can also be interpreted as the square of the ratio between the buoyancy timescale and the Kolmogorov timescale. Large values indicate that turbulence can sustain an energy cascade despite stratification, while small values ($Re_b \lesssim 20$) imply that stratification and viscosity suppress small-scale turbulent motions, limiting mixing [42].

These three parameters are visualised on y -normal slices at $y = 0$ in Figure 16. First, note that S^2 is extremely small over much of the domain, and N^2 also approaches small values outside the thermocline. For this reason, we have limited visualisation of Ri_g to the thermocline bounds where at least N^2 is large. Figures 16 (a) to (c) clearly demonstrate that Ri_g is very large in the stratified wakes, due to the lack of vertical mean shear. There are however two small (vertically symmetric) regions with $Ri_g < 1$ in the strongly stratified wake of Re500Ri200, which are downstream of the recirculation region and just beneath the thermocline bounds. These correlate to the regions where \mathcal{P}^z , \mathcal{B}_{TKE} , and \mathcal{X} are large (Figures 12, 13, and 15), confirming that it is indeed a susceptibility to vertical shearing, due to the vertical recirculation zone, that promotes mixing of the temperature field in the strongly stratified wake. While Ri_g is not a

useful parameter for characterising the weakly stratified flow, it is useful in characterising the transition from turbulence produced from horizontal shear to vertical shear.

Fr_h and Re_b are clearly correlated when inspecting Figure 16. The weakest stratification case (Re500Ri005) shows that $Re_b > 10$ and $Fr_h \gtrsim 1$ for the whole flow, with $Re_b > 1000$ in the near-cylinder wake and unstratified regions. Within the thermocline, both parameters gradually decreases as the wake propagates downstream and turbulence weakens. Re500Ri050 behaves in a similar fashion, although finds that for $x \gtrsim 10$ the horizontal Froude number and the buoyancy Reynolds number are appreciably small to suggest there is a strong influence of buoyancy on turbulent structures, and mixing processes weaken downstream. This is consistent with the region where \mathcal{X} peaks in the wake before being suppressed downstream (Figure 15). Re500Ri200 differs from the other cases, where Re_b and Fr_h are everywhere small in the cylinder stratified wake, aside from the small region at $x \approx 5$, where $Fr_h \approx 1$ and $Re_b \approx 100$. This region is unsurprisingly correlated to that of the high Ri_g region; vertical shearing leads to localised relatively strong turbulence in the near-cylinder wake, which is suppressed as the wake propagates downstream.

The anisotropy measure of Figure 10 is correlated to the horizontal turbulent Froude number. We see that weak stratification has $Fr_h \gtrsim 1$ across the majority of the wake, and so turbulence anisotropy, initially strong due to the dominance of spanwise motion (low $\overline{w'w'}/2e_k$), increases as the wake propagates. $\overline{w'w'}/2e_k$ plateaus at the same region where $Fr_h \sim 1$. Behaviour is similar at moderate stratification (Re500Ri050), although the $\overline{w'w'}/2e_k$ reaches its maximum value much earlier before decaying downstream, correlating where $Fr_h \lesssim 1$. When stratification is strongest (Re500Ri200) we see Fr_h is small throughout the whole wake, aside from the region where $Ri_g < 1$, corresponding to turbulence production. We therefore see higher isotropy near the cylinder with a maximum value in this region of turbulence production, before vertical motions are suppressed downstream.

The dimensionless parameters Ri_g , Fr_h , and Re_b therefore characterise the two flow regimes: At weak stratification we see Ri_g is everywhere large due to the negligible vertical shear, and the near-cylinder wake is characterised by a highly turbulent (large Re_b) flow only weakly affected by buoyancy ($Fr_h \gtrsim 1$). Further downstream this gradually transitions to a buoyancy affected wake once turbulence decays, with lower Re_b and Fr_h . Mixing of the temperature field occurs in the far-wake, once vertical turbulence motion has developed due to the gradual increase in isotropy, away from the dominant horizontal motion in the near-wake. The strong stratification regime is characterised by low Re_b and low Fr_h everywhere in the stratified wake, which leads to the generation of strong vertical shearing associated with vertical secondary motions near the thermocline bounds. This generates a localised region of low Ri_g where turbulence in the stratified wake can be produced through vertical shearing, creating a locally energetic (high Re_b) flow only weakly affected by buoyancy (high Fr_h). As the wake propagates, turbulence is quickly suppressed and anisotropy re-develops. The following section will assess volume-averaged energy budgets to quantify how these flow regimes affect mixing processes in the water column.

3.4 Volume-Integrated Energy Budgets

Of key interest to the offshore wind sector is the fate of energy introduced in the water column. This energy pathway can be identified through a volume-integrated approach of the four governing energy budgets: (6) to (9). Some degree of volume-averaging is required to properly partition these various budgets, particularly due to the larger instantaneous transport terms inevitable in this advecting flow. Energy budgets are constructed

by integrating over volume $\mathcal{V}(x_{\mathcal{V}})$, defined as

$$\langle \cdot \rangle_{\mathcal{V}} = \int_{x_{\min}}^{x_{\mathcal{V}}} \int_{y_{\min}}^{y_{\max}} \int_{z_{\min}}^{z_{\max}} \partial z \partial y \partial x, \quad (14)$$

where we integrate over the full numerical domain up to the streamwise position $x_{\mathcal{V}}$. Here we have used the notation $\langle \cdot \rangle_{\mathcal{V}}$ to denote integration over volume \mathcal{V} . In this way, we construct volume-integrated budgets as a function of how far the energetic wake was propagated, and we can determine how well turbulent/mixing processes are resolved by their dependence on $x_{\mathcal{V}}$, which is critical for understanding how far stratified wakes may propagate in the field.

Integration of the mean kinetic energy (KE) budget (6) over \mathcal{V} leads to

$$0 = \int_{\mathcal{V}} -\mathcal{P} - \mathcal{B}_{\text{KE}} - \mathcal{E} \partial \mathcal{V} + \int_{\Omega} -\bar{u}_j E_k n_j - \bar{u}_j \bar{p} n_j + \frac{1}{Re_d} \frac{\partial E_k}{\partial x_j} n_j - \bar{u}_i \overline{u'_i u'_j} n_j \partial \Omega, \quad (15)$$

where Ω represents the bounding surface of \mathcal{V} with the out-ward pointing surface-normal n_i . The transport terms can be manipulated to identify the KE source term as the power loss to drag [43, 44]. This is achieved by first splitting the bounding surface into $\Omega = \Omega_i + \Omega_w + \Omega_o$, which respectively represent the in-flow surface at x_{\min} , the cylinder no-slip walls, and all remaining boundaries. At Ω_i we have $U_i = (u_{\infty}, 0, 0)'$ and we define the reference pressure as the average pressure on Ω_i :

$$p_{\infty} \int_{\Omega_i} \partial \Omega = \int_{\Omega_i} p \partial \Omega. \quad (16)$$

With some manipulation of (15) we obtain the exact balance

$$-\frac{1}{2} C_D A_{\text{ref}} u_{\infty}^3 = -P_D = \int_{\mathcal{V}} -\mathcal{P} - \mathcal{B}_{\text{KE}} - \mathcal{E} \partial \mathcal{V} + \int_{\Omega_o} -\bar{u}_j n_j \tilde{E}_k - \tilde{u}_i n_i (\bar{p} - p_{\infty}) + \frac{1}{Re_d} \frac{\partial \tilde{E}_k}{\partial x_j} n_j - \tilde{u}_i \overline{u'_i u'_j} n_j \partial \Omega, \quad (17)$$

where P_D represents the power loss to drag, $\tilde{u}_i = \bar{u}_i - u_{\infty} \hat{x}_i$ and $\tilde{E}_k = \frac{1}{2} \tilde{u}_i \tilde{u}_i$. The power lost to drag is dependent on both the drag coefficient, equal to the local drag coefficient (10) integrated over the cylinder surface, and the frontal reference area A_{ref} , equal to the cylinder diameter multiplied by the cylinder length. This KE balance can subsequently be written as

$$0 = P_d - \langle \mathcal{P} \rangle_{\mathcal{V}} - \langle \mathcal{B}_{\text{KE}} \rangle_{\mathcal{V}} - \langle \mathcal{E} \rangle_{\mathcal{V}} + \langle \mathcal{T}_{\text{KE}}^E \rangle_{\Omega_o} + \langle \mathcal{T}_{\text{KE}}^p \rangle_{\Omega_o} + \langle \mathcal{T}_{\text{KE}}^{\nu} \rangle_{\Omega_o} + \langle \mathcal{T}_{\text{KE}}^{u'} \rangle_{\Omega_o}, \quad (18)$$

where the four transport terms \mathcal{T} represent the four terms within the surface integral 17, in the order that they appear from left to right: KE transport, pressure transport, viscous transport, and turbulent transport.

The remaining energy budgets (7) to (9) do not require manipulation of the transport terms. Integrating them over \mathcal{V} leads to the volume-integrated mean potential energy equation:

$$0 = \langle \mathcal{B}_{\text{KE}} \rangle_{\mathcal{V}} + \langle \mathcal{B}_{\text{TKE}} \rangle_{\mathcal{V}} + \langle \mathcal{T}_{\text{PE}}^{E+\kappa} \rangle_{\mathcal{V}} + \langle \mathcal{T}_{\text{PE}}^{u'} \rangle_{\mathcal{V}}, \quad (19)$$

where

$$\mathcal{T}_{\text{PE}}^{E+\kappa} = \frac{\partial}{\partial x_j} \left(-\bar{u}_j E_p - \bar{u}_j \Pi + \frac{1}{Pr Re_d} \frac{\partial E_p}{\partial x_j} + \frac{2}{Pr Re_d} b \hat{z}_j \right) \quad (20)$$

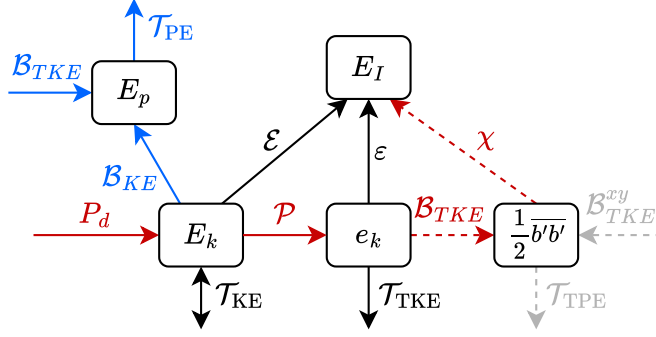


Figure 17: Volume integrated energy pathway for the stratified flow past a cylinder. Terms correspond to volume-integrated budgets (18), (19), (22), and (23) (note that the angled brackets have been removed for this schematic).

and

$$\mathcal{T}_{PE}^{u'} = \frac{\partial}{\partial x_j} (z \overline{b' u_j'}). \quad (21)$$

Here we have grouped the mean and background PE convection terms with the diffusive terms since, even in the absence of the cylinder, transport terms within $\langle \mathcal{T}_{PE}^{E+\kappa} \rangle_V$ are large due to diffusion at the z -normal boundaries which is balanced by advection of E_p .

volume-integration of the TKE budget (8) leads to

$$0 = \langle \mathcal{P} \rangle_V - \langle \mathcal{B}_{TKE} \rangle_V - \langle \varepsilon \rangle_V + \langle \mathcal{T}_{TKE}^e \rangle_V + \langle \mathcal{T}_{TKE}^p \rangle_V + \langle \mathcal{T}_{TKE}^\nu \rangle_V + \langle \mathcal{T}_{TKE}^{u'} \rangle_V, \quad (22)$$

where the four transport terms of (8) have been separated: From left to right they represent TKE advection, pressure, viscous diffusion, and turbulent transport.

Volume-integration of the scaled buoyancy variance (SBV) leads to

$$0 = \langle \mathcal{B}_{TKE} \rangle_V + \langle \mathcal{B}_{TKE}^{xy} \rangle_V - \langle \chi \rangle_V + \langle \mathcal{T}_{SBV}^e \rangle_V + \langle \mathcal{T}_{SBV}^\kappa \rangle_V + \langle \mathcal{T}_{SBV}^{u'} \rangle_V, \quad (23)$$

where transport terms respectively represent advection, diffusion, and turbulent transport components of \mathcal{T}_{SBV} in (9).

The four volume-integrated transport budgets are reported, schematically, in Figure 17, which connects the four conserved energy reservoirs to the internal energy (E_I) of the system, which increases through irreversible dissipative processes. The arrow directions are determined from the computation of respective terms across all cases and volumes with $x_V \geq 1$. While many terms are not sign-definite, their signs appear robust in the volume integrals, with the exception of \mathcal{T}_{KE} . The net KE transport terms are very small compared to P_d and are generally a sink of KE, although become a very slight KE source when stratification is strong. This will be discussed further when analysing the buoyancy flux.

It should also be noted that this system is not entirely closed due to the use of SBV to approximately identify irreversible mixing. One particular issue is that \mathcal{T}_{SBV} is not strictly a transport term, due to the spatial dependence of N^2 . If the domain were closed, or large enough to fully resolve mixing processes in the wake, the term would be minimal. Indeed, we find that for the strongly stratified cases mixing processes

are mostly resolved before the wake leaves the domain. An additional challenge is the extra source term $\mathcal{B}_{\text{TKE}}^{xy}$, which is not necessarily zero if there are appreciable horizontal gradients in \bar{b} . As a result, χ is not necessarily smaller than \mathcal{B}_{TKE} , as it contains additional external sources. Finally, since the mean buoyancy flux is non-zero, it is important to consider PE transport, since this is an additional sink of KE, albeit a reversible one. Regardless, this provides a framework with which the energy pathway from power loss to drag can be identified.

The four transport budgets are reported in Figure 18 for Re500Ri005 and Re500Ri200, as a function of $x_{\mathcal{V}}$. Note that we have normalised all terms by the power input P_d , and have removed the integrals from the legend labels. The mean kinetic energy shows that P_d is balanced primarily by TKE production and mean KE dissipation for Re500Ri005, with a very small contribution from transport terms. The mean KE dissipation \mathcal{E} is large due to the low Reynolds number, and peaks very close to the cylinder walls where mean flow gradients are largest. This is clear from Figure 18 (a) since \mathcal{E} is nearly independent of $x_{\mathcal{V}}$, indicating there are no mean dissipative processes in the far-wake. Nearly all TKE production occurs within the first few cylinder diameters, although there is some slow variation with $x_{\mathcal{V}}$ further downstream due to shear at the edges of the wake.

With stronger stratification (b) we see that \mathcal{P} is reduced, and \mathcal{E} is increased, relative to the weaker stratification case (a). In addition, the mean buoyancy flux becomes important, and the transport terms $\mathcal{T}_{\text{KE}}^E$ and $\mathcal{T}_{\text{KE}}^P$ increase in magnitude. The mean buoyancy flux reaches approximately 10% of the power input from drag, although this is at least partially balanced by the net transport terms due to the large negative $\mathcal{T}_{\text{KE}}^P$.

The mean potential energy budgets (Figure 18 (c) and (d)) unsurprisingly vary considerably in magnitude between Re500Ri005 and Re500Ri200. We see that at low stratification \mathcal{B}_{TKE} balances \mathcal{T}_{PE} with negligible contributions from other terms. The TKE buoyancy flux continues to increase throughout the full domain length, showing little sign of convergence, indicating that mixing processes are far from complete. In contrast, Re500Ri200 shows both the mean and turbulent buoyancy fluxes contribute approximately equally to the PE budget. The turbulent buoyancy flux rises quickly for $x_{\mathcal{V}} \lesssim 5$ before beginning to plateau as the wake advects further. The mean buoyancy flux \mathcal{B}_{KE} appears to grow as the wake propagates downstream, reaching its maximum value at $x_{\mathcal{V}} \approx 33$. This is in part due to how the volume \mathcal{V} is constructed, since the wave propagation direction is not aligned with the volume bounds. Once the mean flow wave has developed, one could imagine the peaks and troughs effectively cancelling in the volume integral if the volume was constructed differently. If this were the case, a reduced \mathcal{B}_{KE} would be compensated by an increase in KE transport terms, and a reduction of mean potential energy; KE is either lost to an increase in PE, or leaves the integration volume through transport. There is evidence for this in the KE budgets (Figure 18 (b)), where $\mathcal{T}_{\text{KE}}^P$ appears negatively correlated to \mathcal{B}_{KE} . Separation between KE transport and the mean buoyancy flux is therefore challenging. Regardless, what is clear is that a significant proportion of the power source due to drag is captured by reversible fluxes and transport terms, and the fate of this energy beyond the numerical domain is unclear.

For low stratification we see TKE production is balanced by the TKE dissipation rate, with a small contribution from $\mathcal{T}_{\text{TKE}}^e$ due to turbulence exiting the volume \mathcal{V} (Figure 18 (e)). Turbulent production appears to vary little for $x_{\mathcal{V}} \gtrsim 20$, although this is due to the strong TKE production in the near-cylinder wake, which is much greater than the TKE production at the edges of the far wake. A longer domain would be required to observe convergence of $\langle \varepsilon \rangle_{\mathcal{V}}$, due to the timescales over which produced TKE can dissipate. This is evidenced by the large \mathcal{T}_k at small $x_{\mathcal{V}}$ which transports TKE downstream until it is dissipated. At

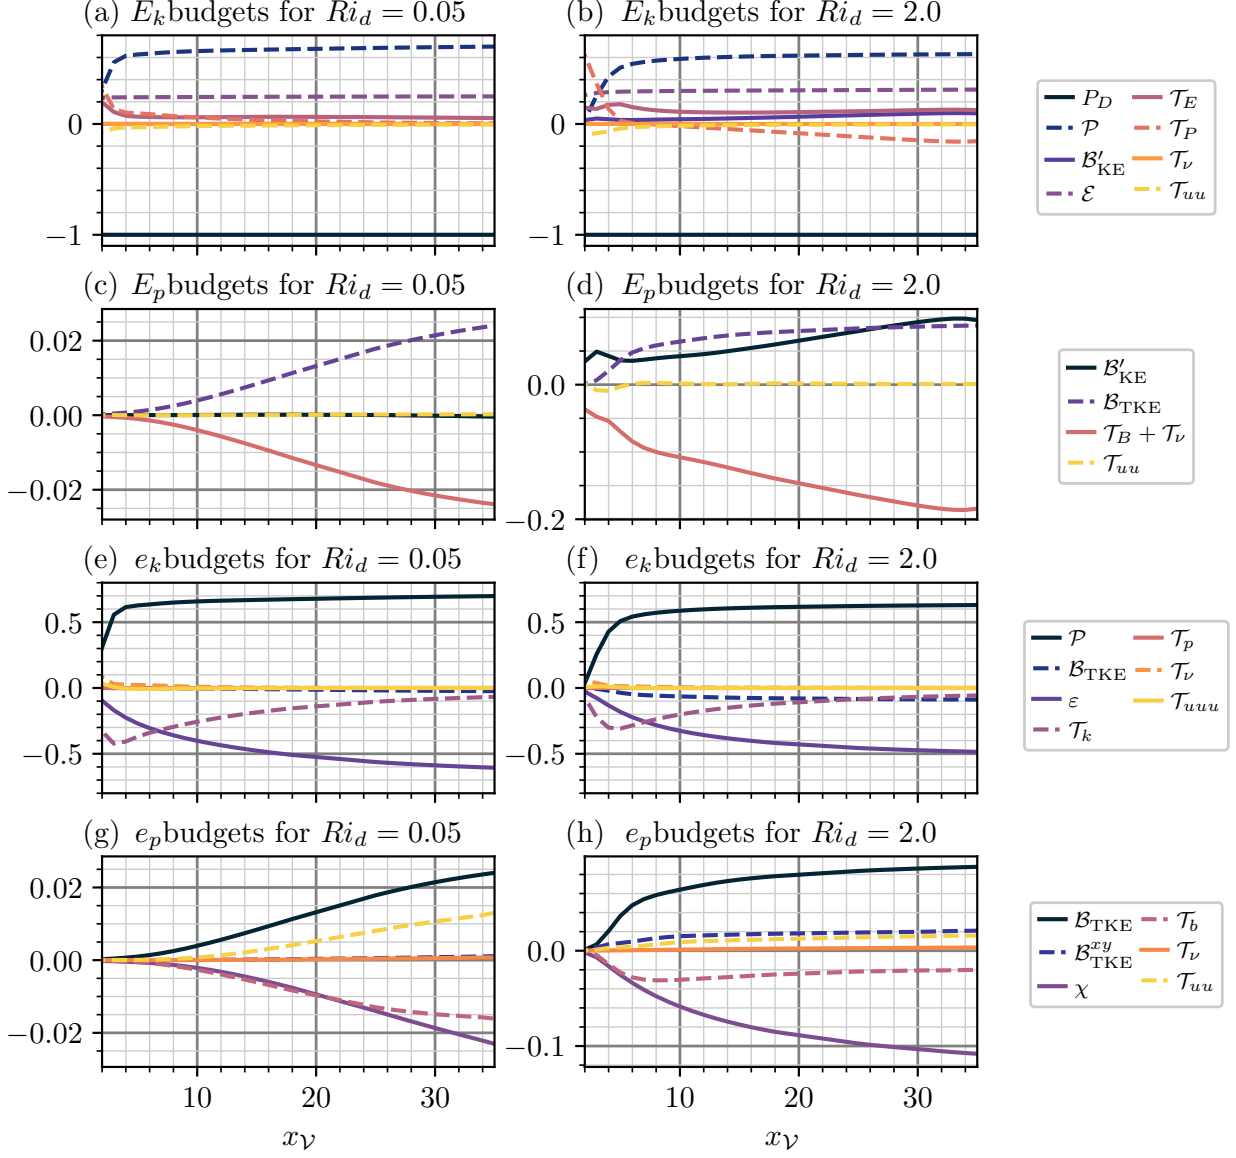


Figure 18: Volume integrated energy budgets for $Ri_d = 0.05$ in panels (a,c,e,g) and $Ri_d = 2.0$ in panels (b,d,f,h), all normalised by the power lost to drag, P_d . Panels (a) and (b) show mean kinetic energy budgets, panels (c) and (d) show mean potential energy budgets, panels (e) and (f) show turbulent kinetic energy budgets, and panels (g) and (h) show scaled buoyancy variance budgets. All budgets are presented as a function of x , which specifies the maximum streamwise bounds of the integration volume \mathcal{V} . Note that all budgets have been integrated over the volume \mathcal{V} .

strong stratification (Figure 18 (f)) we see qualitatively similar behaviour, although with a contribution from the turbulent buoyancy flux which increases with x_γ , reaching approximately 20% of the TKE dissipation rate. In addition, TKE production converges more slowly, due to the downstream shift of the KV.

The SBV buoyancy flux (\mathcal{B}_{TKE}) gradually increases with x_γ at low stratification (Figure 18 (g)). This flux is primarily balanced by the irreversible destruction rate \mathcal{X} , although, while the net ‘transport’ is small, the individual terms $\mathcal{T}_{\text{SBV}}^b$ and $\mathcal{T}_{\text{SBV}}^{u'}$ are of a similar magnitude to the dominant terms. These ‘transport’ terms are reduced at strong stratification (Figure 18 (h)), such that there is a clear dominant balance between

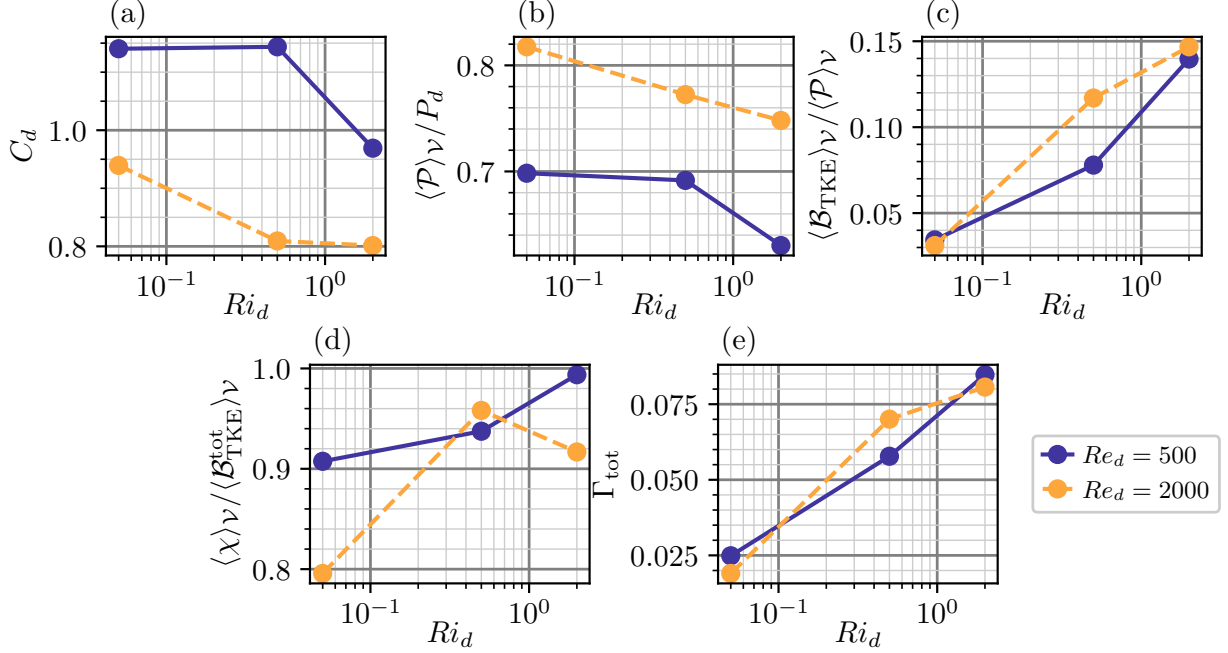


Figure 19: The energy pathway ratios between power input from drag through to irreversible destruction of the scaled buoyancy variance, as a function of Ri_d and Re_d . Γ_{tot} is equal to the product of the four other ratios. The volume-integrals are computed for $x_{\mathcal{V}} = 35$.

\mathcal{B}_{TKE} and \mathcal{X} . Note, however, that the spanwise flux $\mathcal{B}_{\text{TKE}}^{xy}$ also becomes important, reaching approximately 25% of \mathcal{B}_{TKE} . This term arises due to the reasonably strong horizontal shearing of the buoyancy field when the recirculation region is introduced. While \mathcal{B}_{TKE} shows some sign of convergence, it does continue to increase throughout the numerical domain due to turbulent activity at the edges of the thermocline. As a result, \mathcal{X} does not converge within the numerical domain, reaching approximately 10% of P_d for $x_{\mathcal{V}} \gtrsim 30$. This partially contains contributions from $\mathcal{B}_{\text{TKE}}^{xy}$ and so cannot be fully associated with irreversible mixing of the potential energy field.

The energy pathway, from power input through to irreversible mixing of the buoyancy field, can be approximated by the product of four coefficients/efficiency ratios: C_d , \mathcal{P}/P_d , $\mathcal{B}_{\text{TKE}}/\mathcal{P}$, and $\mathcal{X}/\mathcal{B}_{\text{TKE}}^{\text{tot}}$.

Here we have assumed that the ratio $\mathcal{X}/\mathcal{B}_{\text{TKE}}^{\text{tot}}$ is representative of the ratio between irreversible mixing of the buoyancy field, and the vertical turbulent buoyancy flux. These ratios are reported for all six cases in Figure 19, with budgets integrated over \mathcal{V} with $x_{\mathcal{V}} = 35$. Note that for the high Reynolds number cases we consider the imbalance in the SBV budget (a maximum of 5%) an additional source for \mathcal{X} , due to sub-grid-scale dissipation. The drag coefficient (Figure 19 (a)) is primarily a function of Reynolds number. Due to the moderate Reynolds numbers investigated, viscous forces differ considerably between $Re_d = 500$ and $Re_d = 2000$, accounting for the approximate 20% difference in drag. However, there is also a large reduction in drag as the flow transitions from the weakly stratified wake to the strongly stratified wake, arising due to the suppression of the KV and development of the large recirculation region.

TKE production, as a proportion of the power input P_d (Figure 19 (b)), increases with Reynolds number, by approximately 15%, due to the reduced mean-flow dissipation rate. There is also a Richardson number dependence that loosely corresponds to the regime change in the wake, where stronger stratification leads to a weaker TKE production, due both to the increased mean flow dissipation and the generation of the mean

flow internal wave. TKE production decreases from approximately 0.7 to 0.63 for $Re_d = 500$, as the flow undergoes the wake transition.

The flux Richardson number, given by the ratio between the buoyancy flux and TKE production (Figure 19 (c)), appears insensitive to the Reynolds number, but varies strongly with Ri_d . However, it is unclear how the regime change affects this ratio, since there is a large difference in the buoyancy flux between Re500Ri005 and Re500Ri050, despite both being ‘weakly’ stratified. Note that for all flows simulated here, the flux Richardson number is lower than the accepted constant flux Richardson number $Ri_f = 0.167$, particularly for the weak stratification cases. It is unclear how this ratio may vary with a further increase in Ri_d , but given the rate of change of these curves it would not be surprising to see $Ri_f > 0.167$, even without considering local variations with depth.

The ratio between the destruction rate of SBV and the total buoyancy flux (Figure 19 (d)) is greater than 90% for all cases aside from Re2000Ri005, where vigorous mixing processes are far from complete as the wake advects out of the integration volume. Generally this ratio increases with increasing Ri_d , aside from Re2000Ri200 where it drops slightly. There is some degree of uncertainty regarding these higher Reynolds number cases given the approximated sub-grid-scale processes. However, these high ratios give confidence that these simulations capture the majority of mixing processes in the wake.

The total mixing efficiency, Γ_{tot} , equal to the product of the four ratios (Figures 19 (a) to (d)) is reported in Figure (Figure 19 (e)). Γ_{tot} is a measure of how much energy from P_d results in irreversible mixing of the buoyancy field. The total mixing efficiency appears insensitive to Reynolds number, since the reduced drag coefficient at higher Re_d is compensated by an increased TKE production ratio. However, it is strongly affected by Ri_d , varying between approximately 2% at low Ri_d and increasing to approximately 8.5% at high Ri_d .

4 Discussion

This study has investigated the interactions between a uniform two-layer stratified flow and a vertically oriented cylinder, using DNS and high-resolution LES. The primary focus has been on understanding the influence of the flow Reynolds number Re_d and Richardson number Ri_d on flow structure and mixing processes. We have found that a new regime emerges at sufficiently strong Ri_d where mean-flow standing internal waves develop at the interface between the unstratified and buoyancy-affected regions, as a result of strong vertical motions that are induced by recirculating flow structures within the thermocline. These recirculating structures are induced by the vertical shearing across the buoyancy-interface, where strong buoyancy forces suppress momentum transfer in the lee of the cylinder and therefore increase the reattachment length. The Karman Vortex is suppressed across the thermocline by these recirculating structures and the local drag coefficient is reduced. In contrast, the near-cylinder flow of the weakly-stratified regime is reasonably insensitive to the vertical coordinate, since mean shear is horizontal and therefore normal to gravity.

The separation of these two regimes is well characterised by the diagnostic parameters Ri_g , Re_b , and Fr_h : The weakly stratified flow regime is characterised by $Ri_g \gg 1$ everywhere, due to the negligible mean vertical shear. Near the cylinder, we see Re_b and Fr_h are also large, indicative of a weak influence from buoyancy on turbulent structures. Vertical fluctuations, and therefore mixing of the buoyancy field, are initially small in the weakly stratified wake due to the dominance of horizontal motions; vertical fluctuations grow as the flow advects downstream and turbulence tends towards isotropy. At some point downstream, dependent on Re_d and Ri_d , turbulence decays and buoyancy forces become relevant, such that Re_b and Fr_h become small.

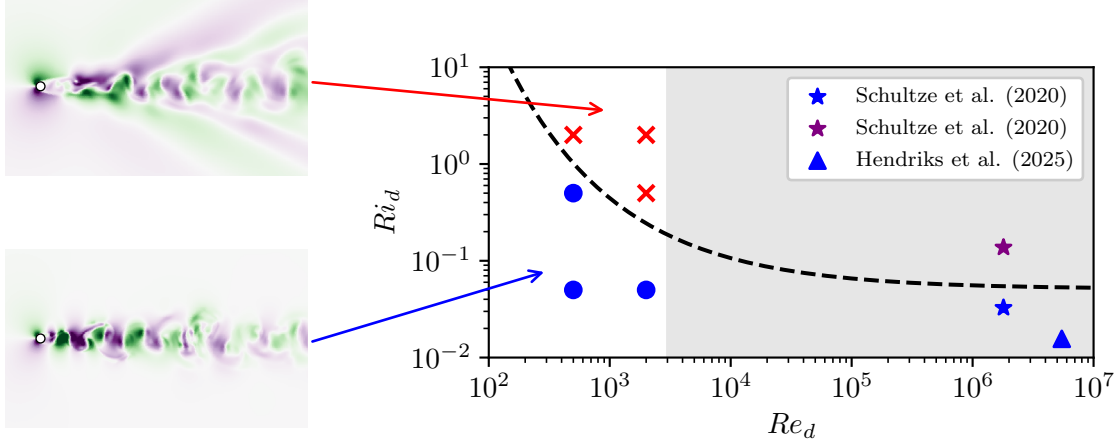


Figure 20: Regime diagram of two-layer stratified cylinder flow, with cases marked with a cross indicating cases with standing internal waves, and those marked with a circle indicating cases without a standing internal wave. The dashed line qualitatively represents the separation between these flow regimes, with the shaded region indicating high uncertainty of behaviour at high Reynolds numbers. Field data [13, 14] have been added to constrain high Reynolds number behaviour.

The point where $Fr_h \approx 1$ roughly corresponds to the peak in turbulent buoyancy flux, which occurs closer to the cylinder as Ri_d increases.

In contrast, the strongly stratified wake is characterised by small Re_b and Fr_h everywhere within the thermocline, aside from near the region of strong vertical flow, approximately four diameters downstream of the cylinder. In this region we also see $Ri_g < 1$; vertical shearing in the flow becomes an important source of TKE within the thermocline and relatively efficient mixing processes develop. Strong vertical fluctuations produced by vertical shearing are subsequently suppressed as the flow advects further downstream and turbulence is suppressed by buoyancy, increasing anisotropy. While the effect of the narrow and turbulent energetic wake on the temperature field is larger for weak stratification, we find that temperature perturbations are felt more widely for the strongly stratified wake, due to the existence of the mean-flow standing waves.

The transition between the two flow regimes is Reynolds and Richardson number dependent. There is an earlier transition to the ‘strong’ stratification regime when Re_d is increased from 500 to 2000. We hypothesise that this is due to the stronger importance of three-dimensionality at higher Reynolds numbers, which are therefore more susceptible to vertical buoyancy forces. However, it is unclear how this process may scale to higher Reynolds numbers, which is critical for predicting mixing at field scale. To understand this gap in scales we have constructed a regime diagram in Figure 20, where simulations resulting in a strongly stratified wake are marked with crosses, and weakly stratified wakes are marked with circles, as a function of Re_d and Ri_d . The dashed line represents the approximate boundary between these two regimes, which we have extrapolated to small and large Re_d . The low Reynolds number extrapolation is based upon the experimental results of Meunier [22], who investigated the onset of instability in a uniformly stratified cylinder wake. They found that the KV emerges independent of stratification strength for vertically aligned cylinders, at $Re_d \approx 45$, due to the lack of vertical motions that buoyancy may effect. For this reason, we hypothesise that the boundary between two-layer weakly and strongly stratified wakes will occur at larger Ri_d as Re_d decreases, until eventually the strongly stratified regime cannot develop, due to the lack of vertical motion. The critical Ri_d value therefore decreases with Re_d , at least for low Reynolds numbers.

At high Reynolds numbers there is much greater uncertainty, but the field data of Schultze et al. [13] and Hendriks et al. [14] can help constrain the problem. Both these studies measured the wakes generated by tidal flows past monopiles in the German/Belgian regions of the North Sea. We have approximated Re_d and Ri_d based on their maximum measured temperature differences, and the tidal velocities when data were recorded. Note however, that the field data differ from the idealised DNS, particularly due to background shear and turbulence.

There is a 3-order of magnitude difference between our simulation Reynolds numbers and those of the field. Despite this, we are reasonably confident that at least two of these field measurements lie in the ‘weakly stratified’ wake regime, given they measured a highly energetic and localised turbulent wake extending far downstream of the structure. However, the second field campaign of Schultze et al. [13] could not detect an energetic wake in their temperature measurements when the background stratification was stronger ($\Delta T \approx 2.1$ °C). We hypothesise that this was due to the regime change between weak and strongly stratified wakes, where temperature variations would only be detectable closer to the structure, and large-scale standing waves may be present. While Schultze et al. [13] did not report observing such large-scale structures, they may be more challenging to detect due to their spatial extent, steady-nature, and relatively weak strength. If this hypothesis is correct, the Reynolds number dependence of the mixing regimes appears to plateau as Re_d increases. However, there is great uncertainty in this scaling. The LES carried out by Schultze et al. [13] did not demonstrate a clear regime change in their stratified wake simulations, although with only a 1 m vertical grid resolution it is unclear whether buoyancy length scales were adequately captured. Indeed, Schultze et al. [13] note significant dissipation and mixing in the background flow, even in the absence of infrastructure. It is therefore vital that future work addresses the scale gap between DNS and field observations.

It is also important to discuss how further increases in Ri_d may affect dynamics. If the vertical domain extent were large enough, the unstratified regions would be unaffected by any change in Ri_d . While high Ri_d may suppress turbulent activity across the thermocline, there must be some interface between the buoyancy affected region and the unstratified active turbulence. This will subsequently lead to the strong vertical shearing at the thermocline edges, and a suppression of the KV within the thermocline. For this reason we speculate that higher Ri_d will fall into the same ‘strongly stratified’ regime identified herein, where vertical motions will develop in response to the vertical shearing, leading to waves propagating on the stratified-unstratified interfaces. Differences will occur regarding how deeply vertical flow structures may penetrate into the strongly stratified regions, which will subsequently limit the extent of vigorous mixing. However, we speculate the fundamental features that separate weakly and strongly stratified wakes will be maintained as Ri_d is increased.

Using the volume-integrated KE and PE budgets we have also identified the energy pathway between the power input associated with the cylinder drag, P_d , through to irreversible mixing of the buoyancy field, which we approximate using the destruction rate of the scaled buoyancy variance, \mathcal{X} . The power input P_d is proportional to the cylinder drag coefficient, which we find varies strongly with Re_d , due to the moderate Reynolds numbers, and Ri_d , due to the suppression of turbulence across the thermocline when stratification is strong. The strongly stratified regime reduces drag by at least 15% compared to the weakly stratified wake. The power loss from drag arises as a source term for time-averaged kinetic energy, which is balanced primarily by TKE production, although there are notable contributions from viscous KE dissipation (due to the moderate Reynolds numbers) and, in the case of the strongly stratified wake, the mean buoyancy flux and KE transport terms. The latter two arise due to the large-scale standing waves that reversibly exchange energy between the KE and PE reservoirs. We show that this mean buoyancy flux can be as large

as the turbulent buoyancy flux, although separating transport processes from this mean buoyancy flux is challenging and dependent on the construction of the integration volume. The sum of the buoyancy flux and KE transport terms reaches approximately 8% of P_d when in the strongly stratified regime, doubling from approximately 4% when stratification is weakest. A key difference between these processes is that transport in the weakly stratified wake is concentrated in the narrow, energetic wake, while the strongly stratified wakes lead to wide-spread transport and buoyancy fluxes, due to the standing waves.

The fraction of P_d that is transferred to TKE is balanced primarily by the TKE dissipation rate, with a small contribution from the turbulent buoyancy flux. The ratio $\mathcal{B}_{\text{TKE}}/\mathcal{P}$, also termed the flux Richardson number, is strongly dependent on Ri_d , varying from approximately 0.03 to 0.15, when the terms are integrated over the full domain volume. This is weaker than the typically assumed value of $Ri_f \approx 0.167$ for mixing in stratified waters, although local values within the thermocline will be larger. The irreversible mixing rate is approximated by \mathcal{X} , which is at least 90% of the turbulent buoyancy flux for five of the six cases investigated, generally increasing with increasing Ri_d . When Ri_d is weaker, transport is responsible for the imbalance, where mixing processes are not complete as the wake advects out of the domain. Indeed, the buoyancy flux and SBV destruction rate are still strongly dependent on the downstream extent of the integration volume, indicating that mixing processes are not constrained to the numerical domain.

This work is motivated by the rapid expansion of offshore wind farms, which are now developing in deep seasonally stratified waters [2]. This is a recognised problem that is seeing increasingly active research [8, 11, 12, 17], although all modelling strategies suitable for assessing regional scale impacts of shelf-sea developments are dependent on parameterising the energy pathway presented herein. Current approaches have correctly identified the drag coefficient as a key uncertainty; here we show that not only is it structure-dependent, but also strongly dependent on the stratified wake regime. In addition, we have shown that a considerable proportion of KE injected into the flow by vertical cylinders is lost to mean-flow internal standing waves. These waves could potentially propagate much longer distances than the energetic wake, eventually losing their energy through wave-breaking, or interactions with downstream structures.

Parameterisations have historically been calibrated against RANS data [11]. However, it is unclear whether the strongly stratified regime is able to be accurately captured by RANS/LES due to the high resolution required to capture over-turning scales. Nevertheless, we note that the LES of Schultze et al. [13] obtained mixing efficiencies ($\gamma = Ri_f/(1 - Ri_f)$) ranging between 0.09-0.14, which is of a similar range to the values obtained in this study (0.03-0.13). Disagreements may be due to the different model set-up where background shear was incorporated into the model of Schultze et al. [13], or could be due to the higher Reynolds numbers ($Re_d \approx 10^6$) which increases turbulence and the strength of mixing. Regardless, both sets of simulations predict that the mixing efficiency is strongly dependent on the stratification strength.

There are a number of other uncertainties that require constraining in future work. In particular, mixing dynamics will be strongly affected by background shear and buoyancy profiles, background turbulence, wake-wake interactions, structure design, and of course the wider Re_d and Ri_d regime space. In particular, structure design will have a significant influence on mixing efficiency. Here we show that the horizontal shearing associated with weakly-stratified cylinder wakes is not an efficient source of mixing until appreciable vertical fluctuations develop in the wake. In contrast, more complex offshore wind infrastructure (e.g. floating semi-submersible structures) will directly create vertical shearing in the flow, in combination with horizontal motions. As a result, we anticipate that both the drag coefficient and flux-Richardson number will be larger, although still strongly dependent on stratification strength. Finally, we note that even in the case of vertical cylinders the drag coefficient and mixing dynamics vary strongly with height. It is not yet clear how such

variations should be incorporated into oceanographic models.

Acknowledgements

CJL was supported by an Early Career Fellowship funded by the Leverhulme Trust. RMD would like to acknowledge funding support from NERC Independent Research Fellow Grant NE/S014535/1. We acknowledge the use of the Viper High Performance Computing facility of the University of Hull, and the Lovelace HPC service at Loughborough University.

References

- [1] Kechao Wang, Wu Xiao, Tingting He, and Maoxin Zhang. Remote sensing unveils the explosive growth of global offshore wind turbines. *Renewable and Sustainable Energy Reviews*, 191:114186, 2024.
- [2] Robert M Dorrell, Charlie J Lloyd, Ben J Lincoln, Tom P Rippeth, John R Taylor, Colm-cille P Caulfield, Jonathan Sharples, Jeff A Polton, Brian D Scannell, Deborah M Greaves, et al. Anthropogenic mixing in seasonally stratified shelf seas by offshore wind farm infrastructure. *Frontiers in Marine Science*, 9:830927, 2022.
- [3] Gary D Egbert and Richard D Ray. Significant dissipation of tidal energy in the deep ocean inferred from satellite altimeter data. *Nature*, 405(6788):775–778, 2000.
- [4] Roland Wollast. Evaluation and comparison of the global carbon cycle in the coastal zone and in the open ocean. p. *The Sea, Vol. 10*, pages 213–252, 1998.
- [5] James E Bauer, Wei-Jun Cai, Peter A Raymond, Thomas S Bianchi, Charles S Hopkinson, and Pierre AG Regnier. The changing carbon cycle of the coastal ocean. *Nature*, 504(7478):61–70, 2013.
- [6] Jeffrey R Carpenter, Lucas Merkelbach, Ulrich Callies, Suzanna Clark, Lidia Gaslikova, and Burkard Baschek. Potential impacts of offshore wind farms on north sea stratification. *PloS one*, 11(8):e0160830, 2016.
- [7] Natalie Isaksson, Beth E Scott, Georgina L Hunt, Ella Benninghaus, Morgane Declerck, Kate Gormley, Caitlin Harris, Sandra Sjöstrand, Neda I Trifonova, James J Waggitt, et al. A paradigm for understanding whole ecosystem effects of offshore wind farms in shelf seas. *ICES Journal of Marine Science*, 82(3):fsad194, 2025.
- [8] Nils Christiansen, Ute Daewel, Bughsin Djath, and Corinna Schrum. Emergence of large-scale hydrodynamic structures due to atmospheric offshore wind farm wakes. *Frontiers in Marine Science*, 9:818501, 2022.
- [9] Ute Daewel, Naveed Akhtar, Nils Christiansen, and Corinna Schrum. Offshore wind farms are projected to impact primary production and bottom water deoxygenation in the north sea. *Communications Earth & Environment*, 3(1):292, 2022.
- [10] Arianna Zampollo, Rory O’Hara Murray, Alejandro Gallego, and Beth Scott. Does the oceanographic response to wind farm wind-wakes affect the spring phytoplankton bloom? *Progress in Oceanography*, page 103512, 2025.

- [11] Hannes Rennau, Stefan Schimmels, and Hans Burchard. On the effect of structure-induced resistance and mixing on inflows into the baltic sea: A numerical model study. *Coastal Engineering*, 60:53–68, 2012.
- [12] Pierre William Cazenave, Ricardo Torres, and J Icarus Allen. Unstructured grid modelling of offshore wind farm impacts on seasonally stratified shelf seas. *Progress in oceanography*, 145:25–41, 2016.
- [13] LKP Schultze, LM Merckelbach, J Horstmann, S Raasch, and JR Carpenter. Increased mixing and turbulence in the wake of offshore wind farm foundations. *Journal of Geophysical Research: Oceans*, 125(8):e2019JC015858, 2020.
- [14] Erik Hendriks, Kobus Langedock, Luca Van Duren, Jan Vanaverbeke, Wieter Boone, and Karline Soetaert. The impact of offshore wind turbine foundations on local hydrodynamics and stratification in the southern north sea. *Frontiers in Marine Science*, 12:1619577, 2025.
- [15] Jens Floeter, Justus EE van Beusekom, Dominik Auch, Ulrich Callies, Jeffrey Carpenter, Tim Dudeck, Sabine Eberle, André Eckhardt, Dominik Gloe, Kristin Hänselmann, et al. Pelagic effects of offshore wind farm foundations in the stratified north sea. *Progress in Oceanography*, 156:154–173, 2017.
- [16] Martin J Austin, Christopher A Unsworth, Katrien JJ Van Landeghem, and Ben J Lincoln. Enhanced bed shear stress and mixing in the tidal wake of an offshore wind turbine monopile. *Ocean Science*, 21(1):81–91, 2025.
- [17] Nils Christiansen, Jeffrey R Carpenter, Ute Daewel, Nobuhiro Suzuki, and Corinna Schrum. The large-scale impact of anthropogenic mixing by offshore wind turbine foundations in the shallow north sea. *Frontiers in Marine Science*, 10:1178330, 2023.
- [18] CP Caulfield. Layering, instabilities, and mixing in turbulent stratified flows. *Annual Review of Fluid Mechanics*, 53(1):113–145, 2021.
- [19] DL Boyer, PA Davies, HJS Fernando, and Xiuzhang Zhang. Linearly stratified flow past a horizontal circular cylinder. *Philosophical Transactions of the Royal Society of London. Series A, Mathematical and Physical Sciences*, 328(1601):501–528, 1989.
- [20] Yunxiu Xu, Harindra JS Fernando, and Don L Boyer. Turbulent wakes of stratified flow past a cylinder. *Physics of fluids*, 7(9):2243–2255, 1995.
- [21] Sarah Christin, Patrice Meunier, and Stéphane Le Dizès. Fluid–structure interactions of a circular cylinder in a stratified fluid. *Journal of Fluid Mechanics*, 915:A97, 2021.
- [22] Patrice Meunier. Stratified wake of a tilted cylinder. part 1. suppression of a von kármán vortex street. *Journal of fluid mechanics*, 699:174–197, 2012.
- [23] M Bosco and P Meunier. Three-dimensional instabilities of a stratified cylinder wake. *Journal of fluid mechanics*, 759:149–180, 2014.
- [24] Paul Billant and Jean-Marc Chomaz. Theoretical analysis of the zigzag instability of a vertical columnar vortex pair in a strongly stratified fluid. *Journal of Fluid Mechanics*, 419:29–63, 2000.
- [25] SA Thorpe. Layers and internal waves in uniformly stratified fluids stirred by vertical grids. *Journal of Fluid Mechanics*, 793:380–413, 2016.

- [26] Natasha S Lucas, Alan LM Grant, Tom P Rippeth, Jeff A Polton, Matthew R Palmer, Liam Brannigan, and Stephen E Belcher. Evolution of oceanic near-surface stratification in response to an autumn storm. *Journal of Physical Oceanography*, 49(11):2961–2978, 2019.
- [27] S Dong, GE Karniadakis, and C Chrysosostomidis. A robust and accurate outflow boundary condition for incompressible flow simulations on severely-truncated unbounded domains. *Journal of Computational Physics*, 261:83–105, 2014.
- [28] NEK5000. Version 19.0. *Argonne National Laboratory, Illinois*, 2019.
- [29] Ketan Mittal, Som Dutta, and Paul Fischer. Nonconforming schwarz-spectral element methods for incompressible flow. *Computers & Fluids*, 191:104237, 2019.
- [30] CJ Lloyd, RM Dorrell, and CP Caulfield. The coupled dynamics of internal waves and hairpin vortices in stratified plane poiseuille flow. *Journal of Fluid Mechanics*, 934:A10, 2022.
- [31] AG Tomboulides, JCY Lee, and SA Orszag. Numerical simulation of low mach number reactive flows. *Journal of Scientific Computing*, 12:139–167, 1997.
- [32] Ketan Mittal, Som Dutta, and Paul Fischer. Multirate timestepping for the incompressible navier-stokes equations in overlapping grids. *Journal of Computational Physics*, 437:110335, 2021.
- [33] Steven A Orszag. Spectral methods for problems in complex geometries. In *Numerical methods for partial differential equations*, pages 273–305. Elsevier, 1979.
- [34] C. Canuto, M.Y. Hussaini, A. Quarteroni, and A. JR. Thomas. Spectral methods in fluid dynamics, 2012.
- [35] C H K Williamson. Vortex dynamics in the cylinder wake. *Annual Review of Fluid Mechanics*, 28(Volume 28, 1996):477–539, 1996. ISSN 1545-4479. doi: <https://doi.org/10.1146/annurev.fl.28.010196.002401>. URL <https://www.annualreviews.org/content/journals/10.1146/annurev.fl.28.010196.002401>.
- [36] Stephen B. Pope. *Turbulent Flows*. Cambridge University Press, 2000.
- [37] JR Taylor, SM de Bruyn Kops, CP Caulfield, and PF Linden. Testing the assumptions underlying ocean mixing methodologies using direct numerical simulations. *Journal of Physical Oceanography*, 49(11):2761–2779, 2019.
- [38] Katherine M Smith, CP Caulfield, and JR Taylor. Turbulence in forced stratified shear flows. *Journal of Fluid Mechanics*, 910:A42, 2021.
- [39] Qi Zhou. Mixing in a strongly stratified turbulent wake quantified by bulk and conditional statistics. *Journal of Fluid Mechanics*, 997:A41, 2024.
- [40] A Brandt and KR Shipley. Laboratory experiments on mass transport by large amplitude mode-2 internal solitary waves. *Physics of Fluids*, 26(4), 2014.
- [41] M. Carr, P. A. Davies, and R. P. Hoebbers. Experiments on the structure and stability of mode-2 internal solitary-like waves propagating on an offset pycnocline. *Physics of Fluids*, 27(4):046602, 04 2015. ISSN 1070-6631. doi: 10.1063/1.4916881. URL <https://doi.org/10.1063/1.4916881>.

- [42] William D Smyth and James N Moum. Length scales of turbulence in stably stratified mixing layers. *Physics of Fluids*, 12(6):1327–1342, 2000.
- [43] An-Kang Gao, Shufan Zou, Yipeng Shi, and Jiezhi Wu. Energy-based drag breakdown in compressible flow by wake-plane integrals. *AIAA Journal*, 57(8):3231–3238, 2019.
- [44] G Bonnavion, J Borée, and V Herbert. On the use of kinetic energy balance for the volumetric identification of drag sources of a blunt body. application to road vehicles. *International Journal of Heat and Fluid Flow*, 96:108977, 2022.