

RESEARCH ARTICLE

A Lightweight Architecture for Multi-instrument Transcription with Practical Optimizations

Ruigang Li*, and Yongxu Zhu†

Abstract

Existing multi-timbre transcription models struggle with generalization beyond pre-trained instruments, rigid source-count constraints, and high computational demands that hinder deployment on low-resource devices. We address these limitations with a lightweight model that extends a timbre-agnostic transcription backbone with a dedicated timbre encoder and performs deep clustering at the note level, enabling joint transcription and dynamic separation of arbitrary instruments. Practical optimizations including spectral normalization, dilated convolutions, and contrastive clustering further improve efficiency and robustness. Despite its small size and fast inference, the model achieves competitive performance with heavier baselines in transcription accuracy and separation quality, and shows promising generalization ability, making it highly suitable for real-world deployment in practical and resource-constrained settings.

Keywords: automatic music transcription, instrument separation, deep clustering, low-resource

1. Introduction

Automatic Music Transcription (AMT), which converts audio signals into symbolic musical notation, represents a fundamental challenge in Music Information Retrieval (MIR) (Benetos et al., 2019). While current systems achieve remarkable accuracy in transcribing polyphonic music for specific instrument timbres (Hawthorne et al., 2017; Riley et al., 2024; Tamer et al., 2023a), we investigate a more practical scenario: processing audio mixtures containing n instruments and outputting n tracks of musical notes, each corresponding to a distinct timbre. We term this task “timbre-separated transcription”, which differs from conventional source separation by operating at the symbolic level to extract note representations rather than reconstructing audio waveforms. In this paper, we study the musical sounds produced by instruments.

Current solutions often use unified classification-based models that treat timbre identification as a categorization task (Wu et al., 2020; Gardner et al., 2022), which limits their flexibility: they demand extensive training data, fix the maximum number of separable sources, and fail to generalize to unseen timbres, essentially functioning as a “timbre dictionary”. Moreover, these models are typically large, computationally

demanding, making them inaccessible to general users despite advances in transcription accuracy.

To address these issues, we propose a lightweight two-branch architecture that decouples pitch/onset estimation from timbre representation learning and employs deep clustering (Hershey et al., 2016) to achieve timbre-separated transcription. The first branch performs timbre-agnostic transcription, predicting frame-level activations with a compact, fully convolutional network. The second branch learns direction-aware timbre embeddings, which are clustered at the note level to enable dynamic instrument separation. Furthermore, we discuss the impact of dataset and possible improvements. All code is open-sourced, with the timbre-agnostic component already deployed in a web-based assisted transcription tool¹.

2. Background and Related Work

2.1 AMT Fundamentals

The majority of existing AMT approaches employ deep neural networks to transform audio inputs into piano-roll-like representations, characterized as two-dimensional matrices indexed by time frames and pitch notes. The process generally comprises: 1) time–frequency feature extraction, 2) frame-level probability estimation with neural networks, and 3) note generation through binarization or specialized output networks.

Stage 1 is typically implemented with classical

*Southeast University, No. 2 Southeast University Road, Nanjing 211189, Jiangsu, China

†Southeast University, No. 2 Southeast University Road, Nanjing 211189, Jiangsu, China

signal-processing transforms. The Short-Time Fourier Transform (STFT) yields linear-spaced frequency bins, whereas the Mel-scale Transform (Mel) and Constant-Q Transform (CQT) provide logarithmic spacing that better matches musical pitch perception. However, these interpretable transforms may not always be optimal, leading to explorations of learnable encodings and hybrid methods (Luo and Mesgarani, 2018; Su and Yang, 2015; Rouard et al., 2023). The CQT is readily enriched into a Harmonic CQT (HCQT) (Balhar and Hajić, 2019) by vertically shifting the spectrogram according to the bin offsets of successive harmonics and concatenating the shifted copies along an additional axis. This prior-driven expansion allows small convolutional kernels to focus efficiently on musically relevant frequency components.

Stage 2 produces a 2-D posterioqram that encodes the probability of pitch activation at each time-frequency bin. Convolutional layers leverage the spectro-temporal grid to capture local structures (Wu et al., 2019; Bittner et al., 2022), while temporal-sequence models extend the receptive field along time, modeling long-range dependencies (Hawthorne et al., 2017). To translate frame-wise posteriors into discrete notes, in stage 3, most systems rely on onset detection (i.e., the initial frame of each note) and then link successive active frames within an onset-defined segment to form complete note events (Hawthorne et al., 2017; Wu et al., 2020, 2024; Bittner et al., 2022).

2.2 Timbre-Separated Transcription

Multi-instrument timbre-separated transcription goes beyond traditional AMT by extracting instrument-specific notes from polyphonic mixtures. Tamer et al. (2023b) demonstrated that simply cascading source separation followed by transcription leads to suboptimal results due to error propagation. Therefore, it’s necessary to combine transcription and separation in a mutually reinforcing manner.

Innovative methods have emerged for this challenge. Gardner et al. (2022) introduced a sequence-to-sequence AMT model that outputs all instrument tracks, achieving high accuracy but relying heavily on diverse multi-timbre data. Multi-task learning frameworks like Timbre-Trap (Cwitkowitz et al., 2024) and Cerberus (Manilow et al., 2020) show that joint optimization can lead to synergistic effects. Wu et al. (2020) proposed a self-attention-based instance segmentation approach that performs joint note detection and instrument classification, achieving timbre-separated transcription for a closed set of trained instruments.

For handling unseen timbres, researchers have explored different strategies. The zero-shot learning method proposed by Lin et al. (2021) employs a query-based mechanism: under contrastive supervision, it learns to encode a clean reference example into a tim-

bre embedding that generalizes to unseen instruments. This embedding is then used to sequentially modulate the U-Net layers, enabling zero-shot separation and transcription of audio sources with novel timbres not encountered during training. The work by Tanaka et al. (2020) pioneered the application of deep clustering networks to timbre-separated transcription. Their approach learns a universal timbre representation and enables separation with a non-fixed number of classes through clustering, showing how these tasks can complement each other when properly combined.

2.3 Deep Clustering Methodology

Deep clustering serves as a fundamental approach addressing two core challenges in source separation: the permutation problem and speaker-independent separation. The methodology operates by encoding each time-frequency bin into a high-dimensional feature, then assigning labels through clustering algorithms to generate separation masks.

The pioneering work of Hershey et al. (2016) first applied deep clustering to separate unknown speakers. This was later extended by Luo et al. (2018), who introduced learnable attractors to enable end-to-end training and handle variable numbers of sources. The adaptation to music transcription was first achieved by Tanaka et al. (2020), but their method uses transcription mainly to aid audio separation, lacks dedicated note-creation post-processing, and omits key implementation details. More fundamentally, these studies share two critical limitations: clustering at frame level produces fragmented results, and hard-assignment strategy cannot handle overlap situations. In contrast, our clustering post-process is tailored for music transcription, aggregating frame embeddings into coherent note events with minimal computational overhead.

3. Proposed Method

3.1 Problem Configuration

Let $X = \sum_{i=1}^K x_i \in \mathbb{R}^l$ be the mixed audio signal of K timbres, where $l = 22.05 \text{ [kHz]} \times \text{Time [sec]}$ is the signal length, and x_i is the single timbre audio corresponding to the frame activation $y_{Fi} \in [0, 1]^{N \times T}$ and onset activation $y_{Oi} \in [0, 1]^{N \times T}$. Since we are aiming for the pitch range $C_1 \sim B_7$, $N = 7 \times 12 = 84$. The goal of timbre-agnostic transcription is to map X to $\sum_{i=1}^K y_{Fi}$ and $\sum_{i=1}^K y_{Oi}$, while the goal of timbre-separated transcription is to obtain $\{y_{Fi}\}_{i=1}^K$. First, we apply the CQT to obtain $Q \in \mathbb{C}^{F \times T}$, where T is the number of frames and F is the number of frequency points analyzed. We extended the CQT analysis to eight octaves to ensure each note has at least two harmonics, and with three bins per semitone, hence $F = 8 \times 12 \times 3 = 288$. Our proposed model outputs the timbre-agnostic transcription results $Y_F = \sum_{i=1}^M \hat{y}_{Fi}$ and $Y_O = \sum_{i=1}^M \hat{y}_{Oi}$, and the timbre-sensitive representation $V_{ti} \in \mathbb{R}^{D \times N \times T}$. Fi-

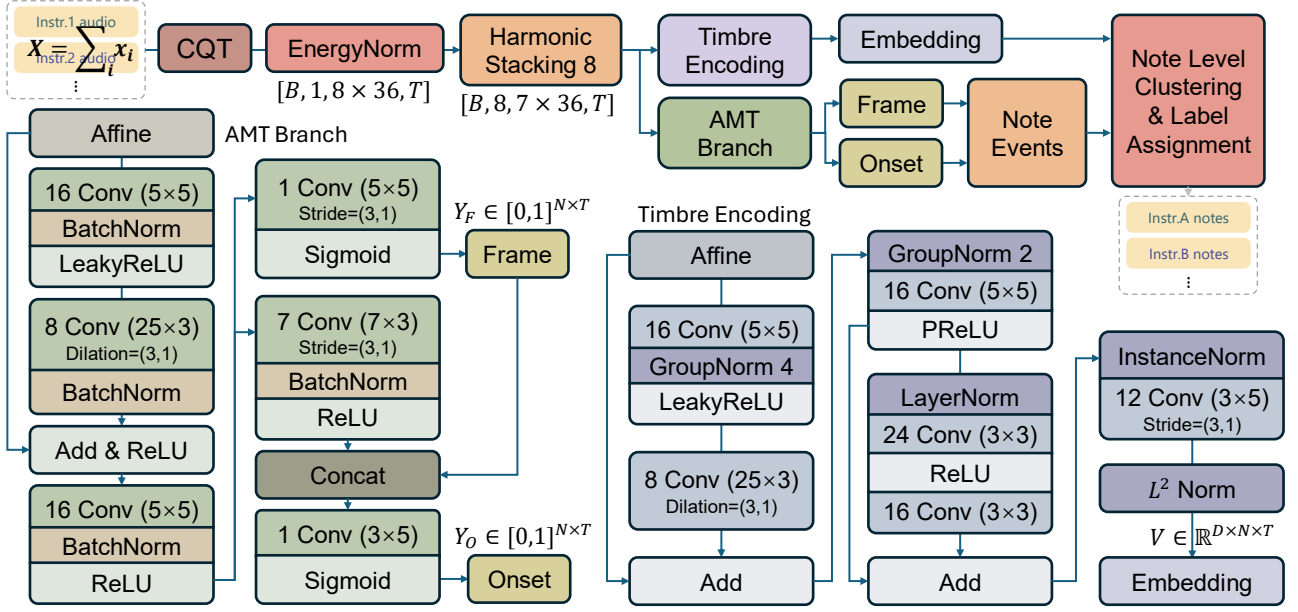


Figure 1: Overview of the proposed method. **Top:** Overall pipeline, which takes a multi-timbral mixture audio as input and outputs note events for each constituent timbre. **Bottom left:** AMT branch producing timbre-agnostic transcription outputs—frame activation posteriorgram Y_F and onset activation posteriorgram Y_O . **Bottom right:** Timbre encoding branch yielding a D -dimensional timbre embedding V_{ti} for each time–frequency bin, where $N = 84$ denotes the target pitch range.

nally, V_{ti} is clustered to assign labels to Y_F , separating $\{\hat{y}_{F1}, \hat{y}_{F2}, \dots, \hat{y}_{FK}\}$ from Y_F .

3.2 Overall Architecture

As shown in Figure 1, our timbre-separated transcription model comprises two parallel branches: timbre-agnostic transcription and timbre encoding, both taking HCQT as input. We also design a tailored post-processing pipeline suited to this task.

The timbre-agnostic transcription branch builds upon BasicPitch (Bittner et al., 2022), a lightweight fully convolutional network that demonstrates strong performance using only local contextual information. We identify several limitations and introduce targeted optimizations, yielding a more compact architecture with comparable accuracy.

The timbre encoding branch adopts a similar fully convolutional design. To incorporate global context, we employ InstanceNorm and GroupNorm for adaptive normalization across the entire input. While convolutional architectures are more deployment-friendly on low-resource devices than RNN-based approaches commonly used in deep clustering (Hershey et al., 2016; Tanaka et al., 2020), they may lack long-range modeling capacity; alternative designs are discussed in the experiments.

3.3 EnergyNorm for Spectral Normalization

Normalizing the CQT addresses audio signal dynamic range differences. However, as timbre information is primarily encoded within the envelope of harmonic

amplitudes (Grey, 1975), we posit that conventional normalization techniques, specifically zero-centering (subtracting the mean), disrupt the critical relative magnitude relationships between harmonics. This issue arises because frequency bins within a single time frame are strongly correlated, originating from the same temporal segment.

Leveraging Parseval’s theorem, we propose a time-domain energy normalization strategy. Under the assumption that the time-domain signal follows a Gaussian distribution, the resulting energy follows a chi-square distribution. We achieve stable amplitude normalization by standardizing the sample variance of the frame-wise energy to unity. Given a CQT spectrum $Q \in \mathbb{C}^{F \times T}$, the process is described as:

$$E_t = \sum_{f=1}^F |q_{f,t}|^2 \in \mathbb{R}^T, \quad (1)$$

$$\sigma = \sqrt{\text{Var}(E_t)} \in \mathbb{R}, \quad (2)$$

$$E_{\text{norm}} = \frac{|Q|^2}{\sigma} \in \mathbb{R}^{F \times T}. \quad (3)$$

This approach reduces the normalization complexity from two dimensions to one, significantly lowering computational costs. Furthermore, to address the limitations of strictly non-negative features in neural network learning, we apply a logarithmic transformation followed by an affine transformation to enhance representational capacity. The final normalized representation is defined as:

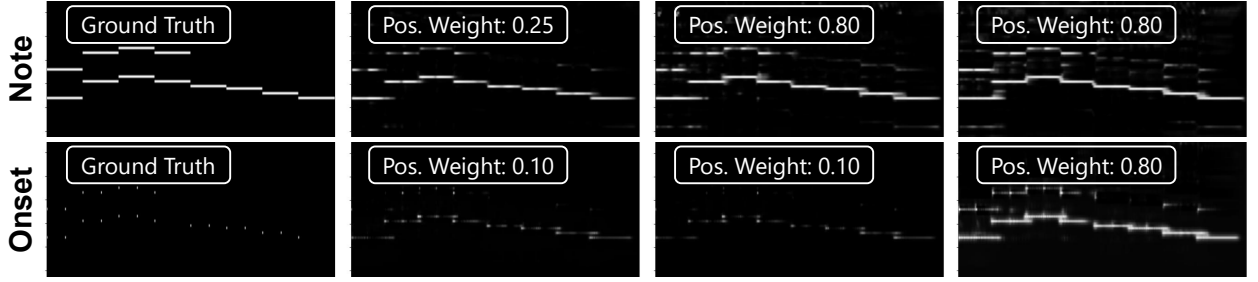


Figure 2: Training outcomes using Focal Loss with varying positive class weights. Each column represents a training session from initialization to convergence.

$$\tilde{Q} = k \cdot (\log|Q|^2 - \log\sigma) + b, \quad (4)$$

where k and b are learnable scalars.

3.4 Dilated Convolution for Harmonic Context

In BasicPitch, a large convolutional kernel spanning 39 frequency bins (one octave plus one note) is explicitly mentioned as effective for mitigating octave errors. However, the reference implementation applies padding to both ends, effectively limiting the receptive field to half an octave above and below, rather than the intended full range above or below. Given the explicit spatial correspondence between input and output representations, this limitation prevents the model from directly attending to information at harmonic intervals. To address this issue, we adopted a more robust strategy by extending the receptive field to cover two octaves in both directions. We implemented this using a dilated convolution with a frequency-axis kernel size of 25 and a dilation factor of 3. This configuration ensures comprehensive harmonic coverage while simultaneously reducing the parameter count.

3.5 Focal Loss for Class Imbalance

BasicPitch employs a class-balanced cross-entropy loss to address the sparsity of onsets, with negative and positive class weights set at 0.05 and 0.95, respectively. However, our experiments revealed that this weighting scheme exacerbates class imbalance. Figure 2 presents our controlled experimental results, demonstrating that assigning a larger weight to the positive class of onsets leads to severe false positives, indicating that sparse classes should be assigned smaller weights.

We directly utilized Focal Loss (Lin et al., 2017) in Eqn. (3.5) with $\gamma = 1$, setting the positive class weights for notes and onsets at 0.2 and 0.06, respectively.

$$\text{FL}(p_t) = -\alpha_t(1 - p_t)^\gamma \log(p_t),$$

$$p_t = \begin{cases} p & \text{if } y = 1 \\ 1 - p & \text{if } y = 0, \end{cases} \quad \alpha_t = \begin{cases} \alpha & \text{if } y = 1 \\ 1 - \alpha & \text{if } y = 0. \end{cases} \quad (5)$$

3.6 InfoNCE for Contrastive Cluster Formation

Hershey et al. (2016) and Tanaka et al. (2020) utilize

the following deep clustering objective:

$$\begin{aligned} \mathcal{L}_{\text{affinity}} &= \|VV^T - ZZ^T\|_F^2 \\ &= \|V^T V\|_F^2 - 2\|V^T Z\|_F^2 + \|Z^T Z\|_F^2, \end{aligned} \quad (6)$$

where $Z \in \mathbb{R}^{K \times M}$ denotes the one-hot class labels (with K representing the number of classes) for bins active in the ground truth, and $V \in \mathbb{R}^{D \times M}$ is the timbre encodings at the corresponding locations extracted from $V_{ti} \in \mathbb{R}^{D \times K \times T}$. Defining $\hat{Z} = ZZ^T \in \mathbb{R}^{K \times K}$ yields:

$$\hat{z}_{i,j} = \begin{cases} 1 & \text{if } v_i \text{ and } v_j \text{ share class} \\ 0 & \text{otherwise.} \end{cases} \quad (7)$$

This loss function benefits from low spatial complexity and high computational efficiency. However, it's at least three orders of magnitude larger than the AMT loss (frame&onset transcription with Focal Loss) and converges slowly, which makes joint optimization more difficult when a backbone is shared. Furthermore, this objective enforces orthogonality between encodings of different classes. We argue that strict orthogonality is an overly stringent constraint; for clustering objectives, anti-parallel alignment yields larger inter-class distances than orthogonality. Consequently, we adopt the contrastive InfoNCE loss (Oord et al., 2018) to facilitate cluster formation:

$$\mathcal{L}_{\text{InfoNCE}} = - \sum_{n=1}^M \log \frac{\sum_{m=1, m \neq n}^M \exp\left(\frac{\mathbf{v}_n^\top \mathbf{v}_m}{\tau}\right)}{\sum_{m=1, m \neq n}^M \exp\left(\frac{\mathbf{v}_n^\top \mathbf{v}_m}{\tau}\right)}. \quad (8)$$

Empirically setting the temperature parameter $\tau = 0.15$ aligns the magnitude of the clustering loss with the AMT loss and synchronizes their convergence rates. Crucially, in scenarios involving a single timbre, the InfoNCE loss naturally vanishes. In contrast, the MSE-based loss continues to force feature vectors toward specific directions even in the absence of contrasting classes, causing the mean output to deviate significantly from the origin and resulting in potential instability.

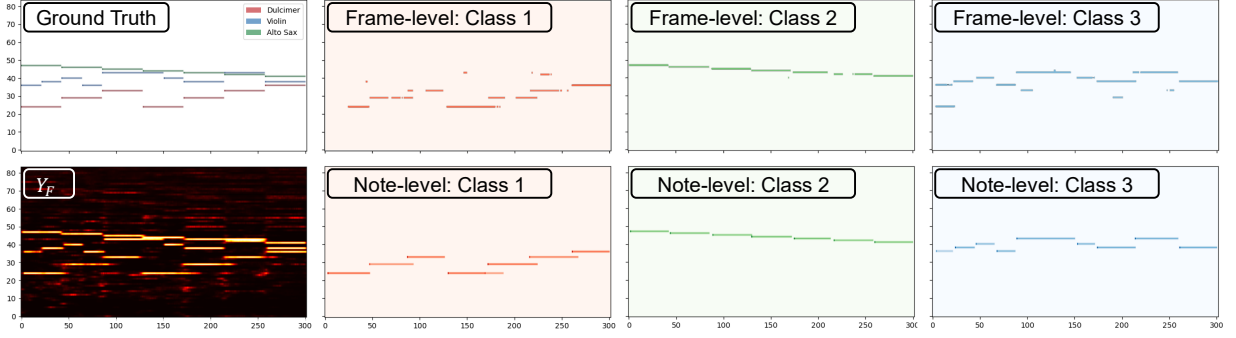


Figure 3: Result of frame-level and note-level post-processing for triple separation.

3.7 Post-process of timbre-separated transcription

Existing deep clustering-based source separation methods are predominantly designed for spectrogram reconstruction. In the field of music transcription, however, there is a lack of discussion on methods for creating specific notes from clustering results.

Tanaka et al. (2020) proposed a frame-level transcription method that predicts a binary mask by assigning an additional cluster to “silence bins” and performing K-means clustering over the entire time–frequency space. But this approach suffers from several critical limitations:

- The absence of onset information hinders accurate note creation from masks.
- Frame level is low, easily dispersing notes.
- The large number of bins makes clustering algorithms very slow.
- Most clustering algorithms require specifying the number of clusters, and hard-assignment strategy cannot handle overlap situations, where instruments play the same pitch simultaneously.

Benefiting from the dual-branch architecture, the separation process can be conducted at the note level. We first obtain notes using BasicPitch’s method, then weight and sum the encodings of each frame in the note to get its timbre encoding, followed by spectral clustering of the note encodings. This method aggregates time-frequency bins of the same note, greatly reducing the number of samples for clustering and resolving the issue of note dispersion. Figure 3 illustrates the difference between frame-level and note-level transcription, with the latter nearly perfectly reconstructing compared to the former’s suboptimal outcome.

For the last issue, we attempted an iterative matching-filter approach, which, however, tends to merge categories and can only be performed at the frame level, so will not be elaborated further.

4. Evaluation

4.1 Experimental Setup

4.1.1 Datasets

Table 1 summarizes the datasets used in our experiments. We train primarily on MusicNet (Thickstun et al., 2017), but replace its DTW-aligned annotations,

which are known to be inaccurate, with the refined labels from MusicNetEM (Maman and Bermano, 2022). All audios are resampled to 22,050 Hz and split into non-overlapping 900-frame clips (frame size: 256 samples, matching the CQT hop length). Tracks sharing the same instrument are mixed to form a single timbral class per piece.

For evaluation, we use three real-world polyphonic datasets with solo tracks: BACH10 (Duan et al., 2010) (fixed quartet of violin, bassoon, clarinet, saxophone), URMP (Li et al., 2019), and PHENICX (Miron et al., 2016), the latter featuring complex orchestral mixtures with an average of 9.5 instruments per piece.

Motivated by Slakh2100 (Manilow et al., 2019), a large-scale fully synthesized dataset, we question the necessity of human-composed, real-recorded data. We therefore generate synthetic audio via a simple algorithm that randomly places notes across our 84-note pitch range and adds harmonically overlapping chord tones with probability. MIDI sequences are rendered with FluidSynth, applying randomization in dynamics, pitch tuning, and articulation to improve realism. Each sample uses a single timbre; an example appears in Figure 4.

For the timbre-agnostic model, we synthesize 252 clips with 900 frames each from 33 General MIDI programs, yielding ~24.1 hours of training data. For timbre-separated transcription, we define 10 categories of acoustically similar instruments, each contributing 12 clips with 600 frames each, totaling ~13.9 minutes of base material. During training, clips are dynamically mixed within categories to create multi-timbral samples, greatly increasing data diversity.

4.1.2 Evaluation Metrics

We evaluate transcription performance at frame and note levels using *mir_eval* (Raffel et al., 2014). Since BasicPitch’s note creation requires thresholds for frames and onsets, we employ a coarse-to-fine search strategy to identify optimal thresholds that maximize model performance, assuming the metric is concave in the threshold. The search converges to 10^{-5} precision: first optimizing the frame threshold by maximizing frame-wise F_1 (F_F), then fixing it while tuning

Dataset	Dur.	Songs	Instr.	Instr./Song
MusicNet	34h	330	11	1–8
BACH10	334s	10	4	4
PHENICX	637s	4	10	10-39
URMP	1.3h	44	14	2–5
Our:AMT	24h	8316	33	1
Our:Sep	836s	120	34	1

Table 1: Datasets used in experiments. “Our:AMT” and “Our:Sep” are our synthetic datasets created to examine whether human composition and real recordings are indispensable. The latter’s timbres are grouped into ten classes; when training, cross-class mixtures yield single-sample multi-timbre pieces. Bold datasets are used for training.

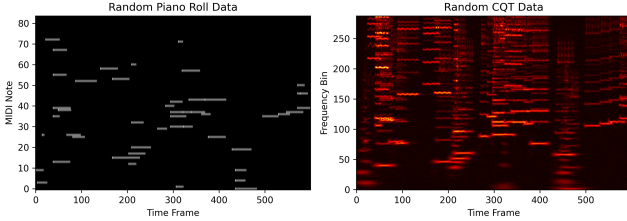


Figure 4: Randomly generated piano-roll (left) and the corresponding CQT spectrogram of the synthesized audio using a trumpet timbre (right)

the onset threshold to maximize note-level F_1 (F_N). A note is correct if its pitch matches ground truth and its onset is within ± 50 ms of the reference.

For timbre-separated transcription, we extract note events following section 3.7 using the optimized thresholds. The number of clusters is set manually. To resolve the label permutation problem, we align estimated and reference piano-roll matrices by minimizing MSE over all track permutations. The separated note-level F_1 score (F_S) is then computed as the average across tracks.

Our core metrics are F_F , F_N , and F_S . To isolate the contribution of timbre encoding, we report the ratio F_S/F_N . All results are averaged over at least three independent training runs.

4.2 Implementation Details

4.2.1 Parameter Setting

We use the parameter-efficient downsampling CQT architecture of Schörkhuber and Klapuri (2010) with a hop size of 256 samples (~ 11 ms at 22,050 Hz). The timbre embedding dimension is set to $D = 12$. Training and validation data follow a 10:1 ratio. The model is selected based on the minimum weighted loss (15% training + 85% validation) to prevent overfitting. We optimize with AdamW with initial $lr = 3 \times 10^{-4}$. Training lasts 60 epochs with a batch size of 18. For timbre-separated transcription on our synthetic dataset, we generate mixtures of 2 or 3 timbres per sample and add mild white noise. The final model comprises: CQT

(19,944 parameters), AMT branch (18,978), and timbre encoder (25,983).

4.2.2 Timbre-agnostic transcription Baseline

We reimplement BasicPitch (Bittner et al., 2022) and Onsets&Frames (Hawthorne et al., 2017) in PyTorch as timbre-agnostic baselines.

We remove the pitch prediction neck from BasicPitch, following the original observation that pitch supervision is non-essential, yielding a 56,517-parameter model. Experiments labeled with “BP” use this architecture.

For Onsets&Frames, we retain only the frame and onset branches and adapt the network to our input configuration, resulting in a 1,714,076-parameter model. Experiments prefixed with “OF” employ this architecture.

4.2.3 Timbre-separated transcription Baseline

We reproduce the method of Tanaka et al. (2020). Due to the absence of official code and unspecified hyperparameters, we set the BiLSTM hidden size to 256, STFT window length to 1024 (matching the original frequency resolution), hop size to 256 (consistent with our setup), and embedding size to 12. We replace the original loss with our L_{InfoNCE} and use our AMT branch for multi-pitch estimation. The resulting timbre encoder contains 4,897,776 trainable parameters.

4.3 Overall Performance Comparison

Table 2 presents the results for timbre-agnostic transcription. Comparing the rows “Ours”, “BPfl”, and “OFfl” (all trained with our focal loss) and the additional rows “MN” and “BPflMN”, we observe that our model achieves performance on par with BasicPitch using significantly fewer parameters. Moreover, our CNN-based architecture substantially outperforms the RNN-based Onsets&Frames, confirming the efficiency of our design.

A similar trend appears in timbre-separated transcription in Table 3: our method (“Ours”) markedly surpasses the RNN-based baseline of Tanaka et al. (2020) (“Tanaka”). Notably, during training, both RNN baselines exhibit an earlier rise in validation loss, indicating overfitting to the training set. Given their much larger parameter counts, this suggests limited generalization under data constraints and further underscores the robustness, sample efficiency, and trainability of our lightweight architecture.

4.4 Ablation Study on Core Components

EnergyNorm Comparing rows “Ours” and “noLog” in Table 2, we find that non-negative features indeed constrain the model’s expressive capacity. Repeated experiments show that the optimal affine scaling factor k in the AMT branch is around 0.2, suggesting that neither raw energy ($k = 1$) nor magnitude ($k = 0.5$) yields the best representation.

Dataset	BACH10 tutti		BACH10 solo		PHENICX		URMP tutti		URMP solo	
Metric(%)	F_F	F_N	F_F	F_N	F_F	F_N	F_F	F_N	F_F	F_N
Ours	83.9	75.1	91.0	87.5	62.1	48.0	74.9	69.9	81.0	82.0
noLog	79.8	68.2	89.5	85.3	60.7	45.7	72.6	65.6	80.8	81.2
BN	85.8	76.4	91.1	87.8	55.6	43.6	69.5	64.1	75.0	75.2
DConv	83.8	74.5	88.7	84.3	62.6	46.3	74.6	69.0	80.4	80.0
BPloss	84.8	63.2	91.2	80.9	10.4	43.2	75.5	62.9	82.2	76.4
MN	85.9	79.7	87.6	86.8	69.3	55.3	79.4	76.6	81.9	84.0
LCQT	78.0	62.0	87.2	82.7	62.3	46.7	73.9	66.7	80.2	80.3
LCQTMN	85.9	76.1	88.4	84.6	70.2	55.8	80.7	76.6	82.4	83.5
BP	83.1	26.4	90.2	26.9	10.4	42.0	65.7	57.8	72.2	69.3
BPfl	85.3	74.1	91.5	87.5	51.1	41.0	68.1	62.5	74.6	71.5
OF	77.2	61.5	89.6	84.0	25.1	19.3	32.1	28.1	22.9	24.4
OFfl	77.5	56.7	90.4	82.1	31.1	23.2	42.9	36.6	39.4	37.9
BPflMN	85.3	80.7	88.6	87.6	69.9	53.7	79.3	76.6	82.1	84.2

Table 2: Comparison of timbre-agnostic transcription. Unless stated otherwise, models are trained on our synthetic dataset. “noLog”: EnergyNorm without log; “BN”: BatchNorm replacing EnergyNorm (BasicPitch-style); “DConv”: BasicPitch’s 39-tap conv replacing dilated conv; “BPloss”: BasicPitch’s loss; “MN”: trained on MusicNet; “LCQT”: learnable CQT; “LCQTMN”: learnable CQT trained on MusicNet; “BP”: original BasicPitch model (Bittner et al., 2022); “BPfl”: BP with focal loss; “OF”: original Onsets&Frames model (Hawthorne et al., 2017) with BCE loss; “OFfl”: OF with focal loss; “BPflMN”: BPfl trained on MusicNet. In headers, “tutti” = full-mix polyphonic pieces; “solo” = single-instrument samples.

We further compare against BatchNorm (row “BN”), which is used in BasicPitch. While “BN” slightly outperforms our method on BACH10, it underperforms significantly on the other two test sets. Notably, all models are trained exclusively on our synthetic dataset. Inspired by Esaki et al. (2024), we hypothesize that our synthetic data distribution aligns more closely with BACH10, and because BatchNorm stores learned mean and variance statistics for inference, it suffers from poor generalization to more divergent domains—highlighting the advantage of our normalization strategy in cross-dataset robustness.

Dilated Convolution Replacing BasicPitch’s big kernel with our dilated kernel (rows “Ours” and “DConv”) yields slightly better performance despite fewer parameters, confirming the benefit of an expanded receptive field. Moreover, non-dilated variants consistently require higher thresholds (not shown), likely because they cannot directly model octave-spanning context, leading to stronger harmonic ghosts that must be suppressed post-hoc.

Focal Loss Although Figure 2 shows onset predictions produced using BasicPitch’s original loss that closely resemble frame activations, the sophisticated post-processing in BasicPitch may compensate for this, mitigating its impact on final note outputs. Nevertheless, Table 2 reveals that models trained with focal loss (“Ours”, “BPfl”, “OFfl”) consistently achieve signif-

icantly higher F_N than their counterparts without it, demonstrating that accurate onset estimation remains crucial for high-quality note creation.

InfoNCE Loss Comparing rows “Ours” and “MSE” in Table 3, which correspond to L_{InfoNCE} and L_{affinity} respectively, shows that L_{InfoNCE} consistently and significantly outperforms L_{affinity} .

Post-Processing As shown in the top row of Figure 5, note-level aggregation yields more dispersed and separable timbre embeddings, significantly improving clustering robustness.

4.5 Exploratory and Negative Results Analysis

4.5.1 Limitations of Synthetic Data

Across all tasks, models trained on our synthetic data consistently underperform those trained on MusicNet. We attribute this gap to two main factors.

First, as shown in Figure 4, our synthetic notes span the entire 84-note pitch range, whereas real instruments are confined to limited registers. Timbre is approximately consistent only within a narrow pitch range (Duan et al., 2008); across wide intervals, the same instrument can exhibit markedly different spectral characteristics. This makes it difficult for the model to learn a coherent timbre representation when notes are scattered across the full spectrum. In contrast, human-composed music typically assigns each instrument to a characteristic register, resulting in more com-

Dataset	BACH10 2mix		BACH10 3mix		BACH10 4mix		URMP 2mix		URMP 3mix	
Metric(%)	F_S	ratio	F_S	ratio	F_S	ratio	F_S	ratio	F_S	ratio
Ours	84.4	98.9	79.9	96.5	73.0	90.3	67.6	83.6	60.4	77.8
D16	84.3	98.7	79.1	95.6	70.1	86.8	67.8	83.9	60.1	77.3
MSE	82.9	97.0	77.1	93.1	71.2	88.1	65.5	81.1	57.5	74.0
Syn	75.6	88.5	65.8	79.5	55.2	68.3	56.0	69.3	47.7	61.4
Rescale	84.1	98.4	79.3	95.8	71.1	88.0	67.0	82.9	60.3	77.6
Share	83.0	98.6	78.7	96.7	73.1	91.9	65.5	81.7	57.2	74.0
Tanaka	79.0	92.5	68.3	82.5	57.3	70.9	65.0	80.4	57.4	73.9

Table 3: Comparison of timbre-sepatated transcription. Unless stated otherwise, models are trained on MusicNet with InfoNCE loss. “D16”: $D = 16$; “MSE”: using $L_{\text{affinity}}(6)$; “Syn”: trained on our synthetic dataset; “Rescale”: forcibly scaling amplitude using Frame prediction before InstanceNorm in timbre encoding branch; “Share”: sharing the first residual block between two branches; “Tanaka”: baseline model (Tanaka et al., 2020). All experiments use identical pre-trained AMT branch parameters except “Share”.

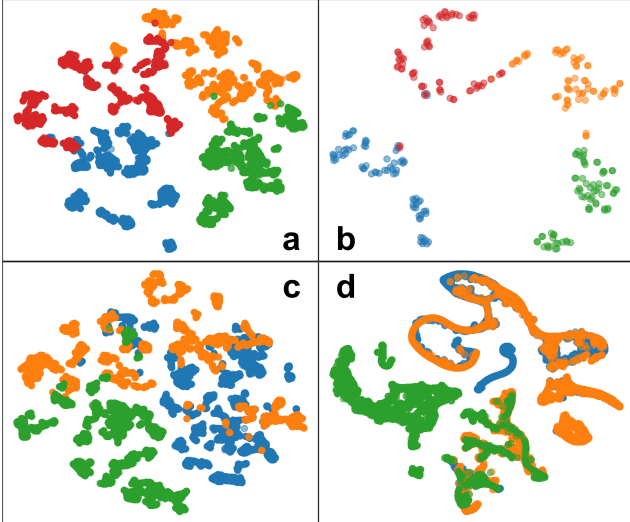


Figure 5: t-SNE visualization of timbre embeddings. (a) Frame-level embeddings for BACH10 Piece 2; (b) note-level aggregates of (a); (c) frame-level for URMP Piece 18; (d) frame-level for URMP Piece 18 using top- k attention.

pact and separable timbre clusters.

Second, although synthesizers offer diverse instrument programs, each produces a static, idealized timbre. Real-world performances exhibit rich timbral variation due to dynamics, articulation, and instrument-specific nuances—factors difficult to replicate with standard MIDI synthesis. This limited acoustic diversity likely hinders generalization.

The domain gap between synthetic and real polyphonic music limits model transferability, highlighting the need for high-quality, human-composed, real-recorded datasets that reflect authentic expression and timbral complexity.

4.5.2 Learnable CQT

Motivated by learnable time–frequency representations, we explore whether a learnable CQT can improve performance. To ensure stability, we first train the full network with fixed CQT parameters, then unfreeze them for joint fine-tuning. While training loss decreases noticeably, test performance degrades on our synthetic data (“Ours” vs. “LCQT”), and yields no improvement on MusicNet (“MN” vs. “LCQTMN”).

We attribute this to overfitting: the added flexibility enhances model capacity, but with limited training data, it leads to memorization rather than generalization. For lightweight systems, handcrafted CQT parameters thus offer better robustness. The potential benefits of learnable CQT may only emerge in large-scale settings, which remains an open question.

4.5.3 Exploring Alternative Encoding Architectures

We evaluate several design choices for the timbre encoding branch; results are summarized in Table 3.

Encoding dimension. Increasing the embedding dimension to 16 (row “D16”) yields no significant gain. Notably, Lin et al. (2021) achieves effective separation with only 6 dimensions, suggesting that even lighter encodings may suffice.

Multi-task coupling. Prior work (Manilow et al., 2020; Cwitkowitz et al., 2024) suggests multi-task learning can be mutually beneficial. We test two coupling strategies: 1) sharing the first residual block between branches (“Share”), and 2) rescaling the timbre embeddings using corresponding frame predictions instead of L_2 normalization (“Rescale”). Neither improves performance and often degrades it, indicating that such coupling may not suit lightweight networks.

Attention mechanisms. In light of the contributions of Transformers to timbre modeling (Wu et al., 2024, 2020), we explore attention (Vaswani et al., 2017) for its potential to incorporate global context and enhance cluster compactness (not included in the table). Given

the large $N \times T$ size, we restrict ourselves to linear-complexity variants. All tested configurations significantly hurt performance. Figure 5(d) shows that using only top-k self-attention connects scattered frame-level embeddings but leads to severe class merging. We attribute this to attention blurring decision boundaries in ambiguous regions, which can chain-react into fusion of distinct timbres. We also try the Transformer layer in which the attention output is processed with residual connections, which merely maintains baseline performance. Attention might be more effective after note-level aggregation, but that prevents end-to-end training. For lightweight networks, attention therefore appears unnecessary and potentially harmful to separability.

4.6 Efficiency

Our model is simple and lightweight enough to run directly in a web browser. On an Intel® Ultra 7 255H CPU using Microsoft Edge, timbre-agnostic transcription of a 301-second duet takes 17.1 s, compared to 39.1 s for BasicPitch. The post-processing step requires 78 ms. For timbre-separated transcription, our model inference takes 38.8 s, followed by 704 ms for clustering-based post-processing. In contrast, RNN-based baselines suffer from ONNX export issues and have prohibitively large parameter counts, rendering them impractical for real-world deployment.

5. Reproducibility

The data and code used in this paper are accessible via <https://github.com/madderscientist/timbreAMT>.

6. Conclusion

We have introduced a compact and efficient architecture for timbre-separated music transcription that overcomes major limitations of current approaches: fixed instrument vocabularies, poor generalization to unseen timbres, and high computational cost. By performing clustering on coherent note events rather than raw time-frequency bins, our method reduces fragmentation, improves separation quality, and supports flexible inference without waveform reconstruction.

Several promising directions remain for future work. First, the current reliance on empirically tuned thresholds for note creation could be replaced by learned, content-adaptive thresholds. Second, training data could be enhanced by mixing instruments in complementary frequency bands to better reflect natural orchestration. Finally, our model still requires the number of instrument classes to be specified at inference time. The matching-filter approach described at the end of Section 3.7 remains a promising direction worth further exploration.

Notes

¹ Link to the web tool:

<https://madderscientist.github.io/noteDigger/>

References

- Balhar, J. and Hajić, J. (2019). Melody extraction using a harmonic harmonic convolutional neural network. volume 10.
- Benetos, E., Dixon, S., Duan, Z., and Ewert, S. (2019). Automatic music transcription: An overview. *IEEE Signal Processing Magazine*, 36(1):20–30.
- Bittner, R. M., Bosch, J. J., Rubinstein, D., Meseguer-Brocal, G., and Ewert, S. (2022). A lightweight instrument-agnostic model for polyphonic note transcription and multipitch estimation. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2022, Virtual and Singapore, 23-27 May 2022*, pages 781–785. IEEE.
- Cwikowitz, F., Cheuk, K. W., Choi, W., Ramírez, M. A. M., Toyama, K., Liao, W., and Mitsufuji, Y. (2024). Timbre-trap: A low-resource framework for instrument-agnostic music transcription. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2024, Seoul, Republic of Korea, April 14-19, 2024*, pages 1291–1295. IEEE.
- Duan, Z., Pardo, B., and Zhang, C. (2010). Multiple fundamental frequency estimation by modeling spectral peaks and non-peak regions. *IEEE Transactions on Audio, Speech, and Language Processing*, 18(8):2121–2133.
- Duan, Z., Zhang, Y., Zhang, C., and Shi, Z. (2008). Unsupervised single-channel music source separation by average harmonic structure modeling. *IEEE Transactions on Audio, Speech, and Language Processing*, 16(4):766–778.
- Esaki, Y., Koide, S., and Kutsuna, T. (2024). One-shot domain incremental learning. In *2024 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8. IEEE.
- Gardner, J., Simon, I., Manilow, E., Hawthorne, C., and Engel, J. H. (2022). MT3: multi-task multitrack music transcription. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Grey, J. M. (1975). An exploration of musical timbre. Master’s thesis, Stanford University, Stanford, California.
- Hawthorne, C., Elsen, E., Song, J., Roberts, A., Simon, I., Raffel, C., Engel, J., Oore, S., and Eck, D. (2017). Onsets and frames: Dual-objective piano transcription.
- Hershey, J. R., Chen, Z., Roux, J. L., and Watanabe, S. (2016). Deep clustering: Discriminative embeddings for segmentation and separation. In *2016 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2016, Shanghai, China, March 20-25, 2016*, pages 31–35. IEEE.
- Li, B., Liu, X., Dinesh, K., Duan, Z., and Sharma, G. (2019). Creating a multitrack classical music performance dataset for multimodal music analysis: Challenges, insights, and applications. *IEEE Transactions on Multimedia*, 21(2):522–535.
- Lin, L., Kong, Q., Jiang, J., and Xia, G. (2021). A unified model for zero-shot music source separation, transcription and synthesis. In *Proceedings of 22st International Conference on Music Information Retrieval, ISMIR*.
- Lin, T., Goyal, P., Girshick, R. B., He, K., and Dollár, P. (2017). Focal loss for dense object detection. In *IEEE International Conference on Computer Vision, ICCV 2017, Venice, Italy, October 22-29, 2017*, pages 2999–3007. IEEE Computer Society.
- Luo, Y., Chen, Z., and Mesgarani, N. (2018). Speaker-independent speech separation with deep attractor network. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 26(4):787–796.
- Luo, Y. and Mesgarani, N. (2018). Tasnet: Time-domain audio separation network for real-time, single-channel

- speech separation. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2018, Calgary, AB, Canada, April 15-20, 2018*, pages 696–700. IEEE.
- Maman, B. and Bermanno, A. H. (2022). Unaligned supervision for automatic music transcription in the wild. In Chaudhuri, K., Jegelka, S., Song, L., Szepesvári, C., Niu, G., and Sabato, S., editors, *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 14918–14934. PMLR.
- Manilow, E., Seetharaman, P., and Pardo, B. (2020). Simultaneous separation and transcription of mixtures with multiple polyphonic and percussive instruments. In *2020 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2020, Barcelona, Spain, May 4-8, 2020*, pages 771–775. IEEE.
- Manilow, E., Wichern, G., Seetharaman, P., and Roux, J. L. (2019). Cutting music source separation some slack: A dataset to study the impact of training data quality and quantity.
- Miron, M., Carabias-Orti J, J., Bosch, J., Gómez, E., and Janer, J. (2016). Phenix-anechoic: note annotations for aalto anechoic orchestral database. *Phenix-Anechoic: Note Annotations For Aalto Anechoic Orchestral Database*.
- Oord, A. v. d., Li, Y., and Vinyals, O. (2018). Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*.
- Raffel, C., Mcfee, B., Humphrey, E. J., Salamon, J., and Ellis, D. P. W. (2014). mir_eval: A transparent implementation of common mir metrics. In *Proceedings - 15th International Society for Music Information Retrieval Conference (ISMIR 2014)*.
- Riley, X., Edwards, D., and Dixon, S. (2024). High resolution guitar transcription via domain adaptation. In *ICASSP 2024 - 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1051–1055.
- Rouard, S., Massa, F., and Défossez, A. (2023). Hybrid transformers for music source separation. In *IEEE International Conference on Acoustics, Speech and Signal Processing ICASSP 2023, Rhodes Island, Greece, June 4-10, 2023*, pages 1–5. IEEE.
- Schörkhuber, C. and Klapuri, A. (2010). Constant-q transform toolbox for music processing. *Proc. 7th Sound and Music Computing Conf.*, pages 3–64.
- Su, L. and Yang, Y.-H. (2015). Combining spectral and temporal representations for multipitch estimation of polyphonic music. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 23(10):1600–1612.
- Tamer, N. C., Özer, Y., Müller, M., and Serra, X. (2023a). High-resolution violin transcription using weak labels. In *Ismir 2023 Hybrid Conference*.
- Tamer, N. C., Özer, Y., Müller, M., and Serra, X. (2023b). TAPE: an end-to-end timbre-aware pitch estimator. In *IEEE International Conference on Acoustics, Speech and Signal Processing ICASSP 2023, Rhodes Island, Greece, June 4-10, 2023*, pages 1–5. IEEE.
- Tanaka, K., Nakatsuka, T., Nishikimi, R., Yoshii, K., and Morishima, S. (2020). Multi-instrument music transcription based on deep spherical clustering of spectrograms and pitchgrams. In *ISMIR*, pages 327–334.
- Thickstun, J., Harchaoui, Z., and Kakade, S. M. (2017). Learning features of music from scratch. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. (2017). Attention is all you need. In Guyon, I., von Luxburg, U., Bengio, S., Wallach, H. M., Fergus, R., Vishwanathan, S. V. N., and Garnett, R., editors, *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Wu, Y., Wei, W., Li, D., Li, M., Yu, Y., Gao, Y., and Li, W. (2024). Harmonic frequency-separable transformer for instrument-agnostic music transcription. In *2024 IEEE International Conference on Multimedia and Expo (ICME)*, pages 1–6.
- Wu, Y.-T., Chen, B., and Su, L. (2019). Polyphonic music transcription with semantic segmentation. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 166–170. IEEE.
- Wu, Y.-T., Chen, B., and Su, L. (2020). Multi-instrument automatic music transcription with self-attention-based instance segmentation. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 28:2796–2809.