

# The Unit Gap: How Sharing Works in Boolean Circuits

Kirill Krinkin

## Abstract

We study the gap between the minimum size of a Boolean circuit (DAG) and the minimum size of a formula (tree circuit) over the And-Inverter Graph (AIG) basis  $\{\text{AND}, \text{NOT}\}$  with free inversions. We prove that this gap is always 0 or 1 (Unit Gap Theorem), that sharing requires  $\text{opt}(f) \geq n$  essential variables (Threshold Theorem), and that no sharing is needed when  $\text{opt}(f) \leq 3$  (Tree Theorem). Gate counts in optimal circuits satisfy an exact decomposition formula with a binary sharing term. When the gap equals 1, it arises from exactly one gate with fan-out 2, employing either dual-polarity or same-polarity reuse; we prove that no other sharing structure can produce a unit gap.

## 1 Introduction

A Boolean circuit over a basis  $B$  is a directed acyclic graph (DAG) whose internal nodes compute functions in  $B$ . A formula is a circuit in which every gate has fan-out one—a tree. Formulas cannot reuse intermediate results, so they are potentially larger. The question of how much reuse (*sharing*) helps has been central to circuit complexity since Shannon [2, 1].

In general, formula size can be superpolynomially larger than circuit size: there exist explicit functions with polynomial-size circuits whose formulas require size  $n^{\Omega(\log n)}$  [16]. Yet the fine structure of this gap—which functions benefit from sharing, by how much, and through what mechanisms—has been studied mainly in the asymptotic regime.

We study the gap for the *And-Inverter Graph* (AIG) basis, where complementation is free (an edge attribute, not a gate) and size is measured by the number of two-input AND gates. The AIG basis is not chosen for generality but for relevance: it is the canonical internal representation used in modern logic synthesis tools such as ABC [13, 12], where circuit optimization proceeds by local rewriting of AIG structures. Our main findings:

- The gap between formula size and circuit size is always 0 or 1 (Theorem 2).
- Sharing requires  $\text{opt}(f) \geq n$  essential variables (Theorem 3).
- No sharing is needed when  $\text{opt}(f) \leq 3$  (Theorem 4).
- Gate counts decompose exactly with a binary sharing term (Corollary 6).
- When  $\text{gap}(f) = 1$ , sharing arises from exactly one gate via dual-polarity or same-polarity reuse; no other structure can produce the unit gap (Theorem 7).

Together, these results give a complete structural characterization of sharing in optimal AIG circuits.

The interest of the result is not the bound itself, but the structural consequences: sharing is atomic, optimal circuits contain at most one reconvergence per decomposition, and the improvement

over trees is quantized. The contribution of the paper is therefore structural rather than asymptotic: we characterize how sharing appears in optimal AIG circuits.

These results are specific to the AIG basis with free inversions. The key ingredient is the trivial decomposition  $f = 1 \wedge f$ , which relies on the constant 1 being available at zero cost. Bases without free constants or with different gate types (majority gates, XOR-AND) may exhibit larger gaps.

Section 2 introduces notation. Sections 3 through 5 prove the theorems. Section 6 analyzes the sharing mechanisms. Section 7 discusses a tropical interpretation. Section 8 lists open questions. Appendix A describes a generative grammar, and Appendix B discusses local rewriting dynamics.

All results are specific to the AIG basis with free inversions; in general bases, the formula-circuit gap can be superpolynomial [16].

## 2 Preliminaries

**And-Inverter Graphs.** An *And-Inverter Graph* (AIG) over primary inputs  $x_1, \dots, x_n$  and the constant 1 is a DAG whose internal nodes are two-input AND gates. Each edge may carry a complementation attribute. Complementation is free. The *size* of an AIG is the number of AND gates; we write  $\text{opt}(f)$  for the minimum size of any AIG computing  $f$ .

**Circuits and formulas.** A *circuit* is an AIG where gates may have fan-out greater than one. A *formula* (or *tree circuit*) has fan-out exactly one at every gate. We write  $\text{tree}(f)$  for the minimum formula size. Since every formula is a circuit,  $\text{tree}(f) \geq \text{opt}(f)$ . The *gap* is  $\text{gap}(f) = \text{tree}(f) - \text{opt}(f)$ .

**Decomposition.** Every AIG gate computes  $f = a \wedge b$  (with possible edge complementation). The minimum formula size satisfies:

$$\text{tree}(f) = \min_{\substack{a,b: f=a \wedge b \\ \text{or } f=\overline{a \wedge b}}} (1 + \text{opt}(a) + \text{opt}(b)).$$

The *trivial decomposition*  $f = 1 \wedge f$  always achieves  $1 + \text{opt}(f)$ .

**NPN equivalence.** Two functions are NPN-equivalent if one can be obtained from the other by negating inputs, permuting inputs, or negating the output. NPN equivalence preserves  $\text{opt}$  and  $\text{gap}$ . At  $n = 4$  there are 222 NPN classes.

**Essential variables.** A variable  $x_i$  is *essential* for  $f$  if  $f$  depends on  $x_i$ . The number of essential variables is denoted  $n$ .

### Gate elimination.

**Lemma 1** (Classical; see Savage [6] for exposition). *Any Boolean function with  $k$  essential variables requires at least  $k - 1$  AND gates in the AIG basis.*

*Proof.* Each AND gate merges at most two independent input dependencies into one. Starting from  $k$  essential variables, at least  $k - 1$  merges are needed.  $\square$

**SAT-based exact synthesis.** We compute  $\text{opt}(f)$  using the SAT-based approach of Kojevnikov, Kulikov, and Yaroslavtsev [14]: encode the existence of a  $k$ -gate AIG computing  $f$  as a satisfiability instance, then binary-search on  $k$ .

**Experimental scope.** Our computational results cover:

- $n = 3$ : all 256 functions, complete enumeration.
- $n = 4$ : all 65,536 functions (20,660 nontrivial), complete.
- $n = 5$ : complete for  $\text{opt} \leq 4$  (30,896 functions). At  $\text{opt} = 5$ : 500 functions sampled uniformly at random from 141,680 functions at that level; 72 out of 500 (14.4%) exhibit  $\text{gap} = 1$ .
- $n = 6$ : 165 gap-1 circuits constructed from known sharing templates and random sharing constructions. This is *not* a uniform sample; it is a vocabulary verification exercise.

The goal of the experiments is structural identification rather than statistical estimation; once the two mechanisms are observed, larger-scale enumeration would not change the qualitative picture. Synthesis scripts and complete data for  $n \leq 4$  are available at <https://github.com/krinkin/unit-gap>.

### 3 The Unit Gap Theorem

**Theorem 2** (Unit Gap). *For every Boolean function  $f$  in the AIG basis with free inversions,  $\text{gap}(f) \in \{0, 1\}$ .*

*Proof. Lower bound.* Every formula is a circuit, so  $\text{tree}(f) \geq \text{opt}(f)$ .

*Upper bound.* The trivial decomposition  $f = 1 \wedge f$  gives  $\text{tree}(f) \leq 1 + \text{opt}(f)$ , since  $\text{opt}(1) = 0$ .  $\square$

The Unit Gap Theorem is a simple consequence of the AIG basis, but it sharply constrains how sharing can appear in optimal circuits: optimal AIG circuits can deviate from tree structure only through a single reconvergent sharing point. In general bases, the formula-circuit gap can be superpolynomial [16, 5, 4]: for instance, parity on  $n$  variables has formula complexity  $\Theta(n^2)$  [5] over the De Morgan basis but circuit complexity  $O(n)$ . The collapse to a gap of at most 1 in the AIG basis arises from two features: (i) the constant 1 is available at zero cost, enabling the identity decomposition  $f = 1 \wedge f$ ; and (ii) complementation is free, so  $\text{opt}(f) = \text{opt}(\bar{f})$ . Bases lacking either property—such as {AND, OR} with explicit NOT gates—can exhibit larger gaps.

**The tree Bellman operator.** Define the operator  $T$  on cost functions by  $(Tv)(f) = \min_{a,b: f=a \wedge b}(1 + v(a) + v(b))$ . Iterating  $T$  from the base case  $v_0(x_i) = v_0(1) = 0$  computes  $\text{tree}(f)$ . The fixed point overshoots  $\text{opt}(f)$  by exactly  $\text{gap}(f) \in \{0, 1\}$ .

**Verification.** Table 1 confirms that no gap exceeds 1 in complete enumerations at  $n = 3$  and  $n = 4$ .

The fraction of gap-1 functions ranges from 10.5% at  $n = 3$  to 15.0% at  $n = 4$  and 14.4% (sampled) at  $n = 5$ . Whether this fraction converges to a limit as  $n \rightarrow \infty$  is unknown.

### 4 The Threshold Theorem and Tree Theorem

**Theorem 3** (Threshold Theorem). *If  $f$  has  $n$  essential variables and  $\text{gap}(f) = 1$ , then  $\text{opt}(f) \geq n$ .*

*Proof.* Since  $\text{gap}(f) = 1$ , the optimal circuit is not a tree: it contains a gate  $g$  with fan-out at least 2. (Otherwise the circuit would be a formula achieving  $\text{opt}(f) = \text{tree}(f)$ , contradicting  $\text{gap} = 1$ .)

Partition the optimal circuit into three parts:

Table 1: Gap distribution by  $\text{opt}(f)$  for  $n = 3$  (complete),  $n = 4$  (complete), and  $n = 5$  (complete for  $\text{opt} \leq 4$ ; sampled at  $\text{opt} = 5$ ).

| opt | $n = 3$ |       |        | $n = 4$ |       |        | $n = 5$          |                 |        |
|-----|---------|-------|--------|---------|-------|--------|------------------|-----------------|--------|
|     | gap=0   | gap=1 | %gap=1 | gap=0   | gap=1 | %gap=1 | gap=0            | gap=1           | %gap=1 |
| 1   | 24      | 0     | 0%     | 48      | 0     | 0%     | 80               | 0               | 0%     |
| 2   | 64      | 0     | 0%     | 256     | 0     | 0%     | 640              | 0               | 0%     |
| 3   | 30      | 0     | 0%     | 940     | 0     | 0%     | 4,420            | 0               | 0%     |
| 4   | 80      | 24    | 23.1%  | 2,048   | 288   | 12.3%  | 24,544           | 1,200           | 4.7%   |
| 5   | 8       | 0     | 0%     | 5,344   | 1,120 | 17.3%  | 428 <sup>†</sup> | 72 <sup>†</sup> | 14.4%  |
| 6   | 16      | 2     | 11.1%  | 8,928   | 1,688 | 15.9%  |                  |                 |        |

<sup>†</sup>Sample of 500 genuinely 5-variable functions at  $\text{opt} = 5$ . For reference, the 95% Wilson CI is [11.4%, 17.8%].

- $S$ : the gates strictly below  $g$  (the fan-in cone of  $g$ , excluding  $g$ ), computing a function of  $k$  essential variables. By Lemma 1,  $|S| \geq k - 1$ .
- The gate  $g$  itself: 1 gate.
- $R$ : the remaining gates above  $g$ . These treat  $g$  (and possibly  $\bar{g}$ ) as a pseudo-input alongside the  $n - k$  primary inputs not in the fan-in of  $g$ . Since  $g$  has fan-out  $\geq 2$ , the function computed by  $R$  depends essentially on  $g$ ; otherwise the multiple fan-outs of  $g$  would be redundant, contradicting optimality. Thus  $R$  has at least  $n - k + 1$  essential inputs, giving  $|R| \geq n - k$  by Lemma 1.

Summing:  $\text{opt}(f) = |S| + 1 + |R| \geq (k - 1) + 1 + (n - k) = n$ . □

**Tightness.** The bound is tight. At  $n = 4$ , all 288 gap-1 functions with  $\text{opt} = 4 = n$  belong to a single NPN class (rep 495). At  $n = 5$ , gap-1 functions with  $\text{opt} = 5 = n$  exist in both structural types (see Section 6.4).

**Theorem 4** (Tree Theorem). *If  $\text{opt}(f) \leq 3$ , then  $\text{gap}(f) = 0$ .*

*Proof.* For  $\text{opt}(f) \leq 2$ , any circuit has at most 2 gates and is necessarily a tree.

For  $\text{opt}(f) = 3$ , we show that every reconvergent 3-gate AIG computes a function with  $\text{opt} \leq 2$ . With 3 gates and one reconvergent gate  $g_1$  (fan-out  $\geq 2$ ), the only possible topology is:  $g_1$  feeds both  $g_2$  and  $g_3$ , with  $g_2$  also feeding  $g_3$ .<sup>1</sup> This gives:

$$\begin{aligned} g_1 &= a \wedge b, \\ g_2 &= c \wedge g_1^p, \\ g_3 &= g_2^s \wedge g_1^q, \end{aligned}$$

where  $a, b, c$  are input literals (possibly overlapping) and  $p, q, s \in \{0, 1\}$  encode complementation. Table 2 enumerates all 8 sign combinations.

In all 8 cases,  $\text{opt}(g_3) \leq 2$ . This holds regardless of whether  $c$  coincides with  $a$ ,  $b$ , or their complements (which can only simplify the function further). Therefore no  $\text{opt} = 3$  function has a reconvergent optimal circuit. □

<sup>1</sup>With 3 gates, the shared gate  $g_1$  must feed both remaining gates (otherwise fan-out is only 1). If  $g_2$  and  $g_3$  both consume only  $g_1$  and inputs, then  $g_3$  cannot consume  $g_2$ , giving a depth-1 output. The only DAG with reconvergence is:  $g_1 \rightarrow g_2 \rightarrow g_3$  and  $g_1 \rightarrow g_3$ .

Table 2: Exhaustive case analysis for reconvergent 3-gate AIGs.

| $p$ | $q$ | $s$ | $g_3$ simplifies to               | opt        |
|-----|-----|-----|-----------------------------------|------------|
| 0   | 0   | 0   | $a \wedge b \wedge c$             | $\leq 2^*$ |
| 0   | 0   | 1   | $a \wedge b \wedge \bar{c}$       | $\leq 2^*$ |
| 0   | 1   | 0   | 0                                 | 0          |
| 0   | 1   | 1   | $(\bar{a} \vee \bar{b}) \wedge c$ | $\leq 2$   |
| 1   | 0   | 0   | 0                                 | 0          |
| 1   | 0   | 1   | $a \wedge b \wedge \bar{c}$       | $\leq 2^*$ |
| 1   | 1   | 0   | $\bar{a} \wedge \bar{b} \wedge c$ | $\leq 2$   |
| 1   | 1   | 1   | $\bar{a} \wedge \bar{b} \wedge c$ | $\leq 2^*$ |

\*A three-literal AND such as  $a \wedge b \wedge c$  costs 2 gates:  $\text{AND}(a, \text{AND}(b, c))$ .

Forms like  $\bar{a} \wedge \bar{b} \wedge c$  also cost  $\leq 2$  since complementation is free.

**Sharp threshold.** The two theorems together locate the onset of sharing: gap-1 is impossible for  $\text{opt} \leq 3$  (Tree Theorem) and requires  $\text{opt} \geq n$  (Threshold Theorem). At  $n = 3, 4$ , gap-1 first appears at  $\text{opt} = 4$ . At  $n = 5$ , no genuinely 5-variable gap-1 function exists at  $\text{opt} = 4$ ; they first appear at  $\text{opt} = 5 = n$ .

## 5 The Decomposition Formula

The following identity makes the structure of optimal circuits explicit. We first note a standard structural property: every subcircuit is itself optimal.

**Remark 5** (Optimal substructure). *Every sub-DAG of a size-optimal AIG is size-optimal for its function. This follows from a replacement argument: if a sub-DAG were non-optimal, substituting a smaller equivalent would reduce the total size, contradicting global optimality.*<sup>2</sup>

Combining this with inclusion-exclusion on sub-DAG sizes yields a decomposition formula.

**Corollary 6** (Decomposition Formula). *Let  $C$  be an optimal AIG, and let  $g$  be any gate computing  $f = a \wedge b$ . Let  $D_a, D_b$  be the sub-DAGs computing  $a$  and  $b$ . Then*

$$\text{opt}(f) = 1 + \text{opt}(a) + \text{opt}(b) - s(a, b),$$

where  $s(a, b) = |D_a \cap D_b| \in \{0, 1\}$  counts the shared gates.

*Proof.* By inclusion-exclusion,  $|D_g| = 1 + |D_a| + |D_b| - |D_a \cap D_b|$ . By optimal substructure,  $|D_g| = \text{opt}(f)$ ,  $|D_a| = \text{opt}(a)$ ,  $|D_b| = \text{opt}(b)$ . The bound  $s(a, b) \leq 1$  follows from the Unit Gap Theorem:  $s(a, b) = 1 + \text{opt}(a) + \text{opt}(b) - \text{opt}(f) \leq \text{tree}(f) - \text{opt}(f) \leq 1$ .  $\square$

**Verification.** Table 3 shows the distribution of  $s(a, b)$  across 6,832 decompositions in optimal circuits for  $n = 3$  (complete) and a sample at  $n = 4$ .

The pattern is consistent with the theorems: no sharing at  $\text{opt} \leq 3$ , sharing emerging at  $\text{opt} = 4$ , and maximal sharing at  $\text{opt} = 6$  (parity, which exhibits maximal sharing in the tested set).

<sup>2</sup>The argument is valid when the sub-DAG interfaces with the rest of the circuit only through its root gate  $g$ . For gates within the sub-DAG that also fan out to other parts of the circuit, the shared gates are accounted for by the decomposition formula below; see also the discussion of sharing in Section 6.

Table 3: Sharing term  $s(a, b)$  in optimal circuit decompositions ( $n = 3$ , complete).

| $\text{opt}(f)$ | Decompositions | $s = 0$      | $s = 1$    |
|-----------------|----------------|--------------|------------|
| 2               | 423            | 423 (100%)   | 0          |
| 3               | 5,609          | 5,609 (100%) | 0          |
| 4               | 695            | 352 (51%)    | 343 (49%)  |
| 5               | 2              | 2 (100%)     | 0          |
| 6               | 299            | 0            | 299 (100%) |

**Recursive characterization.** The decomposition formula gives a recursive equation for circuit complexity:  $\text{opt}(f) = \min_{a,b}(1 + \text{opt}(a) + \text{opt}(b) - s(a, b))$ . Setting  $s \equiv 0$  recovers the tree equation for  $\text{tree}(f)$ . The sharing term  $s(a, b)$  couples the two subproblems: it equals 1 when the optimal sub-DAGs for  $a$  and  $b$  share a gate, and 0 otherwise. Unlike a standard Bellman equation,  $s(a, b)$  depends on the global solution (the specific optimal circuit), not just on the subproblem pair—so this is an identity that holds at the optimum, not a recurrence that can be solved independently.

## 6 The Sharing Mechanism

We analyze the structural mechanisms by which sharing occurs in optimal circuits. All optimal circuits for gap-1 functions at  $n = 3, 4$  were obtained by complete enumeration; at  $n = 5$  (31 functions at  $\text{opt} = 5$ ) and  $n = 6$  (165 functions) by SAT-based synthesis.

### 6.1 Dual-polarity sharing

The first mechanism uses a single AND gate in both positive and negative polarity.

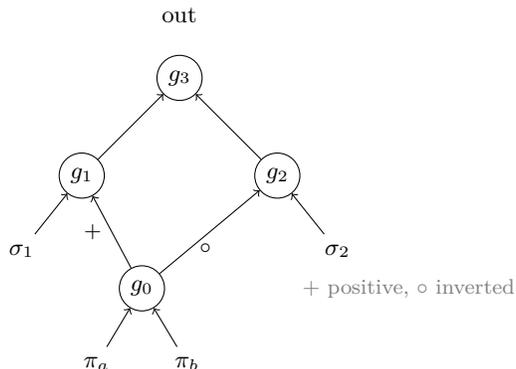


Figure 1: Dual-polarity sharing. Gate  $g_0$  feeds arm  $g_1$  in positive polarity and arm  $g_2$  in negative polarity. In a tree circuit,  $g_0$  must be duplicated, costing exactly 1 gate.

**Template.**

$$\begin{array}{ll}
 g_0 = \text{AND}(\pi_a, \pi_b), & \text{[shared gate]} \\
 g_1 = \text{AND}(\sigma_1, g_0), & \text{[arm 1: uses } g_0\text{]} \\
 g_2 = \text{AND}(\sigma_2, \overline{g_0}), & \text{[arm 2: uses } \overline{g_0}\text{]} \\
 g_3 = \text{NAND}(g_1, g_2). & \text{[combiner]}
 \end{array}$$

The gate  $g_0$  has fan-out 2, feeding  $g_1$  in positive polarity and  $g_2$  in negative polarity. In a tree circuit,  $g_0$  must be duplicated, costing exactly 1 gate.

**Inflections.** Two sub-patterns arise:

- **XOR inflection:**  $\sigma_1 = \overline{\sigma_2}$  (complementary arms), computing  $\text{XOR}(g_0, \sigma_1)$ .
- **MUX inflection:**  $\sigma_1, \sigma_2$  independent, computing  $\text{MUX}(g_0, \sigma_1, \sigma_2)$ .

At  $n = 3$ , only XOR appears. At  $n \geq 4$ , both appear. That XOR and MUX circuits exist is classical. The contribution here is the claim that dual-polarity and CSE are the *only* mechanisms by which sharing reduces circuit size in the AIG basis—a structural completeness result (Theorem 7), not a catalog of known constructions.

## 6.2 Common subexpression (CSE) sharing

The second mechanism, first appearing at  $n = 5$ , reuses a gate in the same polarity.

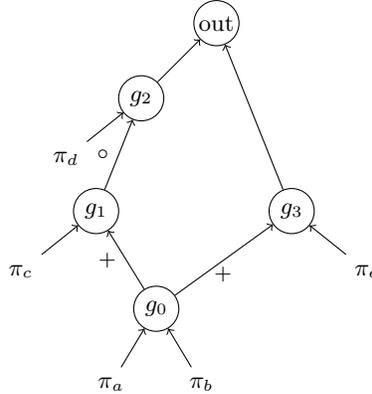


Figure 2: Common subexpression (CSE) sharing. Gate  $g_0$  feeds both  $g_1$  and  $g_3$  in the same polarity. This template requires 5 distinct input slots, explaining its absence at  $n \leq 4$ .

**Template.**

$$\begin{array}{ll}
 g_0 = \text{AND}(\pi_a, \pi_b), & \text{[shared, same polarity]} \\
 g_1 = \text{AND}(\pi_c, g_0), & \text{[first use of } g_0\text{]} \\
 g_2 = \text{AND}(\pi_d, \overline{g_1}), & \text{[inverts } g_1, \text{ not } g_0\text{]} \\
 g_3 = \text{AND}(\pi_e, g_0), & \text{[second use of } g_0\text{]} \\
 \text{out} = \text{NAND}(g_2, g_3).
 \end{array}$$

**Why CSE is absent at  $n \leq 4$ .** The template requires 5 distinct primary-input slots: 2 for the shared gate and 3 for the arm signals. At  $n = 4$ , only 4 inputs are available; reusing one either collapses CSE into dual-polarity or produces a non-optimal circuit.

### 6.3 Vocabulary across input counts

Table 4: Sharing mechanisms by input count.

| $n$ | Mechanisms | Dual-pol | CSE   | Tested | Notes                  |
|-----|------------|----------|-------|--------|------------------------|
| 3   | 1          | 100%     | 0%    | 26     | Complete; XOR only     |
| 4   | 1          | 100%     | 0%    | 3,096  | Complete; XOR + MUX    |
| 5   | 2          | 51.6%    | 48.4% | 31     | SAT synthesis          |
| 6   | 2          | 68%      | 32%   | 165    | Constructed + random   |
| 7   | 2          | 78%      | 22%   | 60     | SAT synthesis (probes) |

The shared gate sits at depth 0 (directly on primary inputs) for  $n \leq 5$  and shifts to depth 1 at  $n = 7$ , indicating that shared subfunctions grow with input count. Dual-polarity dominance increases from 51.6% at  $n = 5$  to 78% at  $n = 7$ , though the sample size at  $n = 7$  (60 functions) is too small for confident extrapolation.

**Theorem 7** (Two-Mechanism). *In any size-optimal AIG with  $\text{gap}(f) = 1$ , the sharing arises from exactly one gate with fan-out 2, employing either dual-polarity reuse (consumers reference the gate in opposite polarities) or same-polarity reuse (consumers reference the gate in the same polarity). No other sharing structure can produce  $\text{gap} = 1$ .*

*Proof.* By Corollary 6,  $\text{gap} = 1$  implies  $s(a, b) = 1$  at some decomposition: exactly one gate  $g$  is shared between the two child sub-DAGs. Gate  $g$  has one output wire; each consumer sees  $g$  through an edge with complementation attribute  $p \in \{0, 1\}$ . Two consumers yield a polarity pair  $(p_1, p_2) \in \{0, 1\}^2$ . If  $p_1 \neq p_2$ : dual-polarity. If  $p_1 = p_2$ : CSE. These exhaust  $\{0, 1\}^2$ .

The multi-gate concern dissolves because the Unit Gap Theorem forces  $s(a, b) \leq 1$  at every decomposition, so each decomposition has at most one shared gate and the argument applies independently at each.  $\square$

The theorem classifies every shared gate in any size-optimal AIG. The connection to gap-1 circuits is that these are the only mechanisms through which sharing produces the unit gap.

### 6.4 Type A and Type B gap-1 functions

Gap-1 NPN classes fall into two types:

**Type A (decomposable).** At least one nontrivial AND decomposition achieves  $\text{tree}(f)$ . Sharing saves 1 gate by reusing a common subexpression between the two subtrees. The cheapest strict decomposition (excluding  $1 \wedge f$ ) costs  $\text{opt}(f) + 1$ . At  $n = 4$ : 7 NPN classes.

**Type B (tree-incompatible).** All nontrivial tree decompositions cost  $\text{opt}(f) + 2$  or more. Only  $1 \wedge f$  achieves  $\text{tree}(f)$ . All Type B functions decompose as XOR-based expressions; the XOR construction in AIG inherently requires both polarities, forcing duplication in any tree. At  $n = 4$ : 6 NPN classes.

Table 5: Type A vs Type B at  $n = 4$ .

| opt | gap=1 | Type A      | Type B    |
|-----|-------|-------------|-----------|
| 4   | 288   | 288 (100%)  | 0         |
| 5   | 1,120 | 768 (69%)   | 352 (31%) |
| 6   | 1,688 | 1,536 (91%) | 152 (9%)  |

## 7 Tropical Interpretation

The results of the preceding sections admit a concise reformulation in the language of tropical algebra. This interpretation is included to clarify the relationship between tree recursion and circuit optimization rather than to introduce new results.

**The tree recursion as a tropical operator.** The tree Bellman operator  $T$  defined in Section 3,

$$(Tv)(f) = \min_{a,b: f=a\wedge b} (1 + v(a) + v(b)),$$

is a min-plus (tropical) operator on the lattice of cost functions over Boolean functions. It computes exactly the minimum formula size: starting from  $v_0 = 0$  on inputs and constants, the iterates  $T^k v_0$  converge to  $\text{tree}(f)$  in finitely many steps. We observe that  $T$  is order-preserving and idempotent at its fixed point, so  $\text{tree}$  is the tropical fixed point of the recursion induced by the AND decomposition lattice.

**The DAG correction.** The true circuit complexity is related to this tropical fixed point by a pointwise correction:

$$\text{opt}(f) = \text{tree}(f) - \text{gap}(f), \quad \text{gap}(f) \in \{0, 1\}.$$

We observe that this is a quantized correction: the tropical operator overshoots by exactly 0 or 1, never more. The DAG structure of circuits provides at most one unit of improvement over the tree structure, everywhere on the lattice.

**The decomposition formula as corrected recurrence.** At each gate of an optimal circuit, the Decomposition Formula (Corollary 6) reads:

$$\text{opt}(f) = 1 + \text{opt}(a) + \text{opt}(b) - s(a, b), \quad s(a, b) \in \{0, 1\}.$$

We observe that this is the tropical recurrence with a binary sharing correction:  $s = 0$  recovers the tree (tropical) equation, while  $s = 1$  accounts for a single shared gate between the sub-DAGs. The sharing term is quantized to the same  $\{0, 1\}$  alphabet as the gap itself.

**The relaxation gap fraction.** Across complete enumerations, roughly 85% of functions satisfy  $\text{gap} = 0$  (the tropical fixed point is exact) and roughly 15% satisfy  $\text{gap} = 1$  (the fixed point overshoots by one). We observe that this fraction is a property of the decomposition lattice and the AIG basis, not of individual functions: it is invariant under NPN symmetries and depends on the interaction between the AND gate structure and the space of Boolean functions at a given complexity level.

**Two types of DAG shortcut.** The two sharing mechanisms of Section 6—dual-polarity and CSE—correspond to two structurally distinct ways a DAG can improve on a tree. In the tropical picture, these are the only two “shortcuts” by which the DAG correction  $s = 1$  is realized:

- *Dual-polarity:* a gate is consumed in both polarities ( $g$  and  $\bar{g}$ ), which a tree cannot express without duplication.
- *Common subexpression:* a gate is consumed twice in the same polarity by disjoint branches, which a tree must duplicate.

We observe that both shortcuts reduce to a single reconvergent edge in the circuit DAG—a single point where the DAG departs from tree structure—and that no circuit uses more than one such shortcut simultaneously (consistent with  $s \leq 1$  and the Two-Mechanism Theorem).

**Scope.** This tropical interpretation is descriptive: it reframes the theorems and computational observations in a unified language but does not yield new results. A formal tropical-algebraic development—characterizing the operator  $T$ , its fixed-point structure, and the lattice geometry that may underlie the observed 85/15 split—remains open.

## 8 Open Questions

1. **Asymptotic gap-1 fraction.** For random Boolean functions,  $\text{opt}(f) \sim 2^n/n$  [2, 3], so the Threshold Theorem is trivially satisfied. Whether the gap-1 fraction converges to a limit—and if so, whether it remains near 15% or vanishes—is unknown.
2. **Multi-output extension.** The decomposition formula applies to single-output circuits. For multi-output circuits, the sharing term couples outputs. A multi-output Unit Gap Theorem is not known.
3. **Other bases.** The Unit Gap Theorem relies on free inversions and a free constant 1. What is the gap structure for {AND, OR, NOT} with explicit NOT gates? For majority-inverter graphs? For XOR-AND graphs?
4. **Natural proofs.** The gap property is constructive and large in the sense of Razborov and Rudich [10]: it can be computed from the truth table, and 85% of functions satisfy  $\text{gap} = 0$ . Under standard cryptographic assumptions, such properties cannot yield superpolynomial lower bounds against circuits computing pseudorandom functions. Whether finer structural properties of sharing (the Type A/B classification) escape this barrier is unclear.
5. **Communication complexity.** The Karchmer–Wigderson framework [8] characterizes circuit *depth* via communication complexity. Whether an analogous framework exists for circuit *size*—and whether the Type A/B classification has a communication-theoretic interpretation—is open. We note that KW theory addresses depth, not size, over the De Morgan basis, not AIG; bridging these is itself a non-trivial problem.

## 9 Conclusion

In the AIG basis with free inversions, the formula-circuit gap is always 0 or 1. Sharing first becomes possible at  $\text{opt}(f) = n$  and operates through two mechanisms—dual-polarity and same-polarity reuse—which we prove are the only possibilities. In optimal AIG circuits, reconvergence

appears as an atomic phenomenon: at most one gate is shared between the two branches of any decomposition.

The results are basis-specific: the trivial decomposition  $f = 1 \wedge f$  that drives the Unit Gap Theorem requires a free constant. Whether analogous structural completeness holds in bases without free inversions is the principal open question. The characterization is complete qualitatively (gap bounds and threshold hold for all  $n$ ) but the exact classification of gap-1 functions remains open beyond  $n = 7$ .

**Reproducibility.** Source code, synthesis scripts, and complete experimental data (all optimal circuits for  $n \leq 4$ , sampled circuits for  $n = 5-7$ , and all gap-1 circuit structures) are available at <https://github.com/krinkin/unit-gap>.

## A Generative Grammar

The grammar is not intended as a synthesis method but as a structural probe of the search space. It generates AIG circuits by composing parameterized blocks (AND, XOR, MUX), each introducing 2-3 AND gates. A *cancellation prevention* check rejects block placements where the redundancy (active gates minus optimal) exceeds 1.

**Optimality rates.** Tested on all 3-input functions (20,000 samples per configuration):

Table 6: Grammar V2 optimality rates for  $n = 3$ .

| Blocks | Optimal | Trivial | Hard (opt $\geq 4$ ) |
|--------|---------|---------|----------------------|
| 1      | 100%    | 0%      | 0%                   |
| 2      | 98.7%   | 0%      | 7.0%                 |
| 3      | 97.0%   | 0%      | 10.5%                |

The 98.7% figure measures the grammar’s output distribution, not per-function coverage: the grammar generates a random circuit and we check if it is optimal. The distribution is grammar-induced, not uniform over functions.

**Mutational robustness.** Random single mutations (block type change, input swap, complementation flip) preserve optimality in 81–94% of cases (10,000 trials per configuration,  $n = 3$ ). The same-function rate under mutation is 53–69% at 2–3 blocks, indicating large neutral networks of expressions computing the same function at optimal size (analogous to neutral networks in RNA secondary structure [9]).

Table 7: Mutational robustness ( $n = 3$ , 10,000 trials per row).

| Blocks | Mutant optimal | Mutant nontrivial | Same function |
|--------|----------------|-------------------|---------------|
| 1      | 80.7%          | 89.7%             | 6.3%          |
| 2      | 90.7%          | 95.0%             | 53.4%         |
| 3      | 93.4%          | 96.1%             | 69.0%         |

These results are limited to  $n = 3$  (248 functions, 12 NPN classes). Whether the robustness rates persist at larger  $n$  is unknown.

## B Local Rewriting Dynamics

Iteratively replacing non-optimal subcircuits with optimal ones is a monotone process (gate count decreases at each step) that terminates at a fixed point where every subcircuit is optimal. For tree-structured fixed points, this corresponds to  $\text{tree}(f)$ .

For gap-0 functions, the fixed point is the global optimum. For gap-1 functions, local rewriting gets stuck at  $\text{tree}(f) = \text{opt}(f) + 1$ : reaching the optimum requires a non-local move that introduces a shared gate with fan-out  $> 1$ .

The difficulty of this non-local move depends on the function type:

- **Type A:** A nontrivial tree decomposition exists. The subtrees share a common truth table; identifying and merging it crosses the barrier.
- **Type B:** No nontrivial tree decomposition achieves  $\text{tree}(f)$ . Crossing the barrier requires recognizing XOR-like structure and building the dual-polarity template.

Under finer-grained single-gate moves, 4 out of 12 NPN classes at  $n = 3$  have local minima 1–2 gates above optimal. The landscape is locally funnel-shaped around the optimum but has barriers elsewhere, arising from topological incompatibility between circuit structures (e.g., parallel vs. sequential decomposition).

## References

- [1] C. E. Shannon. A symbolic analysis of relay and switching circuits. *Transactions of the AIEE*, 57(12):713–723, 1938.
- [2] C. E. Shannon. The synthesis of two-terminal switching circuits. *Bell System Technical Journal*, 28(1):59–98, 1949.
- [3] O. B. Lupanov. A method of circuit synthesis. *Izvestiya VUZ. Radiofizika*, 1:120–140, 1958.
- [4] B. A. Subbotovskaya. Realizations of linear functions by formulas using  $\wedge, \vee, \neg$ . *Soviet Mathematics Doklady*, 2:110–112, 1961.
- [5] V. M. Khrapchenko. Complexity of the realization of a linear function in the class of  $\Pi$ -circuits. *Mathematical Notes*, 9(1):21–23, 1971.
- [6] J. E. Savage. *The Complexity of Computing*. Wiley, 1976.
- [7] I. Wegener. *The Complexity of Boolean Functions*. Wiley–Teubner, 1987.
- [8] M. Karchmer and A. Wigderson. Monotone circuits for connectivity require super-logarithmic depth. *SIAM Journal on Discrete Mathematics*, 3(2):255–265, 1990.
- [9] P. Schuster, W. Fontana, P. F. Stadler, and I. L. Hofacker. From sequences to shapes and back: A case study in RNA secondary structures. *Proceedings of the Royal Society B*, 255(1344):279–284, 1994.
- [10] A. A. Razborov and S. Rudich. Natural proofs. *Journal of Computer and System Sciences*, 55(1):24–35, 1997.
- [11] J. Håstad. The shrinkage exponent of de Morgan formulas is 2. *SIAM Journal on Computing*, 27(1):48–64, 1998.

- [12] A. Kuehlmann, V. Paruthi, F. Krohm, and M. K. Ganai. Robust Boolean reasoning for equivalence checking and functional property verification. *IEEE Transactions on CAD*, 21(12):1377–1394, 2002.
- [13] A. Mishchenko, S. Chatterjee, and R. Brayton. DAG-aware AIG rewriting: A fresh look at combinational logic synthesis. In *Proc. DAC*, pages 532–535, 2006.
- [14] A. Kojevnikov, A. S. Kulikov, and G. Yaroslavtsev. Finding efficient circuits using SAT-solvers. In *Proc. SAT*, pages 32–44, 2009.
- [15] D. E. Knuth. *The Art of Computer Programming*, volume 4A. Addison-Wesley, 2011.
- [16] S. Jukna. *Boolean Function Complexity: Advances and Frontiers*. Springer, 2012.
- [17] J. Boyar, M. Find, and R. Peralta. Small low-depth circuits for cryptographic applications. *Cryptography and Communications*, 5(4):313–325, 2013.