

Quantum Alternating Direction Method of Multipliers for Semidefinite Programming

Hantao Nie* Dong An† Zaiwen Wen‡

December 5, 2025

Abstract

Semidefinite programming (SDP) is a fundamental convex optimization problem with wide-ranging applications. However, solving large-scale instances remains computationally challenging due to the high cost of solving linear systems and performing eigenvalue decompositions. In this paper, we present a quantum alternating direction method of multipliers (QADMM) for SDPs, building on recent advances in quantum computing. An inexact ADMM framework is developed, which tolerates errors in the iterates arising from block-encoding approximation and quantum measurement. Within this robust scheme, we design a polynomial proximal operator to address the semidefinite conic constraints and apply the quantum singular value transformation to accelerate the most costly projection updates. We prove that the scheme converges to an ϵ -optimal solution of the SDP problem under the strong duality assumption. A detailed complexity analysis shows that the QADMM algorithm achieves favorable scaling with respect to dimension compared to the classical ADMM algorithm and quantum interior point methods, highlighting its potential for solving large-scale SDPs.

1 Introduction

Semidefinite programming (SDP) is a pivotal class of convex optimization problems that generalizes linear programming by extending the optimization variable from vectors to matrices and requiring a positive semidefinite constraint. We denote the real matrix inner product $\langle \cdot, \cdot \rangle$ as $\langle A, B \rangle = \text{Tr}(A^\top B)$. Given m symmetric real matrices $A^{(i)} \in \mathbb{S}^n := \{X \in \mathbb{R}^{n \times n} | X^\top = X\}$, $i = 1, \dots, m$, define the linear map $\mathcal{A} : \mathbb{R}^{n \times n} \rightarrow \mathbb{R}^m$ and its adjoint operator $\mathcal{A}^* : \mathbb{R}^m \rightarrow \mathbb{S}^n$ as

$$\mathcal{A}(X) := \left(\langle A^{(1)}, X \rangle, \dots, \langle A^{(m)}, X \rangle \right)^\top \quad \text{and} \quad \mathcal{A}^*(y) := \sum_{i=1}^m y^i A^{(i)}, \quad (1.1)$$

respectively. Further given a symmetric real matrix $C \in \mathbb{S}^n$, and a vector $b \in \mathbb{R}^m$, the SDP and its dual problem are formulated as

$$\min_{X \in \mathbb{S}^n} \langle C, X \rangle \quad \text{s.t.} \quad \mathcal{A}(X) = b, \quad X \succeq 0, \quad (1.2a)$$

$$\min_{y \in \mathbb{R}^m, S \in \mathbb{S}^n} -b^\top y \quad \text{s.t.} \quad \mathcal{A}^*(y) + S = C, \quad S \succeq 0, \quad (1.2b)$$

respectively. For normalization purposes, we assume $\|C\|_F, \|A^{(i)}\|_F \leq 1, i = 1, \dots, m$. Following [39], the solutions are assumed to be bounded, i.e., there exist explicit known upper bounds R_X, R_y, R_S such that a triplet of primal-dual optimal solutions (X^*, y^*, S^*) satisfies $\|X^*\|_F \leq R_X$, $\|y^*\|_1 \leq R_y$, and $\|S^*\|_F \leq R_S$. Under this assumption, the strong duality holds for (1.2a) and (1.2b), i.e., the optimal values of the primal and dual problems are equal.

*School of Mathematical Sciences, Peking University, Beijing, China. nht@pku.edu.cn

†Beijing International Center for Mathematical Research, Peking University, Beijing, China. dongan@pku.edu.cn

‡Beijing International Center for Mathematical Research, Peking University, Beijing, China. wenzw@pku.edu.cn

The significance of solving SDP lies in their ability to provide a versatile framework for formulating critical problems across various domains, including control theory [7, 18, 30, 45], statistics [4, 6, 41], machine learning [12, 20, 25, 46], finance [21, 27] and quantum information science [5, 17, 19, 31, 38, 43]. Moreover, SDP provides convex relaxations for several classical combinatorial optimization problems, such as max-cut [23, 42] and quadratic assignment problems [13, 47].

Classical methods for solving SDP encompass cutting-plane methods [26], matrix multiplicative weights updates (MWU) [2], interior point methods (IPMs) and operator splitting-based methods. The state-of-the-art cutting-plane method [26] solves the SDP in $\tilde{\mathcal{O}}(m(m^2 + n^\omega + s_A))$ time, where $\omega < 2.376$ is the matrix multiplication exponent and s_A is the sum of the number of non-zero entries in the coefficient matrix $A^{(i)}, i = 1, \dots, m$. The MWU framework applies mirror descent method to SDP under the relative entropy divergence and attains $\mathcal{O}\left(mn^2\left(\frac{R_{\text{Tr}X}R_y}{\epsilon_{\text{abs}}}\right)^4\right)$ complexity, where $R_{\text{Tr}X}$ and R_y are the upper bounds of $\text{Tr}(X^*)$ and $\|y^*\|_1$, respectively, and ϵ_{abs} is the absolute accuracy measured by objective value. IPM is a well-established class of algorithms based on the central path and Newton's method, which is also widely used in practice, particularly for medium-scale SDPs. The enhanced IPM [14] requires only $\mathcal{O}(\sqrt{n} \log(\frac{1}{\epsilon_{\text{gap}}}))$ iterations to reach ϵ -optimality, where ϵ_{gap} is the normlized duality gap, i.e., ϵ_{gap} -optimality is achieved $\frac{\langle X, S \rangle}{n} \leq \epsilon_{\text{gap}}$ while each iteration requires cost $\mathcal{O}(s_A + m^\omega + n^\omega)$. By applying alternating direction method of multipliers (ADMM) [8] or primal-dual hybrid gradient (PDHG) [11] schemes to SDP, operator splitting-based methods such as SDPAD [44], ABIP [29] and SCS [35] have gained popularity for solving large-scale instances. As a representative example, ABIP [14] is proved to be converge in a number of iterations as $\mathcal{O}\left(\frac{\kappa_A^2 \|\mathbf{Q}\|^2}{\sqrt{\epsilon_{\text{abs}}}} \log(\frac{1}{\epsilon_{\text{abs}}})\right)$, where κ_A is the condition number of the primal-dual pair of SDPs, \mathbf{Q} is the coefficient matrix of the homogeneous formulation, $\|\mathbf{Q}\|^2 = \mathcal{O}(\sum_{i=1}^m \|A_i\|^2 + \|b\|^2 + \|C\|^2)$. Each iteration in ABIP costs $\mathcal{O}(n^4)$ operations and once eigenvalue decomposition.

To overcome the high computational cost of solving large-scale SDPs, quantum algorithms have been proposed to leverage the power of quantum computing, mainly including quantum matrix multiplicative weights updates (QMWU) [9], quantum interior point methods (QIPM) [3, 32], where s is a sparsity parameter (maximum number of non-zero entries per row, $s \leq n$). QMWU realizes a quadratic improvement over classic MWU, running in $\tilde{\mathcal{O}}(\sqrt{mn}s^2)$ queries which matches $\Omega(\sqrt{m} + \sqrt{n})$ lower bounds on dimension [9]. The subsequent refinements reduced overheads in sparsity, error and boundness parameters [39, 40] and achieves complexity of $\tilde{\mathcal{O}}\left((\sqrt{m} + \sqrt{n} \frac{Rr}{\epsilon_{\text{abs}}})s\left(\frac{R_{\text{Tr}X}R_y}{\epsilon_{\text{abs}}}\right)^4\right)$, where $R_{\text{Tr}X}$ and R_y has the same meaning as in MWU. QIPM [3] improves the complexity of classical interior point methods by leveraging quantum linear system solver for the Newton system, achieving a complexity of $\tilde{\mathcal{O}}\left(n^{3.5} \frac{\kappa_{\text{newt}}^2}{\epsilon_{\text{gap}}}\right)$ quantum accesses and $\tilde{\mathcal{O}}(n^{4.5})$ arithmetic operations for solving the primal-dual pair of SDPs, where κ_{newt} is the condition number of the Newton system. An iterative-refinement framework for QIPM [32] further reduces the complexity of QIPM to $\tilde{\mathcal{O}}(n^{3.5} \kappa_0^2)$ quantum accesses and $\tilde{\mathcal{O}}(n^{4.5})$ arithmetic operations, where κ_0 is the condition number of the initial Newton system. A detailed and comprehensive review of classical and quantum algorithms is presented in Appendix A.

1.1 Our Contributions

In this paper, we propose a quantum alternating direction method of multipliers (QADMM) approach that combines first-order algorithms with quantum speed-ups for eigenvalue transformation. Our main contributions are listed as follows.

1. Inexact ADMM framework for SDP tolerant to quantum errors. Other than allowing the errors in the solving subproblems as generally done in the inexact ADMM literature, we also allow the errors in the dual variable update step. This design enables the algorithm to tolerate the inherent errors introduced by quantum subroutines, such as block-encodings and tomography. It is proved that the average iterated point of this inexact ADMM scheme converges to an ϵ -optimal solution with convergence rate $\mathcal{O}(\frac{1}{\epsilon})$. This inexact ADMM framework for SDP provides a robust theoretical bridge between classical ADMM theory and practical quantum computations, ensuring that quantum acceleration can be harnessed without sacrificing convergence guarantees.

2. QADMM algorithm for SDP with polynomial proximal mapping. The core idea of our QADMM algorithm is to replace the expensive eigenvalue decomposition steps in the classical ADMM with quantum

subroutines. Unlike a traditional log-barrier or direct projection onto the positive semidefinite cone which would require costly eigenvalue decomposition at each step, we consider crafting an implicit barrier function so that its proximal operator reduces to a polynomial eigenvalue transformation. By implementing the subproblem update step utilizing quantum singular value transformation (QSVT) techniques, we achieve an exponential speedup with respect to the dimension.

3. Complexity analysis and comparison with existing methods. We present a rigorous complexity analysis for the proposed QADMM algorithm, demonstrating its favorable theoretical performance compared to both classical and quantum state-of-the-art SDP solvers. In particular, we prove that our algorithm converges to an ϵ_{abs} -accurate optimal solution (measured by objective values) with at most $\tilde{\mathcal{O}}\left((m\kappa_A^2(1+R_y)^2 + n^2(\kappa_A^2(1+R_y) + R_X)) \frac{(R_X+R_S)^3}{\epsilon_{abs}^3}\right)$ quantum gate complexity, and $\mathcal{O}\left((s_A + n^2) \frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right)$ classical arithmetic operations, where R_X and R_S are the upper bounds of primal and dual solutions X^* and S^* , respectively, κ_A^2 is the condition number of $\mathcal{A}\mathcal{A}^*$, and s_A is the total number of non-zero entries in $A^{(i)}, i = 1, \dots, m$. Compared to classical ADMM and QIPMs, our QADMM achieves a significant reduction in the complexity with respect to the dimension of the problem. A comparison of total runtime complexity of existing algorithms is summarized in Table 1.

Algorithm	Complexity
QADMM (Algorithm 1)	$\tilde{\mathcal{O}}\left(n^2(\kappa_A^2(1+R_y)^2 + R_X) \frac{(R_X+R_S)^3}{\epsilon_{abs}^3}\right)$
classical ADMM [44]	$\mathcal{O}\left(n^6 + n^4 \frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right)$
QMWU [39, 40]	$\tilde{\mathcal{O}}\left((n^2 + n^{1.5} \frac{R_{TrX} R_y}{\epsilon_{abs}}) (\frac{R_{TrX} R_y}{\epsilon_{abs}})^4\right)$
QIPM [32]	$\tilde{\mathcal{O}}(n^{3.5} \kappa_0^2)$

Table 1: Comparison of total runtime complexity (quantum gate complexity for quantum algorithms and classical arithmetic operations for classical ADMM) of Algorithms for SDP given that $m = \mathcal{O}(n^2)$ and the data matrices $A^{(i)}$ are fully dense. The notation ϵ_{abs} denotes the absolute accuracy measured by objective value, R_{TrX}, R_X, R_y, R_S are the upper bounds of $\text{Tr}(X^*), \|X^*\|_F, \|y^*\|_1$, and $\|S^*\|_F$, respectively, and κ_A, κ_0 are the condition number of the data matrices and the initial IPM Newton system, respectively. QADMM enjoys a favorable scaling with respect to the dimension n as compared to classical ADMM and QIPM. Compared to QMWU, QADMM has the same order in dimension but achieves a significant reduction in accuracy. Additionally, QADMM can be provably advantageous whenever the optimal SDP variable X^* is diagonal or nearly diagonal, because its gate complexity depends on the Frobenius radius $R_X = \|X^*\|_F$ whereas QMWU depends on the trace radius $R_{TrX} = \text{Tr}(X^*)$. For diagonal matrices we have $R_{TrX} \approx R_X^2$, since R_X grows like \sqrt{n} while R_{TrX} grows linearly with n , implying that for equal accuracy QADMM requires roughly fewer quantum gates.

1.2 Notations

Let \mathbb{S}^n be the set of $n \times n$ symmetric matrices, \mathbb{S}_+^n as the set of $n \times n$ positive semi-definite (PSD) matrices, $-\mathbb{S}_+^n$ as the set of $n \times n$ negative semi-definite matrices. The notations $\text{Proj}_{\mathbb{S}_+^n}(X)$ and $\text{Proj}_{-\mathbb{S}_+^n}(X)$ denote the projection of X onto \mathbb{S}_+^n and $-\mathbb{S}_+^n$, respectively. Assume X has the eigenvalue decomposition $X = U\Lambda U^\top$, where $U \in \mathbb{R}^{n \times n}$ is an orthogonal matrix and Λ is a diagonal matrix with the eigenvalues of X on the diagonal. Then $\text{Proj}_{\mathbb{S}_+^n}(X) = U\Lambda^+ U^\top$, $\text{Proj}_{-\mathbb{S}_+^n}(X) = U\Lambda^- U^\top$, where Λ^+, Λ^- are the diagonal matrices with the positive part and the negative part of the eigenvalues of Λ on the diagonal, respectively. The notation $\|\cdot\|$ (when subscripts are omitted) denotes the Frobenius norm of a matrix or 2-norm of a vector and $\langle \cdot, \cdot \rangle$ denotes the inner product of two matrices or vectors. In a Hilbert space \mathcal{X} , the normal cone of a set $C \subset \mathcal{X}$ at a point x is defined as $\mathcal{N}_C(x) = \{v \in \mathcal{X} \mid \langle v, y - x \rangle \leq 0, \forall y \in C\}$. The proximal mapping of a function $h : \mathcal{X} \rightarrow \mathbb{R}$ is defined by $\text{prox}_{\gamma h}^\mathcal{X}(V) = \arg \min_{S \in \mathcal{X}} \left\{ h(S) + \frac{1}{2\gamma} \|S - V\|^2 \right\}$. The superscript \mathcal{X} is omitted when \mathcal{X} is the full Euclidean space. We denote the identity operator by Id . For complex variables, we denote the real part and imaginary part of x by $\text{Re}(x)$ and $\text{Im}(x)$, respectively.

2 Preliminaries

2.1 Optimality conditions

For the primal-dual pair of SDPs, the optimality conditions are given by the following theorem.

Proposition 2.1. (*Optimality conditions*) (X^*, y^*, S^*) is a primal-dual optimal solution of the primal-dual pair of SDPs (1.2a) and (1.2b) if and only if the following conditions hold:

$$\begin{aligned} \mathcal{A}(X^*) &= b, \quad X^* \succeq 0, & (\text{Primal feasibility}) \\ \mathcal{A}^*(y^*) + S^* &= C, \quad S^* \succeq 0, & (\text{Dual feasibility}) \\ X^* S^* &= 0. & (\text{Complementary slackness}) \end{aligned}$$

2.2 Block-encodings and quantum random access memory

Block-encoding is a method in quantum computing that allows one to embed an arbitrary matrix into a unitary operator. In this framework, a matrix A is said to be block-encoded in a unitary U if there exists a normalization factor α (with $\alpha \geq \|A\|$) such that $U = \begin{pmatrix} \frac{A}{\alpha} & \\ & \end{pmatrix}$. A strict definition of block-encoding is as follows.

Definition 2.1. (*Block-encoding*) Let $A \in \mathbb{C}^{d \times d}$ be an arbitrary matrix, and U be a unitary operator acting on an extended Hilbert space $\mathbb{C}^{2^a} \otimes \mathbb{C}^d$. We say that U is an (α, a, ϵ) -block-encoding of A if

$$\|A - \alpha (|0^{\otimes a}\rangle\langle 0^{\otimes a}| \otimes I_d) U (|0^{\otimes a}\rangle\langle 0^{\otimes a}| \otimes I_d)\| \leq \epsilon,$$

where $\alpha \geq \|A\|$ is a normalization factor, I_d is the identity operator on the d -dimensional space, a denotes the number of ancilla qubits, ϵ is the allowable error (with $\epsilon = 0$ corresponding to an exact block-encoding, and also termed as an (α, a) -block-encoding).

Quantum random access memory (QRAM) enables simultaneous querying of multiple addresses in superposition. Concretely, suppose a QRAM stores classical vectors $v_j \in \mathbb{R}^d$ and an input register is prepared in the state $\sum_{j=0}^{2^w-1} \beta_j |j\rangle$. Under the QRAM assumption, one can implement the map

$$\sum_{j=0}^{2^w-1} \beta_j |j\rangle \otimes |0\rangle \longrightarrow \sum_{j=0}^{2^w-1} \beta_j |j\rangle \otimes |v_j\rangle,$$

in time $\tilde{\mathcal{O}}(1)$. Under the QRAM assumption, we can implement the block-encodings of the data matrices $C, A^{(i)}, i = 1, \dots, m$ in (1.2a) using the following proposition.

Proposition 2.2. (*Block-encoding of matrices stored in QRAM*) (Lemma 50.2 in [22]). Let $A \in \mathbb{C}^{d \times d}$ and $\xi > 0$. If A is stored in a QRAM data structure, then there exist unitaries U_R and U_L that can be implemented in time $\mathcal{O}\left(\text{poly}\left(w \log \frac{1}{\xi}\right)\right)$ such that $U_R^\dagger U_L$ is an $(\alpha, w + 2, \xi)$ -block-encoding of A , where $\alpha = \|A\|_F$ and $w = \lceil \log_2 d \rceil$.

2.3 Tomography

Quantum tomography is a technique used to reconstruct the quantum state of a system based on measurements. It is particularly useful for estimating the parameters of a quantum state when only partial information is available. The following proposition provides a quantum algorithm for estimating the parameters of a quantum state with high probability and low error.

Proposition 2.3. (Theorem 2 in [3]) Let $|\psi\rangle = \sum_{j=0}^{d-1} y_j |j\rangle$ be a quantum state, $y \in \mathbb{C}^d$ the vector with elements y_j , and $U|0\rangle = |\psi\rangle$. There is a quantum algorithm that, with probability at least $1 - \delta$, outputs $\tilde{y} \in \mathbb{R}^d$ such that $\|\text{Re}(y) - \tilde{y}\|_2 \leq \epsilon$ using $\tilde{\mathcal{O}}\left(\frac{d}{\epsilon}\right)$ applications of U and a classical-write, quantum-read QRAM of size $\tilde{\mathcal{O}}\left(2^{d/\epsilon}\right)$ acting on d bits, and $\tilde{\mathcal{O}}\left(\frac{d}{\epsilon}\right)$ additional gates.

2.4 Eigenvalue transformation

Given a real symmetric matrix $X \in \mathbb{S}^n$ with eigenvalue decomposition $X = U\Lambda U^\top$, where $U \in \mathbb{R}^{n \times n}$ is an orthogonal matrix and Λ is a real diagonal matrix. Further given some function $g : \mathbb{R} \rightarrow \mathbb{R}$, we define the eigenvalue transformation operator ¹ with respect to g using boldsymbol \mathbf{g} as

$$\mathbf{g}(X) = U \text{diag}(g(\lambda_1), \dots, g(\lambda_n)) U^\top.$$

As a special case, $g(x) = \max\{0, x\}$ indicates $\mathbf{g}(X) = \text{Proj}_{\mathbb{S}_+^n}(X) = U\Lambda^+U^\top$, where $\Lambda^+ = \text{diag}(\max\{0, \lambda_1\}, \dots, \max\{0, \lambda_n\})$. For a general function g , the classical way to compute $\mathbf{g}(X)$ requires to compute the eigenvalue decomposition of X and then apply the function g to the eigenvalues. However, on the quantum computer, given proper quantum access models, we have a potential exponential speedup when g is a polynomial function as shown in the following proposition.

Proposition 2.4. (Theorem 56 in [22]) Suppose that U is an (α, a, ε) -encoding of a Hermitian matrix A . If $\delta \geq 0$ and $P_{\mathbb{R}} \in \mathbb{R}[x]$ is a polynomial satisfying that $|P_{\mathbb{R}}(x)| \leq \frac{1}{2}, \forall x \in [-1, 1]$ Then there is a quantum circuit \tilde{U} , which is an $(1, a+2, 4 \deg(P_{\mathbb{R}}) \sqrt{\varepsilon/\alpha} + \delta)$ -encoding of $P_{\mathbb{R}}(A/\alpha)$, and consists of d applications of U and U^\dagger gates, a single application of controlled- U and $\mathcal{O}((a+1) \deg(P_{\mathbb{R}}))$ other one- and two-qubit gates. Moreover a description of such a circuit with a classical computer can be computed in time $\mathcal{O}(\text{poly}(\deg(P_{\mathbb{R}}), \log(1/\delta)))$.

2.5 Quantum linear solver

If block-encoding of a Hermitian matrix H is provided, we can use quantum linear solver (QLS) to solve $Hx = b$ as provided in the following proposition.

Proposition 2.5. (Quantum linear solver, Theorem 30, Corollary 32 in [10]) Let $r \in (0, \infty), \kappa \geq 2$ and H be a Hermitian matrix such that its non-zero eigenvalues lie in $[-1, -1/\kappa] \cup [1/\kappa, 1]$. Suppose that $\xi = o\left(\frac{\delta}{\kappa^2 \log^3 \frac{\kappa^2}{\delta}}\right)$ and U is an (α, a, ξ) -block-encoding of H that can be implemented in time T_U . Suppose further that we can prepare a state $|v\rangle$ that is in the image of H in time T_v .

1. For any δ , we can output a state that is δ -close to $H^{-1}|b\rangle / \|H^{-1}b\|$ in time

$$\tilde{\mathcal{O}}(\kappa(\alpha(a + T_U) + T_v)).$$

2. For any δ , we can output \tilde{e} such that $(1 - \delta)\|H^{-1}|b\rangle\| \leq \tilde{e} \leq (1 + \delta)\|H^{-1}|b\rangle\|$ in time

$$\tilde{\mathcal{O}}\left(\frac{\kappa}{\delta}(\alpha(a + T_U) + T_v)\right).$$

3 Quantum alternating direction method of multipliers for SDP

3.1 Inexact ADMM framework for SDP

ADMM is a method designed to solve constrained problems by breaking them into simpler subproblems. A comprehensive review of ADMM for general composite problem is provided in Appendix B. For dual SDP (1.2b), we consider encoding the constraint $S \succeq 0$ via a penalty function $\mathbf{h} : \mathbb{S}^n \rightarrow \mathbb{R}$. When $\mathbf{h}(S) = \mathbf{h}_0(S) := \delta_{\mathbb{S}_+^n}(S)$, (3.1) is equivalent to (1.2b). Smooth functions are also considered such as $\mathbf{h}(S) = \mu \log \det(S)$ in interior point methods, where $\mu > 0$ is a parameter that controls the duality gap. Denote $\mathcal{X} := \{X \in \mathbb{S}^n | X \succeq 0, \|X\|_F \leq R_X\}$, $\mathcal{Y} := \{y \in \mathbb{R}^m | \|y\|_1 \leq R_y\}$, $\mathcal{S} := \{S \in \mathbb{S}^n | S \succeq 0, \|S\|_F \leq R_S\}$ as the feasible sets of X , y and S , respectively. Define $f(y) := -b^T y$. Then (1.2b) is rewritten as

$$\min_{y \in \mathcal{Y}, S \in \mathcal{S}} f(y) + \mathbf{h}(S) \quad \text{s.t.} \quad A^*(y) + S = C. \quad (3.1)$$

¹The operator \mathbf{g} is also called a spectral operator in the literature of optimization [15].

This formulation is amenable to ADMM splitting by associating $f(y)$ with the y -update and $\mathbf{h}(S)$ with the S -update and treating the equation $\mathcal{A}^*(y) + S = C$ as the coupling constraint. The augmented Lagrangian function for the dual SDP is

$$\mathcal{L}_\gamma(X, y, S) := -b^\top y + \mathbf{h}(S) + \langle X, \mathcal{A}^*(y) + S - C \rangle + \frac{1}{2\gamma} \|\mathcal{A}^*(y) + S - C\|_F^2, \quad (3.2)$$

with some fixed $\gamma > 0$. With this augmented Lagrangian function, ADMM iterates as follows [44]:

$$y^{k+1} := \arg \min_{y \in \mathcal{Y}} \mathcal{L}_\gamma(X^k, y, S^k) = -(\mathcal{A}\mathcal{A}^*)^{-1}(\gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C)), \quad (3.3a)$$

$$S^{k+1} := \arg \min_{S \in \mathcal{S}} \mathcal{L}_\gamma(X^k, y^{k+1}, S) = \text{prox}_{\gamma \mathbf{h}}^S(C - \mathcal{A}^*(y^{k+1}) - \gamma X^k), \quad (3.3b)$$

$$X^{k+1} := X^k + \frac{1}{\gamma}(\mathcal{A}^*(y^{k+1}) + S^{k+1} - C) = -\frac{1}{\gamma}(\text{Id} - \text{prox}_{\gamma \mathbf{h}}^S)(C - \mathcal{A}^*(y^{k+1}) - \gamma X^k). \quad (3.3c)$$

The matrix $\mathcal{A}\mathcal{A}^* \in \mathbb{R}^{m \times m}$ in (3.3a) is a symmetric positive definite matrix with its (i, j) -th element being $\langle A^{(i)}, A^{(j)} \rangle$. When $\mathbf{h}(S) = \mathbf{h}_0(S)$, the proximal operator $\text{prox}_{\gamma \mathbf{h}_0}^S = \text{Proj}_S$. We now introduce an inexact ADMM framework for SDP, which allows errors in y -update and S -update. By introducing an intermediate variable $V^{k+1} = C - \mathcal{A}^*(y^{k+1}) - \gamma X^k$ and error terms, (3.3a)-(3.3c) are splitted into several steps:

$$\hat{y}^{k+1} = -(\mathcal{A}\mathcal{A}^*)^{-1}(\gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C)), \quad (3.4a)$$

$$\tilde{y}^{k+1} := \hat{y}^{k+1} + \Delta \tilde{y}^{k+1}, \quad \|\Delta \tilde{y}^{k+1}\|_1 \leq \delta_{\tilde{y}}, \quad (3.4b)$$

$$y^{k+1} := \text{Proj}_{\mathcal{Y}}(\tilde{y}^{k+1} + \Delta y^{k+1}), \quad \|\Delta y^{k+1}\|_1 \leq \delta_y, \quad (3.4c)$$

$$\hat{V}^{k+1} := C - \mathcal{A}^*(\tilde{y}^{k+1}) - \gamma X^k, \quad (3.4d)$$

$$\tilde{V}^{k+1} := \hat{V}^{k+1} + \Delta V^{k+1}, \quad \|\Delta V^{k+1}\|_F \leq \delta_V, \quad (3.4e)$$

$$\tilde{S}^{k+1} := \text{prox}_{\gamma \mathbf{h}}(\tilde{V}^{k+1}), \quad (3.4f)$$

$$S^{k+1} := \text{Proj}_S(\tilde{S}^{k+1} + \Delta S^{k+1}), \quad \|\Delta S^{k+1}\|_F \leq \delta_S, \quad (3.4g)$$

$$\tilde{X}^{k+1} := -\frac{1}{\gamma}(\text{Id} - \text{prox}_{\gamma \mathbf{h}})(\tilde{V}^{k+1}), \quad (3.4h)$$

$$X^{k+1} := \text{Proj}_{\mathcal{X}}(\tilde{X}^{k+1} + \Delta X^{k+1}), \quad \|\Delta X^{k+1}\|_F \leq \delta_X. \quad (3.4i)$$

The variables with tilde notations $\tilde{y}^{k+1}, \tilde{S}^{k+1}, \tilde{X}^{k+1}$ stand for quantum representations and variables without any notation $y^{k+1}, S^{k+1}, X^{k+1}$ stand for classical representations. Additionally, variables with hat notations $\hat{y}^{k+1}, \hat{V}^{k+1}$ are intermediate variables. The error terms $\Delta \tilde{y}^{k+1}, \Delta y^{k+1}, \Delta V^{k+1}, \Delta S^{k+1}, \Delta X^{k+1}$ in (3.4b)-(3.4i) are used to account for the inexactness, which are bounded by $\delta_{\tilde{y}}, \delta_y, \delta_V, \delta_S, \delta_X$, respectively.

3.2 QADMM for SDP

The core idea of QADMM is to alleviate the computational bottlenecks of classical solvers by substituting numerically intensive operations with quantum subroutines. Intuitively, the penalty function $\mathbf{h}(S)$ in (3.1) is chosen so that the form of its proximal operator $\text{prox}_{\gamma \mathbf{h}}(V)$ admits an efficient quantum implementation. The main procedure of QADMM algorithm for SDP is described as follows.

1. y -update (3.3a). First we compute

$$u^{k+1} = \gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C), \quad (3.5)$$

classically and produce a corresponding quantum state $|\hat{u}^{k+1}\rangle = \frac{u^{k+1}}{\|u^{k+1}\|_2}$. Next we invoke QLS reviewed in Section 2.5 to solve $\mathcal{A}\mathcal{A}^* \frac{\hat{y}^{k+1}}{\|\hat{y}^{k+1}\|} = |\hat{u}^{k+1}\rangle$ thereby obtaining $|v_y^{k+1}\rangle, e_y^{k+1}$ such that

$$\left\| |v_y^{k+1}\rangle - \frac{\hat{y}^{k+1}}{\|\hat{y}^{k+1}\|_2} \right\|_2 \leq \delta_{v_y}, \quad (1 - \delta_{e_y}) \|\hat{y}^{k+1}\|_2 \leq e_y^{k+1} \leq (1 + \delta_{e_y}) \|\hat{y}^{k+1}\|_2, \quad (3.6)$$

where $\delta_{v_y}, \delta_{e_y} > 0$. These yields the quantum representation $\tilde{y}^{k+1} = e_y^{k+1}|v_y^{k+1}\rangle \approx \hat{y}^{k+1}$ and the error is bounded by $\delta_S = \delta_{e_y} + \delta_{v_y} \|\hat{y}^{k+1}\|_2$, i.e.,

$$\Delta y^{k+1} \leq \|e_y^{k+1}|v_y^{k+1}\rangle - \|\hat{y}^{k+1}\|_2|v_y^{k+1}\rangle\|_2 + \|\|\hat{y}^{k+1}\|_2|v_y^{k+1}\rangle - \hat{y}^{k+1}\| \leq \delta_{e_y} + \delta_{v_y} \|\hat{y}^{k+1}\|_2. \quad (3.7)$$

Finally, we perform tomography on \tilde{y}^{k+1} to reconstruct a classical vector and then project it onto the feasible set \mathcal{Y} .

2. *V-update (3.4b)-(3.4d)*. Equation (3.4d) is evaluated on the quantum computer via the linear-combination-of-unitaries (LCU) technique. At the start of iteration k , the matrix X^k already resides in quantum memory. Let the $(\alpha_i, \lceil \log(n) \rceil + 2, \xi)$ -block-encodings of $A^{(1)}, \dots, A^{(m)}, C, X^k$ be denoted by $U_{A^{(i)}}, U_C, U_{X^k}$, where $\alpha_i = \|A^{(i)}\|_F$ and $\alpha_{m+1} = \|C\|_F$, $\alpha_{m+2} = \|X^k\|_F$. Then by the LCU lemma (Lemma 7.9 in [28]), we compute a block-encoding of the matrix

$$\frac{1}{\sum_{i=1}^m \alpha_i |y_i^{k+1}| + \alpha_{m+1} + \gamma \alpha_{m+2}} \left(\sum_{i=1}^m \alpha_i y_i^{k+1} U_{A^{(i)}} + \alpha_{m+1} U_C - \gamma \alpha_{m+2} U_{X^k} \right) \quad (3.8)$$

thereby producing the quantum representation $\tilde{V}^{k+1} = e_V^{k+1} v_V^{k+1}$, where $e_V^{k+1} = \sum_{i=1}^m \alpha_i |y_i^{k+1}| + \alpha_{m+1} + \gamma \alpha_{m+2}$ and

$$v_V^{k+1} = \frac{1}{\sum_{i=1}^m \alpha_i |y_i^{k+1}| + \alpha_{m+1} + \gamma \alpha_{m+2}} \left(\sum_{i=1}^m y_i^{k+1} A^{(i)} + C - \gamma X^k \right).$$

The approximation error incurred by the block-encoding and LCU is denoted by ΔV^{k+1} in (3.4e).

3. *S-update (3.4e)-(3.4g)*. We replace $\text{prox}_{\gamma \mathbf{h}}$ in (3.4f) with a polynomial function to the matrix. Let $g_1 : [-1, 1] \rightarrow \mathbb{R}$ be a polynomial of degree d and \mathbf{g} be the corresponding spectral operator. The step (3.4f) is computed by a spectral transformation of the form

$$\tilde{S}^{k+1} = e_V^{k+1} \mathbf{g}_1(v_V^{k+1}). \quad (3.9)$$

The block-encoding of v_V^{k+1} is computed in the previous step. Crucially, we will compute \mathbf{g}_1 using QSVT introduced in Section 2.4. The complete procedure of *S-update* is as follows: Using QRAM and QSVT, we can design a quantum circuit to compute the block-encoding of $\mathbf{g}_1(v_V^{k+1})$. After that tomography recovers the classical representation of the result $\mathbf{g}_1(v_V^{k+1})$. Multiplying the normalization factor yields S^{k+1} as defined in (3.4g).

4. *X-update (3.4h)-(3.4i)*. This step proceeds analogously to the *S-update*. Define \mathbf{g}_2 as a polynomial replacing $\text{Id} - \text{prox}_{\gamma \mathbf{h}}$ in (3.4h). We compute V^{k+1} via step 2, then employ QSVT and tomography to reconstruct X^{k+1} . Finally, we use QRAM to store X^{k+1} in quantum memory to serve as input for *V-update* in the subsequent iteration. The complete procedure is summarized in Algorithm 1. Implementation details are provided in Appendix C.

3.3 Polynomial proximal operator

In this section, we detail the construction of the polynomial $\mathbf{g}_1, \mathbf{g}_2$ introduced in the *S-update* and *X-update*. Without loss of generality, we focus on \mathbf{g}_1 ; the treatment of \mathbf{g}_2 is entirely analogous. The goal is to choose \mathbf{g}_1 as an approximation of the projection operator $\text{Proj}_{\mathbb{S}_+^n}(V)$, which preserve the convergence of the inexact ADMM framework. At the same time, \mathbf{g}_1 is a polynomial transformation, ensuring that it can be implemented efficiently on a quantum computer. The following lemma shows the existence of such polynomials and their detailed proofs are given in Appendix 3.3.

Lemma 3.1. 1. For any $\epsilon > 0$, there exists a monotone increasing polynomial $g(x)$ on $[-1, 1]$ of degree $d = \mathcal{O}(\frac{1}{\epsilon})$ such that $g(-1) = 0$ and

$$|\max(0, x) - g(x)| \leq \epsilon, \quad \forall x \in [-1, 1]. \quad (3.10)$$

2. Let \mathbf{g} be the corresponding spectral operator of g . Then \mathbf{g} is a polynomial eigenvalue transformation on \mathbb{S}^n and satisfies that

$$\|\text{Proj}_{\mathbb{S}_+^n}(X) - \mathbf{g}(X)\|_2 \leq \epsilon, \quad \forall X \in \{X \in \mathbb{S}^n : \|X\|_2 \leq 1\}. \quad (3.11)$$

Algorithm 1 QADMM for SDP

Input: Data $C, b, A^{(i)}, i = 1, \dots, m$.

Initialize (X^0, y^0, S^0) .

for $k = 0, 1, 2, \dots, K - 1$ **do**

- (1) (y-update) Compute u^{k+1} by (3.5) classically and prepare a quantum representation of u^{k+1} .
Solve the linear system $\tilde{y}^{k+1} = -(\mathcal{A}\mathcal{A}^*)^{-1} u^{k+1}$ on the quantum computer.
Construct classical y^{k+1} satisfying (3.4c) using vector state tomography.

- (2) (V-update)

Compute V^{k+1} by (3.4e) via LCU on the quantum computer.

- (3) (S-update)

Compute \tilde{S}^{k+1} by (3.4e)- (3.4f) via QSVT on the quantum computer.

Construct classical S^{k+1} satisfying (3.4g) using tomography.

- (4) (X-update) Update \tilde{X}^{k+1} by (3.4h) via QSVT on the quantum computer.

Construct classical X^{k+1} satisfying (3.4i) using tomography.

Recompute and store \tilde{X}^{k+1} on the quantum computer.

end for

Output: $(X_{out}, y_{out}, S_{out}) := \left(\frac{1}{K} \sum_{k=1}^K X^k, \frac{1}{K} \sum_{k=1}^K y^k, \frac{1}{K} \sum_{k=1}^K S^k \right)$.

After rescaling so that $g_1(x) \leq 1/2$ for $x \in [-1, 1]$, the spectral operator \mathbf{g}_1 can be implemented via QSVT in accordance with Proposition 2.4. Although a convex \mathbf{h} satisfying $\text{prox}_{\gamma \mathbf{h}}^S = \mathbf{g}_1$ may not exist since g is not nonexpansive, we can still choose $\mathbf{h}(S)$ satisfying the variational equation $(\text{Id} + \gamma \partial \mathbf{h}(S))^{-1} = \mathbf{g}_1(S)$.

Lemma 3.2. *Let $g : \mathbb{R} \rightarrow \mathbb{R}$ be a smooth function satisfying $g'(x) > 0$ for all $x \in \mathbb{R}$. Denote g^{-1} as the inverse function of g . Then*

$$h(x) = \begin{cases} \frac{1}{\gamma} \int_0^x (g^{-1}(z) - z) dz, & \text{if } x \geq 0, \\ \infty, & \text{if } x < 0, \end{cases} \quad (3.12)$$

satisfies $(1 + \gamma \partial h(x))^{-1} = g(x)$.

2. For $X \in \mathbb{S}^n$ with eigenvalue decomposition $X = U \text{diag}(\lambda_1, \dots, \lambda_n) U^\top$, where U is a unitary matrix and λ_i are the eigenvalues of X . Let $\mathbf{g}(X) = U \text{diag}(g(\lambda_1), \dots, g(\lambda_n)) U^\top$ be the eigenvalue transformation with respect to g . Define $\mathbf{h} : \mathbb{S}^n \rightarrow \mathbb{R}$ as $\mathbf{h}(X) = \sum_{i=1}^n h(\lambda_i)$, where h is defined in (3.12). Then $\mathbf{h}(S)$ satisfies $(\text{Id} + \partial \mathbf{h}(S))^{-1} = \mathbf{g}(S)$.

By Lemma 3.1 and 3.2, a “virtual” barrier function $\mathbf{h}(S)$ is designed such that $\mathbf{g}_1 = (\text{Id} - \partial \mathbf{h})^{-1}$ is a polynomial eigenvalue transformation. Although $\text{prox}_{\gamma \mathbf{h}}$ is not well-defined since \mathbf{h} is nonconvex, this does not affect the convergence of the inexact ADMM framework.

4 Complexity analysis

In this section, we analyze the complexity of QADMM for SDP. We first establish the convergence of QADMM for SDP and then derive the iteration complexity, and finally evaluate its overall computational cost. The detailed proofs of the results in this section are presented in Appendix E.

4.1 Iteration number of QADMM for SDP

In this subsection, we analyze the ergodic convergence of the inexact QADMM scheme. Without loss of generality, assume $\gamma = 1$. We show that the averaged iterate converges to an ϵ -optimal solution of (1.2b) in the sense of the objective value and the dual feasibility.

Theorem 4.1. (ergodic convergence) Assume (X^*, y^*, S^*) satisfies the optimality conditions. The average iterate $(\bar{X}^K, \bar{y}^K, \bar{S}^K) := \frac{1}{K} \sum_{k=0}^{K-1} (\tilde{X}^k, \tilde{y}^k, \tilde{S}^k)$ generated by the scheme (3.4a)-(3.4i) satisfies

$$f(\bar{y}^K) - f(y^*) \leq \mathcal{O} \left(\frac{\|X^0 - X^*\|_F^2 + \|S^0 - S^*\|_F^2}{K} + \delta \right), \quad (4.1a)$$

$$\|\mathcal{A}^*(\bar{y}^K) + \bar{S}^K - C\|_F \leq \mathcal{O} \left(\frac{\|X^0 - X^*\|_F + \|S^0 - S^*\|_F}{K} + \delta \right), \quad (4.1b)$$

where $\delta = \Theta(\delta_{\tilde{y}} + \delta_y + \delta_V + \delta_X + \delta_S)$ is the error term.

However, the quantum representations of variables are not accessible directly. For the classical representations reconstructed via tomography, we have the following results.

Corollary 4.1. Let the initial point be $(X^0, y^0, S^0) = (0, 0, 0)$. Then the output of Algorithm 1 satisfies

$$\begin{aligned} f(y_{out}) - f(y^*) &\leq \mathcal{O} \left(\frac{R_X^2 + R_S^2}{K} + \delta \right), \\ \|\mathcal{A}^*(y_{out}) + S_{out} - C\|_F &\leq \mathcal{O} \left(\frac{R_X + R_S}{K} + \delta \right). \end{aligned} \quad (4.2)$$

Combining Theorem 4.1 and Corollary 4.1, we derive the iteration complexity as follows.

Corollary 4.2. Assume $\delta = \Theta(\epsilon)$ and let the initial point be $(X^0, y^0, S^0) = (0, 0, 0)$. To achieve an ϵ -accuracy solution (y_{out}, S_{out}) satisfying $-b^\top y_{out} + b^\top y^* \leq \epsilon_{abs}$ and $\|\mathcal{A}^*(y_{out}) + S_{out} - C\|_F \leq \epsilon_{abs}$, the algorithm 1 requires

$$K = \mathcal{O} \left(\frac{R_X^2 + R_S^2}{\epsilon_{abs}} \right)$$

iterations, where R_X and R_S are the upper bounds of $\|X^*\|_F$ and $\|S^*\|_F$, respectively.

4.2 Complexity of QADMM for SDP

In this section, we formally analyze the worst case overall running times of QADMM for SDP. The per-iteration computational cost is written as

$$T_{\text{iter}} = T_{\text{quant}} + T_{\text{classic}},$$

where T_{quant} is the quantum gate complexity and T_{classic} counts the classical arithmetic operations.

On classical computer the linear operator \mathcal{A} defined in (1.1) can be represented as a matrix $\mathbf{A} \in \mathbb{R}^{m \times n(n+1)/2}$ and the matrix X is compressed as a vector of length $n(n+1)/2$ for computing $\mathcal{A}(X)$. Assume $\mathbf{A} \in \mathbb{R}^{m \times n(n+1)/2}$ is a sparse matrix with s non-zero entries. The cost of classically computing $\mathcal{A}(X)$ is $T_A = \mathcal{O}(s_A + n^2)$ and computing $\mathcal{A}^*(y)$ is $T_{A^*} = \mathcal{O}(s_A + n^2)$. As a special case, if \mathbf{A} is a dense matrix, then $T_A = T_{A^*} = \mathcal{O}(mn^2)$. The complexity of each step in Algorithm 1 is analyzed as follows:

1. y -update. Assume the condition number of $\mathbf{A}\mathbf{A}^\top$ is κ_A^2 . By Proposition 2.5 and (3.7), QLS requires a runtime of $T_1 = \tilde{\mathcal{O}}(\frac{\kappa_A^2(1+\|\tilde{y}\|_2)}{\delta_{\tilde{y}}}) \leq \tilde{\mathcal{O}}(\frac{\kappa_A^2(1+R_y)}{\delta_{\tilde{y}}})$ to achieve accuracy $\delta_{\tilde{y}}$ and the tomography step requires $\mathcal{O}(m \frac{R_y}{\delta_y})$ queries to achieve accuracy δ_y . Additionally, $\mathcal{O}(T_A)$ classical operations are required for computing linear mappings.

2. V -update. In this step, LCU requires a runtime of $T_2 = \tilde{\mathcal{O}}(e_V^{k+1}) \leq \tilde{\mathcal{O}}(1 + R_X + R_y)$.

3. S -update. By Proposition 2.4 and Lemma 3.1, applying QSVT to evaluate the polynomial transformation requires $\mathcal{O}(d)$ quantum gates, $\mathcal{O}(d)$ oracle queries, and $\mathcal{O}(1)$ ancillary qubits to achieve that $\|\tilde{S}^{k+1} - \text{Proj}_{\mathbb{S}^n}(\tilde{V}^{k+1})\|_2 \leq \epsilon$, where $d = \mathcal{O}(\frac{e_V^{k+1}}{\epsilon}) \leq \mathcal{O}(\frac{1+R_X+R_y}{\epsilon})$ is the degree of the polynomial transformation. We then construct a classical description of the iterate by performing state tomography on \tilde{S}^{k+1} . Proposition 2.3 implies that tomography requires $\mathcal{O}(n^2 \frac{R_S}{\delta_S})$ queries on the block-encoding of \tilde{S}^{k+1} to achieve accuracy δ_S . Hence the total runtime is $\tilde{\mathcal{O}}((T_1 + T_2 + d) \frac{n^2 R_S}{\delta_S})$.

4. X -update. Similarly to S -update, this step has a runtime of $\mathcal{O}((T_1 + T_2 + d) \frac{n^2 R_X}{\delta_X})$.

Summarizing the above analysis, one single QADMM iteration incurs $T_{\text{classic}} = \mathcal{O}(s_A + n^2)$ classical operations, and

$$T_{\text{quant}} = \tilde{\mathcal{O}} \left(\frac{\kappa_A^2(1+R_y)}{\delta_{\hat{y}}} m \frac{R_y}{\delta_y} + \left(\frac{\kappa_A^2(1+R_y)}{\delta_{\hat{y}}} + \frac{1+R_X+R_y}{\epsilon} \right) \left(\frac{n^2 R_S}{\delta_S} + \frac{n^2 R_X}{\delta_X} \right) \right)$$

quantum gates and queries. Combining these per-iteration costs with the iteration bound established above yields the overall computational complexity of QADMM.

Theorem 4.2. *With the accuracy choice $\delta_{\hat{y}}, \delta_y, \delta_V, \delta_S, \delta_X = \Theta(\epsilon_{\text{abs}})$ and $d = \mathcal{O}(\frac{1+R_X+R_Y}{\epsilon_{\text{abs}}})$, a quantum implementation of Algorithm 1 with the use of a QRAM of size $\tilde{\mathcal{O}}(2^{n^2/\epsilon_{\text{abs}}})$ produces an ϵ_{abs} -accuracy solution using at most $\mathcal{O}\left((s_A + n^2) \frac{R_X^2 + R_S^2}{\epsilon_{\text{abs}}}\right)$ classical operations and*

$$\tilde{\mathcal{O}} \left((m\kappa_A^2(1+R_y)^2 + n^2(\kappa_A^2(1+R_y) + R_X)) \frac{(R_X + R_S)^3}{\epsilon_{\text{abs}}^3} \right)$$

quantum gates and queries.

5 Conclusion

We present QADMM algorithm for SDP based on an inexact ADMM framework, which leverages quantum spectral transformation to replace the most computationally intensive classical matrix eigendecompositions steps. By carefully designing a polynomial proximal operator, the iterative scheme admits an efficient implementation via QSVT. A detailed complexity analysis shows that QADMM improves upon both classical ADMM and quantum solvers in regimes of dimension n or accuracy ϵ . The main limitation of our algorithm is that it requires QRAM for encoding the data matrices, which is a strong assumption. Future work will focus on relaxing this assumption and exploring the potential of QADMM for other convex optimization problems such as convex conic programming and convex quadratic programming.

6 Acknowledgement

We thank Tamas Terlaky for the helpful discussion on the developments of quantum SDP algorithms.

A Literature Review

Classical Methods for SDP

The development of efficient classical algorithms for SDP has been a major focus in optimization research. Cutting plane methods are a class of algorithms that iteratively refine feasible regions by adding linear constraints (cuts) to the problem. These methods are particularly effective for large-scale SDPs, as they can exploit the sparsity of the underlying data. In [26], the authors proposed a cutting plane method for solving SDPs with a complexity of

$$O(m(m^2 + n^\omega + s_A)),$$

where $\omega < 2.376$ is the exponent of matrix multiplication and s_A is the number of non-zero entries in all the constraint matrices.

The matrix multiplication weights update method (MMWU) is a powerful technique for solving game theory problems. MMWU is a primal-dual algorithm that iteratively updates the primal and dual variables based on the observed gradients of the objective function. It is shown that MWU is equivalent to the mirror descent method with quantum relative entropy as the Bregman divergence (Proposition 8.5 in [33]). When applied to SDPs, MMWU has a complexity of

$$\mathcal{O}\left(mn^2 \cdot \text{poly}\left(\frac{R_{\text{Tr}X} R_y}{\epsilon_{\text{abs}}}\right)\right),$$

where $R_{\text{Tr}X}$ is an upper bound on the trace of the primal solutions, R_y is an upper bound on the l_1 norm of the dual solutions, and ϵ_{abs} is the absolute accuracy of the objective function value.

Interior point methods for SDPs were pioneered by Karmarkar in the 1980s. By solving a sequence of Newton systems derived from barrier function optimality conditions, IPMs provide polynomial-time solvability for SDPs and are highly effective for small to medium problem sizes. In [24], the authors proposed an interior point method (IPM) for solving semidefinite programs (SDPs) that requires $O(\sqrt{n} \log(1/\epsilon))$ iterations, with a per-iteration cost of $\mathcal{O}(mn^2 + m^\omega + n^\omega)$. Consequently, the overall complexity is

$$\tilde{\mathcal{O}}(\sqrt{n}(mn^2 + m^\omega + n^\omega)),$$

where ϵ_{gap} is the relative accuracy measured by the relative duality gap. In the literature of IPMs, an ϵ_{gap} -optimal solution measured by relative accuracy is defined as a solution that satisfies

$$\langle C, X \rangle \geq \langle C, X^* \rangle - \epsilon_{\text{gap}} \|C\| \text{ and } \|\mathcal{A}(X) - b\|_1 \leq \epsilon_{\text{gap}} (\|b\|_1 + \sum_{i=1}^m \|A_i\|).$$

Many prominent SDP solvers (e.g. SDPT3, SDPA, MOSEK) are based on IPMs and can reliably solve moderate-sized SDPs. However, interior point approaches become computationally expensive for large-scale SDPs, since each iteration requires factorizing large Hessian or Schur complement matrices. This per-iteration cost grows steeply (often cubic in the matrix dimension), which limits the scalability of IPMs on very high-dimensional problems.

To handle large problem instances where IPMs struggle, researchers have turned to operator splitting-based methods that use only gradient or operator splitting steps instead of second-order Hessian computations. These approaches include alternating direction augmented Lagrangian methods (SDPAD) [44], ADMM-based interior point methods (ABIP) [14], operator splitting with homogeneous self-dual embedding (SCS) [35]. In exchange, they typically attain solutions of modest accuracy and may require many more iterations to converge. The operator splitting-based particularly perform well in numerical experiments but few of them have been rigorously analyzed in terms of complexity. ABIP [14] is proved to converge in a number of iterations as $\mathcal{O}\left(\frac{\kappa_A^2 \|\mathbf{Q}\|^2}{\sqrt{\epsilon_{\text{abs}}}} \log\left(\frac{1}{\epsilon_{\text{abs}}}\right)\right)$, where κ_A is the condition number of the constraint matrix, \mathbf{Q} is the coefficient matrix of the HSD formulation with $\|\mathbf{Q}\|^2 = \mathcal{O}(\sum_{i=1}^m \|A_i\|^2 + \|b\|^2 + \|C\|^2)$. Its each iteration costs $\mathcal{O}(n^4)$ operations for matrix multiplication and require once eigenvalue decomposition of size n . If we assume that the eigenvalue decomposition has the same complexity as matrix multiplication, then the overall complexity of ABIP is

$$\tilde{\mathcal{O}}\left(n^4 \frac{\kappa_A^2 \|\mathbf{Q}\|^2}{\sqrt{\epsilon_{\text{abs}}}}\right).$$

We believe that the complexity of first order methods can be improved by using quantum computers.

Quantum Algorithms for SDP

Given the computational challenges of solving very large SDPs, a growing body of work explores quantum algorithms that could potentially offer polynomial speed-ups over classical methods. Quantum computers can, in principle, accelerate linear algebra subroutines (like solving linear systems or eigenvalue estimation) that are central to SDP solvers. The goal of quantum SDP solvers is typically to improve the dependence on the problem dimension (n) or number of constraints (m) by leveraging quantum linear algebra.

Initial breakthroughs in quantum SDP solving were achieved by Brandão and Svore [9]. The quantum matrix multiplicative weights update (QMWU) method they proposed is built on a combination of quantum Gibbs sampling and the multiplicative weight updates framework. QMWU draws inspiration from a classical heuristic of MWU for SDP, but replaces the costly inner linear programming steps with quantum subroutines. This quantum algorithm prepares quantum states that encode an approximate solution and iteratively updates them using a form of matrix exponential weights. Their method achieves a worst-case running time of

$$\mathcal{O}\left(\sqrt{mns^2}\text{poly}(\log(n), \log(m), R_{\text{Tr}X}, R_y, \frac{1}{\epsilon_{\text{abs}}})\right)$$

with s the row-sparsity of the input matrices. Specifically, their algorithm provides a quadratic improvement over the best known classical runtime dependence on n and m .

In addition to the algorithm itself, Brandão and Svore proved that its speed-up was essentially optimal in broad generality: they established a quantum lower bound of $\Omega(\sqrt{n} + \sqrt{m})$ for solving SDPs when other parameters are held constant. This result indicates that no quantum algorithm can asymptotically outperform the $\mathcal{O}(\sqrt{nm})$ time scaling in full generality, barring improvements in logarithmic or problem-dependent factors.

Following this pioneering work, van Apeldoorn et al. [40] developed improved quantum SDP solvers that refined the complexity dependence on various input parameters. Van Apeldoorn et al. introduced new quantum algorithmic techniques including a method to efficiently implement smooth functions of a sparse Hamiltonian and a generalized minimum-finding procedure, which together yielded better runtime scaling with respect to these parameters. Their improved quantum SDP solver essentially matches the favorable $\mathcal{O}(\sqrt{nm})$ scaling in the main problem sizes while bringing down the overhead polynomial factors in s , $1/\delta$. The worst case complexity of their algorithm is

$$\tilde{\mathcal{O}}\left(\sqrt{nm}s^2\left(\frac{R_{\text{Tr}X}R_y}{\epsilon_{\text{abs}}}\right)^8\right).$$

In the same work, they showed that for certain SDPs arising from combinatorial optimization with high symmetry, the quantum speed-up may disappear. More fundamentally, the authors proved a worst-case lower bound: for general linear programs (including SDPs), any quantum algorithm must take time linear in $m \times n$ when m is on the order of n . In other words, in the dense, worst-case regime, a quantum solver cannot asymptotically outperform classical solvers. This result reinforced the understanding that quantum speed-ups for SDPs are achievable in certain regimes.

Further advances in quantum SDP algorithms were made by van Apeldoorn and Gilyén [39], who provided a unified framework that improved and generalized all prior quantum SDP solvers. They focused on constructing more efficient quantum Gibbs samplers for different models of input access, leading to better algorithmic bounds. For the standard sparse-matrix input model (where the algorithm can query entries of the constraint matrices), their quantum SDP solver runs in time

$$\tilde{\mathcal{O}}\left((\sqrt{m} + \sqrt{n}\frac{R_{\text{Tr}X}R_y}{\epsilon_{\text{abs}}})s\left(\frac{R_{\text{Tr}X}R_y}{\epsilon_{\text{abs}}}\right)^4\right).$$

Notably, they applied their improved algorithm to Aaronson’s shadow tomography problem (estimating properties of an unknown quantum state) and obtained a more efficient solution than was previously known. They also showed quantum speed-ups for tasks like quantum state discrimination and E -optimal experimental design by formulating them as SDPs. In each case, the quantum SDP approach beat the best known classical complexity in certain parameters, albeit sometimes at the expense of worse dependence on other parameters.

Finally, van Apeldoorn and Gilyén strengthened the theoretical foundations by proving new lower bounds for quantum SDP-solving. They showed that any quantum algorithm must incur at least a $\tilde{\Omega}(\sqrt{m})$ factor (up to logarithmic terms) in its runtime complexity for SDPs, and that polynomial dependence on certain problem parameters (like condition numbers or error) is necessary in the quantum setting. These results confirmed that the scaling achieved by their algorithms is essentially tight and unavoidable without further assumptions.

Recently, researchers have revisited the interior point method paradigm in the quantum context. Augustino et al. [3] proposed the first quantum interior point methods (QIPMs) for SDP, aiming to combine the convergence guarantees of IPMs with quantum linear algebra speed-ups. Their work introduced two variants of a quantum interior point algorithm, both leveraging quantum linear system solvers to handle the Newton step at each iteration. The first variant II-QIPM closely mirrors a classical IPM but allows an inexact search direction solved by a quantum linear solver, which can lead to iterates that temporarily violate feasibility. This method achieves a runtime of

$$\tilde{\mathcal{O}}\left((n^{5.5}\kappa_{\text{newt}}\kappa_{\mathcal{A}}\rho(\|\mathcal{A}\|_F + \rho n^{1.5}))\frac{1}{\epsilon_{\text{gap}}}\right),$$

where $\kappa_{\mathcal{A}}$ is the condition number of the matrix \mathcal{A} whose columns are the vectorized constraint matrices $A^{(1)}, \dots, A^{(m)}$, κ_{newt} is the condition number of the Newton system, and $\rho > 0$ denotes the size of the initial infeasible solution and is generally considered a constant in many papers.

The second variant IP-QIPM uses a novel nullspace-based Newton system formulation to ensure that each step stays within the feasible region, even though the Newton equations are solved only approximately. This method solves the primal-dual SDO pair with $m = \mathcal{O}(n^2)$ constraints to ϵ_{gap} -optimality using at most

$$\tilde{\mathcal{O}}\left(n^{3.5}\frac{\kappa_{\text{newt}}^2}{\epsilon_{\text{gap}}}\right)$$

QRAM accesses and $\mathcal{O}(n^{4.5} \text{poly log}(n, \kappa_{\text{newt}}, \frac{1}{\epsilon_{\text{gap}}}))$ arithmetic operations. Compared to classical IPMs, their algorithms run faster in the large- n regime, but the cost grows more steeply with $\frac{1}{\epsilon_{\text{gap}}}$ (accuracy requirements) and with certain spectral condition measures than in classical IPMs. This reflects a common theme in quantum optimization algorithms: one can often trade off some dependence on precision or problem “niceness” for gains in raw dimension or size scaling.

In addition to the baseline QIPM results, Mohammadisiahroudi et al. [32] develop an iterative-refinement (IR) framework for semidefinite optimization that repeatedly calls any limited-precision interior-point-type oracle at a fixed accuracy and provably upgrades the solution to a target precision in refinement steps, thereby turning the overall dependence on accuracy from polynomial to logarithmic while preserving the best known dimension and conditioning scalings of the underlying oracle. Concretely, with the costs of

$$\tilde{\mathcal{O}}(n^{3.5}\kappa_0^2)$$

QRAM accesses and $\tilde{\mathcal{O}}(n^{4.5})$ arithmetic operations, the wrapped IR-QIPM inherits these per-call bounds and achieves quadratic convergence of the duality gap without relying on strict complementarity or nondegeneracy assumptions. The authors note a practical caveat that the cost per refinement step can increase with conditioning, but the worst-case accuracy dependence is exponentially improved relative to directly running a high-precision QIPM.

B Review of ADMM

B.1 ADMM for convex optimization

In general, consider a convex optimization problem of the form:

$$\min_{u,v} f(u) + h(v) \quad \text{s.t.} \quad Au + Bv = c,$$

where $f(u)$ and $h(v)$ are convex functions and $Au + Bv = c$ is an equality constraint coupling the decision variables u and v . The augmented Lagrangian function for this problem introduces a dual variable Λ for the

constraint and a penalty parameter $\gamma > 0$ to enforce the constraint softly:

$$\mathcal{L}_\gamma(u, v, \Lambda) = f(u) + h(v) + \langle \Lambda, Au + Bv - c \rangle + \frac{1}{2\gamma} \|Au + Bv - c\|^2.$$

The augmented Lagrangian function is a penalized version of the Lagrangian function with an additional quadratic term that penalizes the violation of the constraints. Compared to the Lagrangian function, the augmented Lagrangian function serves as a tighter lower bound on the objective function. By coupling the primal and dual variables in the augmented Lagrangian function, we transform the original constrained optimization problem into a saddle point problem

$$\min_{u,v} \max_{\Lambda} \mathcal{L}_\gamma(u, v, \Lambda).$$

ADMM iteration consists of alternating optimization of this augmented Lagrangian function with respect to u and v , updating the dual variable by one gradient step. The classical ADMM algorithm for the above problem is summarized as follows:

1. u -update: $u^{k+1} := \arg \min_u \mathcal{L}_\gamma(u, v^k, \Lambda^k)$.
2. v -update: $v^{k+1} := \arg \min_v \mathcal{L}_\gamma(u^{k+1}, v, \Lambda^k)$.
3. Dual update: $\Lambda^{k+1} := \Lambda^k + \frac{1}{\gamma}(Au^{k+1} + Bv^{k+1} - c)$.

B.2 Classical ADMM for SDP

Assume (X^*, y^*, S^*) satisfies the optimality conditions:

$$\begin{aligned} \mathcal{A}(X^*) &= b, & X^* &\succeq 0, & (\text{Primal feasibility}) \\ \mathcal{A}^*(y^*) + S^* &= C, & S^* &\succeq 0, & (\text{Dual feasibility}) \\ X^* S^* &= 0. & & & (\text{Complementary slackness}) \end{aligned}$$

Starting from an initial guess (X_0, y_0, S_0) , classical ADMM iteratively updates the primal and dual variables as follows:

$$y^{k+1} := -(\mathcal{A}\mathcal{A}^*)^{-1}(\gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C)), \quad (\text{B.1a})$$

$$S^{k+1} := \text{Proj}_{\mathbb{S}^n_+}(C - \mathcal{A}^*(y^{k+1}) - \gamma X^k), \quad (\text{B.1b})$$

$$X^{k+1} := X^k + \frac{1}{\gamma}(\mathcal{A}^*(y^{k+1}) + S^{k+1} - C). \quad (\text{B.1c})$$

We denote $f_1(X) = \langle C, X \rangle + \delta_{\{\mathcal{A}(X)=b\}}(X)$ and compute its proximal operator as

$$\text{prox}_{f_1/\gamma}(Z) = Z - \frac{C}{\gamma} - \mathcal{A}^*(\mathcal{A}\mathcal{A}^*)^{-1}(\mathcal{A}(Z - \frac{C}{\gamma}) - b). \quad (\text{B.2})$$

By introducing a variable

$$Z^{k+1} = X^k + \frac{1}{\gamma}(\mathcal{A}^*(y^{k+1}) - C),$$

the iterate scheme (B.1a)–(B.1c) is rewritten as a fixed point iteration $Z^{k+1} = \mathcal{T}(Z^k)$, where \mathcal{T} is a nonexpansive operator defined as

$$\mathcal{T}(Z^k) := Z^k + \text{prox}_{f_1/\gamma}(2\text{Proj}_{\mathbb{S}^n_+}(Z^k) - Z^k) - \text{Proj}_{\mathbb{S}^n_+}(Z^k). \quad (\text{B.3})$$

This equivalent fixed point iteration is called Douglas-Rachford splitting (DRS) [16]. Moreover, the sequence $\{(X^k, y^k, S^k)\}$ is recovered from Z^k by

$$\begin{aligned} X^k &= \text{Proj}_{\mathbb{S}^n}(Z^k), \\ S^k &= \text{Proj}_{\mathbb{S}^n}(-\gamma Z^k), \\ y^{k+1} &= -(\mathcal{A}\mathcal{A}^*)^{-1}(\gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C)). \end{aligned} \quad (\text{B.4})$$

B.3 Complexity of classical ADMM for SDP

The following proposition shows the convergence of the ADMM algorithm for SDP. This is a direct application of the classical ADMM convergence theory (Theorem 3.2, 3.3 in [29]).

Proposition B.1. *Assume (X^*, y^*, S^*) satisfies the optimality conditions. Let $D = \gamma\|X^0 - X^*\|^2 + \frac{1}{\gamma}\|S^0 - S^*\|^2$.*

1. *(asymptotic convergence) The sequence $\{X^k, y^k, S^k\}$ generated by the scheme (B.1a)–(B.1c) satisfies*

$$-b^\top y^k + b^\top y^* \rightarrow 0, \quad \mathcal{A}^*(y^k) + S^k - C \rightarrow 0, \quad \text{as } k \rightarrow \infty.$$

2. *(non-ergodic convergence) The last iterate $\{X^K, y^K, S^K\}$ generated by the scheme (B.1a)–(B.1c) satisfies*

$$-b^\top y^K + b^\top y^* \leq \frac{D}{K} + \frac{2D}{\sqrt{K}} + \|X^*\| \sqrt{\frac{\gamma D}{K}}, \quad \|\mathcal{A}^*(y^K) + S^K - C\| \leq \sqrt{\frac{\gamma D}{K}}.$$

3. *(ergodic convergence) The average iterate $\bar{X}^K = \frac{1}{K} \sum_{k=1}^K X^k$, $\bar{y}^K = \frac{1}{K} \sum_{k=1}^K y^k$, and $\bar{S}^K = \frac{1}{K} \sum_{k=1}^K S^k$ generated by the scheme (B.1a)–(B.1c) satisfies*

$$-b^\top \bar{y}^K + b^\top y^* \leq \frac{D}{2K} + \frac{2\sqrt{\gamma D} \|X^*\|}{K}, \quad \|\mathcal{A}^*(\bar{y}^K) + \bar{S}^K - C\| \leq \frac{2\sqrt{\gamma D}}{K}.$$

A direct consequence of the above proposition is the following iteration complexity of the classical ADMM algorithm for SDP.

Corollary B.1. *To achieve an ϵ_{abs} -accuracy solution, the classical ADMM algorithm with initialization $(X^0, S^0) = (0, 0)$ requires*

$$K = \mathcal{O}\left(\frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right)$$

iterations, where R_X, R_S are the upper bounds of $\|X^\|$ and $\|S^*\|$, respectively.*

Theorem B.1. *To obtain an ϵ_{abs} -optimal solution that satisfies*

$$-b^\top \bar{y}^K + b^\top y^* \leq \epsilon_{abs}, \quad \|\mathcal{A}^*(\bar{y}^K) + \bar{S}^K - C\| \leq \epsilon_{abs}, \quad (\text{B.5})$$

the classical ADMM requires a running time of

$$\mathcal{O}\left(m^3 + m^2 n^\omega + (m^2 + s_A + n^\omega) \cdot \frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right),$$

where R_X and R_S are the upper bounds on the primal and dual optimal solutions X^, S^* respectively, s_A is the number of non-zero entries in all the constraint matrices, and ω is the exponent of matrix multiplication.*

Proof. Assume we compute $\mathcal{A}\mathcal{A}^*$ and prepare a Cholesky factorization for it, which has a computational cost of $\mathcal{O}(m^2 n^\omega + m^3)$. Now we consider the complexity of each iteration. Solving the linear system $\mathcal{A}\mathcal{A}^* y = U$ requires $\mathcal{O}(m^2)$ time. The eigenvalue decomposition of size n has the same complexity as matrix multiplication, i.e., $\mathcal{O}(n^\omega)$, where ω is the exponent of matrix multiplication. Hence the projection onto \mathbb{S}_+^n requires $\mathcal{O}(n^\omega)$ time.

Assume \mathbf{A} has s_A non-zero entries. As shown in Appendix C.1, the costs of computing $\mathcal{A}(X)$ and $\mathcal{A}^*(y)$ are both $\mathcal{O}(s_A)$. Therefore, step (B.1a) requires $\mathcal{O}(m^2 + s_A + n^2)$ time, step (B.1b) requires $\mathcal{O}(n^\omega + s_A + n^2)$ time, and step (B.1c) requires $\mathcal{O}(s_A + n^2)$ time. Therefore the total complexity of each iteration is $\mathcal{O}(m^2 + s_A + n^\omega)$. Combining the iteration complexity and the iteration cost, we have that the total complexity of the classical ADMM algorithm is

$$\mathcal{O}\left(m^3 + m^2 n^\omega + (m^2 + s_A + n^\omega) \cdot \frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right).$$

This completes the proof. \square

C Implementation details for QADMM

C.1 Classical implementation of linear mapping

The svec operator transform a $n \times n$ symmetric matrix X to a vector $\text{svec}(X) \in \mathbb{R}^{n(n+1)/2}$, which contains the upper triangular part of X excluding the diagonal. The smat operator transforms a vector $\text{svec}(X)$ back to a symmetric matrix $X \in \mathbb{S}^n$. More specifically, the svec and smat operators are defined as follows:

$$\text{svec}(X) = (X_{11}, X_{12}, \dots, X_{1n}, X_{22}, \dots, X_{2n}, \dots, X_{nn})^\top, \quad (\text{C.1a})$$

$$\text{smat}((X_{11}, X_{12}, \dots, X_{1n}, X_{22}, \dots, X_{2n}, \dots, X_{nn})^\top) = X. \quad (\text{C.1b})$$

On classical computers, the linear operator

$$\mathcal{A} : \mathbb{S}^n \rightarrow \mathbb{R}^m, \quad \mathcal{A}(X) = \left(\langle A^{(1)}, X \rangle, \langle A^{(2)}, X \rangle, \dots, \langle A^{(m)}, X \rangle \right)^\top$$

can be represented as a matrix $\mathbf{A} \in \mathbb{R}^{m \times n(n+1)/2}$, where the i -th row of \mathbf{A} is $\text{svec}(A^{(i)})$. Given a symmetric matrix $X \in \mathbb{S}^n$, a vector $y \in \mathbb{R}^m$, the linear operator \mathcal{A} and its adjoint operator \mathcal{A}^* is computed as follows:

$$\mathcal{A}(X) = \mathbf{A} \text{svec}(X), \quad \mathcal{A}^*(y) = \text{smat}(\mathbf{A}^\top y). \quad (\text{C.2})$$

Assume $\mathbf{A} \in \mathbb{R}^{m \times n(n+1)/2}$ is a sparse matrix with s_A non-zero entries.

Complexity of computing $\mathcal{A}(X)$

The cost of computing $\mathcal{A}(X)$ is the sum of the vectorization cost of $\text{svec}(X)$ and the matrix-vector multiplication cost of $\mathbf{A}(X)$. The vectorization cost is $\mathcal{O}(n^2)$, and the matrix-vector multiplication cost is $\mathcal{O}(s_A)$. Therefore, the total cost of computing $\mathcal{A}(X)$ is $T_A = \mathcal{O}(s_A + n^2)$. As a special case, if \mathbf{A} is a dense matrix, then the total cost of computing $\mathcal{A}(X)$ is $\mathcal{O}(mn^2 + n^2) = \mathcal{O}(mn^2)$.

Complexity of computing $\mathcal{A}^*(y)$

The cost of computing $\mathcal{A}^*(y)$ is the sum of the matrix-vector multiplication cost of $\mathbf{A}^\top y$ and the matrix reconstruction cost of $\text{smat}(\mathbf{A}^\top y)$. The matrix-vector multiplication cost is $\mathcal{O}(s_A)$, and the matrix reconstruction cost is $\mathcal{O}(n^2)$. Therefore, the total cost of computing $\mathcal{A}^*(y)$ is $T_{A^*} = \mathcal{O}(s_A + n^2)$. As a special case, if \mathbf{A} is a dense matrix, then the total cost of computing $\mathcal{A}^*(y)$ is $\mathcal{O}(mn^2 + n^2) = \mathcal{O}(mn^2)$.

C.2 Linear system in y-update

Once u^{k+1} has been computed classically and the normalized quantum state $|\hat{u}^{k+1}\rangle$ prepared, we then solve the linear system

$$(\mathbf{A}\mathbf{A}^*) \frac{\hat{y}^{k+1}}{\|u^{k+1}\|} = |\hat{u}^{k+1}\rangle \quad \text{or} \quad (\mathbf{A}\mathbf{A}^\top) \frac{\hat{y}^{k+1}}{\|u^{k+1}\|} = |\hat{u}^{k+1}\rangle.$$

However, the block-encoding of $\mathbf{A}\mathbf{A}^*$ is not available directly. By introducing an auxiliary variable $t \in \mathbb{R}^{n^2}$, the linear system is equivalent to

$$\begin{bmatrix} 0 & \mathbf{A} \\ \mathbf{A}^\top & -\mathbf{I}_{n^2} \end{bmatrix} \begin{bmatrix} \frac{\hat{y}^{k+1}}{\|u^{k+1}\|} \\ t \end{bmatrix} = \begin{bmatrix} |\hat{u}^{k+1}\rangle \\ 0 \end{bmatrix}.$$

By Lemma 50 in [22], if \mathbf{A} is stored in QRAM, then a $(\|\mathbf{M}\|_F, \mathcal{O}(\log(n)), \epsilon)$ -block-encoding of the matrix $\mathbf{M} := \begin{bmatrix} 0 & \mathbf{A} \\ \mathbf{A}^\top & -\mathbf{I}_{n^2} \end{bmatrix}$ can be constructed in time $\tilde{\mathcal{O}}_{\frac{n}{\epsilon}}(1)$. Since this coefficient is independent of the number of iterations, we can construct the block-encoding of \mathbf{M} once and use it in each iteration. After that, we employ QLS to solve the linear system and perform quantum tomography to extract the information of \hat{y}^{k+1} .

C.3 LCU in V-update


Let the $(\alpha_i, \lceil \log(n) \rceil + 2, \xi)$ -block-encodings of $A^{(1)}, \dots, A^{(m)}, C, X^k$ be denoted by $U_{A^{(i)}}, U_C, U_{X^k}$, where $\alpha_i = \|A^{(i)}\|_F$ and $\alpha_{m+1} = \|C\|_F$, $\alpha_{m+2} = \|X^k\|_F$. Our goal is implementing a LCU circuit to obtain the matrix

$$\sum_{i=1}^m \alpha_i y_i^{k+1} U_{A^{(i)}} + \alpha_{m+1} U_C - \gamma \alpha_{m+2} U_{X^k}. \quad (\text{C.3})$$

Let $r = \lceil \log(m) \rceil + 2$ be the number of ancilla qubits. Define preparation operator O_{prep} and select operators $O_{\text{sel}}^{(1)}, O_{\text{sel}}^{(2)}$ as follows:

$$\begin{aligned} O_{\text{prep}} : |0\rangle &\mapsto \frac{1}{\sqrt{e_V^{k+1}}} \left(\sum_{j=0}^{m-1} \sqrt{\alpha_{j+1} y_{j+1}^{k+1}} |j\rangle + \sqrt{\alpha_{m+1}} |m\rangle + \sqrt{\gamma \alpha_{m+2}} |m+1\rangle \right), \\ O_{\text{sel}}^{(1)} &= \sum_{j=0}^{m-1} |j\rangle\langle j| \otimes U_{A^{(j+1)}} + |m\rangle\langle m| \otimes U_C + |m+1\rangle\langle m+1| \otimes \text{Id}, \\ O_{\text{sel}}^{(2)} &= \sum_{j=0}^{m-1} |j\rangle\langle j| \otimes \text{Id} + |m\rangle\langle m| \otimes \text{Id} - |m+1\rangle\langle m+1| \otimes U_{X^k}. \end{aligned} \quad (\text{C.4})$$

A demonstration of the LCU is given below.

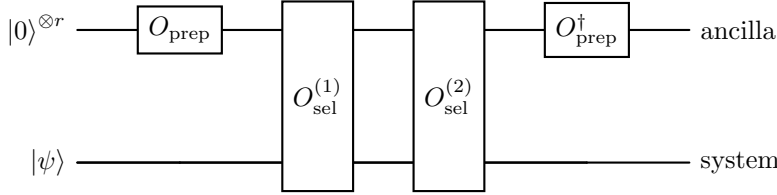

The preparation operator O_{prep} can be efficiently constructed using QRAM. Since $A^{(i)}$ and C are fixed matrices, we can construct $O_{\text{sel}}^{(1)}$ by one query to the controlled version of the block-encodings of $A^{(i)}$ and C .

D Polynomial proximal operator

Lemma D.1. 1. For any $\epsilon > 0$, there exists a monotone increasing polynomial $g(x)$ on $[-1, 1]$ of degree $d = \mathcal{O}(\frac{1}{\epsilon})$ such that $g(-1) = 0$ and

$$|\max(0, x) - g(x)| \leq \epsilon, \quad \forall x \in [-1, 1]. \quad (\text{D.1})$$

2. Let \mathbf{g} be the corresponding spectral operator of g . Then \mathbf{g} is a polynomial eigenvalue transformation on \mathbb{S}^n and satisfies that

$$\|\text{Proj}_{\mathbb{S}_+^n}(X) - \mathbf{g}(X)\|_2 \leq \epsilon, \quad \forall X \in \{X \in \mathbb{S}^n : \|X\|_2 \leq 1\}. \quad (\text{D.2})$$

Proof. 1. Denote $g_0 = \max(x, 0), x \in [-1, 1]$. A well-known result in approximation theory states that a piecewise monotonic function g can be approximated by a polynomial function with the same monotonicity [1, 34, 36, 37]. By Lemma in [36] there exists a sequence of polynomials $\{p_n\}_{n=1}^\infty$ such that

$$\|g_0 - p_n\|_\infty \leq C_2 M \frac{1}{n}, \quad (\text{D.3})$$

where C_2 is an absolute constant, $\omega(g_0; \frac{1}{n})$ is the modulus of continuity of g_0 on the interval $[-1, 1]$, and $M = 1$ is the Lipschitz constant of g_0 . The construction of the polynomial p_n is discussed in Section 3 of [36]. This is equivalent to the following statement: for any $\epsilon' > 0$, there exists a monotone increasing polynomial p_n of degree $n = \mathcal{O}(\frac{1}{\epsilon'})$ such that

$$\|g_0 - p_n\|_\infty \leq \epsilon'. \quad (\text{D.4})$$

Our goal is to find a polynomial such that it also satisfies the condition $g(x) \geq 0$. This can be achieved by the following transformation:

$$g(x) = p_n(x) - \min(0, p_n(-1)).$$

Take $\epsilon' = \frac{1}{2}\epsilon$ then

$$|g(x) - g_0(x)| \leq |g(x) - p_n(x)| + |p_n(x) - g_0(x)| \leq 2\epsilon' = \epsilon.$$

2. By eigenvalue decomposition as $X = U \text{diag}(\lambda_1, \dots, \lambda_n) U^\top$, we have

$$\|\text{Proj}_{\mathbb{S}_+^n}(X) - \mathbf{g}(X)\|_2 = \max_{1 \leq i \leq n} |g_0(\lambda_i) - g(\lambda_i)| \leq \epsilon.$$

This completes the proof. \square

Lemma D.2. *Let $g : \mathbb{R} \rightarrow \mathbb{R}$ be a smooth function satisfying $g'(x) > 0$ for all $x \in \mathbb{R}$. Denote g^{-1} as the inverse function of g . Then*

$$h(x) = \begin{cases} \frac{1}{\gamma} \int_0^x (g^{-1}(z) - z) dz, & \text{if } x \geq 0, \\ \infty, & \text{if } x < 0, \end{cases} \quad (\text{D.5})$$

satisfies $(1 + \gamma \partial h(x))^{-1} = g(x)$.

2. For $X \in \mathbb{S}^n$ with eigenvalue decomposition $X = U \text{diag}(\lambda_1, \dots, \lambda_n) U^\top$, where U is a unitary matrix and λ_i are the eigenvalues of X . Let $\mathbf{g}(X) = U \text{diag}(g(\lambda_1), \dots, g(\lambda_n)) U^\top$ be the eigenvalue transformation with respect to g . Define $\mathbf{h} : \mathbb{S}^n \rightarrow \mathbb{R}$ as $\mathbf{h}(X) = \sum_{i=1}^n h(\lambda_i)$, where h is defined in (D.5). Then $\mathbf{h}(S)$ satisfies $(\text{Id} + \partial \mathbf{h}(S))^{-1} = \mathbf{g}(S)$.

Proof. 1. The continuity and monotonicity of g implies that g^{-1} is also continuous and strictly monotonically increasing. From the definition of the proximal operator, we have

$$g(x) = \arg \min_{u \in \mathbb{R}} \left\{ \frac{1}{2} \|x - u\|^2 + \gamma h(u) \right\}. \quad (\text{D.6})$$

This is equivalent to $0 \in g(x) - x + \gamma \partial h(g(x))$ or $\frac{1}{\gamma} (x - g^{-1}(x)) \in \partial h(x)$. Therefore the design of h satisfies the

$$(1 + \gamma \partial h(x))^{-1} = g(x).$$

2. By eigenvalue decomposition as $X = U \text{diag}(\lambda_1, \dots, \lambda_n) U^\top$,

$$\mathbf{g}(X) = \arg \min_{Y \in \mathbb{S}^n} \left\{ \frac{1}{2} \|X - Y\|_F^2 + \gamma \mathbf{h}(Y) \right\} \quad (\text{D.7})$$

is equivalent to the following optimization problem:

$$\text{diag}(g(\lambda_1), \dots, g(\lambda_n)) = \arg \min_{Y' \in \mathbb{S}^n} \left\{ \frac{1}{2} \|U \text{diag}(\lambda_1, \dots, \lambda_n) U^\top - U Y' U^\top\|_F^2 + \gamma \sum_{i=1}^n h(\lambda_i) \right\}.$$

The minimum is achieved if and only if $g(\lambda_i) = \arg \min_{u \in \mathbb{R}} \left\{ \frac{1}{2} \|\lambda_i - u\|^2 + \gamma h(u) \right\}, i = 1, \dots, n$. Combining the above equations with the result in part 1, we have the desired result. \square

E Complexity analysis

E.1 Iteration number of QADMM for SDP

QADMM algorithm for solving

$$\min_{y \in \mathcal{Y}, S \in \mathcal{S}} -b^\top y \quad \text{s.t.} \quad A^*(y) + S = C, \quad (\text{E.1})$$

iterates in the following scheme:

$$\hat{y}^{k+1} = -(\mathcal{A}\mathcal{A}^*)^{-1} (\gamma(\mathcal{A}(X^k) - b) + \mathcal{A}(S^k - C)), \quad (\text{E.2a})$$

$$\tilde{y}^{k+1} := \hat{y}^{k+1} + \Delta \tilde{y}^{k+1}, \quad \|\Delta \tilde{y}^{k+1}\|_2 \leq \delta_{\tilde{y}}, \quad (\text{E.2b})$$

$$y^{k+1} := \text{Proj}_{\mathcal{Y}}(\tilde{y}^{k+1} + \Delta y^{k+1}), \quad \|\Delta y^{k+1}\|_2 \leq \delta_y, \quad (\text{E.2c})$$

$$\hat{V}^{k+1} := C - \mathcal{A}^*(\tilde{y}^{k+1}) - \gamma X^k, \quad (\text{E.2d})$$

$$\tilde{V}^{k+1} := \hat{V}^{k+1} + \Delta V^{k+1}, \quad \|\Delta V^{k+1}\|_F \leq \delta_V, \quad (\text{E.2e})$$

$$\tilde{S}^{k+1} := \mathbf{g}_1(\tilde{V}^{k+1}), \quad (\text{E.2f})$$

$$S^{k+1} := \text{Proj}_{\mathcal{S}}(\tilde{S}^{k+1} + \Delta S^{k+1}), \quad \|\Delta S^{k+1}\|_F \leq \delta_S, \quad (\text{E.2g})$$

$$\tilde{X}^{k+1} := -\frac{1}{\gamma} \mathbf{g}_2(\tilde{V}^{k+1}), \quad (\text{E.2h})$$

$$X^{k+1} := \text{Proj}_{\mathcal{X}}(\tilde{X}^{k+1} + \Delta X^{k+1}), \quad \|\Delta X^{k+1}\|_F \leq \delta_X. \quad (\text{E.2i})$$

The variables with tilde notations $\tilde{y}^{k+1}, \tilde{S}^{k+1}, \tilde{X}^{k+1}$ stand for quantum representations and variables without any notation $y^{k+1}, S^{k+1}, X^{k+1}$ stand for classical representations. Additionally, variables with hat notations $\hat{y}^{k+1}, \hat{V}^{k+1}$ are intermediate variables. The error terms $\Delta \tilde{y}^{k+1}, \Delta y^{k+1}, \Delta V^{k+1}, \Delta S^{k+1}, \Delta X^{k+1}$ in (E.2a)–(E.2i) are used to account for the inexactness, which are bounded by $\delta_{\tilde{y}}, \delta_y, \delta_V, \delta_S, \delta_X$, respectively. Let

$$\hat{S}^{k+1} = \text{Proj}_{\mathbb{S}_+^n}(\tilde{V}^{k+1}), \quad (\text{E.3a})$$

$$\Delta \tilde{S}^{k+1} = \tilde{S}^{k+1} - \hat{S}^{k+1}, \quad (\text{E.3b})$$

$$\hat{X}^{k+1} = -\frac{1}{\gamma} (\text{Id} - \text{Proj}_{\mathbb{S}_+^n})(\tilde{V}^{k+1}) = \frac{1}{\gamma} (\hat{S}^{k+1} - \tilde{V}^{k+1}), \quad (\text{E.3c})$$

$$\Delta \tilde{X}^{k+1} = \tilde{X}^{k+1} - \hat{X}^{k+1}, \quad (\text{E.3d})$$

be the error term between the polynomial QSVT and projection operator. By Lemma D.1, there exists a polynomial \mathbf{g}_1 with degree $\mathcal{O}(\frac{B}{\epsilon})$ such that $\|\text{Proj}_{\mathbb{S}_+^n}(V) - \mathbf{g}_1(V)\|_2 \leq \epsilon$ for any $V \in \{V \in \mathbb{S}^n \mid \|V\|_2 \leq B\}$. Similar properties hold for \mathbf{g}_2 . Assume \tilde{V}^{k+1} has a uniform bound B . After we choose proper polynomials \mathbf{g}_1 and \mathbf{g}_2 with degree $\mathcal{O}(\frac{B}{\delta_S}), \mathcal{O}(\frac{B}{\delta_X})$, respectively, it holds that

$$\begin{aligned} \|\Delta \tilde{S}^{k+1}\|_2 &\leq \delta_{\tilde{S}}, \\ \|\Delta \tilde{X}^{k+1}\|_2 &\leq \delta_{\tilde{X}}. \end{aligned} \quad (\text{E.4})$$

Theorem E.1. (ergodic convergence) Assume (X^*, y^*, S^*) satisfies the optimality conditions. The average iterate $(\bar{X}^K, \bar{y}^K, \bar{S}^K) := \frac{1}{K} \sum_{k=0}^{K-1} (\tilde{X}^k, \hat{y}^k, \tilde{S}^k)$ generated by QADMM satisfies

$$f(\bar{y}^K) - f(y^*) \leq \mathcal{O}\left(\frac{\|X^0 - X^*\|_F^2 + \|S^0 - S^*\|_F^2}{K} + \delta\right), \quad (\text{E.5a})$$

$$\|\mathcal{A}^*(\bar{y}^K) + \bar{S}^K - C\|_2 \leq \mathcal{O}\left(\frac{\|X^0 - X^*\|_F + \|S^0 - S^*\|_F}{K} + \delta\right), \quad (\text{E.5b})$$

where $\delta = \Theta(\delta_{\tilde{y}} + \delta_y + \delta_V + \delta_X + \delta_S)$ is the error term.

Proof. For notational convenience, denote $z^k := (\tilde{X}^k, \hat{y}^k, \tilde{S}^k)$, $z := (X, y, S)$, $\tilde{X}^0 = X^0$, $\tilde{S}^0 = S^0$, and $\hat{y}^0 = y^0$. Let the primal-dual gap function be

$$Q(z^k, z) = f(\hat{y}^k) + \langle X, \mathcal{A}^*(\hat{y}^k) + \tilde{S}^k - C \rangle - f(y) - \langle \tilde{X}^k, \mathcal{A}^*(y) + S - C \rangle. \quad (\text{E.6})$$

By (E.3a) and the property of projection operator, we have

$$\langle \hat{S}^{k+1} - \tilde{V}^{k+1}, \hat{S}^{k+1} - S \rangle \leq 0, \quad \forall S \in \mathbb{S}_+^n.$$

This together with (E.3c) yields

$$\langle \hat{X}^{k+1}, \hat{S}^{k+1} - S \rangle \leq 0. \quad (\text{E.7})$$

It follows from (E.2a)–(E.2i) that

$$\begin{aligned} b &= \mathcal{A}(X^k + \frac{1}{\gamma}(\mathcal{A}^*(\hat{y}^{k+1}) + S^k - C)) \quad (\text{by (E.2a)}) \\ &= \mathcal{A}(X^k + \frac{1}{\gamma}(\mathcal{A}^*(\tilde{y}^{k+1} - \Delta \tilde{y}^{k+1}) + S^k - C)) \quad (\text{by (E.2b)}) \\ &= \mathcal{A}(X^k) + \mathcal{A}(\hat{X}^{k+1} - X^k - \frac{1}{\gamma}(\hat{S}^{k+1} - S^k)) \quad (\text{by (E.2d) and (E.3c)}) \\ &= \mathcal{A}(\hat{X}^{k+1} - \frac{1}{\gamma}(\hat{S}^{k+1} - S^k)). \end{aligned} \quad (\text{E.8})$$

Combining this with (E.6) and (E.7), we have

$$\begin{aligned}
Q(z^{k+1}, z) &= -b^\top(\hat{y}^{k+1} - y) + \langle X, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - b \rangle - \langle \tilde{X}^{k+1}, \mathcal{A}^*(y) + S - b \rangle \\
&\leq -b^\top(\hat{y}^{k+1} - y) + \langle X, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - b \rangle - \langle \tilde{X}^{k+1}, \mathcal{A}^*(y) + S - b \rangle \\
&\quad - \langle \hat{X}^{k+1}, \hat{S}^{k+1} - S \rangle \quad (\text{by (E.7)}) \\
&= -\langle \hat{X}^{k+1} - \frac{1}{\gamma}(\tilde{S}^{k+1} - S^k), \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle - \langle \Delta \tilde{S}^{k+1}, \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \\
&\quad + \langle X, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - b \rangle - \langle \tilde{X}^{k+1}, \mathcal{A}^*(y) + S - b \rangle - \langle \hat{X}^{k+1}, \hat{S}^{k+1} - S \rangle \\
&\quad + \langle \hat{X}^{k+1}, \Delta \tilde{S}^{k+1} \rangle \quad (\text{by (E.8) and (E.2f)}) \\
&= -\langle \hat{X}^{k+1} - \frac{1}{\gamma}(\hat{S}^{k+1} - S^k), \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle + \langle X - \tilde{X}^{k+1}, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - C \rangle \\
&\quad + \langle \tilde{X}^{k+1}, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - C \rangle - \langle \tilde{X}^{k+1}, \mathcal{A}^*(y) + S - C \rangle - \langle \hat{X}^{k+1}, \hat{S}^{k+1} - S \rangle \\
&\quad + \langle \Delta \tilde{S}^{k+1}, \hat{X}^{k+1} - \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \\
&= \langle X - \tilde{X}^{k+1}, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - C \rangle + \frac{1}{\gamma} \langle \hat{S}^{k+1} - S^k, \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \\
&\quad + \langle \tilde{X}^{k+1} - \hat{X}^{k+1}, \mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - C \rangle + \langle \Delta \tilde{S}^{k+1}, \hat{X}^{k+1} - \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \\
&= \gamma \langle X - \tilde{X}^{k+1}, \hat{X}^{k+1} - X^k + \frac{1}{\gamma} \Delta \tilde{V}^{k+1} \rangle + \frac{1}{\gamma} \langle \hat{S}^{k+1} - S^k, \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \\
&\quad + \gamma \langle \Delta \tilde{X}^{k+1}, \hat{X}^{k+1} - X^k \rangle + \langle \Delta \tilde{S}^{k+1}, \hat{X}^{k+1} - \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle \quad (\text{by (E.3c), (E.2h), (E.2d)}) \\
&\leq \gamma \langle X - \tilde{X}^{k+1}, \tilde{X}^{k+1} - \tilde{X}^k \rangle + \frac{1}{\gamma} \langle \tilde{S}^{k+1} - \tilde{S}^k, \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle + e^{(1)},
\end{aligned}$$

where $e^{(1)} = 2\delta_{\tilde{V}}R_X + \delta_{\tilde{X}}R_X + \delta_{\tilde{S}}(R_X + 2R_y)$ is the upper bound of $\langle X - \tilde{X}^{k+1}, \Delta V^{k+1} \rangle + \gamma \langle \Delta \tilde{X}^{k+1}, \hat{X}^{k+1} - X^k \rangle + \langle \Delta \tilde{S}^{k+1}, \hat{X}^{k+1} - \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle$. Note that

$$2\langle X - \tilde{X}^{k+1}, \tilde{X}^{k+1} - \tilde{X}^k \rangle = \|X - \tilde{X}^k\|_F^2 - \|X - \tilde{X}^{k+1}\|_F^2 - \|\tilde{X}^k - \tilde{X}^{k+1}\|_F^2.$$

and

$$\begin{aligned}
2\langle \tilde{S}^{k+1} - \tilde{S}^k, \mathcal{A}^*(\hat{y}^{k+1} - y) \rangle &= \|\mathcal{A}^*(y) + \tilde{S}^k - C\|_F^2 - \|\mathcal{A}^*(y) + \tilde{S}^{k+1} - C\|_F^2 \\
&\quad + \|\mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^{k+1} - C\|_F^2 - \|\mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^k - C\|_F^2 \\
&= \|\mathcal{A}^*(y) + \tilde{S}^k - C\|_F^2 - \|\mathcal{A}^*(y) + \tilde{S}^{k+1} - C\|_F^2 \\
&\quad + \gamma^2 \left\| X^k - \hat{X}^{k+1} - \frac{1}{\gamma} \Delta \tilde{V}^{k+1} \right\|_F^2 - \|\mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^k - C\|_F^2 \\
&\leq \|\mathcal{A}^*(y) + \tilde{S}^k - C\|_F^2 - \|\mathcal{A}^*(y) + \tilde{S}^{k+1} - C\|_F^2 \\
&\quad + \gamma^2 \left\| \tilde{X}^k - \tilde{X}^{k+1} \right\|_F^2 - \|\mathcal{A}^*(\hat{y}^{k+1}) + \tilde{S}^k - C\|_F^2 + e^{(2)},
\end{aligned}$$

where $e^{(2)} = \gamma^2(\delta_X + \delta_{\tilde{X}} + \frac{1}{\gamma}\delta_{\tilde{V}})(4R_X + \frac{1}{\gamma}\delta_{\tilde{V}})$ is the upper bound of $\gamma^2 \left\| X^k - \hat{X}^{k+1} - \frac{1}{\gamma} \Delta \tilde{V}^{k+1} \right\|_F^2 -$

$\gamma^2 \left\| \tilde{X}^k - \tilde{X}^{k+1} \right\|_F^2$. Thus we conclude that

$$\begin{aligned}
& Q(z^{k+1}, z) \\
& \leq \frac{\gamma}{2} \left(\left\| \tilde{X}^k - X \right\|_F^2 - \left\| \tilde{X}^{k+1} - X \right\|_F^2 \right) \\
& + \frac{1}{2\gamma} \left(\left\| \mathcal{A}^* y + \tilde{S}^k - C \right\|_F^2 - \left\| \mathcal{A}^*(y) + \tilde{S}^{k+1} - C \right\|_F^2 - \left\| \mathcal{A}^*(\tilde{y}^{k+1}) + \tilde{S}^k - C \right\|_F^2 \right) + e^{(1)} + e^{(2)} \\
& \leq \frac{\gamma}{2} \left(\left\| \tilde{X}^k - X \right\|_F^2 - \left\| \tilde{X}^{k+1} - X \right\|_F^2 \right) \\
& + \frac{1}{2\gamma} \left(\left\| \mathcal{A}^*(y) + \tilde{S}^k - C \right\|_F^2 - \left\| \mathcal{A}^*(y) + \tilde{S}^{k+1} - C \right\|_F^2 \right) + e^{(1)} + e^{(2)}.
\end{aligned}$$

Summing up the above inequality from $k = 0, \dots, K-1$, we obtain

$$\begin{aligned}
\sum_{k=1}^K Q(z^k, z) & \leq \frac{\gamma}{2} \left(\left\| \tilde{X}^0 - X \right\|_F^2 - \left\| \tilde{X}^K - X \right\|_F^2 \right) \\
& + \frac{1}{2\gamma} \left(\left\| \mathcal{A}^*(y) + \tilde{S}^k - C \right\|_F^2 - \left\| \mathcal{A}^*(y) + \tilde{S}^{k+1} - C \right\|_F^2 \right) + K e^{(1)} + K e^{(2)}.
\end{aligned} \tag{E.9}$$

Setting $z = z^*$ in the above inequality and using the facts that $\mathcal{A}^* y^* + \tilde{S}^k - C = \tilde{S}^k - S^*$ and $Q(z^k, z^*) \geq 0$, we see that

$$\left\| \tilde{X}^K - X^* \right\|_F^2 \leq \left\| \tilde{X}^0 - X^* \right\|_F^2 + \frac{1}{\gamma^2} \left\| \tilde{S}^0 - S^* \right\|_F^2 + \frac{2K}{\gamma} (e^{(1)} + e^{(2)}),$$

and hence that

$$\begin{aligned}
\left\| \tilde{X}^K - \tilde{X}^0 \right\|_F & \leq \left\| \tilde{X}^0 - X^* \right\|_F + \left\| \tilde{X}^K - X^* \right\|_F \\
& \leq 2 \left\| \tilde{X}^0 - X^* \right\|_F + \frac{1}{\gamma} \left\| \tilde{S}^0 - S^* \right\|_F + \sqrt{\frac{2K}{\gamma} (e^{(1)} + e^{(2)})}.
\end{aligned} \tag{E.10}$$

From the definition of (\bar{y}^K, \bar{S}^K) and (E.3c), (E.2h), (E.2d), we have

$$\begin{aligned}
\left\| \mathcal{A}^*(\bar{y}^K) + \bar{S}^K - C \right\|_F & = \left\| \frac{\gamma}{K} \sum_{k=0}^{K-1} (\tilde{X}^k - \tilde{X}^{k-1} - \Delta \tilde{X}^k - \Delta X^{k-1} + \frac{1}{\gamma} \Delta V^k) \right\|_F \\
& \leq \left\| \frac{\gamma}{K} (\tilde{X}^K - \tilde{X}^0) \right\|_F + \delta_{\tilde{X}} + \delta_X + \frac{1}{\gamma} \delta_{\tilde{V}} \\
& \leq \frac{\gamma}{K} \left(2 \left\| \tilde{X}^0 - X^* \right\|_F + \left\| \tilde{X}^K - X^* \right\|_F + \sqrt{\frac{2K}{\gamma} (e^{(1)} + e^{(2)})} \right) \\
& \quad + \delta_{\tilde{X}} + \delta_X + \frac{1}{\gamma} \delta_{\tilde{V}}.
\end{aligned} \tag{E.11}$$

This relation implies that (E.5b) holds. Moreover, letting $z = (X^*, y^*, S^*)$ in (E.9). Using the fact that

$$\begin{aligned}
\frac{1}{K} \sum_{k=1}^K Q(z^K, (X^*, y^*, S^*)) & \geq Q(\bar{z}^K, (X^*, y^*, S^*)) \\
& = f(\bar{y}^K) - f(y^*) + \langle X^*, \mathcal{A}^*(\bar{y}^k) + \bar{S}^K - C \rangle,
\end{aligned}$$

we have

$$\begin{aligned}
f(\bar{y}^K) - f(y^*) & \leq \frac{1}{2K} \left(\gamma \left\| \tilde{X}^0 - X^* \right\|_F^2 - \gamma \left\| \tilde{X}^K - X^* \right\|_F^2 + \frac{1}{\gamma} \left\| \tilde{S}^0 - S^* \right\|_F^2 - \frac{1}{\gamma} \left\| \tilde{S}^K - S^* \right\|_F^2 \right) \\
& \quad + e^{(1)} + e^{(2)} + \left\| X^* \right\|_F \left\| \mathcal{A}^*(\bar{y}^k) + \bar{S}^K - C \right\|_F.
\end{aligned}$$

Combining this with (E.11) gives (E.5a). This completes the proof. \square

Corollary E.1. *Let the initial point be $(X^0, y^0, S^0) = (0, 0, 0)$. Then the output of QADMM satisfies*

$$\begin{aligned} f(y_{out}) - f(y^*) &\leq \mathcal{O}\left(\frac{R_X^2 + R_S^2}{K} + \delta\right), \\ \|\mathcal{A}^*(y_{out}) + S_{out} - C\|_2 &\leq \mathcal{O}\left(\frac{R_X + R_S}{K} + \delta\right). \end{aligned} \quad (\text{E.12})$$

Proof. Since $\|y_{out} - \bar{y}^K\|_2 \leq \delta_{\bar{y}} + \delta_y$ and $\|S_{out} - \bar{S}^K\|_2 \leq \delta_S$, the desired result follows from Theorem E.1. \square

Corollary E.2. *Assume $\delta = \Theta(\epsilon_{abs})$ and let the initial point be $(X^0, y^0, S^0) = (0, 0, 0)$. To achieve an ϵ_{abs} -accuracy solution (y_{out}, S_{out}) satisfying $-b^\top y_{out} + b^\top y^* \leq \epsilon_{abs}$ and $\|\mathcal{A}^*(y_{out}) + S_{out} - C\|_2 \leq \epsilon_{abs}$, QADMM requires*

$$K = \mathcal{O}\left(\frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right)$$

iterations, where R_X and R_S are the upper bounds of $\|X^\|_F$ and $\|S^*\|_F$, respectively.*

Proof. This follows from Corollary E.1 and the fact that $\delta = \Theta(\epsilon_{abs})$. \square

E.2 Complexity of QADMM for SDP

Theorem E.2. *With the accuracy choice $\delta_{\bar{y}}, \delta_y, \delta_V, \delta_S, \delta_X = \Theta(\epsilon_{abs})$ and $d = \mathcal{O}(\frac{1+R_X+R_Y}{\epsilon_{abs}})$, a quantum implementation of QADMM with the use of a QRAM of size $\tilde{\mathcal{O}}(2^{n^2/\epsilon_{abs}})$ produces an ϵ_{abs} -accuracy solution using at most $\mathcal{O}\left((s_A + n^2) \frac{R_X^2 + R_S^2}{\epsilon_{abs}}\right)$ classical operations and*

$$\tilde{\mathcal{O}}\left((m\kappa_A^2(1+R_y)^2 + n^2(\kappa_A^2(1+R_y) + R_X)) \frac{(R_X + R_S)^3}{\epsilon_{abs}^3}\right)$$

quantum gates and queries.

Proof. The result follows from the complexity of each iteration of QADMM for SDP and the number of iterations in Corollary E.1. \square

References

- [1] R. M. Aarts. Comonotone approximation. MathWorld—A Wolfram Web Resource, n.d. URL <https://mathworld.wolfram.com/ComonotoneApproximation.html>. Accessed May 14, 2025. (Cited on page 17.)
- [2] S. Arora, E. Hazan, and S. Kale. Multiplicative weights method: a meta-algorithm and its applications. *Theory Comput.(2012, to appear)*, 2006. (Cited on page 2.)
- [3] B. Augustino, G. Nannicini, T. Terlaky, and L. F. Zuluaga. Quantum interior point methods for semidefinite optimization. *Quantum*, 7:1110, 2023. (Cited on pages 2, 4, and 13.)
- [4] J. Banks, S. Mohanty, and P. Raghavendra. Local statistics, semidefinite programming, and community detection. In *Proceedings of the 2021 ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 1298–1316. SIAM, 2021. (Cited on page 2.)
- [5] M. Berta, F. Borderi, O. Fawzi, and V. B. Scholz. Semidefinite programming hierarchies for constrained bilinear optimization. *Mathematical Programming*, pages 1–49, 2022. (Cited on page 2.)

- [6] D. Bertsimas and Y. Ye. Semidefinite relaxations, multivariate normal distributions, and order statistics. In *Handbook of Combinatorial Optimization: Volume 1–3*, pages 1473–1491. Springer, 1998. (Cited on page 2.)
- [7] S. Boyd, L. El Ghaoui, E. Feron, and V. Balakrishnan. *Linear matrix inequalities in system and control theory*. SIAM, 1994. (Cited on page 2.)
- [8] S. Boyd, N. Parikh, E. Chu, B. Peleato, J. Eckstein, et al. Distributed optimization and statistical learning via the alternating direction method of multipliers. *Foundations and Trends® in Machine learning*, 3(1):1–122, 2011. (Cited on page 2.)
- [9] F. G. Brandão, A. Kalev, T. Li, C. Y.-Y. Lin, K. M. Svore, and X. Wu. Quantum SDP solvers: Large speed-ups, optimality, and applications to quantum learning. *arXiv preprint arXiv:1710.02581*, 2017. (Cited on pages 2 and 12.)
- [10] S. Chakraborty, A. Gilyén, and S. Jeffery. The power of block-encoded matrix powers: improved regression techniques via faster hamiltonian simulation. *arXiv preprint arXiv:1804.01973*, 2018. (Cited on page 5.)
- [11] A. Chambolle and T. Pock. A first-order primal-dual algorithm for convex problems with applications to imaging. *Journal of mathematical imaging and vision*, 40:120–145, 2011. (Cited on page 2.)
- [12] T. De Bie and N. Cristianini. Semi-supervised learning using semi-definite programming., 2006. (Cited on page 2.)
- [13] E. de Klerk and R. Sotirov. Improved semidefinite programming bounds for quadratic assignment problems with suitable symmetry. *Mathematical programming*, 133:75–91, 2012. (Cited on page 2.)
- [14] Q. Deng, Q. Feng, W. Gao, D. Ge, B. Jiang, Y. Jiang, J. Liu, T. Liu, C. Xue, Y. Ye, et al. An enhanced alternating direction method of multipliers-based interior point method for linear and conic optimization. *INFORMS Journal on Computing*, 2024. (Cited on pages 2 and 11.)
- [15] C. Ding, D. Sun, J. Sun, and K.-C. Toh. Spectral operators of matrices. *Mathematical Programming*, 168:509–531, 2018. (Cited on page 5.)
- [16] J. Douglas and H. H. Rachford. On the numerical solution of heat conduction problems in two and three space variables. *Transactions of the American mathematical Society*, 82(2):421–439, 1956. (Cited on page 14.)
- [17] Y. C. Eldar. A semidefinite programming approach to optimal unambiguous discrimination of quantum states. *IEEE Transactions on information theory*, 49(2):446–456, 2003. (Cited on page 2.)
- [18] B. Fares, D. Noll, and P. Apkarian. Robust control via sequential semidefinite programming. *SIAM Journal on Control and Optimization*, 40(6):1791–1820, 2002. (Cited on page 2.)
- [19] H. Fawzi, J. Saunderson, and P. A. Parrilo. Semidefinite approximations of the matrix logarithm. *Foundations of Computational Mathematics*, 19:259–296, 2019. (Cited on page 2.)
- [20] M. Fazlyab, M. Morari, and G. J. Pappas. An introduction to neural network analysis via semidefinite programming. In *2021 60th IEEE Conference on Decision and Control (CDC)*, pages 6341–6350. IEEE, 2021. (Cited on page 2.)
- [21] A. Gepp, G. Harris, and B. Vanstone. Financial applications of semidefinite programming: a review and call for interdisciplinary research. *Accounting & Finance*, 60(4):3527–3555, 2020. (Cited on page 2.)
- [22] A. Gilyén, Y. Su, G. H. Low, and N. Wiebe. Quantum singular value transformation and beyond: exponential improvements for quantum matrix arithmetics. In *Proceedings of the 51st Annual ACM SIGACT Symposium on Theory of Computing*, pages 193–204, 2019. (Cited on pages 4, 5, and 16.)

- [23] M. X. Goemans and D. P. Williamson. Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming. *Journal of the ACM (JACM)*, 42(6):1115–1145, 1995. (Cited on page 2.)
- [24] H. Jiang, T. Kathuria, Y. T. Lee, S. Padmanabhan, and Z. Song. A faster interior point method for semidefinite programming. In *2020 IEEE 61st annual symposium on foundations of computer science (FOCS)*, pages 910–918. IEEE, 2020. (Cited on page 11.)
- [25] G. R. Lanckriet, N. Cristianini, P. Bartlett, L. E. Ghaoui, and M. I. Jordan. Learning the kernel matrix with semidefinite programming. *Journal of Machine learning research*, 5(Jan):27–72, 2004. (Cited on page 2.)
- [26] Y. T. Lee, A. Sidford, and S. C.-w. Wong. A faster cutting plane method and its implications for combinatorial and convex optimization. In *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, pages 1049–1065. IEEE, 2015. (Cited on pages 2 and 11.)
- [27] F. Leibfritz and J. H. Maruhn. A successive SDP-NSDP approach to a robust optimization problem in finance. *Computational Optimization and Applications*, 44:443–466, 2009. (Cited on page 2.)
- [28] L. Lin. Lecture notes on quantum algorithms for scientific computation. *arXiv preprint arXiv:2201.08309*, 2022. (Cited on page 7.)
- [29] Z. Lin, H. Li, and C. Fang. *Alternating direction method of multipliers for machine learning*. Springer, 2022. (Cited on pages 2 and 15.)
- [30] A. Majumdar, G. Hall, and A. A. Ahmadi. Recent scalability improvements for semidefinite programming with applications in machine learning, control, and robotics. *Annual Review of Control, Robotics, and Autonomous Systems*, 3(1):331–360, 2020. (Cited on page 2.)
- [31] P. Mironowicz. Semi-definite programming and quantum information. *Journal of Physics A: Mathematical and Theoretical*, 57(16):163002, 2024. (Cited on page 2.)
- [32] M. Mohammadisiahroudi, B. Augustino, P. Sampourmahani, and T. Terlaky. Quantum computing inspired iterative refinement for semidefinite optimization. *Mathematical Programming*, pages 1–40, 2025. (Cited on pages 2, 3, and 13.)
- [33] G. Nannicini. Quantum algorithms for optimizers. *arXiv preprint arXiv:2408.07086*, 2024. (Cited on page 11.)
- [34] D. J. Newman. Efficient co-monotone approximation. *Journal of Approximation Theory*, 25(3):189–192, 1979. (Cited on page 17.)
- [35] B. O’donoghue, E. Chu, N. Parikh, and S. Boyd. Conic optimization via operator splitting and homogeneous self-dual embedding. *Journal of Optimization Theory and Applications*, 169:1042–1068, 2016. (Cited on pages 2 and 11.)
- [36] E. Passow and L. Raymon. Copositive polynomial approximation. *Journal of Approximation Theory*, 12(3):299–304, 1974. (Cited on page 17.)
- [37] E. Passow and L. Raymon. Monotone and comonotone approximation. *Proceedings of the American Mathematical Society*, 42(2):390–394, 1974. (Cited on page 17.)
- [38] P. Skrzypczyk and D. Cavalcanti. *Semidefinite programming in quantum information science*. IOP Publishing, 2023. (Cited on page 2.)
- [39] J. Van Apeldoorn and A. Gilyén. Improvements in quantum SDP-solving with applications. *arXiv preprint arXiv:1804.05058*, 2018. (Cited on pages 1, 2, 3, and 12.)
- [40] J. Van Apeldoorn, A. Gilyén, S. Gribling, and R. de Wolf. Quantum SDP-solvers: Better upper and lower bounds. In *2017 IEEE 58th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 403–414. IEEE, 2017. (Cited on pages 2, 3, and 12.)

- [41] L. Vandenberghe and S. Boyd. Applications of semidefinite programming. *Applied Numerical Mathematics*, 29(3):283–299, 1999. (Cited on page 2.)
- [42] I. Waldspurger, A. d’Aspremont, and S. Mallat. Phase recovery, maxcut and complex semidefinite programming. *Mathematical Programming*, 149:47–81, 2015. (Cited on page 2.)
- [43] X. Wang, K. Fang, and R. Duan. Semidefinite programming converse bounds for quantum communication. *IEEE Transactions on Information Theory*, 65(4):2583–2592, 2018. (Cited on page 2.)
- [44] Z. Wen, D. Goldfarb, and W. Yin. Alternating direction augmented Lagrangian methods for semidefinite programming. *Mathematical Programming Computation*, 2(3):203–230, 2010. (Cited on pages 2, 3, 6, and 11.)
- [45] H. Wolkowicz, R. Saigal, and L. Vandenberghe. *Handbook of semidefinite programming: theory, algorithms, and applications*, volume 27. Springer Science & Business Media, 2012. (Cited on page 2.)
- [46] Y. Zhang, S. Burer, W. Nick Street, K. P. Bennett, and E. Parrado-Hernández. Ensemble pruning via semi-definite programming. *Journal of machine learning research*, 7(7), 2006. (Cited on page 2.)
- [47] Q. Zhao, S. E. Karisch, F. Rendl, and H. Wolkowicz. Semidefinite programming relaxations for the quadratic assignment problem. *Journal of Combinatorial Optimization*, 2:71–109, 1998. (Cited on page 2.)