

# A Dual-Mode Framework for Mean-Field Systems: Model-Based $H_2/H_\infty$ Control with Jump Diffusions and Model-Free Reinforcement Learning

Huimin Han, Shaolin Ji, and Weihai Zhang, *Senior Member, IEEE*

**Abstract**—The stochastic  $H_2/H_\infty$  control problem for continuous-time mean-field stochastic differential equations with Poisson jumps over finite horizon is investigated in this paper. Continuous and jump diffusion terms in the system depend not only on the state but also on the control input, external disturbance, and mean-field components. By employing the quasi-linear technique and the method of completing the square, a mean-field stochastic jump bounded real lemma of the system is derived. This study demonstrates that the feasibility of the stochastic  $H_2/H_\infty$  control problem is equivalent to the solvability of four sets of cross-coupled generalized differential Riccati equations, which generalizes the previous results to mean-field jump-diffusion systems. To validate the proposed methodology, a numerical simulation example is provided to illustrate the effectiveness of the control strategy. This paper also presents a data-driven, model-free, off-policy reinforcement learning approach, which can be utilized to solve the  $H_\infty$  control problem for the mean-field systems discussed herein. The findings establish a systematic framework for designing robust controllers for interacting particle systems.

**Index Terms**— $H_2/H_\infty$  control, mean-field stochastic differential equation, Poisson jumps, Riccati differential equation, reinforcement learning

## I. INTRODUCTION

This paper addresses the design of stochastic  $H_2/H_\infty$  control for mean-field Poisson jump systems over a finite time horizon, as well as the model-free  $H_\infty$  control design for linear mean-field systems. Consider System (1), where  $u(t)$ ,  $v(t)$ , and  $z(t)$  denote the control input, external disturbance, and controlled output, respectively.  $\{\tilde{N}_p\}_{0 \leq t \leq T}$  denote a Poisson random martingale measure and  $\{W(t)\}_{0 \leq t \leq T}$  represent a one-dimensional standard Brownian motion defined on the complete probability space  $(\Omega, \mathcal{F}, P)$ . The system dynamics

are then given by:

$$\begin{cases} dx(t) = \{A(t)x(t) + \bar{A}(t)\mathbb{E}[x(t)] + B_2(t)u(t) + \bar{B}_2(t)\mathbb{E}[u(t)] + B_1(t)v(t) + \bar{B}_1(t)\mathbb{E}[v(t)]\} dt + \{C(t)x(t) + \bar{C}(t)\mathbb{E}[x(t)] + D_2(t)u(t) + \bar{D}_2(t)\mathbb{E}[u(t)] + D_1(t)v(t) + \bar{D}_1(t)\mathbb{E}[v(t)]\} dW(t) + \int_G \{E(t, \theta)x(t-) + \bar{E}(t, \theta)\mathbb{E}[x(t-)] + F_2(t, \theta)u(t) + \bar{F}_2(t, \theta)\mathbb{E}[u(t)] + F_1(t, \theta)v(t) + \bar{F}_1(t, \theta)\mathbb{E}[v(t)]\} \tilde{N}_p(d\theta, dt), \\ x(0) = x_0, \\ z(t) = \begin{pmatrix} M(t)x(t) \\ N(t)u(t) \end{pmatrix}, \end{cases} \quad (1)$$

where  $T < \infty$ ,  $t \in [0, T]$ , and  $N'(t)N(t) = I$ . All coefficients in (1) constitute deterministic continuous matrices with appropriate dimensions.

The distinctive feature of equation (1) lies in its incorporation of mean-field terms  $\mathbb{E}[x(t)]$ ,  $\mathbb{E}[u(t)]$ , and  $\mathbb{E}[v(t)]$ , which fundamentally differentiates it from conventional stochastic differential equations (SDEs). There are subsequent results about MF-SDEs and their applications, including mean-field games [1], [2], mean-field backward stochastic differential equations [3], and mean-field control systems [4]–[10].

Poisson jump processes model discontinuous dynamics prevalent in practical applications, particularly in financial markets. We refer the reader to [11] to obtain comprehensive information about financial modeling with jump processes. In 2011, Lin and Zhang's research [12] on  $H_\infty$  control for SDEs with Poisson jumps initiated the study of  $H_2/H_\infty$  control in jump systems.

Although some results have been obtained in stochastic  $H_2/H_\infty$  control, few works focus on mean-field systems with jump diffusion. Such systems are particularly relevant to financial optimization, where they accurately describe risky asset pricing and strategic interactions. While existing literature extensively addresses control problems for these systems, see, [13], [14], [15], [16], [17], [18], [19], [20], [21]. In this paper, we investigate system (1), assuming that disturbance can not be detected and optimization is under worst-case disturbance scenarios. The stochastic  $H_2/H_\infty$  control problem is investigated in this work via a Nash game approach. In addition to

Corresponding authors: Shaolin Ji; Weihai Zhang.

Huimin Han and Shaolin Ji are with Zhongtai Securities Institute for Financial Studies, Shandong University, Jinan 250100 P. R. China (e-mails: hanhuiminhhm@mail.sdu.edu.cn, jsl@sdu.edu.cn).

Weihai Zhang is with College of Electrical Engineering and Automation, Shandong University of Science and Technology, Qingdao 266590 P. R. China (e-mail: w.hzhang@163.com).

model-based methods, data-driven approaches are also gaining increasing attention, such as [22], [23]. Building upon the necessary and sufficient conditions derived for the  $H_2/H_\infty$  control problem, a reinforcement learning method for mean-field systems is developed. By leveraging the corresponding Lyapunov equation, the associated  $H_\infty$  control solution for mean-field system is obtained in a model-free setting.

In our work, the  $H_2/H_\infty$  control problem is linked to finding a Nash equilibrium point  $(u^*, v^*)$  with respect to performance

$$J_1(u^*, v^*) = \mathbb{E} \int_0^T (\gamma^2 (v^*)'(v^*) - x' M' M x - (u^*)'(u^*)) dt \leq J_1(u^*, v), \quad (2)$$

$$J_2(u^*, v^*) = \mathbb{E} \int_0^T (x' M' M x + (u^*)'(u^*)) dt \leq J_2(u, v^*), \quad (3)$$

under the constraint of the perturbation operator  $\|\mathcal{L}\|_{[0,T]} < \gamma$ .

Our results extend the framework for SDEs by incorporating mean-field terms  $\mathbb{E}[x(t)]$ ,  $\mathbb{E}[u(t)]$ , and  $\mathbb{E}[v(t)]$  into the state equation, leading to coupled Riccati equations (23)-(26) with respect to  $(P, Q)$  instead of the Riccati equations solely dependent on  $P$ . We have proved the solvability of two coupled Riccati equations, which are nonlinear matrix-valued ordinary differential equations. We not only overcome the Riccati equation coupling difficulty in game frameworks with incomplete information highlighted in [18], but also resolved the complexities arising from Poisson jump process-induced stochastic disturbances and mean-field expectation coupling. Based on the bounded real lemma, we derived the corresponding Lyapunov equation for solving the  $H_\infty$  control problem and utilized it for policy evaluation. Thus, for the first time, we established an Actor-Critic type reinforcement learning method for the robust control problem of mean-field systems.

For the model-based approach, we employ the quasi-linearization technique for the Riccati equations and apply the completing the square approach to the cost function (2). The positive definiteness of the algebraic operators is analytically verified via the Lebesgue differentiation theorem. Subsequently, the unique solvability of the coupled Riccati equations (12)-(13) is guaranteed via Picard iteration, and the explicit state feedback control representation is derived. For the model-free setting, this work transforms the policy evaluation problem into a linear regression problem (33) by using Kronecker products and vectorization techniques, thereby reducing computational complexity while avoiding dependence on system dynamics coefficients.

The rest of the paper is organized as follows. Section 2 formulates the problem and introduces key notations, definitions, and preliminary lemmas. Section 3 develops the Stochastic Bounded Real Lemma for mean-field jump-diffusion systems (MF-SJBRL). Section 4 describes the main results. Using classical linear quadratic control results and MF-SJBRL, the feedback representations are obtained through solving four coupled sets of generalized differential Riccati equations (GDREs). Numerical simulations are presented in Section 5,

followed by a model-free reinforcement learning approach for the mean-field system in Section 6. The paper concludes with final conclusion in Section 7.

## II. PRELIMINARIES

### A. Notations

- 1)  $\mathbb{R}^n$  is the real  $n$ -dimensional space and  $\mathbb{R}^{n \times m}$  is the space of all real  $n \times m$  matrices.  $I$  is the identity matrix in  $\mathbb{R}^{n \times n}$ . For a matrix/vector  $A$ ,  $A'$  denotes the transpose of  $A$ , and  $|A|$  denotes the square root of the summarized squares of all the components of the matrix/vector  $A$ . For square matrix  $A$ ,  $\det(A)$  is the determinant of  $A$ , and  $A^{-1}$  is its inverse if  $A$  is nonsingular.  $A > 0/A \geq 0$  means that  $A$  is a positive definite/positive semi-definite symmetric matrix.  $\langle A_1, A_2 \rangle$  denotes the inner product of two vectors  $A_1$  and  $A_2$ .
- 2)  $(\Omega, \mathcal{F}, \{\mathcal{F}_t\}_{t \geq 0}, P)$  is a given complete filtered probability space, on which a one-dimensional standard Brownian motion  $\{W(t)\}_{0 \leq t \leq T}$  and a compensated Poisson random measure  $\tilde{N}_p$  are defined and assumed to be mutually independent.

$$\mathcal{F}_t := \sigma[W(s); 0 \leq s \leq t] \vee$$

$$\sigma \left[ \int \int_{A \times (0, s]} \tilde{N}_p(d\theta, dr); 0 \leq s \leq t \right], A \in \mathcal{B}(G)$$

is  $P$ -completed filtration. More specifically, denote by  $\mathcal{B}(\Lambda)$  the Borel  $\sigma$ -algebra of any topological space  $\Lambda$ . Let  $(G, \mathcal{B}(G), \nu)$  be a measurable space,  $\nu$  is a measure with  $\nu(A) < \infty$  for any  $A \in \mathcal{B}(G)$ . And  $p : \Omega \times D_p \rightarrow G$  is a  $\mathcal{F}_t$ -adapted stationary Poisson point process with characteristic measure  $\nu$ , where  $D_p$  is a countable subset of  $(0, \infty)$ . Then the counting measure induced by  $p$  is

$$N_p((0, t] \times A) := \#\{s \in D_p; s \leq t, p(s) \in A\},$$

for  $t > 0, A \in \mathcal{B}(G)$ . Let  $\tilde{N}_p(d\theta, dt) := N_p(d\theta, dt) - \nu(d\theta)dt$  be a compensated Poisson random martingale measure.

- 3)  $S^n \in \mathbb{R}^{n \times n}$ : the collection of  $n \times n$  real symmetric matrices.  
 $S_+^n \in \mathbb{R}^{n \times n}$ : the set of all non-negative definite matrices of  $S^n$ .  
 $L_{\mathcal{F}_t}^2(\Omega; \mathbb{R}^d)$ : the collection of  $\mathbb{R}^d$ -valued,  $\mathcal{F}_t$ -measurable random variables  $\eta$  with

$$\|\eta\|^2 := \mathbb{E}[\|\eta\|^2] < +\infty.$$

$L_{\mathcal{F}}^2([0, T]; \mathbb{R}^d)$ : the collection of  $\mathbb{R}^d$ -valued,  $\mathcal{F}$ -adapted random processes  $\eta(t)$  with

$$\|\eta(t)\|_{[0, T]}^2 := \mathbb{E} \int_0^T |\eta(t)|^2 dt < +\infty.$$

$\mathcal{H}_{\mathcal{F}}^2([0, T]; \mathbb{R}^d)$ : the space of all  $\mathbb{R}^d$ -valued,  $\mathcal{F}$ -adapted càdlàg process  $\varphi(t)$  on  $[0, T]$ , such that

$$\mathbb{E} \int_0^T |\varphi(t)|^2 dt < +\infty.$$

$\mathcal{S}_{\mathcal{F}}^2([0, T]; \mathbb{R}^d)$ : the space of all  $\mathbb{R}^d$ -valued,  $\mathcal{F}$ -adapted càdlàg random process  $\varphi(t)$  on  $[0, T]$  with

$$\mathbb{E} \left[ \sup_{0 \leq s \leq T} |\varphi(s)|^2 \right] < +\infty.$$

$M^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n})$ : the collection of  $\mathbb{R}^{n \times n}$ -valued,  $r(t, \theta)$  with

$$\|r(t, \theta)\|_{M^{\nu, 2}}^2 := \int_0^T \int_G \|r(t, \theta)\|^2 \nu(d\theta) dt < +\infty.$$

$M_{\mathcal{F}}^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n})$ : the collection of  $\mathbb{R}^{n \times n}$ -valued,  $\mathcal{F}$ -predictable random processes  $r(t, \omega, \theta)$  with

$$\|r(t, \theta)\|_{M_{\mathcal{F}}^{\nu, 2}}^2 := \mathbb{E} \int_0^T \int_G \|r(t, \theta)\|^2 \nu(d\theta) dt < +\infty.$$

$\mathcal{P}_n(\mathbb{R}^n)$ : the collection of probability measures  $\nu$  on  $\mathbb{R}^n$  with finite second order moment, i.e.

$$\int |x|^n \nu(dx) < +\infty.$$

$\mathcal{U}([0, T]; \mathbb{R}^n)$ : the collection of predictable random processes  $u(t)$ , which belongs to  $L_{\mathcal{F}}^2([0, T]; \mathbb{R}^n)$ .

- 4) To simplify the system representation, the following symbols (with  $t$  omitted) are defined:

$$\begin{aligned} \mathbf{x} &= \begin{pmatrix} x - \mathbb{E}[x] \\ \mathbb{E}[x] \end{pmatrix}, \mathbf{u} = \begin{pmatrix} u - \mathbb{E}[u] \\ \mathbb{E}[u] \end{pmatrix}, \mathbf{v} = \begin{pmatrix} v - \mathbb{E}[v] \\ \mathbb{E}[v] \end{pmatrix}, \\ \mathcal{A} &= \begin{pmatrix} A & 0 \\ 0 & A + \bar{A} \end{pmatrix}, \mathcal{C} = \begin{pmatrix} C & C + \bar{C} \\ 0 & 0 \end{pmatrix}, \\ \mathcal{E}(\theta) &= \begin{pmatrix} E(\theta) & E(\theta) + \bar{E}(\theta) \\ 0 & 0 \end{pmatrix}, I_{1,2} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \\ \mathcal{B}_i &= \begin{pmatrix} B_i & 0 \\ 0 & B_i + \bar{B}_i \end{pmatrix}, \mathcal{D}_i = \begin{pmatrix} D_i & D_i + \bar{D}_i \\ 0 & 0 \end{pmatrix}, \\ \mathcal{F}_i(\theta) &= \begin{pmatrix} F_i(\theta) & F_i(\theta) + \bar{F}_i(\theta) \\ 0 & 0 \end{pmatrix}, i = 1, 2. \end{aligned}$$

The above notations are adopted in the subsequent analysis.

## B. Problem Formulation

Assuming that  $A, \bar{A}, C, \bar{C} \in L^\infty([0, T], \mathbb{R}^{n \times n})$ ,  $B_2, \bar{B}_2, D_2, \bar{D}_2 \in L^\infty([0, T], \mathbb{R}^{n \times n_u})$ ,  $B_1, \bar{B}_1, D_1, \bar{D}_1 \in L^\infty([0, T], \mathbb{R}^{n \times n_v})$ ,  $E, \bar{E} \in M^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n})$ ,  $F_2, \bar{F}_2 \in M^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n_u})$ ,  $F_1, \bar{F}_1 \in M^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n_v})$ . Above standard assumptions will be in force throughout this paper.

**Definition 1:** (see [24]) For  $0 < T < \infty$ , by Lemma 1, when  $(u, v, x_0) \in \mathcal{U}([0, T]; \mathbb{R}^{n_u}) \times \mathcal{U}([0, T]; \mathbb{R}^{n_v}) \times \mathbb{R}^n$ , there exists a unique solution  $x(t) : x(t, u, v, x_0) \in \mathcal{H}_{\mathcal{F}}^2([0, T]; \mathbb{R}^n)$ . The finite horizon stochastic  $H_2/H_\infty$  control problem of (1) can be stated as follows.

Given disturbance attenuation  $\gamma > 0$ , to find  $u^*(t, x) \in \mathcal{U}([0, T]; \mathbb{R}^{n_u})$ , such that

(1)

$$\begin{aligned} \|\mathcal{L}_{u^*}\|_{[0, T]} &= \sup_{\substack{v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}) \\ v \neq 0, x_0 = 0}} \frac{\|z\|_{[0, T]}}{\|v\|_{[0, T]}} \\ &:= \sup_{\substack{v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}) \\ v \neq 0, x_0 = 0}} \frac{\left\{ \mathbb{E} \int_0^T (x' M' M x + u'^* u^*) dt \right\}^{1/2}}{\left\{ \mathbb{E} \int_0^T v' v dt \right\}^{1/2}} \\ &< \gamma, \end{aligned} \quad (4)$$

where

$$\mathcal{L}_{u^*}(v) = \begin{bmatrix} Mx(t, u^*, v, 0) \\ Nu^* \end{bmatrix}$$

is called the perturbation operator of (1).

(2) When the worst-case disturbance  $v^*(t, x) \in \mathcal{U}([0, T]; \mathbb{R}^{n_v})$ , if it exists, is applied to system (1),  $u^*(t, x)$  minimizes the output energy

$$J_2(u, v^*; 0, x_0) = \|z\|_2^2 = \mathbb{E} \int_0^T (x' M' M x + u' u) dt.$$

Here,  $v^*(t, x)$  is called a worst-case disturbance in the sense that

$$v^*(t, x) = \arg \min_{v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v})} J_1(u^*, v; 0, x_0), \forall x_0 \in L_{\mathcal{F}_0}^2(\Omega; \mathbb{R}^n),$$

$$J_1(u^*, v; 0, x_0) = \mathbb{E} \int_0^T (\gamma^2 v' v - z' z) dt.$$

If an admissible control  $u(t, x) \in \mathcal{U}([0, T]; \mathbb{R}^{n_u})$  only satisfies (4), then this  $u(t, x)$  is called a solution to  $H_\infty$  control of (1). Obviously, there may be more than one solution to the  $H_\infty$  control problem. If the previous predictable progresses  $(u^*, v^*)$  exists, then we say that the finite horizon  $H_2/H_\infty$  control admits a pair of solutions.

**Remark 1:** (see [24]) If the finite horizon stochastic  $H_2/H_\infty$  control problem is solvable, then the global Nash equilibrium strategies  $(u^*, v^*)$  for two-player, nonzero-sum game satisfying

$$J_1(u^*, v^*) \leq J_1(u^*, v) \quad (5)$$

and

$$J_2(u^*, v^*) \leq J_2(u, v^*). \quad (6)$$

To guarantee the uniqueness of the global Nash equilibrium in (5) and (6), both players are restricted to using linear, memoryless state feedback control.

## C. Three Useful Lemmas

Now we recall three lemmas for SDE driven by the Brownian motion and Poisson random jump.

**Lemma 1:** (see [25] and [16]) Assume that  $b : [0, T] \times \mathbb{R}^n \times \mathcal{P}_2(\mathbb{R}^n) \rightarrow \mathbb{R}^n$ ,  $\sigma : [0, T] \times \mathbb{R}^n \times \mathcal{P}_2(\mathbb{R}^n) \rightarrow \mathbb{R}^n$ ,  $\pi : [0, T] \times G \times \mathbb{R}^n \times \mathcal{P}_2(\mathbb{R}^n) \rightarrow \mathbb{R}^n$  satisfy the following conditions:

(1)  $b(\cdot, 0, 0) \in L_{\mathcal{F}}^2([0, T]; \mathbb{R}^n)$ ,  $\sigma(\cdot, 0, 0) \in L_{\mathcal{F}}^2([0, T]; \mathbb{R}^n)$ , and  $\pi(\cdot, \cdot, 0, 0) \in M_{\mathcal{F}}^{\nu, 2}([0, T] \times G; \mathbb{R}^n)$ ;

(2) For all  $x, \bar{x} \in \mathbb{R}^n$ ,  $\mu_1, \mu_2 \in \mathcal{P}_2(\mathbb{R}^n)$ , there exists a constant  $C_t > 0$  such that

$$\begin{aligned} & |b(t, x, \mu_1) - b(t, \bar{x}, \mu_2)| + |\sigma(t, x, \mu_1) - \sigma(t, \bar{x}, \mu_2)| \\ & + \left( \int_G |\pi(t, \theta, x, \mu_1) - \pi(t, \theta, \bar{x}, \mu_2)|^2 \nu(d\theta) \right)^{\frac{1}{2}} \\ & \leq C(|x - \bar{x}| + \rho(\mu_1, \mu_2)), \end{aligned}$$

where  $\rho(\mu_1, \mu_2)$  is Wasserstein metric which satisfies

$$\begin{aligned} & \rho(\mu_1, \mu_2) \\ & = \inf \left\{ \int |x - y| r(dx, dy); r \text{ has marginals } \mu_1 \text{ and } \mu_2 \right\} \\ & = \sup \{ \langle g, \mu_1 \rangle - \langle g, \mu_2 \rangle; g(x) - g(y) \leq |x - y| \}. \end{aligned}$$

Then the following equation with the Poisson random jumps

$$\begin{aligned} x(t) &= x_0 + \int_0^t b(s, x(s), \mu(s)) ds \\ &+ \int_0^t \sigma(s, x(s), \mu(s)) dW(s) \\ &+ \int_0^t \int_G \pi(s, \theta, x(s-), \mu(s)) \tilde{N}_p(d\theta, ds) \end{aligned}$$

admits a unique strong solution  $x \in \mathcal{S}_{\mathcal{F}}^2(0, T; \mathbb{R}^n)$ .

Moreover, for system (9), the following estimate holds:

$$\mathbb{E} \left\{ \sup_{0 \leq t \leq T} |x(t)|^2 \right\} \leq K \mathbb{E} \left\{ |x(0)|^2 + \int_0^T |v(t)|^2 dt \right\}, \quad (7)$$

where  $K > 0$  is a constant relying on the Lipschitz constant  $C$  and the time horizon  $T$ .

**Lemma 2:** (Generalized Itô formula) Let  $x(t)$  satisfy

$$\begin{aligned} dx(t) &= b(t, x(t)) dt + \sigma(t, x(t)) dW(t) \\ &+ \int_G c(t, \theta, x(t-)) \tilde{N}_p(d\theta, dt), \end{aligned}$$

and  $\phi(\cdot, \cdot) \in C^{1,2}([0, T] \times \mathbb{R}^n)$ . Then

$$\begin{aligned} d\phi(t, x(t)) &= \phi_t(t, x) dt + \langle \phi_x(t, x), b(t, x) \rangle dt + \\ &\langle \phi_x(t, x), \sigma(t, x) \rangle dW(t) + \frac{1}{2} \text{tr} \{ \sigma'(t, x) \phi_{xx}(t, x) \sigma(t, x) \} dt \\ &+ \int_G [\phi(t, x + c(t, \theta, x)) - \phi(t, x) - \\ &\langle \phi_x(t, x), c(t, \theta, x) \rangle] \nu(d\theta) dt \\ &+ \int_G [\phi(t, x(t-) + c(t, \theta, x(t-))) - \phi(t, x(t-))] \tilde{N}_p(d\theta, dt), \end{aligned} \quad (8)$$

and  $\phi_t$  and  $\phi_x$  denote the partial derivatives of  $\phi$  with respect to  $t$  and  $x$  respectively, and  $\phi_{xx}$  denotes the second-order partial derivative of  $\phi$  with respect to  $x$ .

**Lemma 3:** Consider the following differential equation:

$$\begin{cases} \dot{P} + P\tilde{A} + \tilde{A}'P + \tilde{C}'P\tilde{C} + \tilde{Q} \\ + \int_G (\tilde{E}'(\theta)P\tilde{E}(\theta)) \nu(d\theta) = 0, \\ P(T) = \tilde{G}, \quad t \in [0, T], \end{cases}$$

where  $\tilde{A}, \tilde{C} \in L^\infty(0, T; \mathbb{R}^{n \times n})$ ,  $\tilde{E} \in M^{\nu, 2}([0, T] \times G, \mathbb{R}^{n \times n})$ ,  $\tilde{G} \in S_+^n$ ,  $\tilde{Q} \in L^\infty(0, T; S_+^n)$ . Then, the equation admits a unique solution  $P \in C([0, T]; S_+^n)$ .

### III. MEAN-FIELD STOCHASTIC JUMP BOUNDED REAL LEMMA

A finite horizon mean-field stochastic jump bounded real lemma (for short, MF-SJBRL) is obtained in this section, which serves as a crucial tool for analyzing stochastic  $H_2/H_\infty$  control. For stochastic system

$$\begin{cases} dx(t) = I_{1,2} \{ \mathcal{A}_{11}(t) \mathbf{x}(t) + \mathcal{B}_{11}(t) \mathbf{v}(t) \} dt \\ + I_{1,2} \{ \mathcal{C}_{11}(t) \mathbf{x}(t) + \mathcal{D}_{11}(t) \mathbf{v}(t) \} dW(t) \\ + \int_G I_{1,2} \{ \mathcal{E}_{11}(t, \theta) \mathbf{x}(t-) + \mathcal{F}_{11}(t, \theta) \mathbf{v}(t) \} \tilde{N}_p(d\theta, dt), \\ x(0) = x_0 \in \mathbb{R}^n, \\ z_1(t) = M_{11}x(t), \quad t \in [0, T], \end{cases} \quad (9)$$

define the perturbation operator as

$$\begin{aligned} \|\tilde{\mathcal{L}}\|_{[0, T]} &= \sup_{\substack{v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}) \\ v \neq 0, x_0 = 0}} \frac{\|z_1\|_{[0, T]}}{\|v\|_{[0, T]}} \\ &:= \sup_{\substack{v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}) \\ v \neq 0, x_0 = 0}} \frac{\left\{ \mathbb{E} \int_0^T (x' M_{11}' M_{11} x) dt \right\}^{1/2}}{\left\{ \mathbb{E} \int_0^T v' v dt \right\}^{1/2}}, \end{aligned} \quad (10)$$

and cost functional

$$J_1(0, v; 0, x_0) = \mathbb{E} \int_0^T (\gamma^2 v' v - z_1' z_1) dt. \quad (11)$$

**Lemma 4:** (MF-SJBRL)  $\|\tilde{\mathcal{L}}\|_{[0, T]} < \gamma$  for some  $\gamma > 0$  iff the following differential Riccati equations (DRE) (with the time argument  $t$  suppressed)

$$\begin{cases} S(P) - \mathcal{G}(P) \Sigma_0^{-1}(P) \mathcal{G}'(P) = 0, \\ P(T) = 0, \\ \Sigma_0(P) > 0, \end{cases} \quad (12)$$

$$\begin{cases} \tilde{S}(P, Q) - \tilde{\mathcal{G}}(P, Q) \Sigma_2^{-1}(P) \tilde{\mathcal{G}}'(P, Q) = 0, \\ Q(T) = 0, \\ \Sigma_2(P) > 0. \end{cases} \quad (13)$$

have unique solution  $P, Q \leq 0$  on  $[0, T]$ , where

$$\begin{aligned} S(P) &= \dot{P} + PA_{11} + A_{11}'P + C_{11}'PC_{11} \\ &+ \int_G \{ E_{11}(\theta)' P E_{11}(\theta) \} \nu(d\theta) - M_{11}' M_{11}, \\ \mathcal{G}(P) &= PB_{11} + C_{11}'PD_{11} + \int_G \{ E_{11}(\theta)' P F_{11}(\theta) \} \nu(d\theta), \\ \Sigma_0(P) &= \gamma^2 I + D_{11}'PD_{11} + \int_G \{ F_{11}(\theta)' P F_{11}(\theta) \} \nu(d\theta), \\ \tilde{S}(P, Q) &= \dot{Q} + Q(A_{11} + \bar{A}_{11}) + (A_{11} + \bar{A}_{11})'Q \\ &+ (C_{11} + \bar{C}_{11})'P(C_{11} + \bar{C}_{11}) \end{aligned}$$

$$\begin{aligned}
& + \int_G \{(E_{11} + \bar{E}_{11})(\theta)' P(E_{11} + \bar{E}_{11})(\theta)\} \nu(d\theta) - M'_{11} M_{11}, \\
& \tilde{G}(P, Q) = Q(B_{11} + \bar{B}_{11}) + (C_{11} + \bar{C}_{11})' P(D_{11} + \bar{D}_{11}) \\
& + \int_G \{(E_{11} + \bar{E}_{11})(\theta)' P(F_{11} + \bar{F}_{11})(\theta)\} \nu(d\theta), \\
& \Sigma_2(P) = \gamma^2 I + (D_{11} + \bar{D}_{11})' P(D_{11} + \bar{D}_{11}) \\
& + \int_G \{(F_{11} + \bar{F}_{11})(\theta)' P(F_{11} + \bar{F}_{11})(\theta)\} \nu(d\theta).
\end{aligned} \tag{14}$$

For convenience, we denote  $\Phi = -\Sigma_0(P)^{-1} \mathcal{G}'(P)$ ,  $\Psi = -\Sigma_2(P)^{-1} \tilde{G}'(P, Q)$ . Before proving the MF-SJBRL, we propose some lemmas.

**Lemma 5:** Assume that  $\varphi, \psi \in C([0, T]; \mathbb{R}^{n \times n})$  and  $P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi} \in C([0, T]; S^n)$  satisfy the following linear differential matrix-valued equations

$$\begin{aligned}
& \left\{ \begin{pmatrix} I \\ \varphi \end{pmatrix}' \begin{pmatrix} \mathcal{S}(P^{\gamma, \varphi}) & \mathcal{G}(P^{\gamma, \varphi}) \\ \mathcal{G}'(P^{\gamma, \varphi}) & \Sigma_0(P^{\gamma, \varphi}) \end{pmatrix} \begin{pmatrix} I \\ \varphi \end{pmatrix} = 0, \right. \\
& P^{\gamma, \varphi}(T) = 0, \\
& \left\{ \begin{pmatrix} I \\ \psi \end{pmatrix}' \begin{pmatrix} \tilde{\mathcal{S}}(P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi}) & \tilde{\mathcal{G}}(P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi}) \\ \tilde{\mathcal{G}}'(P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi}) & \Sigma_2(P^{\gamma, \varphi}) \end{pmatrix} \begin{pmatrix} I \\ \psi \end{pmatrix} \right. \\
& = 0, \\
& Q^{\gamma, \varphi, \psi}(T) = 0.
\end{aligned} \tag{15}$$

Then, for any  $(\tau, \xi) \in [0, T] \times L^2_{\mathcal{F}_\tau}(\Omega; \mathbb{R}^n)$ ,  $v \in \mathcal{U}([\tau, T]; \mathbb{R}^{n_v})$ , we derive that

$$\begin{aligned}
& J_1(0, v + \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; \tau, \xi) \\
& = \mathbb{E} \langle (\xi - \mathbb{E}\xi), P^{\gamma, \varphi}_\tau(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Q^{\gamma, \varphi, \psi}_\tau \mathbb{E}\xi \rangle \\
& + \mathbb{E} \int_\tau^T \langle (v(t) - \mathbb{E}v(t)), (\mathcal{G}'(P^{\gamma, \varphi}) + \Sigma_0(P^{\gamma, \varphi})\varphi(t)) \cdot \\
& (x^{\varphi, \psi}(t) - \mathbb{E}x^{\varphi, \psi}(t)) \rangle + \langle (\mathcal{G}'(P^{\gamma, \varphi}) + \Sigma_0(P^{\gamma, \varphi})\varphi(t)) \cdot \\
& (x^{\varphi, \psi}(t) - \mathbb{E}x^{\varphi, \psi}(t)), v(t) - \mathbb{E}v(t) \rangle \\
& + \langle v(t) - \mathbb{E}v(t), \Sigma_0(P^{\gamma, \varphi})(v(t) - \mathbb{E}v(t)) \rangle \\
& + \langle \mathbb{E}v(t), (\tilde{\mathcal{G}}'(P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi}) + \Sigma_2(P^{\gamma, \varphi})\psi(t)) \mathbb{E}x^{\varphi, \psi}(t) \rangle \\
& + \langle (\tilde{\mathcal{G}}'(P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi}) + \Sigma_2(P^{\gamma, \varphi})\psi(t)) \mathbb{E}x^{\varphi, \psi}(t), \mathbb{E}v(t) \rangle \\
& + \langle \mathbb{E}v(t), \Sigma_2(P^{\gamma, \varphi}) \mathbb{E}v(t) \rangle dt,
\end{aligned} \tag{17}$$

where

$$x^{\varphi, \psi}(t, v(\cdot); \tau, \xi) = x(t, v + \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; \tau, \xi)$$

solves (9). In particular,

$$\begin{aligned}
& J_1(0, \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; \tau, \xi) \\
& = \mathbb{E} \langle (\xi - \mathbb{E}\xi), P^{\gamma, \varphi}_\tau(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Q^{\gamma, \varphi, \psi}_\tau \mathbb{E}\xi \rangle.
\end{aligned} \tag{18}$$

**Lemma 6:** If  $\|\tilde{\mathcal{L}}\| < \gamma$ , then for any  $(\tau, \xi) \in [0, T] \times L^2_{\mathcal{F}_\tau}(\Omega; \mathbb{R}^n)$ ,  $v \in \mathcal{U}([\tau, T]; \mathbb{R}^{n_v})$ , there exists  $\mu > 0$  such that  $J_1(0, v; \tau, \xi) \geq -\mu \mathbb{E}|\xi|^2$ .

**Lemma 7:** If  $\|\tilde{\mathcal{L}}\| < \gamma$ ,  $\varphi, \psi \in C([0, T]; \mathbb{R}^{n \times n})$  and  $P^{\gamma, \varphi}, Q^{\gamma, \varphi, \psi} \in C([0, T]; S^n)$  are the solutions of linear differential matrix-valued equations (15)-(16). Then for any  $\delta > 0$  satisfying  $\delta < \gamma^2 - \|\tilde{\mathcal{L}}\|^2$ ,  $\Sigma_0(P^{\gamma, \varphi}) \geq \delta I$ ,  $\Sigma_2(P^{\gamma, \varphi}) \geq \delta I$ .

*Proof:* [Proof of Lemma 7] For any deterministic  $\tilde{v}(\cdot) \in \mathbb{R}^{n_v}$ , let  $x$  be the solution of

$$\begin{cases} dx(t) = \{A_{11}(t)x(t) + B_{11}(t)v(t)\}dt \\ \quad + \{C_{11}(t)x(t) + D_{11}(t)v(t)\}dW(t) \\ \quad + \int_G \{E_{11}(t, \theta)x(t-) + F_{11}(t, \theta)v(t)\} \tilde{N}_p(d\theta, dt), \\ x(0) = 0, \quad t \in [0, T], \end{cases}$$

and set

$$v(\cdot) \triangleq \tilde{v}W + \varphi(x - \mathbb{E}x) + \psi \mathbb{E}x \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}).$$

Clearly,

$$\mathbb{E}[x(t)] = 0, \quad \mathbb{E}[v(t)] = 0, \quad t \in [0, T]$$

By the uniqueness of the solution,  $x$  also solves (9) when  $x_0 = 0$ .

If  $\|\tilde{\mathcal{L}}\| < \gamma$ , then

$$J_1(0, v; 0, 0) \geq \delta \mathbb{E} \int_0^T |v(s)|^2 ds, \forall v \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}).$$

By Lemma 5,

$$\begin{aligned}
& J_1(0, \tilde{v}W + \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; 0, 0) \\
& = \mathbb{E} \int_0^T \langle \tilde{v}W, (\mathcal{G}'(P^{\gamma, \varphi}) + \Sigma_0(P^{\gamma, \varphi})\varphi(t))x^{\varphi, \psi}(t) \rangle \\
& + \langle (\mathcal{G}'(P^{\gamma, \varphi}) + \Sigma_0(P^{\gamma, \varphi})\varphi(t))x^{\varphi, \psi}(t), \tilde{v}W \rangle \\
& + \langle \tilde{v}W, \Sigma_0(P^{\gamma, \varphi})\tilde{v}W \rangle dt \\
& \geq \delta \mathbb{E} \int_0^T |\tilde{v}W + \varphi x^{\varphi, \psi}|^2 dt.
\end{aligned} \tag{19}$$

Hence, the following holds:

$$\begin{aligned}
& \mathbb{E} \int_0^T 2 \langle [\mathcal{G}'(P^{\gamma, \varphi}) + (\Sigma_0(P^{\gamma, \varphi}) - \delta I)\varphi] W x^{\varphi, \psi}, \tilde{v} \rangle \\
& + W^2 \langle (\Sigma_0(P^{\gamma, \varphi}) - \delta I) \tilde{v}, \tilde{v} \rangle dt \geq 0.
\end{aligned}$$

Now, applying Itô's formula, we have

$$\begin{cases} d\mathbb{E}[W(s)x^{\varphi, \psi}(s)] = \{[A_{11}(s) + B_{11}(s)\varphi(s)] \\ \mathbb{E}[W(s)x^{\varphi, \psi}(s)] + sB_{11}(s)\tilde{v}(s)\} ds, \quad s \in [0, T], \\ \mathbb{E}[W(0)x^{\varphi, \psi}(0)] = 0. \end{cases}$$

Fix any  $u_0 \in \mathbb{R}^{n_v}$  and take  $\tilde{v}(s) = u_0 \mathbf{1}_{[t', t'+h]}(s)$ , with  $0 < t' < t' + h \leq T$ . Then

$$\mathbb{E}[W(s)x(s)] = \begin{cases} 0, & s \in [0, t'], \\ \Phi(s) \int_{t'}^{s \wedge (t'+h)} \Phi(r)^{-1} B_{11}(r) r u_0 dr, & s \in [t', T], \end{cases}$$

where  $\Phi(\cdot)$  is the solution of the following ordinary differential equation:

$$\begin{cases} \dot{\Phi}(s) = [A_{11}(s) + B_{11}(s)\varphi(s)]\Phi(s), \quad s \in [0, T], \\ \Phi(0) = I. \end{cases}$$

Consequently, (19) becomes

$$\begin{aligned}
& \int_{t'}^{t'+h} \left\{ 2 \langle [\mathcal{G}'(P^{\gamma, \varphi}) + (\Sigma_0(P^{\gamma, \varphi}) - \delta I)\varphi] \Phi(s) \cdot \right. \\
& \left. \int_{t'}^s \Phi(r)^{-1} B_{11}(r) r u_0 dr, u_0 \rangle \right. \\
& \left. + s \langle (\Sigma_0(P^{\gamma, \varphi}) - \delta I) u_0, u_0 \rangle \right\} ds \geq 0.
\end{aligned}$$

Dividing both sides by  $h$  and letting  $h \rightarrow 0$ , by using Lebesgue differentiation theorem, we obtain

$$t' \langle [\Sigma_0(P^{\gamma,\varphi}) - \delta I] u_0, u_0 \rangle \geq 0, \quad \forall u_0 \in \mathbb{R}^{n_v}, t' \in (0, T].$$

By the continuity of  $\Sigma_0(P^{\gamma,\varphi})$ ,  $\Sigma_0(P^{\gamma,\varphi}) \geq \delta I$  on  $[0, T]$ . Set

$$v(\cdot) \triangleq \tilde{v} + \varphi(x - \mathbb{E}x) + \psi \mathbb{E}x \in \mathcal{U}([0, T]; \mathbb{R}^{n_v}).$$

By lemma 5,

$$\begin{aligned} J_1(0, \tilde{v} + \varphi(x^{\varphi,\psi} - \mathbb{E}x^{\varphi,\psi}) + \psi \mathbb{E}x^{\varphi,\psi}; 0, 0) = \\ \mathbb{E} \int_0^T \left\langle \mathbb{E}v(t), (\tilde{\mathcal{G}}'(P^{\gamma,\varphi}, Q^{\gamma,\varphi,\psi}) + \Sigma_2(P^{\gamma,\varphi})\psi(t)) \mathbb{E}x^{\varphi,\psi}(t) \right\rangle \\ + \left\langle (\tilde{\mathcal{G}}'(P^{\gamma,\varphi}, Q^{\gamma,\varphi,\psi}) + \Sigma_2(P^{\gamma,\varphi})\psi(t)) \mathbb{E}x^{\varphi,\psi}(t), \mathbb{E}v(t) \right\rangle \\ + \langle \mathbb{E}v(t), \Sigma_2(P^{\gamma,\varphi}) \mathbb{E}v(t) \rangle dt \\ \geq \delta \mathbb{E} \int_0^T |\tilde{v} + \varphi(x^{\varphi,\psi} - \mathbb{E}x^{\varphi,\psi}) + \psi \mathbb{E}x^{\varphi,\psi}|^2 dt. \end{aligned} \quad (20)$$

Hence, the following holds:

$$\begin{aligned} \int_0^T 2 \left\langle [\tilde{\mathcal{G}}'(P^{\gamma,\varphi}, Q^{\gamma,\varphi,\psi}) + (\Sigma_2(P^{\gamma,\varphi}) - \delta I)\psi(t)] \mathbb{E}x^{\varphi,\psi}, \tilde{v} \right\rangle \\ + \langle (\Sigma_2(P^{\gamma,\varphi}) - \delta I) \tilde{v}, \tilde{v} \rangle dt \geq 0. \end{aligned}$$

Now, applying Itô formula, we have

$$\begin{cases} d\mathbb{E}[x^{\varphi,\psi}(s)] = \{[(A_{11}(s) + \bar{A}_{11}(s)) + (B_{11}(s) \\ + \bar{B}_{11}(s))\psi(s)]\mathbb{E}[x^{\varphi,\psi}(s)] + (B_{11}(s) + \bar{B}_{11}(s))\tilde{v}(s)\} ds, \\ \mathbb{E}[x^{\varphi,\psi}(0)] = 0, \quad s \in [0, T]. \end{cases}$$

Fix any  $u_0 \in \mathbb{R}^{n_v}$  and take  $\tilde{v}(s) = u_0 \mathbf{1}_{[t', t'+h]}(s)$ , with  $0 \leq t' < t' + h \leq T$ . Then

$$\mathbb{E}[x^{\varphi,\psi}(s)] = \begin{cases} 0, & s \in [0, t'], \\ \Phi(s) \int_{t'}^{s \wedge (t'+h)} \Phi(r)^{-1} \bar{B}_{11}(r) u_0 dr, & s \in [t', T], \end{cases}$$

where  $\Phi(\cdot)$  is the solution of the following ordinary differential equation:

$$\begin{cases} \dot{\Phi}(s) = [(A_{11}(s) + \bar{A}_{11}(s)) + (B_{11}(s) + \bar{B}_{11}(s))\psi(s)]\Phi(s), \\ \Phi(0) = I, \quad s \in [0, T]. \end{cases}$$

Consequently, (20) becomes

$$\begin{aligned} \int_{t'}^{t'+h} \left\{ 2 \left\langle [\tilde{\mathcal{G}}'(P^{\gamma,\varphi}, Q^{\gamma,\varphi,\psi}) + (\Sigma_2(P^{\gamma,\varphi}) - \delta I)\psi(s)] \Phi(s) \cdot \right. \right. \\ \left. \left. \int_{t'}^s \Phi(r)^{-1} \bar{B}_{11}(r) u_0 dr, u_0 \right\rangle \right. \\ \left. + \langle (\Sigma_2(P^{\gamma,\varphi}) - \delta I) u_0, u_0 \rangle \right\} ds \geq 0. \end{aligned}$$

Dividing both sides by  $h$  and letting  $h \rightarrow 0$ , by using Lebesgue differentiation theorem, we obtain

$$\langle [\Sigma_2(P^{\gamma,\varphi}) - \delta I] u_0, u_0 \rangle \geq 0, \quad \forall u_0 \in \mathbb{R}^{n_v}, \quad \text{a.e. } t' \in [0, T].$$

So  $\Sigma_0(P^{\gamma,\varphi}) \geq \delta I$  and  $\Sigma_2(P^{\gamma,\varphi}) \geq \delta I$ . ■

*Proof:* [Proof of Lemma 4] Sufficiency:

By Itô formulation and DRE (12)-(13), the following equation holds.

$$\begin{aligned} J_1(0, v; \tau, \xi) \\ = \mathbb{E} \langle \xi - \mathbb{E}\xi, P(\tau)(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Q(\tau)\mathbb{E}\xi \rangle \\ + \mathbb{E} \int_\tau^T \left\{ \{(v - \mathbb{E}v) - \Phi(P)(x - \mathbb{E}x)\}' \Sigma_0(P) \right. \\ \left. \{(v - \mathbb{E}v) - \Phi(P)(x - \mathbb{E}x)\} \right. \\ \left. + \{(\mathbb{E}v) - \Psi(P, Q)(\mathbb{E}x)\}' \Sigma_2(P) \right. \\ \left. \{(\mathbb{E}v) - \Psi(P, Q)(\mathbb{E}x)\} \right\} dt. \end{aligned}$$

When  $\tau = 0, \xi = 0$ ,

$$J_1(0, v; 0, 0) = \mathbb{E} \int_0^T (\gamma^2 \|v\|^2 - \|z_1\|^2) dt \geq 0,$$

i.e.  $\|\tilde{\mathcal{L}}\|_{[0,T]} \leq \gamma$ . We prove  $\|\tilde{\mathcal{L}}\|_{[0,T]} < \gamma$  below. Define the operators  $\mathcal{L}_1 : L_{\mathcal{F}}^2([0, T], \mathbb{R}^{n_v}) \mapsto L_{\mathcal{F}}^2([0, T], \mathbb{R}^{n_v})$  and  $\tilde{\mathcal{L}}_1 : L_{\mathcal{F}}^2([0, T], \mathbb{R}^{n_v}) \mapsto L_{\mathcal{F}}^2([0, T], \mathbb{R}^{n_v})$  as

$$\begin{aligned} \mathcal{L}_1(v(t) - \mathbb{E}v(t)) &= v(t) - \mathbb{E}v(t) - (v^*(t) - \mathbb{E}v^*(t)), \\ \tilde{\mathcal{L}}_1(\mathbb{E}v(t)) &= \mathbb{E}v(t) - \mathbb{E}v^*(t), \end{aligned}$$

with the realization

$$\begin{cases} d\mathbf{x}(t) = \{A_{11}(t)\mathbf{x}(t) + B_{11}(t)\mathbf{v}(t)\} dt \\ \quad + \{C_{11}(t)\mathbf{x}(t) + D_{11}(t)\mathbf{v}(t)\} dW(t) \\ \quad + \int_G \{E_{11}(t, \theta)\mathbf{x}(t-) + F_{11}(t, \theta)\mathbf{v}(t)\} \tilde{N}_p(d\theta, dt), \\ \mathbf{x}(0) = \begin{pmatrix} \xi - \mathbb{E}[\xi] \\ \mathbb{E}[\xi] \end{pmatrix}, \\ \mathbb{E}v(t) - \mathbb{E}v^*(t) = \mathbb{E}v(t) - \Psi(t)\mathbb{E}x(t), \\ v(t) - \mathbb{E}v(t) - (v^*(t) - \mathbb{E}v^*(t)) = \\ v(t) - \mathbb{E}v(t) - \Phi(t)(x(t) - \mathbb{E}x(t)). \end{cases}$$

Then this is a linear continuous bijection. By inverse mapping theorem,  $\mathcal{L}_1^{-1}, \tilde{\mathcal{L}}_1^{-1}$  exists and  $\mathcal{L}_1^{-1}, \tilde{\mathcal{L}}_1^{-1}$  is bounded, which is determined by

$$\begin{cases} d\mathbb{E}[x(t)] = (A_{11}(t) + \bar{A}_{11}(t) - (B_{11}(t) + \bar{B}_{11}(t))\Psi(t)) \\ \mathbb{E}[x(t)] + (B_{11}(t) + \bar{B}_{11}(t))(\mathbb{E}[v(t)] - \mathbb{E}[v^*(t)])dt, \\ \mathbb{E}[x(0)] = \mathbb{E}[\xi] \end{cases}$$

with

$$\mathbb{E}v(t) = \Psi(t)\mathbb{E}x(t) + (\mathbb{E}v(t) - \mathbb{E}v^*(t)),$$

and

$$\begin{cases} dx(t) - \mathbb{E}[x(t)] = \{(A_{11}(t) - B_{11}(t)\Psi(t))(x(t) - \mathbb{E}[x(t)]) \\ \quad + B_{11}(t)(v(t) - \mathbb{E}[v(t)] - (v^*(t) - \mathbb{E}v^*(t)))\} dt \\ \quad + \{(C_{11}(t) - D_{11}(t)\Psi(t))(x(t) - \mathbb{E}[x(t)]) \\ \quad + (C_{11}(t) + \bar{C}_{11}(t))\mathbb{E}[x(t)] \\ \quad + D_{11}(t)(v(t) - \mathbb{E}[v(t)] - (v^*(t) - \mathbb{E}v^*(t))) \\ \quad + (D_{11}(t) + \bar{D}_{11}(t))\mathbb{E}[v(t)]\} dW(t) \\ \quad + \int_G \{(E_{11}(t, \theta) - F_{11}(t, \theta)\Psi(t))(x(t-) - \mathbb{E}[x(t-)]) \\ \quad + (E_{11}(t, \theta) + \bar{E}_{11}(t, \theta))\mathbb{E}[x(t-)] \\ \quad + F_{11}(t, \theta)(v(t) - \mathbb{E}[v(t)] - (v^*(t) - \mathbb{E}v^*(t))) \\ \quad + (F_{11}(t, \theta) - \bar{F}_{11}(t, \theta))\mathbb{E}[v(t)]\} \tilde{N}_p(d\theta, dt), \\ x(0) - \mathbb{E}[x(0)] = \xi - \mathbb{E}[\xi] \end{cases}$$

with

$$v(t) - \mathbb{E}v(t) = \Phi(t)(x(t) - \mathbb{E}x(t)) + (v(t) - \mathbb{E}v(t) - (v^*(t) - \mathbb{E}v^*(t))).$$

Then there exists  $\varepsilon > 0, \delta > 0$ , such that

$$\begin{aligned} & J_1(0, v; 0, 0) \\ &= \mathbb{E} \int_0^T \{ \{ (v - \mathbb{E}v) - \Phi(x - \mathbb{E}x) \}' \Sigma_0(P) \\ & \quad \{ (v - \mathbb{E}v) - \Phi(x - \mathbb{E}x) \} + \\ & \quad \{ (\mathbb{E}v) - \Psi(\mathbb{E}x) \}' \Sigma_2(P) \{ (\mathbb{E}v) - \Psi(\mathbb{E}x) \} \} dt \\ &\geq \delta \mathbb{E} \int_0^T \{ ((v - \mathbb{E}v) - \Phi(x - \mathbb{E}x))^2 + (\mathbb{E}v - \Psi(\mathbb{E}x))^2 \} dt \\ &= \delta \| \mathcal{L}_1(v(t) - \mathbb{E}v(t)) \|_{[0, T]}^2 + \delta \| \tilde{\mathcal{L}}_1(\mathbb{E}v(t)) \|_{[0, T]}^2 \\ &= \delta \frac{1}{\| \mathcal{L}_1^{-1} \|} \| v(t) - \mathbb{E}v(t) \|_{[0, T]}^2 + \delta \frac{1}{\| \tilde{\mathcal{L}}_1^{-1} \|} \| \mathbb{E}v(t) \|_{[0, T]}^2 \\ &\geq \varepsilon (\| v(t) - \mathbb{E}v(t) \|_{[0, T]}^2 + \| \mathbb{E}v(t) \|_{[0, T]}^2) \\ &> 0, \end{aligned}$$

which yields  $\| \tilde{\mathcal{L}} \| < \gamma$ . The sufficiency of MF-SJBRL is completely proved.

Necessity: We study the global solvability of DREs. The function

$$f(t, P) = \mathcal{S}(P) - \mathcal{G}(P) \Sigma_0^{-1}(P) \mathcal{G}'(P) - \dot{P}$$

is continuously differentiable on  $[0, T] \times D_f$ , where  $D_f = \{P : \det(\Sigma_0^\gamma(t, P(t))) \neq 0\}$ . The global solution of DREs is equivalent to the solution of

$$P(t) = P(T) + \int_t^T f(s, P) ds.$$

Define  $\varphi(\hat{P}) = -\Sigma_0(\hat{P})^{-1} \mathcal{G}'(\hat{P})$ , and

$$F(t, P; \hat{P}) = \begin{pmatrix} I \\ \varphi(\hat{P}) \end{pmatrix}' \begin{pmatrix} \mathcal{S}(P) & \mathcal{G}(P) \\ \mathcal{G}'(P) & \Sigma_0(P) \end{pmatrix} \begin{pmatrix} I \\ \varphi(\hat{P}) \end{pmatrix}. \quad (21)$$

Obviously,

$$\begin{aligned} F(t, P; \hat{P}) &= \dot{P} + P(A_{11} + B_{11}\varphi(\hat{P})) + (A_{11} + B_{11}\varphi(\hat{P}))'P \\ &+ (C_{11} + D_{11}\varphi(\hat{P}))'P(C_{11} + D_{11}\varphi(\hat{P})) \\ &+ \int_G \{ (E_{11} + F_{11}\varphi(\hat{P}))(\theta)' P (E_{11} + F_{11}\varphi(\hat{P}))(\theta) \} \nu(d\theta) \\ &- M_{11}' M_{11} + \gamma^2 \varphi(\hat{P})' \varphi(\hat{P}). \end{aligned}$$

Then construct an iteration sequence below. At first, let  $\hat{P} = 0$ , then

$$\begin{cases} F(t, P_1; \hat{P}) = 0, \\ P_1(T) = 0. \end{cases}$$

It is a linear ordinary differential equation which has a unique solution  $P_1$ . Next, let  $\hat{P} = P_1$ , then

$$\begin{cases} F(t, P_2; P_1) = 0, \\ P_2(T) = 0. \end{cases}$$

Repeat the above step to obtain the sequence  $\{P_n\}_{n=1}^\infty$ . And

$$\begin{aligned} & -d(P_n - P_{n+1}) \\ &= (P_n - P_{n+1}) \tilde{A}_n + \tilde{A}_n' (P_n - P_{n+1}) + \tilde{C}_n' (P_n - P_{n+1}) \tilde{C}_n \\ &+ \int_G \{ \tilde{E}_n(\theta)' (P_n - P_{n+1}) \tilde{E}_n(\theta) \} \nu(d\theta) \\ &+ P_n B_{11} (\varphi(P_{n-1}) - \varphi(P_n)) + (\varphi(P_{n-1}) - \varphi(P_n))' B_{11}' P_n \\ &- \gamma^2 \varphi(P_n)' \varphi(P_n) + \gamma^2 \varphi(P_{n-1})' \varphi(P_{n-1}) \\ &+ \tilde{C}_{n-1}' P_n \tilde{C}_{n-1} - \tilde{C}_n' P_n \tilde{C}_n \\ &+ \int_G \{ \tilde{E}_{n-1}(\theta)' P_n \tilde{E}_{n-1}(\theta) \} \nu(d\theta) \\ &- \int_G \{ \tilde{E}_n(\theta)' P_n \tilde{E}_n(\theta) \} \nu(d\theta) \\ &= (P_n - P_{n+1}) \tilde{A}_n + \tilde{A}_n' (P_n - P_{n+1}) + \tilde{C}_n' (P_n - P_{n+1}) \tilde{C}_n \\ &+ \int_G \{ \tilde{E}_n(\theta)' (P_n - P_{n+1}) \tilde{E}_n(\theta) \} \nu(d\theta) \\ &+ (\varphi(P_{n-1}) - \varphi(P_n))' \Sigma_0(P_n) (\varphi(P_{n-1}) - \varphi(P_n)), \end{aligned}$$

where  $\tilde{A}_n = A_{11} + B_{11}\varphi(P_n)$ ,  $\tilde{C}_n = C_{11} + D_{11}\varphi(P_n)$ ,  $\tilde{E}_n = E_{11} + F_{11}\varphi(P_n)$ . By Lemma 3,  $(P_n - P_{n+1}) \geq 0$ . Repeat the same procedure, we can also get the decreasing sequence  $\{Q_n\}_{n=1}^\infty$ .

By Lemma 5 and Lemma 6, when  $\xi = xW_t, x \in \mathbb{R}^n$ ,

$$\begin{aligned} & J_1(0, \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; t, \xi) = \\ & \mathbb{E} \langle xW_t, P_n(t)xW_t \rangle \geq -\mu \mathbb{E}|xW_t|^2. \end{aligned}$$

Then  $P_n(t) \geq -\mu I$  for  $t \in [0, T]$ . When  $\xi \in \mathbb{R}^n$ , we have

$$\begin{aligned} & J_1(0, \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi \mathbb{E}x^{\varphi, \psi}; t, \xi) \\ &= \langle \mathbb{E}\xi, Q_n(t)\mathbb{E}\xi \rangle \geq -\mu \mathbb{E}|\xi|^2. \end{aligned}$$

Then  $Q_n(t) \geq -\mu I$  for  $t \in [0, T]$ .

Considering that  $0 \geq P_1 \geq P_2 \geq \dots \geq P_n \geq \dots \geq -\mu I$  and  $0 \geq Q_1 \geq Q_2 \geq \dots \geq Q_n \geq \dots \geq -\mu I$ . By monotone convergence theorem, there exists  $P, Q$  such that  $P_n \rightarrow P$ ,  $Q_n \rightarrow Q$ . Because of Lebesgue's dominated convergence theorem,

$$\begin{aligned} P(t) &= \lim_{n \rightarrow \infty} P_n(t) = P(T) + \lim_{n \rightarrow \infty} \int_t^T f(s, P_n; P_{n-1}) ds \\ &= P(T) + \int_t^T \lim_{n \rightarrow \infty} f(s, P_n; P_{n-1}) ds \\ &= P(T) + \int_t^T f(s, P; P) ds \end{aligned}$$

satisfies (12). Moreover, by Lemma 7,

$$\Sigma_0(t, P(t)) = \lim_{n \rightarrow \infty} \Sigma_0(t, P_n(t)) \geq \delta I > 0,$$

so is  $\Sigma_2^\gamma(t, P(t))$  on  $[0, T]$ . Repeating the procedure for  $Q_n$ , and then derives the DRE (12)-(13) having a solution  $(P, Q)$  on  $[0, T]$ .



Suppose  $\tilde{P} \in C([0, T]; \mathbb{R}^{n \times n})$  is another solution of (12). Set  $\hat{P} \triangleq P - \tilde{P}$ . Then  $\hat{P}$  satisfies

$$\begin{cases} \mathcal{S}(\hat{P}) + M'_{11}M_{11} - \mathcal{G}'(\hat{P})\Sigma_0^{-1}(P)\mathcal{G}'(P) \\ - \mathcal{G}(\tilde{P})\Sigma_0^{-1}(\tilde{P})\mathcal{G}'(\tilde{P}) \\ + \mathcal{G}(\tilde{P})\Sigma_0^{-1}(P)D'_{11}\hat{P}D_{11}\Sigma_0^{-1}(\tilde{P})\mathcal{G}'(\tilde{P}) + \mathcal{G}(\tilde{P}) \cdot \\ \Sigma_0^{-1}(P) \int_G F'_{11}\hat{P}F_{11}\nu(d\theta)\Sigma_0^{-1}(\tilde{P})\mathcal{G}'(\tilde{P}) = 0, \\ \hat{P}(T) = 0, \end{cases}$$

where  $\Sigma_0(P) > 0$  and  $\Sigma_0(\tilde{P}) > 0$ . Since  $|\Sigma_0^{-1}(P)|$  and  $|\Sigma_0^{-1}(\tilde{P})|$  are uniformly bounded due to their continuity, we can apply Gronwall's inequality to get  $\hat{P}(t) \equiv 0$ . This proves the uniqueness of the equation (12). Repeating the previous steps, the uniqueness for equation (13) is derived due to the uniform boundedness of all the coefficients. The proof is completed. ■

#### IV. STOCHASTIC $H_2/H_\infty$ CONTROL

*Theorem 1:* Finite horizon  $H_2/H_\infty$  control has solution  $(u^*(t, x), v^*(t, x))$ , where  $u^*(t, x)$  and  $v^*(t, x)$  are the following time-variant feedback strategies:

$$\begin{aligned} u^*(t, x) &= K_2(t)x(t) + \tilde{K}_2(t)\mathbb{E}(x(t)) \\ &= K_2(t)[x(t) - \mathbb{E}(x(t))] + (K_2(t) + \tilde{K}_2(t))\mathbb{E}(x(t)), \\ v^*(t, x) &= K_1(t)x(t) + \tilde{K}_1(t)\mathbb{E}(x(t)) \\ &= K_1(t)[x(t) - \mathbb{E}(x(t))] + (K_1(t) + \tilde{K}_1(t))\mathbb{E}(x(t)), \end{aligned} \quad (22)$$

respectively, iff the four sets of coupled Riccati equations

$$\begin{cases} \mathcal{S}_1(P_1) - \mathcal{G}_1(P_1)\Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1) = 0, \\ P_1(T) = 0, \\ \Sigma_0(P_1) > 0, \end{cases} \quad (23)$$

$$\begin{cases} \tilde{\mathcal{S}}_1(P_1, Q_1) - \tilde{\mathcal{G}}_1(P_1, Q_1)\Sigma_2(P_1)^{-1}\tilde{\mathcal{G}}'_1(P_1, Q_1) = 0, \\ Q_1(T) = 0, \\ \Sigma_2(P_1) > 0, \end{cases} \quad (24)$$

$$\begin{cases} \mathcal{S}_2(P_2) - \mathcal{G}_2(P_2)\Sigma_0^{-1}(P_2)\mathcal{G}'_2(P_2) = 0, \\ P_2(T) = 0, \\ \tilde{\Sigma}_0(P_2) > 0, \end{cases} \quad (25)$$

$$\begin{cases} \tilde{\mathcal{S}}_2(P_2, Q_2) - \tilde{\mathcal{G}}_2(P_2, Q_2)\Sigma_2^{-1}(P_2)\tilde{\mathcal{G}}'_2(P_2, Q_2) = 0, \\ Q_2(T) = 0, \\ \tilde{\Sigma}_2(P_2) > 0, \end{cases} \quad (26)$$

have the solution  $(P_1, Q_1; P_2, Q_2; K_1, \tilde{K}_1; K_2, \tilde{K}_2)$  on  $[0, T]$ . Furthermore,  $P_1(t), Q_1(t) < 0$ ,  $P_2(t), Q_2(t) > 0$ . In this case,

1)

$$\begin{aligned} u^*(t, x) &= -\tilde{\Sigma}_0^{-1}(P_2)\mathcal{G}'_2(P_2)(x(t-) - \mathbb{E}(x(t-))) \\ &\quad - \tilde{\Sigma}_2^{-1}(P_2)\tilde{\mathcal{G}}'_2(P_2, Q_2)\mathbb{E}(x(t-)), \\ v^*(t, x) &= -\Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x(t-) - \mathbb{E}(x(t-))) \\ &\quad - \Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)\mathbb{E}(x(t-)), \end{aligned}$$

$$\begin{aligned} J_1(u^*, v^*; 0, x_0) &= \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_1(0)(x_0 - \mathbb{E}x_0) \rangle \\ &\quad + \langle \mathbb{E}x_0, Q_1(0)\mathbb{E}x_0 \rangle, \\ J_2(u^*, v^*; 0, x_0) &= \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_2(0)(x_0 - \mathbb{E}x_0) \rangle \\ &\quad + \langle \mathbb{E}x_0, Q_2(0)\mathbb{E}x_0 \rangle, \end{aligned}$$

where

$$\begin{aligned} \mathcal{S}_1(P_1) &= \dot{P}_1 + P_1(A + B_2K_2) + (A + B_2K_2)'P_1 \\ &\quad + (C + D_2K_2)'P_1(C + D_2K_2) \\ &\quad + \int_G \{(E + F_2K_2)'(\theta)P_1(E + F_2K_2)(\theta)\}\nu(d\theta) \\ &\quad - M'M - K_2'K_2, \\ \mathcal{G}_1(P_1) &= P_1B_1 + (C + D_2K_2)'P_1D_1 \\ &\quad + \int_G \{(E + F_2K_2)'(\theta)P_1F_1(\theta)\}\nu(d\theta), \\ \Sigma_0(P_1) &= \gamma^2I + D_1'P_1D_1 + \int_G \{F_1'(\theta)P_1F_1(\theta)\}\nu(d\theta), \\ \tilde{\mathcal{S}}_1(P_1, Q_1) &= \dot{Q}_1 + Q_1[A + \bar{A} + (B_2 + \bar{B}_2)(K_2 + \tilde{K}_2)] \\ &\quad + \{A + \bar{A} + (B_2 + \bar{B}_2)(K_2 + \tilde{K}_2)\}'Q_1 \\ &\quad + \{C + \bar{C} + (D_2 + \bar{D}_2)(K_2 + \tilde{K}_2)\}'P_1 \cdot \\ &\quad [C + \bar{C} + (D_2 + \bar{D}_2)(K_2 + \tilde{K}_2)] \\ &\quad + \int_G \{[E + \bar{E} + (F_2 + \bar{F}_2)(K_2 + \tilde{K}_2)]'(\theta)P_1 \cdot \\ &\quad \{E + \bar{E} + (F_2 + \bar{F}_2)(K_2 + \tilde{K}_2)\}(\theta)\}\nu(d\theta) \\ &\quad - M'M - K_2'K_2 - \tilde{K}_2'\tilde{K}_2, \\ \tilde{\mathcal{G}}_1(P_1, Q_1) &= Q_1(B_1 + \bar{B}_1) + [C + \bar{C} + (D_2 + \bar{D}_2)(K_2 \\ &\quad + \tilde{K}_2)]P_1(D_1 + \bar{D}_1) + \int_G [E + \bar{E} + (F_2 + \bar{F}_2)(K_2 \\ &\quad + \tilde{K}_2)](\theta)P_1(F_1 + \bar{F}_1)(\theta)\nu(d\theta), \\ \Sigma_2(P_1) &= \gamma^2I + (D_1 + \bar{D}_1)'P_1(D_1 + \bar{D}_1) \\ &\quad + \int_G \{(F_1 + \bar{F}_1)(\theta)'P_1(F_1 + \bar{F}_1)(\theta)\}\nu(d\theta), \end{aligned}$$

$$\begin{aligned} \mathcal{S}_2(P_2) &= \dot{P}_2 + P_2(A + B_1K_1) + (A + B_1K_1)'P_2 \\ &\quad + (C + D_1K_1)'P_2(C + D_1K_1) + \int_G \{(E + F_1K_1)' \\ &\quad (\theta)P_2(E + F_1K_1)(\theta)\}\nu(d\theta) + M'M, \end{aligned}$$

$$\begin{aligned} \mathcal{G}_2(P_2) &= P_2B_2 + (C + D_1K_1)'P_2D_2 \\ &\quad + \int_G \{(E + F_1K_1)'(\theta)P_2F_2(\theta)\}\nu(d\theta), \\ \tilde{\Sigma}_0(P_2) &= I + D_2'P_2D_2 + \int_G \{F_2'(\theta)P_2F_2(\theta)\}\nu(d\theta), \end{aligned}$$



$$\begin{aligned}\tilde{S}_2(P_2, Q_2) &= \dot{Q}_2 + Q_2\{A + \bar{A} + (B_1 + \bar{B}_1)(K_1 + \tilde{K}_1)\} + \\ &\quad \{A + \bar{A} + (B_1 + \bar{B}_1)(K_1 + \tilde{K}_1)\}'Q_2 \\ &\quad + \{C + \bar{C} + (D_1 + \bar{D}_1)(K_1 + \tilde{K}_1)\}'P_2 \cdot \\ &\quad \{C + \bar{C} + (D_1 + \bar{D}_1)(K_1 + \tilde{K}_1)\} \\ &\quad + \int_G \{(E + \bar{E} + (F_1 + \bar{F}_1)(K_1 + \tilde{K}_1))'(\theta)P_2 \cdot \\ &\quad (E + \bar{E} + (F_1 + \bar{F}_1)(K_1 + \tilde{K}_1))(\theta)\}'\nu(d\theta) \\ &\quad + M'M,\end{aligned}$$

$$\begin{aligned}\tilde{G}_2(P_2, Q_2) &= Q_2(B_2 + \bar{B}_2) + [C + \bar{C} + (D_1 \\ &\quad + \bar{D}_1)(K_1 + \tilde{K}_1)]P_2(D_2 + \bar{D}_2) \\ &\quad + \int_G \{E + \bar{E} + (F_1 + \bar{F}_1)(K_1 + \tilde{K}_1)\}'(\theta) \cdot \\ &\quad P_2(F_2 + \bar{F}_2)(\theta)\nu(d\theta),\end{aligned}$$

$$\begin{aligned}\tilde{\Sigma}_2(P_2) &= I + (D_2 + \bar{D}_2)'P_2(D_2 + \bar{D}_2) + \\ &\quad \int_G \{(F_2 + \bar{F}_2)(\theta)'P_2(F_2 + \bar{F}_2)(\theta)\}'\nu(d\theta).\end{aligned}$$

*Proof:* Sufficiency: From the state equation, we have

$$\begin{cases} dx(t) = \{A(t)x(t) + B_2(t)u(t) + B_1(t)v(t)\} dt \\ \quad + \{C(t)x(t) + D_2(t)u(t) + D_1(t)v(t)\} dW(t) \\ \quad + \int_G \{\mathcal{E}(t, \theta)x(t-) + \mathcal{F}_2(t, \theta)u(t) \\ \quad + \mathcal{F}_1(t, \theta)v(t)\}'\tilde{N}_p(d\theta, dt), \\ x(0) = x_0, \end{cases}$$

Then by Itô formulation and DRE (23), it follows that

$$\begin{aligned}& J_1(K_2x + \tilde{K}_2\mathbb{E}(x), v; 0, x_0) \\ &= \mathbb{E} \int_0^T (\gamma^2 v'v - x'M'Mx - (u^*)'(u^*)) dt \\ &\quad + \mathbb{E} \int_0^T d((x - \mathbb{E}x)'P_1(x - \mathbb{E}x)) + \mathbb{E} \int_0^T d((\mathbb{E}x)'Q_1(\mathbb{E}x)) \\ &\quad + \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_1(0)(x_0 - \mathbb{E}x_0) \rangle + \langle \mathbb{E}x_0, Q_1(0)\mathbb{E}x_0 \rangle \\ &= \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_1(0)(x_0 - \mathbb{E}x_0) \rangle + \langle \mathbb{E}x_0, Q_1(0)\mathbb{E}x_0 \rangle \\ &\quad + \mathbb{E} \int_0^T \left\{ \{(v - \mathbb{E}v) + \Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x - \mathbb{E}x)\}'\Sigma_0(P_1) \cdot \right. \\ &\quad \{(v - \mathbb{E}v) + \Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x - \mathbb{E}x)\} \\ &\quad + \{(\mathbb{E}v) + \Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)(\mathbb{E}x)\}'\Sigma_2(P_1)\{(\mathbb{E}v) \\ &\quad \left. + \Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)(\mathbb{E}x)\} \right\} dt.\end{aligned}$$

It is obvious that  $v - \mathbb{E}v = -\Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x - \mathbb{E}x)$  and  $\mathbb{E}v = -\Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)(\mathbb{E}x)$  arrive at the minimum of cost function  $J_1(u^*, v; 0, x_0)$ , i.e.

$$\begin{aligned}v^* &= -\Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x(t-) - \mathbb{E}x(t-)) \\ &\quad - \Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)(\mathbb{E}x(t-)),\end{aligned}$$

$$\begin{aligned}J_1(u^*, v^*; 0, x_0) &= \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_1(0)(x_0 - \mathbb{E}x_0) \rangle \\ &\quad + \langle \mathbb{E}x_0, Q_1(0)\mathbb{E}x_0 \rangle.\end{aligned}$$

When  $x_0 = 0$ ,  $J_1(u^*, v; 0, 0) \geq 0$ , then  $\|\mathcal{L}\| \leq \gamma$ . By the same procedure,

$$\begin{aligned}& J_2(u, v^*; 0, x_0) \\ &= \mathbb{E} \langle x_0 - \mathbb{E}x_0, P_2(0)(x_0 - \mathbb{E}x_0) \rangle + \langle \mathbb{E}x_0, Q_2(0)\mathbb{E}x_0 \rangle \\ &\quad + \mathbb{E} \int_0^T \left\{ \{(u - \mathbb{E}u) + \tilde{\Sigma}_0^{-1}(P_2)\mathcal{G}'_2(P_2)\}'(x - \mathbb{E}x)\}'\tilde{\Sigma}_0(P_2) \cdot \right. \\ &\quad \{(u - \mathbb{E}u) + \tilde{\Sigma}_0^{-1}(P_2)\mathcal{G}'_2(P_2)\}'(x - \mathbb{E}x) \\ &\quad + \{(\mathbb{E}u) + \tilde{\Sigma}_2^{-1}(P_2)\tilde{\mathcal{G}}'_2(P_2, Q_2)(\mathbb{E}x)\}' \cdot \\ &\quad \left. \tilde{\Sigma}_2(P_2)\{(\mathbb{E}u) + \tilde{\Sigma}_2^{-1}(P_2)\tilde{\mathcal{G}}'_2(P_2, Q_2)(\mathbb{E}x)\} \right\} dt,\end{aligned}$$

and

$$\begin{aligned}u^* &= -\tilde{\Sigma}_0^{-1}(P_2)\mathcal{G}'_2(P_2)(x(t-) - \mathbb{E}x(t-)) \\ &\quad - \tilde{\Sigma}_2^{-1}(P_2)\tilde{\mathcal{G}}'_2(P_2, Q_2)\mathbb{E}(x(t-)).\end{aligned}$$

The proof of  $\|\mathcal{L}\| < \gamma$  is the same as in MF-SJBRL.

Necessity: Implementing  $u^*(t, x) = K_2(t)x(t) + \tilde{K}_2(t)\mathbb{E}(x(t))$  in system (1), the state equation becomes

$$\begin{cases} dx(t) = \{(A + B_2K_2)x(t) + (\bar{A} + B_2\tilde{K}_2 + \bar{B}_2(K_2 + \tilde{K}_2)) \cdot \\ \quad \mathbb{E}[x(t)] + B_1(t)v(t) + \bar{B}_1(t)\mathbb{E}[v(t)]\} dt + \\ \quad \{(C + D_2K_2)x(t) + (\bar{C} + D_2\tilde{K}_2 + \bar{D}_2(K_2 + \tilde{K}_2))\mathbb{E}[x(t)] \\ \quad + D_1(t)v(t) + \bar{D}_1(t)\mathbb{E}[v(t)]\} dW(t) + \\ \quad \int_G \{(E + F_2K_2)(\theta)x(t-) + (\bar{E} + F_2\tilde{K}_2 + \bar{F}_2(K_2 + \tilde{K}_2)) \\ \quad (\theta)\mathbb{E}[x(t-)] + F_1(t, \theta)v(t) + \bar{F}_1(t, \theta)\mathbb{E}[v(t)]\}'\tilde{N}_p(d\theta, dt), \\ x(0) = x_0, \\ z(t) = \begin{pmatrix} Mx(t) \\ NK_2x(t) + N\tilde{K}_2\mathbb{E}(x(t)) \end{pmatrix}. \end{cases}$$

By definition of  $H_2/H_\infty$  control, we have  $\|\mathcal{L}\| < \gamma$ . Then we can derive that Riccati equation (23) has a unique solution  $(P, Q)$  through MF-SJBRL. And the worst-case disturbance

$$\begin{aligned}v^* &= -\Sigma_0^{-1}(P_1)\mathcal{G}'_1(P_1)(x(t-) - \mathbb{E}(x(t-))) \\ &\quad - \Sigma_2^{-1}(P_1)\tilde{\mathcal{G}}'_1(P_1, Q_1)\mathbb{E}(x(t-)).\end{aligned}$$

Substituting  $v^*(t) = K_1(t)x(t) + \tilde{K}_1(t)\mathbb{E}(x(t))$  into system (1), it is obvious that minimizing  $J_2(u, v^*; 0, x_0)$  is a classical linear quadratic control problem under standard assumption. By using Theorem IV.1. in [17], the Riccati equation (25) has a unique solution. Combining all of the above, we get Theorem 1. The proof is completed. ■

## V. NUMERICAL SIMULATION

In this section, we consider a portfolio problem in financial markets. System (1) represents dynamics of the stock price, external interference  $v(t)$  represents macroeconomic fluctuations, tariff policy, or other factors on the stock price, jumping process simulates the instantaneous impact of such as breaking news events or black swan events or other events on the stock price, and the mean field term reflects the interaction between a large number of investors and the market (according to market pricing theory, the game between investors affects the overall price trend through anticipation transmission). So the stock price is modeled as formula (1).

In order to ensure the robustness of the investment strategy, we model it as  $H_2/H_\infty$  control problem represented by (2) and (3). Not only the impact of external interference is considered to avoid reliance on policy intervention leading to a large withdrawal of the portfolio, but also the implementation cost (3) is considered. For continuous coupled Riccati equations, it is not easy to get its unique solution. Therefore, we consider to discretize it and obtain the solution by numerically simulating the difference equation. If the matrix-valued equations (23), (25) are solvable, we can obtain  $H_2/H_\infty$  control by the algorithm as follows:

- 1) For given  $\gamma > 0$ , we can compute  $\Sigma_0, \Sigma_2, \tilde{\Sigma}_0, \tilde{\Sigma}_2$  and  $K_1, K_1 + \tilde{K}_1, K_2, K_2 + \tilde{K}_2$ .
- 2) If  $\Sigma_0 > 0, \Sigma_2 > 0, \tilde{\Sigma}_0 > 0, \tilde{\Sigma}_2 > 0$ , we can substitute the obtained  $K_1, K_1 + \tilde{K}_1, K_2, K_2 + \tilde{K}_2$  into the matrix equations (23), (24), (25), (26). Then  $P_1(T - \Delta t), Q_1(T - \Delta t), P_2(T - \Delta t), Q_2(T - \Delta t)$  are available by solving the matrix equations (23), (24), (25), (26) with  $P_1(T), Q_1(T), P_2(T), Q_2(T)$ .
- 3) Repeat the above procedures,  $(K_1, K_1 + \tilde{K}_1, K_2, K_2 + \tilde{K}_2)$  and  $(P_1, Q_1, P_2, Q_2)$  can be computed recursively for  $t = T, T - \Delta t, T - 2\Delta t, \dots, \Delta t, 0$ .

Next, we present a two-dimensional numerical example. In system (1), set  $T = 0.1, \Delta t = 0.001, \gamma = 5, G = \{1\}, \nu(G) = 1$ . According to the above algorithm, we can obtain the solutions of the coupled matrix-valued equations (23), (24), (25), (26) backward by using standard fourth-order Runge-Kutta iteration procedure. Figure 1 and figure 2 shows the evolution of  $P_1, Q_1$  and  $P_2, Q_2$ . Figure 3 and 4 shows the evolution of  $\det(P_1), \det(Q_1)$  and  $\det(P_2), \det(Q_2)$ .

For simplicity, we set the parameter matrix to be a constant matrix in example. There is no intrinsic difficulty for time-varying matrices. The parameters of system (1) are set as follows:

$$\begin{aligned}
 M &= \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}, A = \begin{bmatrix} 1 & 2 \\ -2 & 1 \end{bmatrix}, \bar{A} = \begin{bmatrix} 1 & -2 \\ 2 & 1 \end{bmatrix}, B_1 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}, \\
 \bar{B}_1 &= \begin{bmatrix} 0.5 \\ -1 \end{bmatrix}, B_2 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}, \bar{B}_2 = \begin{bmatrix} 2 \\ -1 \end{bmatrix}, C = \begin{bmatrix} 1 & 2 \\ 2 & 1 \end{bmatrix}, \\
 \bar{C} &= \begin{bmatrix} 1 & 2 \\ 2 & 1 \end{bmatrix}, D_1 = \begin{bmatrix} 2 \\ 1 \end{bmatrix}, \bar{D}_1 = \begin{bmatrix} 1 \\ 1 \end{bmatrix}, D_2 = \begin{bmatrix} 2 \\ -2 \end{bmatrix}, \\
 \bar{D}_2 &= \begin{bmatrix} -2 \\ 2 \end{bmatrix}, E = \theta * \begin{bmatrix} -1 & 1 \\ 3 & 1 \end{bmatrix}, \bar{E} = \theta * \begin{bmatrix} -1 & 0 \\ 3 & 1 \end{bmatrix}, \\
 F_1 &= \theta * \begin{bmatrix} 2 \\ 1 \end{bmatrix}, \bar{F}_1 = \theta * \begin{bmatrix} 2 \\ 2 \end{bmatrix}, F_2 = \theta * \begin{bmatrix} 2 \\ 1 \end{bmatrix}, \bar{F}_2 = \theta * \begin{bmatrix} 2 \\ 2 \end{bmatrix}.
 \end{aligned}$$

If we keep reducing the value of  $\gamma$ , we will meet a threshold which determine the solvability of Riccati equations (23)-(25).

## VI. SOLVE $H_\infty$ CONTROL BY REINFORCEMENT LEARNING

In this section, we propose a reinforcement learning approach to solve the  $H_\infty$  control problem for the mean-field

system (27) without prior knowledge of the system dynamics.

$$\begin{cases}
 d\mathbf{x}(t) = \{A(t)\mathbf{x}(t) + \bar{A}(t)\mathbb{E}[\mathbf{x}(t)] + B_2(t)u(t) \\
 + \bar{B}_2(t)\mathbb{E}[u(t)] + B_1(t)v(t) + \bar{B}_1(t)\mathbb{E}[v(t)]\} dt \\
 + \{C(t)\mathbf{x}(t) + \bar{C}(t)\mathbb{E}[\mathbf{x}(t)] + D_2(t)u(t) \\
 + \bar{D}_2(t)\mathbb{E}[u(t)] + D_1(t)v(t) + \bar{D}_1(t)\mathbb{E}[v(t)]\} dW(t), \\
 \mathbf{x}(0) = \begin{pmatrix} \xi - \mathbb{E}[\xi] \\ \mathbb{E}[\xi] \end{pmatrix}.
 \end{cases} \quad (27)$$

Based on the discussions in the previous sections, we have the following lemma.

**Lemma 8:** Assume that  $\bar{u}(t) = L * [x(t) - E(x(t))] + \tilde{L} * E(x(t))$  is an  $H_\infty$  control and  $\bar{v}(t) = F * [x(t) - E(x(t))] + \tilde{F} * E(x(t))$  is the corresponding worst-case disturbance, then

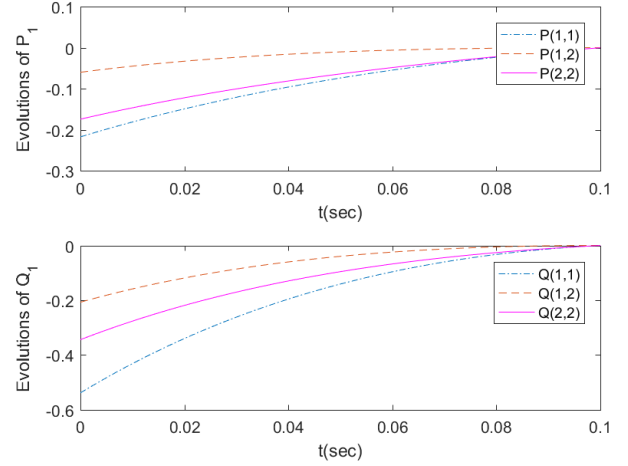


Fig. 1. The trajectories of  $P_1$  and  $Q_1$

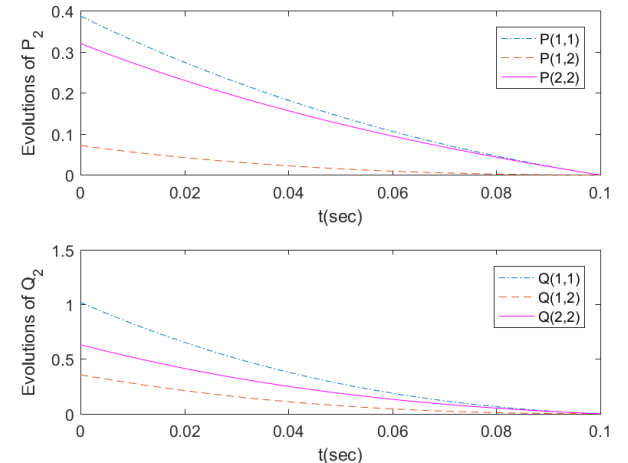
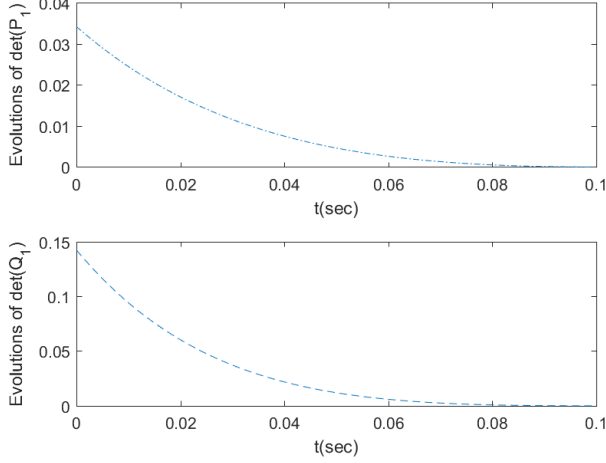
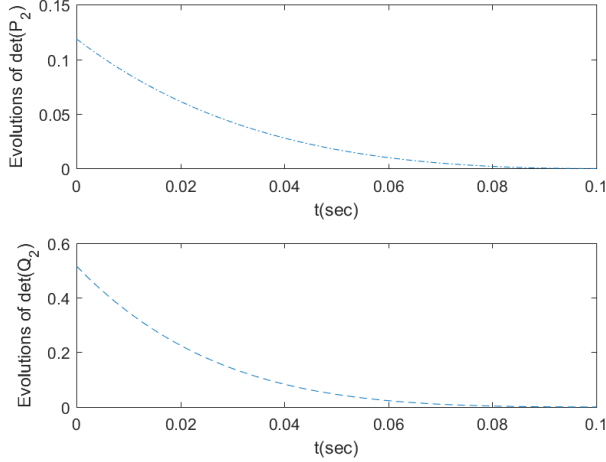
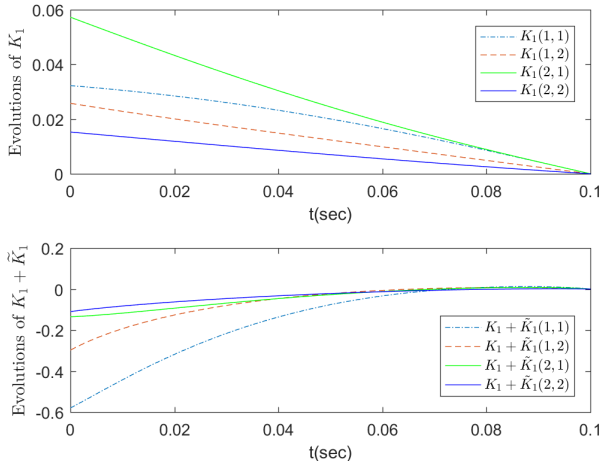
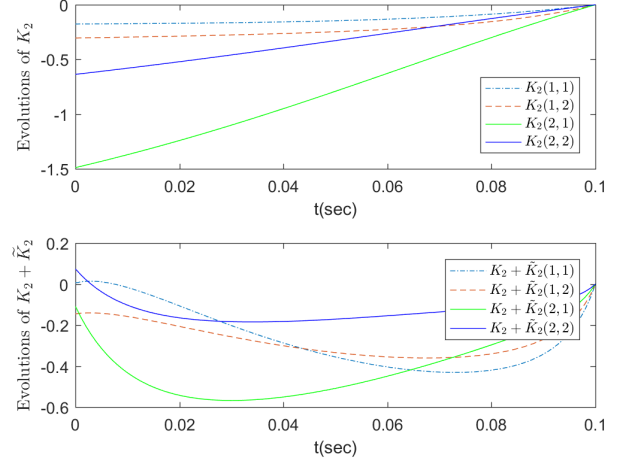


Fig. 2. The trajectories of  $P_2$  and  $Q_2$

Fig. 3. The trajectories of  $\det(P_1)$  and  $\det(Q_1)$ Fig. 4. The trajectories of  $\det(P_2)$  and  $\det(Q_2)$ Fig. 5. The trajectories of  $K_1$  and  $K_1 + \tilde{K}_1$ Fig. 6. The trajectories of  $K_2$  and  $K_2 + \tilde{K}_2$ 

the following DREs:

$$\begin{cases} \dot{P} + PA + A'P + C'PC + M'M + [PB_1 + C'PD_1] \\ [\gamma^2 I - D_1'PD_1]^{-1}[PB_1 + C'PD_1]' - \\ [PB_2 + C'PD_2][I + D_2'PD_2]^{-1}[PB_2 + C'PD_2]' = 0, \\ P(T) = 0, \\ \dot{Q} + Q(A + \bar{A}) + (A + \bar{A})'Q + (C + \bar{C})'P(C + \bar{C}) \\ + M'M + [Q(B_1 + \bar{B}_1) + (C + \bar{C})'P(D_1 + \bar{D}_1)] \\ [\gamma^2 I - (D_1 + \bar{D}_1)'P(D_1 + \bar{D}_1)]^{-1} \\ [Q(B_1 + \bar{B}_1) + (C + \bar{C})'P(D_1 + \bar{D}_1)]' \\ - [Q(B_2 + \bar{B}_2) + (C + \bar{C})'P(D_2 + \bar{D}_2)] \\ [I + (D_2 + \bar{D}_2)'P(D_2 + \bar{D}_2)]^{-1} \\ [Q(B_2 + \bar{B}_2) + (C + \bar{C})'P(D_2 + \bar{D}_2)]' = 0, \\ Q(T) = 0, \end{cases} \quad (28)$$

admit a solution pair  $(P, Q)$  and

$$\begin{aligned} L &= -[I + D_2'PD_2]^{-1}[PB_2 + C'PD_2]', \\ F &= [\gamma^2 I - D_1'PD_1]^{-1}[PB_1 + C'PD_1]', \\ \tilde{L} &= -[I + (D_2 + \bar{D}_2)'P(D_2 + \bar{D}_2)]^{-1} \\ &\quad [Q(B_2 + \bar{B}_2) + (C + \bar{C})'P(D_2 + \bar{D}_2)]', \\ \tilde{F} &= [\gamma^2 I - (D_1 + \bar{D}_1)'P(D_1 + \bar{D}_1)]^{-1} \\ &\quad [Q(B_1 + \bar{B}_1) + (C + \bar{C})'P(D_1 + \bar{D}_1)]'. \end{aligned} \quad (29)$$

This lemma leads to the following Lyapunov equations for policy evaluation in the  $k$ -th iteration:

$$\begin{cases} \dot{P}^{k+1,j+1} + P^{k+1,j+1}(A + B_2L^{k+1,j} + B_1F^k) + \\ (A + B_2L^{k+1,j} + B_1F^k)'P^{k+1,j+1} + (C + D_2L^{k+1,j} \\ + D_1F^k)'P^{k+1,j+1}(C + D_2L^{k+1,j} + D_1F^k) \\ + M'M + (L^{k+1,j})'L^{k+1,j} - \gamma^2(F^k)'F^k = 0, \\ P^{k+1,j+1}(T) = 0, \end{cases}$$

$$\begin{cases} \dot{Q}^{k+1,j+1} + Q^{k+1,j+1}[A + \bar{A} + (B_2 + \bar{B}_2)(\tilde{L}^{k+1,j}) + \\ (B_1 + \bar{B}_1)(\tilde{F}^k)] + [A + \bar{A} + (B_2 + \bar{B}_2)(\tilde{L}^{k+1,j}) \\ + (B_1 + \bar{B}_1)(\tilde{F}^k)]' Q^{k+1,j+1} + [C + \bar{C} + \\ (D_2 + \bar{D}_2)\tilde{L}^{k+1,j} + (D_1 + \bar{D}_1)\tilde{F}^k]' P^{k+1,j+1} \\ [C + \bar{C} + (D_2 + \bar{D}_2)\tilde{L}^{k+1,j} + (D_1 + \bar{D}_1)\tilde{F}^k] \\ + M' M + (\tilde{L}^{k+1,j})' \tilde{L}^{k+1,j} - \gamma^2 \tilde{F}^k{}' \tilde{F}^k = 0, \\ Q^{k+1,j+1}(T) = 0, \end{cases} \quad (30)$$

and the equations for policy improvement:

$$\begin{aligned} L^{k+1,j+1} &= -[I + D_2' P^{k+1,j+1} D_2]^{-1} \\ &\quad [P^{k+1,j+1} B_2 + (C + D_1 F^k)' P^{k+1,j+1} D_2]', \\ F^{k+1} &= [\gamma^2 I - D_1' P^{k+1} D_1]^{-1} \\ &\quad [P^{k+1} B_1 + (C + D_2 L^{k+1})' P^{k+1} D_1]', \\ \tilde{L}^{k+1,j+1} &= -[I + (D_2 + \bar{D}_2)' P^{k+1,j+1} (D_2 + \bar{D}_2)]^{-1} \\ &\quad [Q^{k+1,j+1} (B_2 + \bar{B}_2) + \{(C + \bar{C}) + (D_1 + \bar{D}_1) \\ &\quad \tilde{F}^k\}' P^{k+1,j+1} (D_2 + \bar{D}_2)]', \\ \tilde{F}^{k+1} &= [\gamma^2 I - (D_1 + \bar{D}_1)' P^{k+1} (D_1 + \bar{D}_1)]^{-1} \\ &\quad [Q^{k+1} (B_1 + \bar{B}_1) + \{(C + \bar{C}) + (D_2 + \bar{D}_2) \\ &\quad \tilde{L}^{k+1}\}' P^{k+1} (D_1 + \bar{D}_1)]'. \end{aligned} \quad (31)$$

Applying Itô's formula to  $(x(\tau) - \mathbb{E}[x(\tau)])^\top P(x(\tau) - \mathbb{E}[x(\tau)])$  and  $(\mathbb{E}[x(\tau)])^\top Q(\mathbb{E}[x(\tau)])$ , then integrating along the trajectory of system (27) and taking the conditional expectation, we obtain from (30) that (abbreviate  $(P^{k+1,j+1}, Q^{k+1,j+1})$  as  $(P^{k+1}, Q^{k+1})$ ):

$$\begin{aligned} &\mathbb{E} \left[ (x_{t_{i+1}} - \mathbb{E}[x_{t_{i+1}}])^\top P_{t_{i+1}}^{k+1} (x_{t_{i+1}} - \mathbb{E}[x_{t_{i+1}}]) \mid \mathcal{F}_{t_i} \right] + \\ &\mathbb{E}[x_{t_{i+1}} \mid \mathcal{F}_{t_i}]^\top Q_{t_{i+1}}^{k+1} \mathbb{E}[x_{t_{i+1}} \mid \mathcal{F}_{t_i}] - x_{t_i}^\top Q_{t_i}^{k+1} x_{t_i} \\ &= \mathbb{E} \left\{ \int_{t_i}^{t_{i+1}} \left[ -\mathbb{E}[x(\tau)]^\top \left( M^\top M - \gamma^2 (\tilde{F}^k)^\top \tilde{F}^k + \right. \right. \right. \\ &\quad \left. \left. (\tilde{L}^{k+1,j})^\top \tilde{L}^{k+1,j} \right) \mathbb{E}[x(\tau)] - (x(\tau) - \mathbb{E}[x(\tau)])^\top (M^\top M \right. \\ &\quad \left. - \gamma^2 (F^k)^\top F^k + (L^{k+1,j})^\top L^{k+1,j}) (x(\tau) - \mathbb{E}[x(\tau)]) \right. \\ &\quad \left. + 2 \left( \mathbb{E}[u(\tau)] - \tilde{L}^{k+1,j} \mathbb{E}[x(\tau)] \right)^\top \{(B_2 + \bar{B}_2)^\top Q^{k+1} + \right. \\ &\quad \left. [(D_2 + \bar{D}_2)^\top P^{k+1} (C + \bar{C}) + (D_1 + \bar{D}_1) \tilde{F}^k]\} \mathbb{E}[x(\tau)] \right. \\ &\quad \left. + 2 \left( \mathbb{E}[v(\tau)] - \tilde{F}^k \mathbb{E}[x(\tau)] \right)^\top \{(B_1 + \bar{B}_1)^\top Q^{k+1} + \right. \\ &\quad \left. (D_1 + \bar{D}_1)^\top P^{k+1} [C + \bar{C} + (D_2 + \bar{D}_2) \tilde{L}^{k+1,j}]\} \mathbb{E}[x(\tau)] \right. \\ &\quad \left. + 2 \left( (u(\tau) - \mathbb{E}[u(\tau)]) - L^{k+1,j} (x(\tau) - \mathbb{E}[x(\tau)]) \right)^\top \right. \\ &\quad \left. \{B_2^\top P^{k+1} + D_2^\top P^{k+1} (C + D_1 F^k)\} (x(\tau) - \mathbb{E}[x(\tau)]) \right. \\ &\quad \left. + 2 \left( (v(\tau) - \mathbb{E}[v(\tau)]) - F^k (x(\tau) - \mathbb{E}[x(\tau)]) \right)^\top [B_1^\top P^{k+1} \right. \\ &\quad \left. + D_1^\top P^{k+1} (C + D_2 L^{k+1,j})\} (x(\tau) - \mathbb{E}[x(\tau)]) \right. \\ &\quad \left. + (u(\tau) - \mathbb{E}[u(\tau)])^\top D_2^\top P^{k+1} D_2 (u(\tau) - \mathbb{E}[u(\tau)]) \right. \\ &\quad \left. - (x(\tau) - \mathbb{E}[x(\tau)])^\top (L^{k+1,j})^\top D_2^\top P^{k+1} D_2 L^{k+1,j} (x(\tau) - \right. \\ &\quad \left. \mathbb{E}[x(\tau)]) + (v(\tau) - \mathbb{E}[v(\tau)])^\top D_1^\top P^{k+1} D_1 (v(\tau) - \mathbb{E}[v(\tau)]) \right\} \end{aligned}$$

$$\begin{aligned} &- (x(\tau) - \mathbb{E}[x(\tau)])^\top F^k{}^\top D_1^\top P^{k+1} D_1 F^k (x(\tau) - \mathbb{E}[x(\tau)]) \\ &+ \mathbb{E}[u(\tau)]^\top (D_2 + \bar{D}_2)^\top P^{k+1} (D_2 + \bar{D}_2) (\mathbb{E}[u(\tau)]) \\ &- \mathbb{E}[x(\tau)]^\top (L^{k+1,j})^\top (D_2 + \bar{D}_2)^\top P^{k+1} \\ &(D_2 + \bar{D}_2) (L^{k+1,j}) \mathbb{E}[x(\tau)] \\ &+ (\mathbb{E}[v(\tau)])^\top (D_1 + \bar{D}_1)^\top P^{k+1} (D_1 + \bar{D}_1) (\mathbb{E}[v(\tau)]) \\ &- \mathbb{E}[x(\tau)]^\top F^k{}^\top (D_1 + \bar{D}_1)^\top P^{k+1} (D_1 + \bar{D}_1) F^k \mathbb{E}[x(\tau)] \\ &+ 2(u(\tau) - \mathbb{E}[u(\tau)])^\top D_2^\top P^{k+1} D_1 (v(\tau) - \mathbb{E}[v(\tau)]) \\ &- 2(u(\tau) - \mathbb{E}[u(\tau)])^\top D_2^\top P^{k+1} D_1 F^k (x(\tau) - \mathbb{E}[x(\tau)]) \\ &- 2(x(\tau) - \mathbb{E}[x(\tau)])^\top (L^{k+1,j})^\top D_2^\top P^{k+1} D_1 \\ &(v(\tau) - \mathbb{E}[v(\tau)]) + 2(x(\tau) - \mathbb{E}[x(\tau)])^\top (L^{k+1,j})^\top \\ &D_2^\top P^{k+1} D_1 F^k (x(\tau) - \mathbb{E}[x(\tau)]) \\ &+ 2\mathbb{E}[u(\tau)]^\top (D_2 + \bar{D}_2)^\top P^{k+1} (D_1 + \bar{D}_1) (\mathbb{E}[v(\tau)]) \\ &- 2\mathbb{E}[u(\tau)]^\top (D_2 + \bar{D}_2)^\top P^{k+1} (D_1 + \bar{D}_1) \tilde{F}^k \mathbb{E}[x(\tau)] \\ &- 2\mathbb{E}[x(\tau)]^\top (\tilde{L}^{k+1,j})^\top (D_2 + \bar{D}_2)^\top P^{k+1} (D_1 + \bar{D}_1) \mathbb{E}[v(\tau)] \\ &+ 2\mathbb{E}[x(\tau)]^\top (\tilde{L}^{k+1,j})^\top (D_2 + \bar{D}_2)^\top P^{k+1} (D_1 + \bar{D}_1) \tilde{F}^k \\ &\mathbb{E}[x(\tau)] \, d\tau \mid \mathcal{F}_{t_i} \}. \end{aligned} \quad (32)$$

For any matrix  $P \in \mathbb{S}^n$  and vector  $x \in \mathbb{R}^n$ , we define

$$\text{svec}(P) := [p_{11}, 2p_{12}, \dots, 2p_{1n}, p_{22}, 2p_{23}, \dots, 2p_{n-1,n}, p_{nn}]^\top \\ \in \mathbb{R}^{\frac{1}{2}n(n+1)},$$

$\bar{x} :=$

$$[x_1^2, x_1 x_2, \dots, x_1 x_n, x_2^2, x_2 x_3, \dots, x_{n-1} x_n, x_n^2]^\top \in \mathbb{R}^{\frac{1}{2}n(n+1)}.$$

Construct the regression column vector as

$$\begin{aligned} \Xi_i^{k+1,j+1} &:= \\ &\left[ \text{svec}(Q^{k+1,j+1}(t_{i+1}))^\top, \text{svec}(Q^{k+1,j+1}(t_i))^\top, \right. \\ &\text{vec}(\tilde{B}_2^{k+1,j+1}(t_i))^\top, \text{vec}(\tilde{B}_1^{k+1,j+1}(t_i))^\top, \\ &\text{vec}(\mathcal{B}_2^{k+1,j+1}(t_i))^\top, \text{vec}(\mathcal{B}_1^{k+1,j+1}(t_i))^\top, \\ &\text{svec}(\tilde{\mathcal{D}}_2^{k+1,j+1}(t_i))^\top, \text{svec}(\tilde{\mathcal{D}}_1^{k+1,j+1}(t_i))^\top, \\ &\text{svec}(\mathcal{D}_2^{k+1,j+1}(t_i))^\top, \text{svec}(\mathcal{D}_1^{k+1,j+1}(t_i))^\top, \\ &\text{vec}(H^{k+1,j+1}(t_i))^\top, \text{vec}(\tilde{H}^{k+1,j+1}(t_i))^\top, \\ &\left. \text{svec}(P^{k+1,j+1}(t_{i+1}))^\top \right]^\top, \end{aligned}$$

where (abbreviate  $(P^{k+1,j+1}, Q^{k+1,j+1})$  as  $(P^{k+1}, Q^{k+1})$ )

$$\begin{aligned} \tilde{B}_2^{(k+1,j+1)} &= (B_2 + \bar{B}_2)^\top Q^{k+1} + [(D_2 + \bar{D}_2)^\top P^{k+1} \\ &(C + \bar{C}) + (D_1 + \bar{D}_1) \tilde{F}^k], \\ \tilde{B}_1^{(k+1,j+1)} &= (B_1 + \bar{B}_1)^\top Q^{k+1} + [(D_1 + \bar{D}_1)^\top P^{k+1} \\ &(C + \bar{C}) + (D_2 + \bar{D}_2) \tilde{L}^{k+1,j}], \\ \mathcal{B}_2^{(k+1,j+1)} &= B_2^\top P^{k+1} + [D_2^\top P^{k+1} (C + D_1 F^k)], \\ \mathcal{B}_1^{(k+1,j+1)} &= B_1^\top P^{k+1} + [D_1^\top P^{k+1} (C + D_2 L^{k+1,j})], \end{aligned}$$

$$\begin{aligned}
\tilde{D}_2^{(k+1,j+1)} &= (D_2 + \bar{D}_2)^\top P^{k+1} (D_2 + \bar{D}_2), \\
\tilde{D}_1^{(k+1,j+1)} &= (D_1 + \bar{D}_1)^\top P^{k+1} (D_1 + \bar{D}_1), \\
\mathcal{D}_2^{(k+1,j+1)} &= D_2^\top P^{k+1} D_2, \\
\mathcal{D}_1^{(k+1,j+1)} &= D_1^\top P^{k+1} D_1, \\
\mathcal{H}^{k+1} &= D_2^\top P^{k+1} D_1, \\
\tilde{\mathcal{H}}^{k+1} &= (D_2 + \bar{D}_2)^\top P^{k+1} (D_1 + \bar{D}_1).
\end{aligned}$$

Then (32) on the interval  $[t_i, t_{i+1}]$  can be reformulated as:

$$\Phi_i^{k+1,j} \Xi_i^{k+1,j+1} = \Theta_i^{k+1,j}. \quad (33)$$

Under the assumption that  $\Phi$  has full column rank (which can be ensured by an appropriate rank condition), the unknown vector  $\Xi^{k+1,j+1}$  can be solved in the least-squares sense by

$$\Xi_i^{k+1,j+1} = \left( \left( \Phi_i^{k+1,j} \right)^\top \Phi_i^{k+1,j} \right)^{-1} \left( \Phi_i^{k+1,j} \right)^\top \Theta_i^{k+1,j},$$

where the matrices  $\Phi$  and  $\Theta$  are defined by the collected data.

$$\begin{aligned}
\Phi_i^{k+1,j} &= \left[ \Delta_{\bar{x}}, \tilde{\Delta}_{\bar{x}}, 2\tilde{\mathcal{I}}_{xu}, 2\tilde{\mathcal{I}}_{xv}, 2\mathcal{I}_{xu}, 2\mathcal{I}_{xv}, \tilde{\mathcal{A}}_U, \tilde{\mathcal{A}}_V, \mathcal{A}_U, \mathcal{A}_V, \right. \\
&\quad \left. 2\tilde{\mathcal{I}}_{uv}, 2\mathcal{I}_{uv}, \mathcal{I}_{\bar{x}} \right], \\
\Theta_i^{k+1,j} &:= [\theta_1, \theta_2, \dots, \theta_s]^\top, \\
\theta_q &= \tilde{\omega}(x^q, \tilde{F}^k, \tilde{L}^{k+1,j}) + \omega(x^q, F^k, L^{k+1,j}).
\end{aligned} \quad (34)$$

where

$$\begin{aligned}
\tilde{\omega}(x, \tilde{F}^k, \tilde{L}^k) &= \int_{t_i}^{t_{i+1}} \left\{ \mathbb{E}^{\mathcal{F}_{t_i}}[x(s)]^\top \left( M^\top M - \gamma^2 (\tilde{F}^k)^\top \tilde{F}^k \right. \right. \\
&\quad \left. \left. + (\tilde{L}^k)^\top I \tilde{L}^k \right) \mathbb{E}^{\mathcal{F}_{t_i}}[x(s)] \right\} ds, \\
\omega(x, F^k, L^k) &= \mathbb{E}^{\mathcal{F}_{t_i}} \left\{ \int_{t_i}^{t_{i+1}} (x(s) - \mathbb{E}^{\mathcal{F}_{t_i}}[x(s)])^\top \right. \\
&\quad \left. (M^\top M - \gamma^2 (F^k)^\top F^k + (L^k)^\top I L^k) (x(s) - \mathbb{E}^{\mathcal{F}_{t_i}}[x(s)]) ds \right\}, \\
\tilde{\alpha}_i(u) &:= \int_{t_i}^{t_{i+1}} \left[ \mathbb{E}^{\mathcal{F}_{t_i}} u(s) \right] ds, \\
\alpha_i(u) &:= \mathbb{E}^{\mathcal{F}_{t_i}} \left[ \int_{t_i}^{t_{i+1}} (u - \mathbb{E}u)(s) ds \right], \\
\phi_i(x, x) &:= \mathbb{E}^{\mathcal{F}_{t_i}} \left[ \int_{t_i}^{t_{i+1}} (x - \mathbb{E}x)(s) \otimes (x - \mathbb{E}x)(s) ds \right], \\
\tilde{\phi}_i(x, x) &:= \int_{t_i}^{t_{i+1}} \left[ \mathbb{E}^{\mathcal{F}_{t_i}} x(s) \otimes \mathbb{E}^{\mathcal{F}_{t_i}} x(s) \right] ds, \\
\phi_i(x, u) &:= \mathbb{E}^{\mathcal{F}_{t_i}} \left[ \int_{t_i}^{t_{i+1}} (x - \mathbb{E}x)(s) \otimes (u - \mathbb{E}u)(s) ds \right], \\
\tilde{\phi}_i(x, u) &:= \int_{t_i}^{t_{i+1}} \left[ \mathbb{E}^{\mathcal{F}_{t_i}} x(s) \otimes \mathbb{E}^{\mathcal{F}_{t_i}} u(s) \right] ds, \\
\phi_i(x, v) &:= \mathbb{E}^{\mathcal{F}_{t_i}} \left[ \int_{t_i}^{t_{i+1}} (x - \mathbb{E}x)(s) \otimes (v - \mathbb{E}v)(s) ds \right], \\
\tilde{\phi}_i(x, v) &:= \int_{t_i}^{t_{i+1}} \left[ \mathbb{E}^{\mathcal{F}_{t_i}} x(s) \otimes \mathbb{E}^{\mathcal{F}_{t_i}} v(s) \right] ds. \\
\Delta_{\bar{x}} &= [\delta_1, \delta_2, \dots, \delta_s]^\top, \delta_j := -\mathbb{E}^{\mathcal{F}_{t_i}}[x]^\top,
\end{aligned}$$

$$\begin{aligned}
\tilde{\Delta}_{\bar{x}} &= [\tilde{\delta}_1, \tilde{\delta}_2, \dots, \tilde{\delta}_s]^\top, \tilde{\delta}_j = \bar{x}^\top, \\
\mathcal{I}_{\bar{x}} &= [\tilde{\mathcal{X}}_1, \tilde{\mathcal{X}}_2, \dots, \tilde{\mathcal{X}}_s]^\top, \tilde{\mathcal{X}}_j := -\mathbb{E}^{\mathcal{F}_{t_i}} \left[ (x - \mathbb{E}^{\mathcal{F}_{t_i}}[x]) \right], \\
\tilde{\mathcal{A}}_U &= [\phi^1, \phi^2, \dots, \phi^s]^\top, \\
\phi^j &= \tilde{\alpha}_i^{k+1,j}(u) - \tilde{\phi}_i^{k+1,j}(x, x) ((\tilde{L}_i^{k+1,j})^\top(t_i) \otimes \tilde{L}_i^{k+1,j}(t_i)), \\
\tilde{\mathcal{A}}_V &= [\phi^1, \phi^2, \dots, \phi^s]^\top, \\
\phi^j &= \tilde{\alpha}_i^{k+1,j}(v) - \tilde{\phi}_i^{k+1,j}(x, x) ((\tilde{F}_i^k)^\top(t_i) \otimes \tilde{F}_i^k(t_i)), \\
\mathcal{A}_U &= [\phi^1, \phi^2, \dots, \phi^s]^\top, \\
\phi^j &= \alpha_i^{k+1,j}(u) - \phi_i^{k+1,j}(x, x) ((L_i^{k+1,j})^\top(t_i) \otimes L_i^{k+1,j}(t_i)), \\
\mathcal{A}_V &= [\phi^1, \phi^2, \dots, \phi^s]^\top, \\
\phi^j &= \alpha_i^{k+1,j}(v) - \phi_i^{k+1,j}(x, x) ((F_i^k)^\top(t_i) \otimes F_i^k(t_i)), \\
\tilde{\mathcal{I}}_{xu} &= [\mathcal{U}_1, \mathcal{U}_2, \dots, \mathcal{U}_s]^\top, \\
\mathcal{U}_j &:= 2\tilde{\phi}_i^{k+1,j}(u, x) - 2\tilde{\phi}_i^{k+1,j}(x, x) (I_n \otimes \tilde{L}_i^{k+1,j}(t_i)), \\
\mathcal{I}_{xu} &= [\mathcal{U}_1, \mathcal{U}_2, \dots, \mathcal{U}_s]^\top, \\
\mathcal{U}_j &:= 2\phi_i^{k+1,j}(u, x) - 2\phi_i^{k+1,j}(x, x) (I_n \otimes L_i^{k+1,j}(t_i)), \\
\tilde{\mathcal{I}}_{xv} &= [\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_s]^\top, \\
\mathcal{V}_j &:= 2\tilde{\phi}_i^{k+1,j}(v, x) - 2\tilde{\phi}_i^{k+1,j}(x, x) (I_n \otimes \tilde{F}_i^k(t_i)), \\
\mathcal{I}_{xv} &= [\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_s]^\top, \\
\mathcal{V}_j &:= 2\phi_i^{k+1,j}(x, v) - 2\phi_i^{k+1,j}(x, x) (I_n \otimes F_i^k(t_i)), \\
\tilde{\mathcal{I}}_{uv} &= [\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_s]^\top, \\
\mathcal{V}_j &:= 2\tilde{\phi}_i^{k+1,j}(u, v) - 2\tilde{\phi}_i^{k+1,j}(u, x) (I_n \otimes \tilde{F}_i^k(t_i)) - \\
&\quad 2\tilde{\phi}_i^{k+1,j}(x, v) (\tilde{L}_i^{k+1,j}(t_i) \otimes I_n) + \\
&\quad 2\tilde{\phi}_i^{k+1,j}(x, x) (\tilde{L}_i^{k+1,j}(t_i) \otimes \tilde{F}_i^k(t_i)), \\
\mathcal{I}_{uv} &= [\mathcal{V}_1, \mathcal{V}_2, \dots, \mathcal{V}_s]^\top, \\
\mathcal{V}_j &:= 2\phi_i^{k+1,j}(u, v) - 2\phi_i^{k+1,j}(u, x) (I_n \otimes F_i^k(t_i)) - \\
&\quad 2\phi_i^{k+1,j}(x, v) (L_i^{k+1,j}(t_i) \otimes I_n) + 2\phi_i^{k+1,j}(x, x) (L_i^{k+1,j}(t_i) \otimes F_i^k(t_i)).
\end{aligned} \quad (35)$$

We discretize the continuous function represented by the components of  $\Xi$  over the time interval  $[t_0, t_f]$  in order to apply the least squares method for estimation. Therefore, we select a sampling interval  $\Delta t$ , such that there are  $N = \frac{t_f - t_0}{\Delta t} + 1$  sampling instants:  $t_i = t_0 + i\Delta t$ ,  $i = 0, \dots, N$ . The proposed algorithm attempts to find a piecewise constant approximation for the components of  $\Xi$  at the time points  $t_i, i = 0, \dots, N - 1$ , for the expression. By choosing a sufficiently small  $\Delta t$ , the discretization error can be confined to a small bound. To avoid an overly technical discussion, we neglect the discretization error in the above representation.

Since there are  $g = \frac{3n(n+1)}{2} + 2(n_u)n + 2(n_v)n + n_u(n_u + 1) + n_v(n_v + 1) + 2n_u n_v$  unknown components in the regression vector, we need  $s$  ( $s \geq g$ ) initial states to record the trajectories to satisfy the rank condition.

The conditional expectations in data matrices  $\Phi_i^k$  and  $\Theta_i^k$  cannot be obtained exactly. In practice, we adopt numerical averages to approximate the conditional expectations and use summations to approximate the integrals. More specifically, if we have  $\bar{L}$  sample paths  $x^{(l)}, l = 1, 2, \dots, \bar{L}$  with the data collected at time  $t_{i_k}, k = 1, 2, \dots, K$ , where  $t_i = t_{i_0} < t_{i_1} <$

$\dots < t_{i_K} = t_{i+1}$ , we approximate

$$\mathbb{E}^{\mathcal{F}_{t_i}} [x(t_{i_K})] = \frac{1}{\bar{L}} \sum_{l=1}^{\bar{L}} \left[ x^{(l)}(t_{i_K}) \right].$$

and

$$\begin{aligned} & \mathbb{E} \left[ \int_{t_i}^{t_{i+1}} x(\tau) \otimes x(\tau) d\tau \mid \mathcal{F}_{t_i} \right] \\ &= \frac{1}{\bar{L}} \sum_{l=1}^{\bar{L}} \left[ \sum_{k=1}^K \left( x^{(l)}(t_{i_K}) \otimes x^{(l)}(t_{i_K}) \right) \cdot (t_{i_K} - t_{i_{K-1}}) \right]. \end{aligned}$$

The integrals in (34) can be approximately obtained in the same way. Then we can now present the data-driven RL Algorithm 1.

---

**Algorithm 1: Model-Free Algorithm**


---

**Input:** Choose an initial matrix  $\hat{L}^0, \hat{F}^0, \hat{\tilde{L}}^0, \hat{\tilde{F}}^0$ .

Apply control policies

$$u(t) = \hat{L}^0[x(t) - E(x(t))] + \hat{\tilde{L}}^0 E[x(t)],$$

$v(t) = \hat{F}^0[x(t) - E(x(t))] + \hat{\tilde{F}}^0 E[x(t)]$  with exploration noises to system (27) and collect the input and state data;

Select a large enough number  $s$  (to ensure the rank condition is satisfied) and calculate  $\Phi$ . Let the iteration index  $k = 0, j = 0, L^{(k+1,0)} = \hat{L}^0, \tilde{L}^{(k+1,0)} = \hat{\tilde{L}}^0, F^0 = \hat{F}^0, \tilde{F}^0 = \hat{\tilde{F}}^0$ ;

Approximately calculate  $\hat{\Phi}$  and  $\hat{\Xi}$  from the collected data.

**repeat**

**repeat**

Solve the equation  $\hat{\Phi}^{k+1,j} \hat{\Xi}^{k+1,j+1} = \hat{\Theta}^{k+1,j}$  for  $\hat{\Xi}^{k+1,j+1}$ ;

Update  $L^{k+1,j+1}$  and  $\tilde{L}^{k+1,j+1}$  by (31);

$j = j + 1$ .

**until**  $\|P^{(k+1,j)} - P^{(k+1,j-1)}\| \leq \epsilon_1$  and

$\|Q^{(k+1,j)} - Q^{(k+1,j-1)}\| \leq \epsilon_1$ ;

Update  $F^{k+1}$  and  $\tilde{F}^{k+1}$  by (31);

$k = k + 1$ .

**until**  $\|F^{(k)} - F^{(k-1)}\| \leq \epsilon$  and  $\|\tilde{F}^{(k)} - \tilde{F}^{(k-1)}\| \leq \epsilon$ ;

**return**  $\hat{L}, \hat{\tilde{L}}$  and  $\hat{F}, \hat{\tilde{F}}$ .

---

## VII. CONCLUSION

This paper discussed the finite horizon  $H_2/H_\infty$  control problem for mean-field jump systems with  $(x, u, v)$ -dependent noise. A necessary and sufficient condition is derived based on four coupled Riccati equations, for which a recursive algorithm is provided. A model-free reinforcement learning approach is also proposed to design robust controllers for mean-field systems. Potential extensions include applying the framework to infinite horizon problems and systems with random coefficients.

## APPENDIXES

*Proof:* [Proof of Lemma 3] Since the equation is linear and all coefficients are uniformly bounded, it admits a unique solution  $P \in C(0, T; S^n)$ . For any given  $x \in \mathbb{R}^n$ , suppose  $\phi(\cdot)$  is the solution of the following equation:

$$\begin{cases} d\phi(s) = \tilde{A}(s)\phi(s)ds + \tilde{C}(s)\phi(s)dW(s) \\ \quad + \int_G \left( \tilde{E}(s)\phi(s-) \right) \nu(d\theta)ds, \\ \phi(t) = x, \quad t \in [0, T]. \end{cases}$$

Through Itô formula, we obtain

$$\begin{aligned} d(\phi'(s)P(s)\phi(s)) &= \phi(s)' \dot{P}(s)\phi(s)ds + \\ &\phi'(s) \left[ P(s)\tilde{A}'(s) + \tilde{A}'(s)P(s) + \tilde{C}'(s)P(s)\tilde{C}(s) \right] \phi(s)ds \\ &+ \phi'(s) \left[ \tilde{C}'(s)P(s) + P(s)\tilde{C}(s) \right] \phi(s)dW(s) \\ &+ \int_G \left[ \phi'(s)\tilde{E}'(s)P(s)\tilde{E}(s)\phi(s) \right] \nu(d\theta)ds \\ &+ \int_G \phi'(s-)\tilde{E}'(s)P(s)\tilde{E}(s)\phi(s-)\tilde{N}_p(d\theta, ds). \end{aligned} \quad (36)$$

Integrating from  $t$  to  $T$ , and taking  $\mathbb{E}$  on both sides of (36) yield

$$\langle P(t)x, x \rangle = \mathbb{E} \left\{ \phi'(T)\tilde{G}\phi(T) + \int_t^T \phi'(s)\tilde{Q}(s)\phi(s)ds \right\}.$$

Given  $\tilde{G} \geq 0, \tilde{Q} \geq 0$ , it follows that  $P(t) \geq 0$  for all  $t \in [0, T]$ . ■

*Proof:* [Proof of Lemma 5]

$$\begin{aligned} & J_1(0, v + \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi\mathbb{E}x^{\varphi, \psi}; \tau, \xi) \\ &= \mathbb{E} \int_\tau^T \left( \gamma^2 \|v + \varphi(x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi}) + \psi\mathbb{E}x^{\varphi, \psi}\|^2 \right. \\ &\quad \left. - (x^{\varphi, \psi})' M_{11}' M_{11} x^{\varphi, \psi} \right) dt \\ &\quad + \mathbb{E} \int_\tau^T d((x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi})' P^{\gamma, \varphi} (x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi})) \\ &\quad - \mathbb{E} \int_\tau^T d((x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi})' P^{\gamma, \varphi} (x^{\varphi, \psi} - \mathbb{E}x^{\varphi, \psi})) \\ &\quad + \mathbb{E} \int_\tau^T d((\mathbb{E}x^{\varphi, \psi})' Q^{\gamma, \varphi, \psi} (\mathbb{E}x^{\varphi, \psi})) \\ &\quad - E \int_\tau^T d((\mathbb{E}x^{\varphi, \psi})' Q^{\gamma, \varphi, \psi} (\mathbb{E}x^{\varphi, \psi})). \end{aligned}$$

Then by Lemma 2 and equations (15)-(16), we can derive (17). ■

*Proof:* [Proof of Lemma 6] By linearity of the system, the solution  $x(t, v; \tau, \xi)$  to system (9) can be decomposed as  $x(t, v; \tau, \xi) = x(t, v; \tau, 0) + x(t, 0; \tau, \xi)$ . Denote  $X$  and  $Y$  as the solutions of

$$\begin{cases} \mathcal{S}(X) = 0, \\ X(T) = 0 \end{cases}$$

and

$$\begin{cases} \tilde{\mathcal{S}}(Y, Y) = 0, \\ Y(T) = 0 \end{cases}$$

respectively. It is easy to check that

$$\begin{aligned}
& J_1(0, v; \tau, \xi) - J_1(0, v; \tau, 0) \\
&= \mathbb{E} \langle (\xi - \mathbb{E}\xi), X_\tau(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Y_\tau \mathbb{E}\xi \rangle \\
&+ \mathbb{E} \int_\tau^T (v - \mathbb{E}v) \mathcal{G}'(X)(x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi)) \\
&+ (x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi))' \mathcal{G}(X)(v - \mathbb{E}v) \\
&+ (\mathbb{E}v) \tilde{\mathcal{G}}'(X, Y)(\mathbb{E}x(t, 0; \tau, \xi)) \\
&+ (\mathbb{E}x(t, 0; \tau, \xi))' \tilde{\mathcal{G}}(X, Y)(\mathbb{E}v) dt.
\end{aligned}$$

Because of  $\|\tilde{\mathcal{L}}\| < \gamma$ , we can take  $0 \leq \epsilon^2 \leq \gamma^2 - \|\tilde{\mathcal{L}}\|^2$ , then

$$\begin{aligned}
J_1(0, v; \tau, 0) &\geq \gamma^2 \|\bar{v}\|_{[0, T]}^2 - \|z_1\|_{[0, T]}^2 \\
&\geq (\gamma^2 - \|\tilde{\mathcal{L}}\|^2) \|\bar{v}\|_{[0, T]}^2 \geq \epsilon^2 \|\bar{v}\|_{[0, T]}^2 = \epsilon^2 \|v\|_{[\tau, T]}^2,
\end{aligned}$$

where

$$\bar{v} = \begin{cases} v, & t \in [\tau, T], \\ 0, & t \in [0, \tau]. \end{cases}$$

Therefore, by completing the square,

$$\begin{aligned}
& J_1(0, v; \tau, \xi) \\
&\geq \mathbb{E} \langle (\xi - \mathbb{E}\xi), X_\tau(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Y_\tau \mathbb{E}\xi \rangle + \mathbb{E} \int_\tau^T \left\{ \epsilon^2 \|v\|^2 \right. \\
&\quad + (v - \mathbb{E}v) \mathcal{G}'(X)(x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi)) \\
&\quad + (x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi))' \mathcal{G}(X)(v - \mathbb{E}v) \\
&\quad + (\mathbb{E}v) \tilde{\mathcal{G}}'(X, Y)(\mathbb{E}x(t, 0; \tau, \xi)) \\
&\quad \left. + (\mathbb{E}x(t, 0; \tau, \xi))' \tilde{\mathcal{G}}(X, Y)(\mathbb{E}v) \right\} dt \\
&\geq \mathbb{E} \langle (\xi - \mathbb{E}\xi), X_\tau(\xi - \mathbb{E}\xi) \rangle + \langle \mathbb{E}\xi, Y_\tau \mathbb{E}\xi \rangle \\
&\quad - \mathbb{E} \int_\tau^T \left\| \frac{1}{\epsilon} \mathcal{G}'(X)(x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi)) \right\|^2 \\
&\quad - \left\| \frac{1}{\epsilon} \tilde{\mathcal{G}}'(X, Y)(\mathbb{E}x(t, 0; \tau, \xi)) \right\|^2 dt.
\end{aligned}$$

By Lemma 1 and the estimate (7), there are  $\alpha_1, \alpha_2 > 0$  satisfying

$$\begin{aligned}
\mathbb{E} \int_\tau^T \|x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi)\|^2 dt &\leq \alpha_1 \mathbb{E} \|\xi - \mathbb{E}\xi\|^2, \\
\mathbb{E} \int_\tau^T \|\mathbb{E}x(t, 0; \tau, \xi)\|^2 dt &\leq \alpha_2 \|\mathbb{E}\xi\|^2,
\end{aligned}$$

and there are  $\alpha_3, \alpha_4 > 0$  that the following hold.

$$\begin{aligned}
& \mathbb{E} \langle (\xi - \mathbb{E}\xi), X_\tau(\xi - \mathbb{E}\xi) \rangle = -\mathbb{E} \int_\tau^T d(x(t, 0; \tau, \xi) - \\
& \mathbb{E}x(t, 0; \tau, \xi))' X(x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi)) \\
&= -\mathbb{E} \int_\tau^T (x(t, 0; \tau, \xi) - \mathbb{E}x(t, 0; \tau, \xi))' M'_{11} M_{11} (x(t, 0; \tau, \xi) \\
&\quad - \mathbb{E}x(t, 0; \tau, \xi)) dt \\
&\geq -\alpha_3 \mathbb{E} \|\xi - \mathbb{E}\xi\|^2, \\
& \langle \mathbb{E}\xi, Y_\tau \mathbb{E}\xi \rangle = -\mathbb{E} \int_\tau^T d(\mathbb{E}x)' Y(\mathbb{E}x) \\
&= -\mathbb{E} \int_\tau^T (\mathbb{E}x(t, 0; \tau, \xi))' M'_{11} M_{11} (\mathbb{E}x(t, 0; \tau, \xi)) dt \\
&\geq -\alpha_4 \|\mathbb{E}\xi\|^2.
\end{aligned}$$

Then there exists  $\mu > 0$ , such that  $J_1(0, v; \tau, \xi) \geq -\mu \mathbb{E} \|\xi\|^2$ . The proof is completed.  $\blacksquare$

## REFERENCES

- [1] J.-M. Lasry and P.-L. Lions, "Mean field games," *Japanese Journal of Mathematics*, vol. 2, no. 1, pp. 229–260, 2007.
- [2] R. Carmona, F. Delarue *et al.*, *Probabilistic theory of mean field games with applications I-II*. Springer, 2018.
- [3] R. Buckdahn, B. Djehiche, J. Li, and S. Peng, "Mean-field backward stochastic differential equations: a limit approach," *The Annals of Probability*, vol. 37, no. 4, pp. 1524–1565, 2009.
- [4] R. Buckdahn, J. Li, and S. Peng, "Mean-field backward stochastic differential equations and related partial differential equations," *Stochastic Processes and their Applications*, vol. 119, no. 10, pp. 3133–3154, 2009.
- [5] D. Andersson and B. Djehiche, "A maximum principle for SDEs of mean-field type," *Applied Mathematics & Optimization*, vol. 63, no. 3, pp. 341–356, 2011.
- [6] R. Buckdahn, B. Djehiche, and J. Li, "A general stochastic maximum principle for SDEs of mean-field type," *Applied Mathematics & Optimization*, vol. 64, no. 2, pp. 197–216, 2011.
- [7] R. Carmona, F. Delarue, and A. Lachapelle, "Control of McKean–Vlasov dynamics versus mean field games," *Mathematics and Financial Economics*, vol. 7, no. 2, pp. 131–166, 2013.
- [8] J. Yong, "Linear-quadratic optimal control problems for mean-field stochastic differential equations," *SIAM Journal on Control and Optimization*, vol. 51, no. 4, pp. 2809–2838, 2013.
- [9] X. Li, J. Sun, and J. Yong, "Mean-field stochastic linear quadratic optimal control problems: closed-loop solvability," *Probability, Uncertainty and Quantitative Risk*, vol. 1, no. 1, pp. 1–24, 2016.
- [10] J. Sun, "Mean-field stochastic linear quadratic optimal control problems: open-loop solvabilities," *ESAIM: Control, Optimisation and Calculus of Variations*, vol. 23, no. 3, pp. 1099–1127, 2017.
- [11] P. Tankov, *Financial modelling with jump processes*. Chapman and Hall/CRC, 2003.
- [12] X. Lin and R. Zhang, " $H_\infty$  control for stochastic systems with poisson jumps," *Journal of Systems Science and Complexity*, vol. 24, no. 4, pp. 683–700, 2011.
- [13] T. Hao and J. Li, "Mean-field SDEs with jumps and nonlocal integral-PDEs," *Nonlinear Differential Equations and Applications*, vol. 23, no. 2, pp. 1–51, 2016.
- [14] J. Li, "Mean-field forward and backward SDEs with jumps and associated nonlocal quasi-linear integral-pdes," *Stochastic Processes and their Applications*, vol. 128, no. 9, pp. 3118–3180, 2018.
- [15] Y. Shen, Q. Meng, and P. Shi, "Maximum principle for mean-field jump–diffusion stochastic delay differential equations and its application to finance," *Automatica*, vol. 50, no. 6, pp. 1565–1579, 2014.
- [16] M. Tang and Q. Meng, "Linear-quadratic optimal control problems for mean-field stochastic differential equations with jumps," *Asian Journal of Control*, vol. 21, no. 2, pp. 809–823, 2019.
- [17] M. Wang, Q. Meng, and Y. Shen, " $H_2/H_\infty$  control for stochastic jump-diffusion systems with Markovian switching," *Journal of Systems Science and Complexity*, vol. 34, no. 3, pp. 924–954, 2021.
- [18] L. Ma, T. Zhang, W. Zhang, and B.-S. Chen, "Finite horizon mean-field stochastic  $H_2/H_\infty$  control for continuous-time systems with  $(x, v)$ -dependent noise," *Journal of the Franklin Institute*, vol. 352, no. 12, pp. 5393–5414, 2015.
- [19] M. Wang, Q. Meng, Y. Shen, and P. Shi, "Stochastic  $H_2/H_\infty$  control for mean-field stochastic differential systems with  $(x, u, v)$ -dependent noise," *Journal of Optimization Theory and Applications*, vol. 197, no. 3, pp. 1024–1060, 2023.
- [20] M. Gao, J. Zhao, and W. Sun, "Stochastic  $H_2/H_\infty$  control for discrete-time mean-field systems with poisson jump," *Journal of the Franklin Institute*, vol. 358, no. 6, pp. 2933–2947, 2021.
- [21] S. Zhang, W. Zhang, and Q. Meng, "Stackelberg game approach to mixed stochastic  $H_2/H_\infty$  control for mean-field jump-diffusions systems," *Applied Mathematics & Optimization*, vol. 89, no. 6, 2023.
- [22] N. Li, X. Li, J. Peng, and Z. Q. Xu, "Stochastic linear quadratic optimal control problem: A reinforcement learning method," *IEEE Transactions on Automatic Control*, vol. 67, no. 9, pp. 5009–5016, 2022.
- [23] X. Jiang, Y. Wang, D. Zhao, and L. Shi, "Online pareto optimal control of mean-field stochastic multi-player systems using policy iteration," *Science China Information Sciences*, vol. 67, no. 4, p. 140202, 2024.



- [24] B.-S. Chen and W. Zhang, "Stochastic  $H_2/H_\infty$  control with state-dependent noise," *IEEE Transactions on Automatic Control*, vol. 49, no. 4, pp. 45–57, 2004.
- [25] C. Graham, "McKean-Vlasov Itô-Skorohod equations, and nonlinear diffusions with discrete jump sets," *Stochastic Processes and their Applications*, vol. 40, no. 1, pp. 69–82, 1992.