

Fast Multi-view Consistent 3D Editing with Video Priors

Liya Chen Ruihuang Li Guowen Zhang Pengfei Wang Lei Zhang*

The Hong Kong Polytechnic University

{liyi0308.chen, guowen.zhang, pengfei.wang}@connect.polyu.hk

{csrhl, cslzhang}@comp.polyu.edu.hk


Project Page: <https://mt-cly.github.io/ViP3DE>

Abstract

Text-driven 3D editing enables user-friendly 3D object or scene editing with text instructions. Due to the lack of multi-view consistency priors, existing methods typically resort to employing 2D generation or editing models to process each view individually, followed by iterative 2D-3D-2D updating. However, these methods are not only time-consuming but also prone to over-smoothed results because the different editing signals gathered from different views are averaged during the iterative process. In this paper, we propose generative **Video Prior based 3D Editing (ViP3DE)** to employ the temporal consistency priors from pre-trained video generation models for multi-view consistent 3D editing in a single forward pass. Our key insight is to condition the video generation model on a single edited view to generate other consistent edited views for 3D updating directly, thereby bypassing the iterative editing paradigm. Since 3D updating requires edited views to be paired with specific camera poses, we propose motion-preserved noise blending for the video model to generate edited views at predefined camera poses. In addition, we introduce geometry-aware denoising to further enhance multi-view consistency by integrating 3D geometric priors into video models. Extensive experiments demonstrate that our proposed ViP3DE can achieve high-quality 3D editing results even within a single forward pass, significantly outperforming existing methods in both editing quality and speed.

1. Introduction

3D editing aims to achieve high-quality personalized editing of 3D objects or scenes by modifying their shape and content. Traditional 3D editing requires professional skills and tools to manipulate 3D mesh [58, 71] or point clouds [83], which is time-consuming and labor-intensive. Recent development of 3D representations and multi-

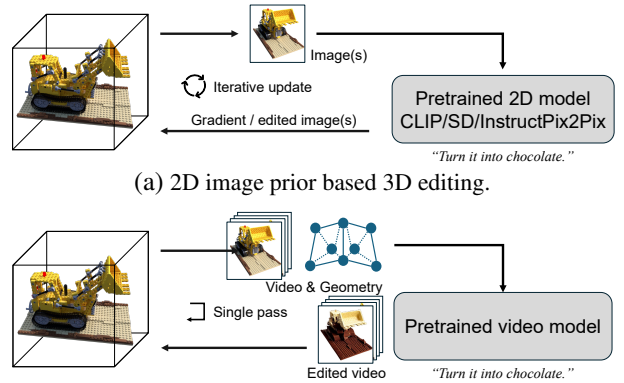

(b) ViP3DE integrates video priors and 3D priors for 3D editing.

Figure 1. **Motivation of ViP3DE.** (a) Most existing studies [9–11, 21, 36, 41, 62] employ pre-trained 2D models to iteratively update 3D assets, suffering from slow convergence and over-smoothed textures. (b) ViP3DE integrates video priors and source 3D priors to achieve multi-view consistent editing with a single pass.

modality 2D models has revolutionized 3D editing. By integrating NeRF [44] or 3D Gaussians Splatting (GS) [32] with off-the-shelf 2D multi-modal models such as CLIP [51] and Stable Diffusion (SD) [52], a user-friendly 3D editing interface can be built using instructions.

Most existing methods employ 2D models to perform 3D editing with an iterative updating paradigm, as shown in Fig. 1(a). In each iteration, images from a randomly selected camera pose are rendered and edited individually using models like CLIP and SD [11, 29, 38, 41, 62, 63] via Score Distillation, *e.g.*, SDS, DDS, and SSD [2, 23, 81], or 2D editor to output edited views [12, 21]. The source 3D representation is updated with edited views through differential volume rendering [44] or rasterization [32]. Due to the lack of multi-view consistency priors, these per-image editing-based methods usually demand hundreds or thousands of iterations to average out the inconsistent gradient signals or the edited pixel values, resulting in slow conver-

*Corresponding author.

gence and over-smoothed texture. Although recent efforts have been proposed to synchronize different views by introducing extrapolated cross-attention [9, 10] or point correspondence [36, 57], they fail to achieve editing in a single pass, and these issues remain.

Motivated by the capability of pre-trained video models to generate inter-frame continuous videos, we propose to leverage pre-trained video priors to achieve multi-view consistent 3D editing in a single pass, as shown in Fig. 1(b). However, generative video models cannot be applied directly for 3D editing due to two issues. Firstly, 3D updating requires pairs of camera poses and edited images, while existing video models cannot produce edited images corresponding to precise camera poses [22, 35]. Secondly, video models have limited understanding of 3D geometry and physics [6, 30]. Therefore, the edited views often suffer from shape deformation or color shifts, which will cause undesired 3D editing results.

In this paper, we propose **Video Prior based 3D Editing (ViP3DE)** to overcome these challenges. To obtain paired edited views and camera poses, we first render a source video along a known camera trajectory. We then acquire inverted video noise to guide subsequent edited view generation via an inversion-based paradigm. Note that, different from previous inversion-based video editing methods [17, 35, 39], which either overestimates or underestimates the importance of the inverted noise and results in unsatisfactory camera motion or visual quality, we propose *motion-preserved noise blending* to produce desired edited views under given 3D perspectives by blending inverted noise with random Gaussian noise as initial noise. Besides, to further improve the 3D consistency of edited views, we propose *geometry-aware denoising* to integrate 3D priors and video priors during diffusion process. We first build latent feature correspondence between the conditional view and other views based on the geometric relations between 3D representation and camera poses, which can then provide explicit constraints in video latent space across each denoising step. These two novel designs enable the video model to produce edited views that are continuous and consistent in 3D geometry. Finally, the source 3D asset is updated using the edited views in a single forward pass.

Our contributions are summarized as follows.

- We propose ViP3DE, an early and pioneering work that introduces generative video priors for text-driven 3D editing in a training-free manner.
- We introduce two novel designs, *i.e.*, motion-preserved noise blending and geometry-aware denoising, to produce 3D-consistent edited views with high-quality visual results in a single pass.
- Extensive experiments demonstrate that ViP3DE significantly outperforms previous methods in both efficiency and editing quality.

2. Related Work

Text-driven 3D Editing. With the advancement of 2D multi-modal models [40, 48] such as CLIP [51], SD [52], and InstructPix2Pix [5], text-driven 3D editing has attracted much attention recently. One line of research aims to translate source 3D representations to edited 3D representations directly under the guidance of off-the-shelf 2D models. CLIP-NeRF [62] and NeRF-Art [63] optimize the NeRF by employing CLIP as the discriminator. Shape-Editor [11] learns a NeRF latent mapping using text-to-image models with SDS loss [49]. GenN2N [41] builds a translated NeRF that takes image embeddings as input and generates edited novel views in specific poses. Other works along this line [13, 29, 38, 54, 61, 70, 74, 80, 82] share a similar idea by employing different variants of SDS with different 2D models. Due to the inherited limitation of SDS loss, however, these methods usually produce over-saturated and low-quality editing results.

Another line of research performs 2D image editing [5] and use them to update 3D representations, while the challenge is that per-image editing lacks multi-view consistency. Some efforts have been made to alleviate this issue by introducing noise synchronization [9], pixel correspondence constraint [36, 57], or cross-attention mechanism [10, 42], but the challenge remains. In addition, these methods heavily rely on iterative 3D updating [21, 33], resulting in slow convergence. We argue that the common problem of these approaches lies in the lack of inter-frame consistency priors in 2D models. In this work, we propose to explore generative video models for efficient multi-view consistent 3D editing.

Video Generation and Editing. Animatediff [20], SVD [4] and their following works [6–8, 26, 69, 77, 79] extend pre-trained 2D image generative model for video generation by fine-tuning them with video datasets and incorporating temporal information interactions [14, 59]. However, the generated videos are uncontrollable in camera pose. Therefore, CameraCtrl [22] and MotionCtrl [64] introduce extra camera trajectory as input to enable video generation with customized camera motion. Tune-a-video [66], FateZero [50] and Tokenflow [18] are typical works to accomplish video editing with pre-trained SD [52] model, yet they can only achieve sub-optimal performance due to the limited capability of 2D models in processing videos. MotionI2V [55], MOCA [68], VideoSwap [19] and I2VEdit [47] employ more powerful video models to perform video editing. However, they demand complex preprocessing of optical flow estimation, key point tracking, or motion LoRA optimization to control the video editing process. While MotionClone [39], Videoshop [17], AnyV2V [35], and VACE [28] perform video editing in a training-free or learning-based strategy, they lack 3D geometric constraints and often generate inconsistent results.

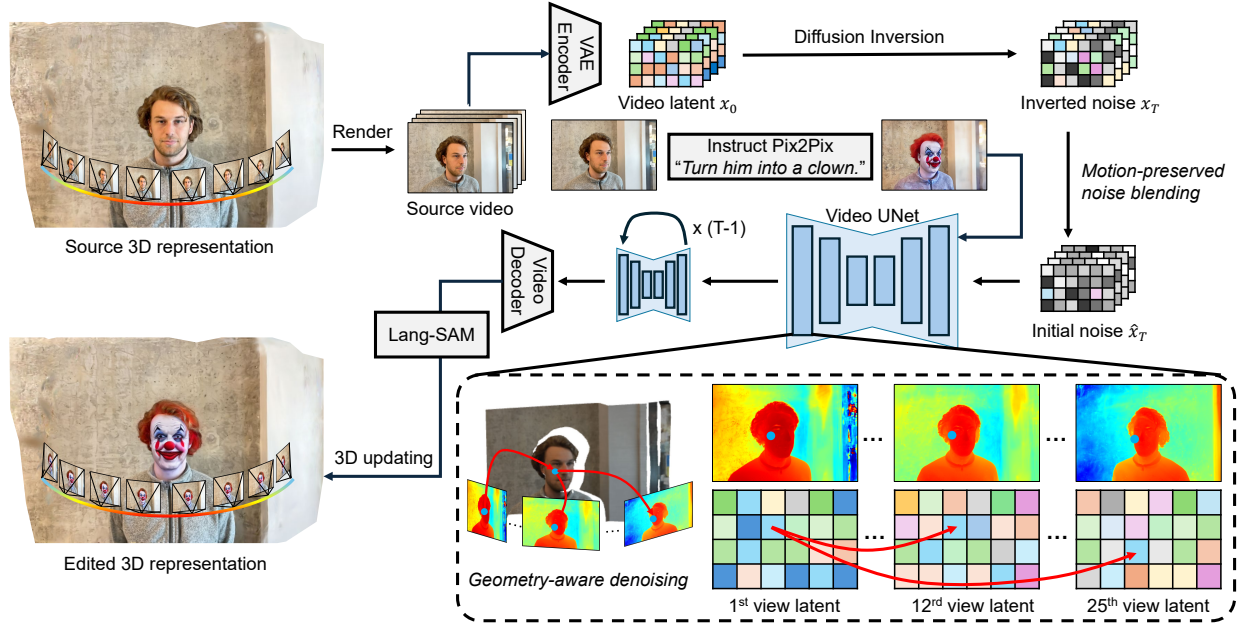


Figure 2. **Workflow of ViP3DE.** First, the contiguous multi-view images are rendered from the source 3D representation as source video. Then, the first frame is edited with InstructPix2Pix as the condition of the video model, and the initial noise of the diffusion process is obtained by *motion-preserved noise blending*. Consequently, the geometric priors excavated from the source 3D representation are introduced during the video denoising process to improve 3D consistency across views, termed *geometry-aware denoising*. Finally, these edited multi-view images are utilized to update the source 3D representation. Thanks to video priors, ViP3DE achieves fast and multi-view consistent 3D editing in a single forward pass.

3. The Proposed Approach

Following common 3D editing protocols, ViP3DE begins with a 3D scene from systems like COLMAP [53] and user-provided instructions. The 3D editing is performed according to the user-provided instructions. ViP3DE employs SVD-XT [4] for its competitive performance with much faster inference speed compared to large models *e.g.*, Wan2.2 [60], CogvideoX [69]. The ViP3DE workflow is illustrated in Fig. 2. Firstly, we render the 3D scene to obtain source views following continuous camera trajectories, termed source video. Then, we propose *motion-preserved noise blending* and *geometry-aware denoising* to achieve geometrically consistent edited multi-views, which are used to update source 3D Gaussians.

3.1. Editing Multi-view Images with Video Prior

ViP3DE accomplishes multi-view editing by integrating InstructPix2Pix [5] with SVD-XT in an inversion-based manner [17, 35, 47]. In particular, for a source video $\mathcal{I}_{src} = \{I_{src}^1, \dots, I_{src}^N\}$ with N -view, its latent x_0 is first obtained by the VAE encoder, then passed through EDM [31] inversion to get the inverted latent noise x_t at step $t = 1, \dots, T$. The first frame I_{src}^1 and textual instruction are fed into InstructPix2Pix to obtain an edited view I_{cond}^1 , which serves as the condition to guide the denoising process, producing

edited video latent \hat{x}_0 . Finally, \hat{x}_0 is converted to the edited video $\mathcal{I}_{edit} = \{I_{edit}^1, \dots, I_{edit}^N\}$ using the pre-trained video decoder. The details of EDM inversion can be found in the **supplementary file**. We take advantage of the byproduct of EDM inversion (*i.e.*, inverted noise and attention maps) to inherit the camera motion from the source video to output 3D consistent edited views, which can be directly used to update the 3D representation in known camera poses.

3.2. Balance Pose Alignment and Editing Quality

It is noticed that by starting the generation process from x_T , the edited multi-view images can achieve desired camera pose alignment. However, they exhibit significant artifacts if the instruction indicates substantial modifications, *e.g.*, “Turn the man into a clown”, as shown in the first column of Fig. 3(b). We hypothesize that this is because the inverted noise x_T contains not only motion cues but also the appearance cues of the source video. When conditioned on an edited image I_{cond}^1 that significantly deviates from the appearance of source video, the network can be confused and produce ambiguous results. Therefore, there is a critical question: *Can we retain the camera pose/motion information while removing unwanted appearance cues in the inverted noise?*

We experimentally find that motion and appearance cues exhibit different behaviors as the initial noise progressively

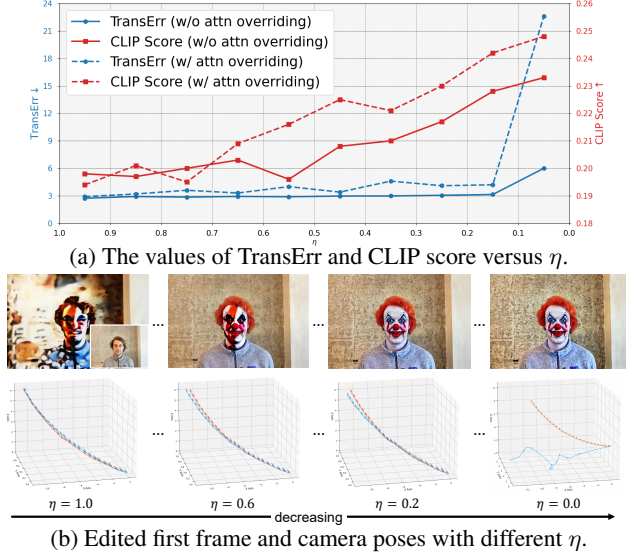


Figure 3. **Demonstration of motion-preserved noise blending.** Appearance and pose alignment exhibit different levels of robustness to noise.

transitions from inverted noise x_T to random Gaussian noise ϵ , enabling the disentanglement of motion cues and appearance cues. Specifically, we perform a pilot study by randomly selecting 100 off-the-shelf 3D assets [21, 43] and render them into 3D videos. Then we leverage GPT-4o [1] to generate editing instructions and target prompts based on the first frame of the source video, which are utilized to generate the edited video by noise inversion. The initial noise \hat{x}_T is obtained by blending the inverted noise x_T and random Gaussian noise ϵ with different weights:

$$\hat{x}_T = \sqrt{\eta}x_T + \sqrt{1-\eta}\epsilon, \text{ where } \epsilon \sim \mathcal{N}(0, \sigma_T^2 \mathbf{I}), \quad (1)$$

where $\eta \in [0, 1]$ controls the intensity of inverted noise. We call this operation *motion-preserved noise blending*.

We employ COLMAP [53] and TransErr [22] to estimate and compare the camera poses of edited and source videos with different \hat{x}_T , and use CLIP text-image score [51] to study the faithfulness of edited first frame I_{edit}^1 . We analyze both results with and without *attention overriding*, which is a typical technique to improve camera pose alignment [35, 39]. The results under different η are plotted in Fig. 3(a). One can observe that as η gradually decreases from 1 to 0, the quality of edited frames improves steadily, with persistent performance gains within the entire range of η . Meanwhile, the camera pose alignment exhibits remarkable robustness, maintaining highly competitive TransErr even when the signal-to-noise ratio is low (*i.e.*, $\eta = 0.1$). Note that $\eta = 0$ corresponds to the completely free generation with random camera trajectories. The editing example “Turn the man into a clown” is shown in Fig. 3(b).

The above findings can be interpreted from two perspectives. Firstly, setting initial noise close to random Gaussian

Algorithm 1: 3D Consistent Editing with ViP3DE

- 1 **Input:** Source 3D views $\mathcal{I}_{src} = \{I_{src}^1, \dots, I_{src}^N\}$, hyper-parameter η , τ , classifier guidance w , geometric constraint index M , and instruction \mathcal{P} .
- 2 **Output:** Edited 3D views $\mathcal{I}_{edit} = \{I_{edit}^1, \dots, I_{edit}^N\}$.
- 3 $\{x_1, x_2, \dots, x_T\} \leftarrow \text{EDM-Inv}(\mathcal{I}, I_{src}^1)$
- 4 $I_{cond}^1 \leftarrow \text{Edit}(I_{src}^1; \mathcal{P})$
- 5 $\hat{x}_T = \sqrt{\alpha}x_T + \sqrt{1-\alpha}\epsilon$, where $\epsilon \sim \mathcal{N}(0, \sigma_T^2 \mathbf{I})$
- 6 **for** $t = T, T-1, \dots, 1$ **do**
- 7 $\hat{x}_t^{uc} \leftarrow \hat{x}_t$
- 8 $\hat{x}_t^c \leftarrow \hat{x}_t[M]$ # geometry-aware denoising
- 9 $\hat{x}_{t-1} \leftarrow (1+w)\text{GVM}(\hat{x}_t^c, I_{cond}^1; t) - w\text{GVM}(\hat{x}_t^{uc}, \emptyset; t)$ # classifier-free guidance
- 10 **end**
- 11 $\mathcal{I}_{edit} \leftarrow \hat{x}_0$
- 12 **Return** \mathcal{I}_{edit}

noise allows better appearance manipulation, which is identical to the conclusion in image editing works [37, 45]. Secondly, we posit that camera motion constitutes global low-frequency information, making it relatively insensitive to additive white Gaussian noise. More analyses can be found in the **supplementary file**. Based on the different behaviors between motion and appearance cues, we set $\eta = 0.15$ to balance camera poses alignment and editing quality.

3.3. Integrating 3D Priors and Video Priors

Equipped with motion-preserved noise blending, our model can generate high-quality edited views under specific camera poses. However, we observe that parts of edited views suffer from structural deformation and color shifts. This is because while the generated videos exhibit inter-frame continuity, they are not consistent in 3D space. This discrepancy stems from the fact that current generative video models lack a comprehensive understanding of the real-world 3D geometry [6, 30]. To address this issue, we propose *geometry-aware denoising* to exploit the geometric priors from the source 3D Gaussians to guide the denoising process of video generation.

We begin by rendering the depth of the source Gaussian to obtain depth maps $\mathcal{D} = \{D_1, \dots, D_N\}$ from N views. Based on known camera poses, we identify the corresponding pixel at (\hat{u}, \hat{v}) in the first conditional frame for the pixel at (u, v) in the i -th frame through 3D projection:

$$[\hat{u}, \hat{v}, \hat{D}_1(\hat{u}, \hat{v})]^T = \mathbf{K}_1 \mathbf{R}_1 \mathbf{R}_i^{-1} \mathbf{K}_i^{-1} [u, v, D_i(u, v)]^T, \quad (2)$$

where \mathbf{K}_i and \mathbf{R}_i are intrinsic and extrinsic matrices of the i -th camera pose, and $\hat{D}_1(\hat{u}, \hat{v})$ is the projected Gaussian depth at (\hat{u}, \hat{v}) of the first frame. Considering that some projected Gaussians may be invisible in the first frame, we

Method	Multi-modal Models	Consistency Mechanism	CLIP T-I Sim.	CLIP Direction Sim.	Forward Pass	Time
<i>3D-based methods</i>						
NeRF-Art [63]	CLIP	Iterative Updating	0.243	0.121	400	> 8 hours
ViCA-NeRF [16]	InstructPix2Pix	Depth Constraint	0.274	0.183	2	~ 25 min
GaussCtrl [65]	ControlNet	Depth Constraint	0.266	0.170	1	~ 10 min
InstructN2N [21]	InstructPix2Pix	Iterative Updating	0.262	0.145	5000	~ 28 min
GaussianEditor [12]	InstructPix2Pix	Iterative Updating	0.272	0.187	1500	~ 8 min
DGE [10]	InstructPix2Pix	Extrapolated Attention	0.269	0.180	3	~ 4 min
<i>Video-based methods</i>						
AnyV2V [35]	I2VGen	Video Editing	0.230	0.114	1	~12 min
VideoShop [17]	SVD-XT	Video Editing	0.253	0.149	1	~ 3 min
I2VEdit [47]	SVD-XT	Video Editing	0.264	0.178	1	~ 40 min
InsViE [67]	CogVideoX	Video Editing	0.244	0.132	1	~ 4 min
ViP3DE (Ours)	SVD-XT	Video&3D Prior	0.284	0.197	1	~ 3 min

Table 1. **Quantitative comparison with previous methods.** ViP3DE achieves more faithful results to the texture instruction with higher CLIP scores. In addition, ViP3DE costs less time to converge. The consistency mechanisms of video-based methods are set to ‘-’ since they are not designed for 3D consistent editing.

filter out occluded pixel correspondences by comparing the projected depth \hat{D}_1 with the rendered depth map D_1 . The mapping M for (u, v) of the i -th frame is defined as:

$$M(i, u, v) = \begin{cases} (\hat{u}, \hat{v}) & \text{if } |\hat{D}_1(\hat{u}, \hat{v}) - D_1(\hat{u}, \hat{v})| < \tau, \\ \emptyset & \text{otherwise,} \end{cases} \quad (3)$$

where τ is the threshold to filter occluded correspondences.

The computed geometric correspondence is then leveraged to provide additional guidance during the diffusion denoising process. Specifically, we downsample the pixel correspondences to the latent resolution. At each denoising step, the features of all frames in the last layer of the UNet are replaced by those from the corresponding positions in the first frame if valid correspondence exists. Furthermore, we exploit the advantage of classifier-free guidance (CFG) by performing feature overriding only on conditional latent features and omitting the unconditional features so that rich texture can be generated from the unconditional prediction term, achieving multi-view consistent 3D editing results.

Pseudo Code. Let $Edit(I, \mathcal{P})$ be the image editing function with input image I and editing instruction prompt \mathcal{P} . To align with previous work, we employ InstructPix2Pix [5] to edit the first frame. Denote by $GVM(x_t, I; t)$ the computation of a single diffusion step t in the generative video model with noisy video latent x_t conditioned on Image I . Let M record the indices of each view’s latent features corresponding to the first view latent features, which is used to provide 3D geometric constraints. The algorithm of ViP3DE is summarized in Alg. 1.

Remarks. Note that existing methods rely on epipolar constraints [10, 27] or semantic correspondence [42], which omit 3D Gaussian geometric priors and suffer from inaccurate matching. Studies in [36, 57] enforce pixel-wise

constraints, introducing noticeable artifacts and requiring multiple forward passes. In contrast, our method addresses these limitations through latent-space integration of 3D priors and video priors, achieving high-fidelity editing in a single forward pass.

3.4. Implementation Details

Parallel Inference. We perform individual view editing for all video frames and select the one with the highest CLIP similarity score as the condition of SVD-XT. To adapt the first-frame conditional paradigm, we temporally partition the video into two subsequences at the conditional frame while reversing the temporal order of the preceding sub-video. These two sub-videos share the same condition and are edited in parallel to reduce time costs. An autoregressive manner [47] is adopted if the frames of sub-video exceed the model’s context length.

Views Continuity. We place continuous cameras around the 3D scene to obtain source video. Specifically, we first follow DGE [10] to sort the training view cameras according to their view changes. Then, we randomly select several cameras from the sorted training views as the key cameras, which are used to obtain interpolated cameras based on Slerp [15, 56] and linear interpolation.

Updating 3D Representation. We find that InstructPix2Pix tends to override the whole image even if the editing instruction specifies partial localization. Therefore, we follow GaussianEditor [12] to employ SAM [34] to calculate 2D masks, which prevent the 3D updating from occurring in unwanted regions. Following the typical 3D Gaussians reconstruction [32], we update source 3D under the supervision of 2D views with L_1 and LPIPS losses [76].

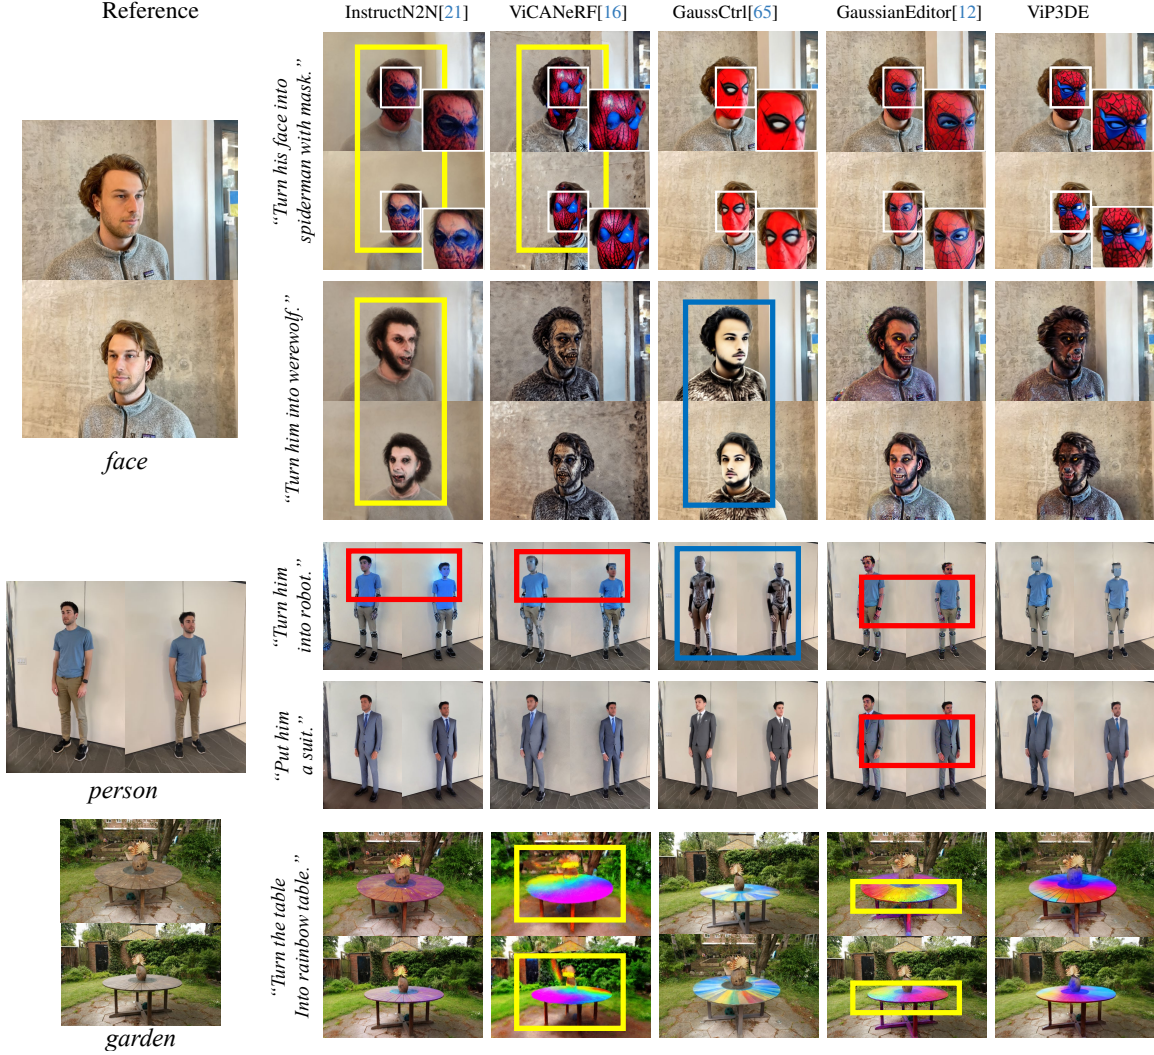


Figure 4. **Qualitative comparison.** We highlight the edited results suffering from inconsistency (red boxes), poor details (yellow boxes), and unfaithfulness (blue boxes). In comparison, ViP3DE obtains consistent results with higher faithfulness to instruction. Besides, rich details are preserved by avoiding multiple iterations that typically cause over-smoothed textures.

4. Experiments

Dataset and Metrics. To compare ViP3DE with previous methods, we collect 3D scenes and object assets from diverse datasets. Considering the significant time cost in previous methods like [63], we conduct fair comparative evaluations using a subset of Mip-NeRF360 [3] and LLFF [43]. More details are provided in the **supplementary file**. We follow common practice [10, 21] using CLIP text-image similarity and directional similarity to evaluate the alignment of editing and instructions, CLIP temporal consistency [21] is adopted to study the cross-view consistency.

Experimental Setting. The CFGs of textual and image conditions in InstructPix2Pix [5] are set to 7.5 and 1.5, respectively. The numbers of inversion steps and denoising steps in video models are set to 25. The τ in Eq. 3 is set

to 0.5. We use edited multi-view images to perform 750 updating iterations. All experiments are conducted on two RTX A6000 GPUs.

4.1. Comparison to 3D Editing Methods

Quantitative Comparison. We demonstrate the effectiveness and efficiency of ViP3DE by comparing it to previous 3D editing methods. The numerical results are reported in Tab. 1. Early work NeRF-Art [63] employs CLIP as a discriminator to edit a 3D object with VolSDF as representation, suffering from low convergence since rendering is time-consuming. ViCA-NeRF [16] forces the consistency of features in InstructPix2Pix, resulting in over-smoothed editing results with relatively low CLIP scores. Although GaussCtrl [65] can achieve 3D editing in a

Method	Base Model	Video Prior	Training-Free	Operations on		Remark
				Inverted Noise	3D constraint	
Tune-A-Video [66]	SD	✗	✗	✗	✗	No video pre-training
TokenFlow [18]	SD	✗	✓	✗	✗	No video pre-training
CoDeF [46]	-	✗	✗	✗	✗	Need training, time-consuming
ControlVideo [78]	ControlNet	✗	✓	✗	✗	No video pre-training
MotionClone [39]	AnimateDiff	✓	✓	✗	✗	Low editability
AnyV2V [35]	I2VGen	✓	✓	✓	✗	Color shift
VideoShop [17]	SVD-XT	✓	✓	✓	✗	Low conditional faithfulness
I2VEdit [47]	SVD-XT	✓	✗	✓	✗	Need training, time-consuming
Ours	SVD-XT	✓	✓	✓	✓	Consistent 3D editing

Table 2. Comparison with video-based methods.

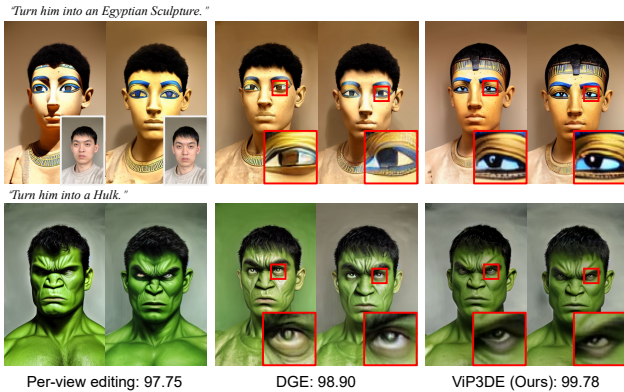


Figure 5. The editing results with CLIP temporal score in a single forward pass. ViP3DE achieves better consistency.

single iteration, it uses ControlNet [75] to perform editing, which often produces unfaithful results to the given text prompt. InstructN2N [21] and GaussianEditor [12] take advantage of InstructPix2Pix to achieve high-quality editing. However, they edit each view independently, resulting in cross-view inconsistency. In addition, they rely on multiple forward passes, causing slow convergence. DGE [10] introduce semantic correspondence from TokenFlow [18] to improve consistency. However, it inherits the limitations of 2D models, lacking cross-view consistency priors. Instead, ViP3DE introduces video priors with proposed motion-preserved noise blending and geometry-aware denoising, making edited views consistent and faithful.

Qualitative Comparison. We provide visual comparisons to further illustrate the advantages of ViP3DE. We mainly study three failure cases including inconsistency, poor texture details, and unfaithfulness. As shown in Fig. 4, InstructN2N and GaussianEditor lead to view-inconsistent results due to per-image editing. On *robot*, InstructN2N shows inconsistency in person heads. GaussianEditor maintains different hand colors in different views. In addition, it often introduces floating Gaussian artifacts, as shown in the *garden* scene. ViCANeRF fails to produce satisfied appearance with over-smoothed textures (*e.g.*, *rainbow table*). Al-



Figure 6. Comparison with video editing methods using instruction “Turn it into crystal diamond horn.” ViP3DE achieves better visual quality and camera pose alignment. Note that the images shown here are generated video frames instead of edited 3D Gaussians.

though GaussCtrl can achieve consistent editing, it suffers from unfaithfulness to the given textural prompt, caused by the use of ControlNet. DGE [10] extends InstructPix2Pix to a video model, sharing a similar motivation to ours. We compare the details of edited frames in a single forward pass in Fig. 5. Both DGE and ViP3DE achieve better temporal consistency compared to per-image editing independently. On *fangzhou*, compared to DGE, which fails to maintain detail consistency and demands iterative updating, ViP3DE achieves better consistency and richer textures by fully exploiting video priors from pre-trained video models.

4.2. Comparison to Video Editing Methods

Quantitative Comparison. We compare our method with video-based methods, which has the potential to achieve 3D editing. Both AnyV2V [35] and VideoShop [17] achieve

Continuous views	Motion-preserved noise blending	Geometrically aware denoising	CLIP score	
			T-I	Direction
			0.198	0.083
✓			0.220	0.109
✓	✓		0.271	0.185
✓		✓	0.258	0.181
✓	✓	✓	0.284	0.197

Table 3. **Ablation study on ViP3DE.** Removing either motion-preserved noise blending or geometry-aware denoising reduces the performance significantly.

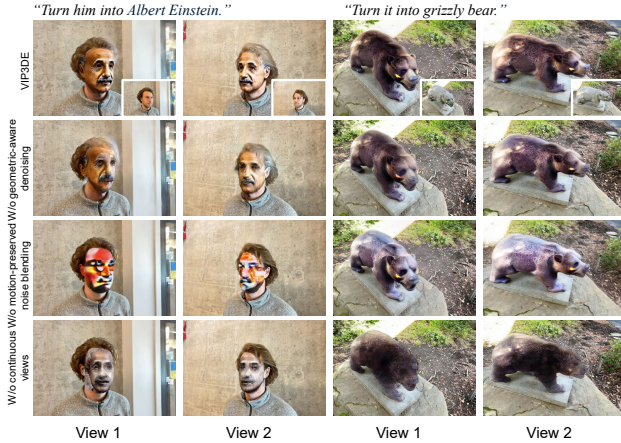


Figure 7. **Qualitative ablation results.** All the three components are important to achieve 3D consistent editing.

video editing in an inverse-based manner, while InsViE [67] is an instruction-based video editing model. We employ these methods to edit rendered 3D views in an autoregressive way and back-project edited views to 3D assets, similar to our post-processing. As shown in Tab. 1, these methods fail to achieve the desired performance because they overlook the balance between pose alignment and editing quality. Besides, they are designed for general videos editing containing object-level dynamics, which will introduce multi-view inconsistencies when directly applied to 3D editing. In contrast, our proposed ViP3DE is specialized for 3D editing tasks by explicitly integrating 3D geometric priors during editing, thereby enforcing cross-view consistency through physically grounded constraints. More detailed analysis by comparing ViP3DE with existing video editing methods in Tab. 2.

Qualitative Comparison. We provide qualitative comparisons with those video-based methods that can be adopted to achieve 3D editing. (1) *Motion-conditioned Video Generation Methods.* MotionCtrl [64] and CammaCtrl [22] aim to generate videos under specified camera poses. Specifically, we employ extrinsic matrices of camera poses as the condition, guiding video generation from the edited first frame. However, they cannot handle customized trajectories and will produce collapsed content. As shown in the second row of Fig. 6, the *crystal horn* with MotionCtrl gradually deviates from its original structure, producing mean-

ingless appearances. (2) *Video Editing Methods.* Recent advances in video editing can also be used to perform 3D editing. Here, we omit methods that require test-time training (*e.g.*, Tune-a-Video [66], CoDef [46], and I2VEdit [47]), and we compare our ViP3DE with MotionClone [39] and AnyV2V [35] in Fig. 6. MotionClone uses a text-guided video model, tending to generate ambiguous edited frames. The videos generated by AnyV2V show inconsistent colors in the horn. In comparison, ViP3DE achieves better visual quality since we inject 3D priors to enhance consistency.

4.3. Diagnostic Experiments

Quantitative Ablation Studies. We conduct ablation studies to evaluate the effectiveness of the key components of ViP3DE in Tab. 3. We see that the generative video model fails to tackle discrete 3D views and only achieves a CLIP score of 0.198. With continuous views as input, editing 3D multi-views with InstructPix2Pix and generative video models still outputs unfaithful visual results. Our proposed motion-preserved noise blending brings a significant performance improvement. Introducing geometry-aware denoising further enforces cross-view 3D consistency, achieving the best performance.

Qualitative Ablation Studies. We employ face and bear as examples to demonstrate the functionality of each component. The absence of ordered continuous views in input would make the video model fail in proper view editing, resulting in a mismatch between edited views and their corresponding camera poses. Consequently, the edited 3D representation exhibits significant quality degradation even with mask constraints. Removing motion-preserved noise blending makes the editing unfaithful to the conditional images, showing confused appearance artifacts. In addition, geometry-aware denoising reinforces the geometric relationships among views while maintaining alignment with the source 3D structure, effectively preventing blurring artifacts in the edited 3D views.

Generation Ability. Sometimes, the 3D content to be edited may not be fully covered by the first anchor view. One natural question rises: *Can consistent editing be achieved for missing content?* We use the large *bicycle* scene to demonstrate that ViP3DE inherits the generative capability of the video model and can transfer the editing cues of the anchor view to subsequent content, even if they do not appear in the first frame. As shown in Fig. 8, the trees and roads within the red box are also covered in snow. Note that such a capability is unattainable by previous warping-based single-view editing for 3D editing [36].

We provide more experiments (*e.g.*, comparison with video editing methods), implementation details (*e.g.*, pilot study), and discussions in the **supplementary file**.



Figure 8. **The Generalization ability of ViP3DE.** Leveraging video priors, ViP3DE can implicitly transfer the editing cues from the conditional first view to unseen regions.

5. Conclusion

In this paper, we proposed ViP3DE by introducing generative video priors for fast and multi-view consistent 3D editing. We first rendered continuous views to bridge the gap between discrete 3D views and video. Then, we proposed motion-preserved noise blending to improve editing quality, and introduced geometry-aware denoising to integrate 3D priors with video priors to enhance cross-view 3D consistency. The edited results were used directly to update 3D without iterative passes. Extensive experimental results demonstrated the superiority of ViP3DE over previous methods in both effectiveness and efficiency.

Limitations. While ViP3DE can manage 3D editing with certain geometric changes, such as adding glasses to a person, it is limited in editing scenes with significant geometric alterations, such as raising a person’s hands. This limitation mainly inherits from InstructPix2Pix, which is used to generate the edited first frame. As the editing and generative capabilities of image and video models continue to evolve, 3D editing with substantial geometric changes will be solved.

Supplementary Material

In this supplementary file, we provide the following materials to support the findings of the main paper:

- **Additional Implementation Details** provide more implementation details of ViP3DE.
- **Additional Analyses** provide extend analyses and discussions of the proposed ViP3DE.
- **Additional Experimental Results** provide more experimental details and visualization.

6. Additional Implementation Details

Generating 3D Instruction with GPT4o. As described in the main paper, we curate 100 3D assets and employ GPT4o [1] to automatically generate editing instructions and target prompts based on rendered views. The prompt provided to GPT4o is shown in Fig. 9.

EDM Inversion. As generative image-to-video models, SVD [4] and its extension SVD-XT can generate 16 and 25 continuous frames with a given first-frame image as the condition. In the training stage, the video model grounds the initial model on Stable Diffusion [52], followed by video fine-tuning. In the inference stage, SVD-XT denoises the randomly sampled noise x_T with the EDM solver [31] as follows¹:

$$x_t = x_{t+1} + \frac{\sigma_t - \sigma_{t+1}}{\sigma_{t+1}}(x_{t+1} - D_\theta(x_{t+1}, t+1; I)), \quad (4)$$

where σ_t is the scheduled noise level at step $t \in [0, T]$. $D_\theta(x_t, t; I)$ is the estimated x_0 from x_t conditioned on the first frame I , which is defined as follows:

$$D_\theta(x_t, t; I) = x_t - (c_{skip}^t x_t + c_{out}^t F_\theta(c_{in}^t x_t, c_{noise}^t; I)), \quad (5)$$

where c_{skip}^t , c_{in}^t , c_{out}^t , and c_{noise}^t are coefficients of noise schedule in EDM. F_θ refers to the UNet in SVD framework. SVD extends the classifier-free guidance [24] by linearly increasing the guidance scale across the frame axis. As an ODE approximation solver, EDM significantly reduces the sampling steps, improving the ViP3DE inference speed as well.

To inverse the denosing diffusion process, Equation (5) can be rewritten as follows to obtain x_{t+1} from x_t :

$$x_{t+1} = \frac{\sigma_{t+1}x_t + (\sigma_t - \sigma_{t+1})c_{out}^{t+1}F_\theta(c_{in}^{t+1}x_{t+1}, c_{noise}^{t+1}; I)}{\sigma_t - \sigma_t c_{skip}^{t+1} + \sigma_{t+1}c_{skip}^{t+1}}. \quad (6)$$

Since x_{t+1} is not available during inversion, we approximate $F_\theta(c_{in}^{t+1}x_{t+1}, c_{noise}^{t+1})$ by employing $F_\theta(c_{in}^t x_t, c_{noise}^t)$

¹For simplicity, we omit the 2nd order correction. The noise level increases with the step t , which is opposite to the original paper [31].

as a substitute. The inverted noise x_T can be used for source video reconstruction with I_{src}^1 as the denoising condition.

Discrete Views Interpolation. We first follow DGE [10] to sort the training view cameras according to their view changes. Then we randomly select 2~4 cameras from the sorted training views as the key cameras to be interpolated. To obtain a smooth video from a 3D scene, we propose to interpolate two adjacent cameras if they are not close enough. Specifically, given two camera poses $A = \{R_A, T_A\}$ and $B = \{R_B, T_B\}$, their rotations matrices are converted to quaternion q_A and q_B so that linear interpolation can be performed in this space. The quaternion of novel interpolated camera q_C is obtained based on Slerp (spherical linear interpolation) [15, 56], which is formulated as follows:

$$q_C = \text{Slerp}(q_A, q_B; k) = \frac{\sin \theta}{\sin \theta} q_A + \frac{\sin(1-k)\theta}{\sin \theta} q_B, \quad (7)$$

where $\theta = \arccos(q_A \cdot q_B)$, $k \in [0, 1]$ is the interpolation ratio. For translation terms, T_C are interpolated from:

$$T_C = kT_A + (1-k)T_B. \quad (8)$$

A number of K interpolated cameras between A and B can be obtained by set $k = \{\frac{1}{K+1}, \frac{2}{K+1}, \dots, \frac{K}{K+1}\}$.

7. Additional Analyses

Analyses on Inverted Noise. While inverted noise can serve as a validated initialization in image editing, our analysis reveals its limitations in 3D editing, where it produces severe artifacts. This stems from the multi-view nature of 3D content: Static objects' visual patterns show strong cross-view similarity, creating redundancy that survives noise inversion. We devise an experiment to quantify the relationship between 3D view counts and inversion efficacy. In detail, we perform naive inversion-based video editing with different numbers of source frames $N = \{1, 5, 10, 25\}$. As shown in Fig. 10, when there is only a single frame, the editability of inverted noise is relatively high, while as the number of frames increases, the appearance of the edited video becomes less similar to the condition. This phenomenon is observed across different η , demonstrating that the number of 3D views affects redundancy, and more 3D views reduce the editability of inverted noise.

Analyses on Geometry-aware Denoising. The proposed geometry-aware denoising operates within the video latent space across all denoising iterations. Its functional mechanisms can be decomposed into two aspects: (1) The downsampled geometric information integrated into

ROLE

You are a creative visual editor assistant. Based on the content of the provided image frame, suggest ONE concise editing instruction to creatively modify the scene, and ONE edited prompt, split with &.

REQUIREMENTS

1. Be specific and actionable (e.g., "Make snow falling", "Turn the car into a spaceship"), better the related semantic modification, like "dog to tiger"
2. Focus on object/context modification rather than filters
3. Use simple imperative form
4. Maximum 30 words
5. No explanations or disclaimers

EXAMPLES

GOOD: "Add a rainbow in the background & a rainbow background"

GOOD: "Replace the dog with a lion & a lion"

BAD: "Maybe add some weather effects?"

BAD: "Adjust brightness and contrast" ""

Figure 9. The prompt for GPT4o to generate instruction and target prompt automatically.

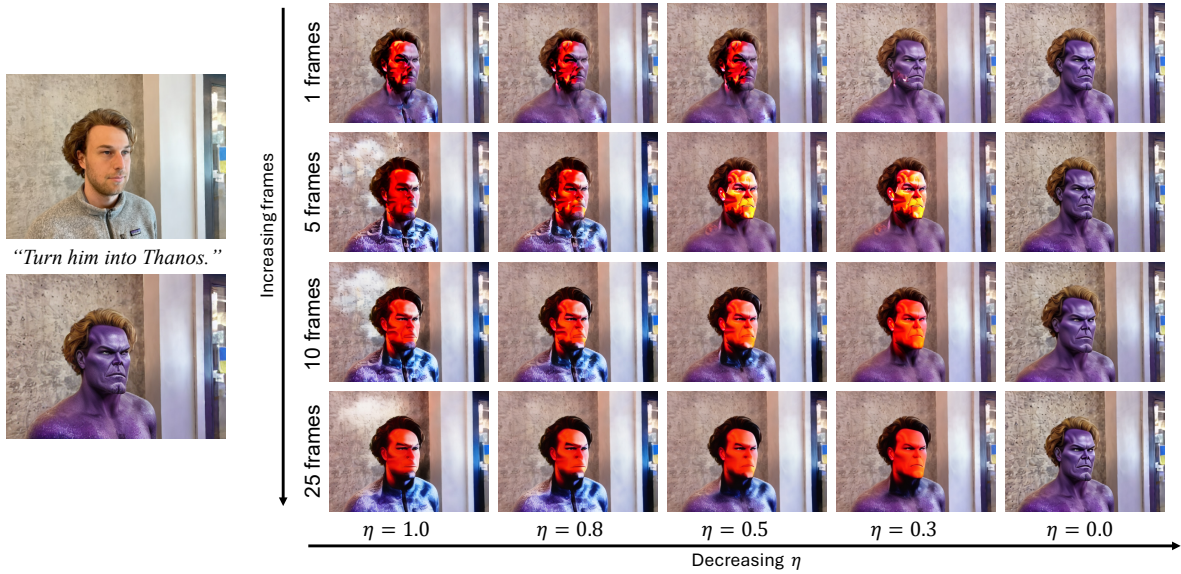


Figure 10. The effect of number of views on editing.

low-resolution latent space establishes soft yet robust constraints. Unlike pixel-space warping that inevitably introduces artifacts [36], this approach enables minor geometric modifications while maintaining coherence, as evidenced by the distinct geometric profiles of “Fangzhou” and “Hulk” in the main paper. (2) Overriding the latent features based on 3D view geometric relationships essentially performs geometric prior-guided annealing on denoised latent representations, which subsequently participates in the iterative diffusion optimization process, sharing a similar mechanism with SDE solvers like DDPM [25].

Efficiency. To establish connections between different views, previous methods [9, 10, 36] typically extrapolate the attention layers of 2D models (*e.g.*, Stable Diffusion) to maintain view consistency. Since 2D models process different views independently, these methods increase memory cost significantly, thus they can only tackle a small number of views in a single forward. In contrast, ViP3DE is based on a video model that stacks different views along the channel dimension. With efficient convolution and decoupled spatial-temporal attention, our method achieves consistent editing results across more views using video priors.

Scene	Source Prompt	Target Prompt	Edit Instruction	Prompt for GaussCtrl
Face	"A man."	"A clown."	"Turn him into a clown."	"A photo of a man." "A photo of a clown."
Face	"A man."	"A spiderman with mask."	"Turn him into a spider man with mask."	"A photo of a man." "A photo of a spider man with mask."
Face	"A man."	"A werewolf."	"Turn him into a werewolf."	"A photo of a man." "A photo of a werewolf."
Person	"A person."	"A robot."	"Turn him into a robot."	"a photo of a person." "A photo of a robot."
Person	"A person."	"A person wearing a suit."	"Put him a suit."	"A photo of a man." "A photo of a man wearing a suit."
Garden	"A table in the garden."	"A rainbow table in the garden."	"Turn the table into a rainbow table."	"A photo of a table." "A photo of a rainbow table."
Garden	"A table in the garden."	"A table in the garden with van Gogh style."	"Make it van Gogh style."	"A photo of a garden." "A photo of garden with van Gogh style."
Bear	"A stone bear."	"A grizzly bear."	"Turn it into a grizzly bear."	"A photo of a bear." "A photo of a grizzly bear."
Fangzhou	"A man."	"A Hulk."	"Turn him into a Hulk."	"A photo of a man." "A photo of a Egyptian Sculpture."
Fangzhou	"A man."	"An Egyptian Sculpture."	"Make him look like an Egyptian Sculpture."	"A photo of a man." "A photo of an Egyptian Sculpture."

Table 4. The scene and instruction prompts in the datasets.

Object Motion. The video model can generate videos containing both camera motion and object motion. ViP3DE generates edited 3D views with only camera motion via motion-preserved noise blending, which potentially provides a solution for decoupling camera motion and object motion. On the other hand, better utilization of object motion could provide a technical foundation for 4D perception [72, 73] or 3D animation [60], which we leave for future work.

8. Additional Experimental Results

Scene-Prompt Pairs. We provide the detailed scene-prompt pairs in Tab. 4. Since GaussCtrl [65] relies on source and target prompts to achieve editing instead of editing instruction, which is different from other methods, we additionally report the prompts used in GaussCtrl.

Metric. We employ TransErr to study the camera pose alignment of the source and edited 3D views. In detail, COLMAP [53] is utilized to estimate the camera pose sequence of edited videos, which consist of rotation matrixes $\mathbf{R}_{edit} \in \mathbb{R}^{n \times 3 \times 3}$ and translation vector $\mathbf{T}_{edit} \in \mathbb{R}^{n \times 3 \times 1}$. The translation error TransErr is calculated by comparing with ground truth matrix \mathbf{R}_{gt} and \mathbf{T}_{gt} as follows:

$$\text{TransErr} = \sum_{j=1}^n \left\| \mathbf{T}_{gt}^j - \mathbf{T}_{edit}^j \right\|_2. \quad (9)$$

Considering the randomness in the world coordinate origin and intrinsic parameters when estimating camera poses with COLMAP, directly comparing camera trajectories of source and edited videos would introduce significant errors. Therefore, we first fix their intrinsic parameters, including the focal length and image coordinate origin. Then, the ex-

trinsic matrices are aligned to the coordinates of the first view before making a comparison.

Visualization. We provide more visualization results to demonstrate the effectiveness of ViP3DE from Fig. 11 to Fig. 16. One can observe that even with a single forward pass, ViP3DE presents an impressive 3D consistency without blurs.

Source views



"Make him a skull."



"Give him a glass."



Edited 3D

"Turn him to Trump."



"Turn him to Thonas." (without mask)





Figure 11. **Face.**


Source views



"Turn him into David sculpture."

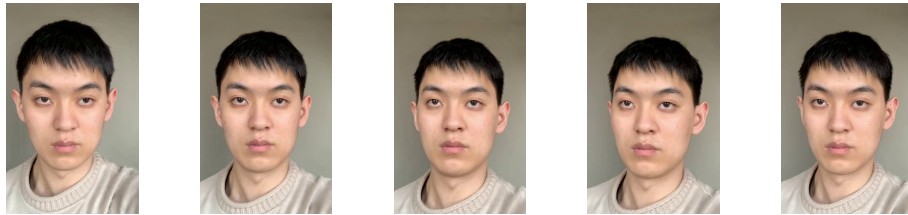

"Turn him into iron man."

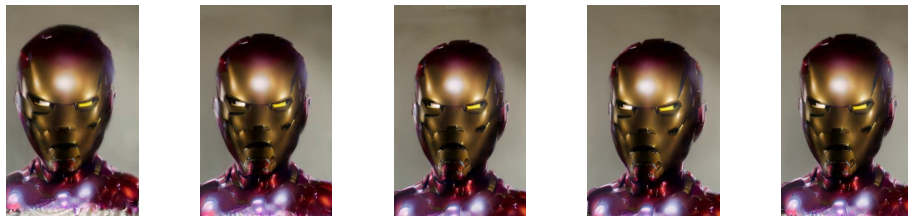

Edited 3D

"Turn him into iron hulk."



Figure 12. **Fangzhou.**

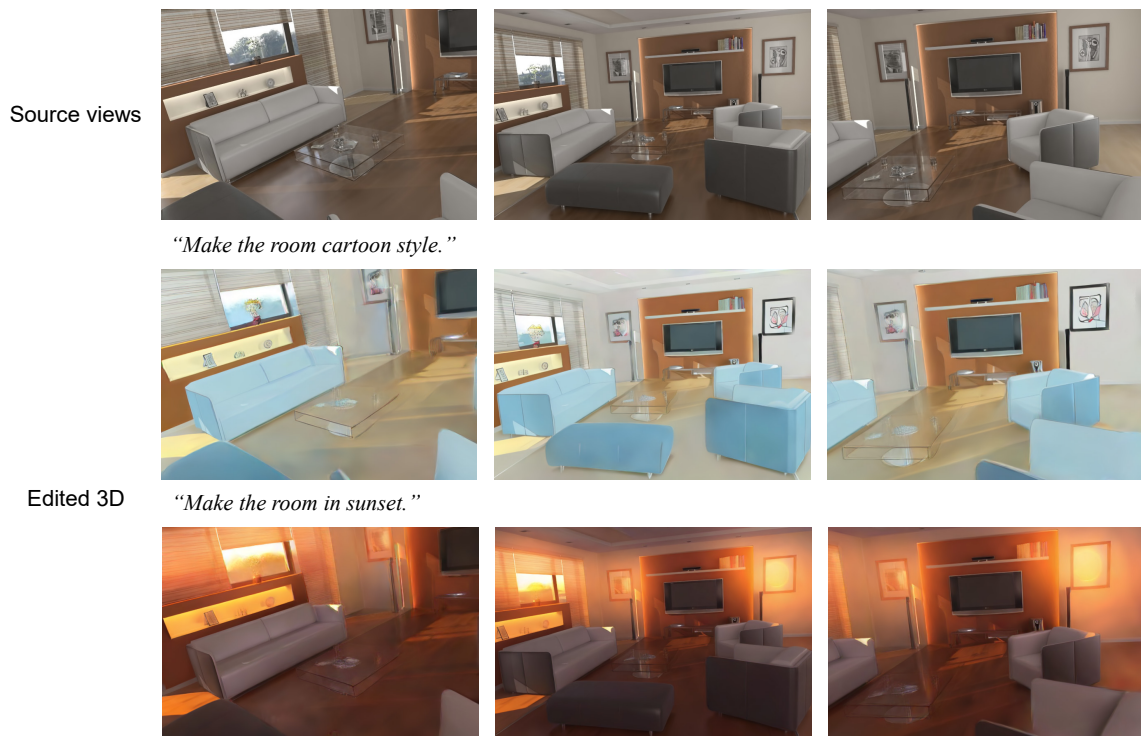


Figure 13. **Replica.**

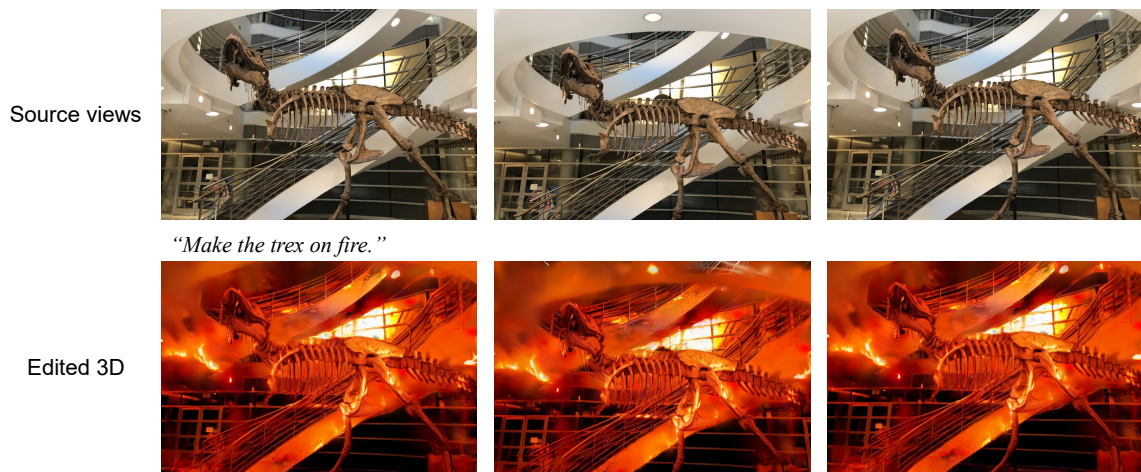


Figure 14. **Trex.**

Source views



"Turn it into crystal diamond."

Edited 3D



Figure 15. **Horn.**

Source views



"Make the bench golden."

Edited 3D



Figure 16. **Bicycle.**

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 4, 10
- [2] Roi Bar-On, Dana Cohen-Bar, and Daniel Cohen-Or. Editp23: 3d editing via propagation of image prompts to multi-view. *arXiv preprint arXiv:2506.20652*, 2025. 1
- [3] Jonathan T Barron, Ben Mildenhall, Dor Verbin, Pratul P Srinivasan, and Peter Hedman. Mip-nerf 360: Unbounded anti-aliased neural radiance fields. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5470–5479, 2022. 6
- [4] Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023. 2, 3, 10
- [5] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023. 2, 3, 5, 6
- [6] Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, et al. Video generation models as world simulators. *OpenAI Blog*, 1(8):1, 2024. 2, 4
- [7] Haoxin Chen, Menghan Xia, Yingqing He, Yong Zhang, Xiaodong Cun, Shaoshu Yang, Jinbo Xing, Yaofang Liu, Qifeng Chen, Xintao Wang, Chao Weng, and Ying Shan. Videocrafter1: Open diffusion models for high-quality video generation, 2023.
- [8] Haoxin Chen, Yong Zhang, Xiaodong Cun, Menghan Xia, Xintao Wang, Chao Weng, and Ying Shan. Videocrafter2: Overcoming data limitations for high-quality video diffusion models, 2024. 2
- [9] Jun-Kun Chen, Samuel Rota Bulò, Norman Müller, Lorenzo Porzi, Peter Kotschieder, and Yu-Xiong Wang. Consist-dreamer: 3d-consistent 2d diffusion for high-fidelity scene editing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21071–21080, 2024. 1, 2, 11
- [10] Minghao Chen, Iro Laina, and Andrea Vedaldi. Dge: Direct gaussian 3d editing by consistent multi-view editing. In *European Conference on Computer Vision*, pages 74–92. Springer, 2024. 2, 5, 6, 7, 10, 11
- [11] Minghao Chen, Junyu Xie, Iro Laina, and Andrea Vedaldi. Shap-editor: Instruction-guided latent 3d editing in seconds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26456–26466, 2024. 1, 2
- [12] Yiwen Chen, Zilong Chen, Chi Zhang, Feng Wang, Xiaofeng Yang, Yikai Wang, Zhongang Cai, Lei Yang, Huaping Liu, and Guosheng Lin. Gaussianeditor: Swift and controllable 3d editing with gaussian splatting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21476–21485, 2024. 1, 5, 6, 7
- [13] Xinhua Cheng, Tianyu Yang, Jianan Wang, Yu Li, Lei Zhang, Jian Zhang, and Li Yuan. Progressive3d: Progressively local editing for text-to-3d content creation with complex semantic prompts. *arXiv preprint arXiv:2310.11784*, 2023. 2
- [14] Özgün Çiçek, Ahmed Abdulkadir, Soeren S Lienkamp, Thomas Brox, and Olaf Ronneberger. 3d u-net: learning dense volumetric segmentation from sparse annotation. In *Medical Image Computing and Computer-Assisted Intervention–MICCAI 2016: 19th International Conference, Athens, Greece, October 17–21, 2016, Proceedings, Part II 19*, pages 424–432. Springer, 2016. 2
- [15] Erik B Dam, Martin Koch, and Martin Lillholm. *Quaternions, interpolation and animation*. Citeseer, 1998. 5, 10
- [16] Jiahua Dong and Yu-Xiong Wang. Vica-nerf: View-consistency-aware 3d editing of neural radiance fields. *Advances in Neural Information Processing Systems*, 36, 2024. 5, 6
- [17] Xiang Fan, Anand Bhattad, and Ranjay Krishna. Videoshop: Localized semantic video editing with noise-extrapolated diffusion inversion, 2024. 2, 3, 5, 7
- [18] Michal Geyer, Omer Bar-Tal, Shai Bagon, and Tali Dekel. Tokenflow: Consistent diffusion features for consistent video editing. *arXiv preprint arXiv:2307.10373*, 2023. 2, 7
- [19] Yuchao Gu, Yipin Zhou, Bichen Wu, Licheng Yu, Jia-Wei Liu, Rui Zhao, Jay Zhangjie Wu, David Junhao Zhang, Mike Zheng Shou, and Kevin Tang. Videoswap: Customized video subject swapping with interactive semantic point correspondence. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7621–7630, 2024. 2
- [20] Yuwei Guo, Ceyuan Yang, Anyi Rao, Zhengyang Liang, Yaohui Wang, Yu Qiao, Maneesh Agrawala, Dahua Lin, and Bo Dai. Animatediff: Animate your personalized text-to-image diffusion models without specific tuning. *International Conference on Learning Representations*, 2024. 2
- [21] Ayaan Haque, Matthew Tancik, Alexei A Efros, Aleksander Holynski, and Angjoo Kanazawa. Instruct-nerf2nerf: Editing 3d scenes with instructions. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19740–19750, 2023. 1, 2, 4, 5, 6, 7
- [22] Hao He, Yinghao Xu, Yuwei Guo, Gordon Wetzstein, Bo Dai, Hongsheng Li, and Ceyuan Yang. Cameractrl: Enabling camera control for text-to-video generation. *arXiv preprint arXiv:2404.02101*, 2024. 2, 4, 8
- [23] Amir Hertz, Kfir Aberman, and Daniel Cohen-Or. Delta denoising score. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2328–2337, 2023. 1
- [24] Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022. 10
- [25] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020. 11
- [26] Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. Cogvideo: Large-scale pretraining for

- text-to-video generation via transformers. *arXiv preprint arXiv:2205.15868*, 2022. 2
- [27] Zehuan Huang, Hao Wen, Junting Dong, Yaohui Wang, Yangguang Li, Xinyuan Chen, Yan-Pei Cao, Ding Liang, Yu Qiao, Bo Dai, et al. Epidiff: Enhancing multi-view synthesis via localized epipolar-constrained diffusion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9784–9794, 2024. 5
- [28] Zeyinzi Jiang, Zhen Han, Chaojie Mao, Jingfeng Zhang, Yulin Pan, and Yu Liu. Vace: All-in-one video creation and editing. *arXiv preprint arXiv:2503.07598*, 2025. 2
- [29] Hiromichi Kamata, Yuiko Sakuma, Akio Hayakawa, Masato Ishii, and Takuya Narihira. Instruct 3d-to-3d: Text instruction guided 3d-to-3d conversion. *arXiv preprint arXiv:2303.15780*, 2023. 1, 2
- [30] Bingyi Kang, Yang Yue, Rui Lu, Zhijie Lin, Yang Zhao, Kaixin Wang, Gao Huang, and Jiashi Feng. How far is video generation from world model: A physical law perspective. *arXiv preprint arXiv:2411.02385*, 2024. 2, 4
- [31] Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. Elucidating the design space of diffusion-based generative models. *Advances in neural information processing systems*, 35:26565–26577, 2022. 3, 10
- [32] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Trans. Graph.*, 42(4):139–1, 2023. 1, 5
- [33] Jiwook Kim, Seonho Lee, Jaeyo Shin, Jiho Choi, and Hyun-jung Shim. Dreamcatalyst: Fast and high-quality 3d editing via controlling editability and identity preservation. *arXiv preprint arXiv:2407.11394*, 2024. 2
- [34] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023. 5
- [35] Max Ku, Cong Wei, Weiming Ren, Huan Yang, and Wenhui Chen. Anyv2v: A plug-and-play framework for any video-to-video editing tasks. *arXiv preprint arXiv:2403.14468*, 2024. 2, 3, 4, 5, 7, 8
- [36] Ruihuang Li, Liyi Chen, Zhengqiang Zhang, Varun Jampani, Vishal M Patel, and Lei Zhang. Syncnoise: Geometrically consistent noise prediction for text-based 3d scene editing. *arXiv preprint arXiv:2406.17396*, 2024. 1, 2, 5, 8, 11
- [37] Ruibin Li, Ruihuang Li, Song Guo, and Lei Zhang. Source prompt disentangled inversion for boosting image editability with diffusion models. In *European Conference on Computer Vision*, pages 404–421. Springer, 2024. 4
- [38] Yuhang Li, Yishun Dou, Yue Shi, Yu Lei, Xuanhong Chen, Yi Zhang, Peng Zhou, and Bingbing Ni. Focaldreamer: Text-driven 3d editing via focal-fusion assembly. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 3279–3287, 2024. 1, 2
- [39] Pengyang Ling, Jiazi Bu, Pan Zhang, Xiaoyi Dong, Yuhang Zang, Tong Wu, Huaian Chen, Jiaqi Wang, and Yi Jin. Motionclone: Training-free motion cloning for controllable video generation. *arXiv preprint arXiv:2406.05338*, 2024. 2, 4, 7, 8
- [40] Parker Liu, Chenxin Li, Zhengxin Li, Yipeng Wu, Wuyang Li, Zhiqin Yang, Zhenyuan Zhang, Yunlong Lin, Sirui Han, and Brandon Y Feng. Ir3d-bench: Evaluating vision-language model scene understanding as agentic inverse rendering. *arXiv preprint arXiv:2506.23329*, 2025. 2
- [41] Xiangyue Liu, Han Xue, Kunming Luo, Ping Tan, and Li Yi. Genn2n: Generative nerf2nerf translation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5105–5114, 2024. 1, 2
- [42] Chaofan Luo, Donglin Di, Xun Yang, Yongjia Ma, Zhou Xue, Chen Wei, and Yebin Liu. Trame: Trajectory-anchored multi-view editing for text-guided 3d gaussian splatting manipulation. *arXiv preprint arXiv:2407.02034*, 2024. 2, 5
- [43] Ben Mildenhall, Pratul P Srinivasan, Rodrigo Ortiz-Cayon, Nima Khademi Kalantari, Ravi Ramamoorthi, Ren Ng, and Abhishek Kar. Local light field fusion: Practical view synthesis with prescriptive sampling guidelines. *ACM Transactions on Graphics (ToG)*, 38(4):1–14, 2019. 4, 6
- [44] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. *Communications of the ACM*, 65(1):99–106, 2021. 1
- [45] Ron Mokady, Amir Hertz, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. Null-text inversion for editing real images using guided diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6038–6047, 2023. 4
- [46] Hao Ouyang, Qiuyu Wang, Yuxi Xiao, Qingyan Bai, Juntao Zhang, Kecheng Zheng, Xiaowei Zhou, Qifeng Chen, and Yujun Shen. Codef: Content deformation fields for temporally consistent video processing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8089–8099, 2024. 7, 8
- [47] Wenqi Ouyang, Yi Dong, Lei Yang, Jianlou Si, and Xingang Pan. I2vedit: First-frame-guided video editing via image-to-video diffusion models. *arXiv preprint arXiv:2405.16537*, 2024. 2, 3, 5, 7, 8
- [48] Panwang Pan, Chenguo Lin, Jingjing Zhao, Chenxin Li, Yuchen Lin, Haopeng Li, Honglei Yan, Kairun Wen, Yunlong Lin, Yixuan Yuan, et al. Diff4splat: Controllable 4d scene generation with latent dynamic reconstruction models. *arXiv preprint arXiv:2511.00503*, 2025. 2
- [49] Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022. 2
- [50] Chenyang Qi, Xiaodong Cun, Yong Zhang, Chenyang Lei, Xintao Wang, Ying Shan, and Qifeng Chen. Fatezero: Fusing attentions for zero-shot text-based video editing. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15932–15942, 2023. 2
- [51] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 1, 2, 4

- [52] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. 1, 2, 10
- [53] Johannes Lutz Schönberger and Jan-Michael Frahm. Structure-from-motion revisited. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016. 3, 4, 12
- [54] Etai Sella, Gal Fiebelman, Peter Hedman, and Hadar Averbuch-Elor. Vox-e: Text-guided voxel editing of 3d objects. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 430–440, 2023. 2
- [55] Xiaoyu Shi, Zhaoyang Huang, Fu-Yun Wang, Weikang Bian, Dasong Li, Yi Zhang, Manyuan Zhang, Ka Chun Cheung, Simon See, Hongwei Qin, et al. Motion-i2v: Consistent and controllable image-to-video generation with explicit motion modeling. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–11, 2024. 2
- [56] Ken Shoemake. Animating rotation with quaternion curves. In *Proceedings of the 12th annual conference on Computer graphics and interactive techniques*, pages 245–254, 1985. 5, 10
- [57] Liangchen Song, Liangliang Cao, Jiatao Gu, Yifan Jiang, Junsong Yuan, and Hao Tang. Efficient-nerf2nerf: Streamlining text-driven 3d editing with multiview correspondence-enhanced diffusion models. *arXiv preprint arXiv:2312.08563*, 2023. 2, 5
- [58] Olga Sorkine, Daniel Cohen-Or, Yaron Lipman, Marc Alexa, Christian Rössl, and H-P Seidel. Laplacian surface editing. In *Proceedings of the 2004 Eurographics/ACM SIGGRAPH symposium on Geometry processing*, pages 175–184, 2004. 1
- [59] A Vaswani. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017. 2
- [60] Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Feiwei Yu, Haiming Zhao, Jianxiao Yang, Jianyuan Zeng, Jiayu Wang, Jingfeng Zhang, Jingren Zhou, Jinkai Wang, Jixuan Chen, Kai Zhu, Kang Zhao, Keyu Yan, Lianghua Huang, Mengyang Feng, Ningyi Zhang, Pandeng Li, Pingyu Wu, Ruihang Chu, Ruili Feng, Shiwei Zhang, Siyang Sun, Tao Fang, Tianxing Wang, Tianyi Gui, Tingyu Weng, Tong Shen, Wei Lin, Wei Wang, Wei Wang, Wenmeng Zhou, Wenten Wang, Wenting Shen, Wenyuan Yu, Xianzhong Shi, Xiaoming Huang, Xin Xu, Yan Kou, Yangyu Lv, Yifei Li, Yijing Liu, Yiming Wang, Yingya Zhang, Yitong Huang, Yong Li, You Wu, Yu Liu, Yulin Pan, Yun Zheng, Yuntao Hong, Yupeng Shi, Yutong Feng, Zeyinzi Jiang, Zhen Han, Zhi-Fan Wu, and Ziyu Liu. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*, 2025. 3, 12
- [61] Binglun Wang, Niladri Shekhar Dutt, and Niloy J Mitra. Pro-teusnerf: Fast lightweight nerf editing using 3d-aware image context. *Proceedings of the ACM on Computer Graphics and Interactive Techniques*, 7(1):1–17, 2024. 2
- [62] Can Wang, Menglei Chai, Mingming He, Dongdong Chen, and Jing Liao. Clip-nerf: Text-and-image driven manipulation of neural radiance fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3835–3844, 2022. 1, 2
- [63] Can Wang, Ruixiang Jiang, Menglei Chai, Mingming He, Dongdong Chen, and Jing Liao. Nerf-art: Text-driven neural radiance fields stylization. *IEEE Transactions on Visualization and Computer Graphics*, 2023. 1, 2, 5, 6
- [64] Zhouxia Wang, Ziyang Yuan, Xintao Wang, Yaowei Li, Tianshui Chen, Menghan Xia, Ping Luo, and Ying Shan. Motionctrl: A unified and flexible motion controller for video generation. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–11, 2024. 2, 8
- [65] Jing Wu, Jia-Wang Bian, Xinghui Li, Guangrun Wang, Ian Reid, Philip Torr, and Victor Adrian Prisacariu. Gaussctrl: multi-view consistent text-driven 3d gaussian splatting editing. *arXiv preprint arXiv:2403.08733*, 2024. 5, 6, 12
- [66] Jay Zhangjie Wu, Yixiao Ge, Xintao Wang, Stan Weixian Lei, Yuchao Gu, Yufei Shi, Wynne Hsu, Ying Shan, Xiao-hu Qie, and Mike Zheng Shou. Tune-a-video: One-shot tuning of image diffusion models for text-to-video generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7623–7633, 2023. 2, 7, 8
- [67] Yuhui Wu, Liyi Chen, Ruibin Li, Shihao Wang, Chenxi Xie, and Lei Zhang. Insvie-1m: Effective instruction-based video editing with elaborate dataset construction. *arXiv preprint arXiv:2503.20287*, 2025. 5, 8
- [68] Wilson Yan, Andrew Brown, Pieter Abbeel, Rohit Girdhar, and Samaneh Azadi. Motion-conditioned image animation for video editing. *arXiv preprint arXiv:2311.18827*, 2023. 2
- [69] Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024. 2, 3
- [70] Lu Yu, Wei Xiang, and Kang Han. Edit-diffnerf: Editing 3d neural radiance fields using 2d diffusion model. *arXiv preprint arXiv:2306.09551*, 2023. 2
- [71] Yizhou Yu, Kun Zhou, Dong Xu, Xiaohan Shi, Hujun Bao, Baining Guo, and Heung-Yeung Shum. Mesh editing with poisson-based gradient field manipulation. In *ACM SIGGRAPH 2004 Papers*, pages 644–651, 2004. 1
- [72] Guowen Zhang, Junsong Fan, Liyi Chen, Zhaoxiang Zhang, Zhen Lei, and Lei Zhang. General geometry-aware weakly supervised 3d object detection. In *European Conference on Computer Vision*, pages 290–309. Springer, 2024. 12
- [73] Guowen Zhang, Lue Fan, Chenhang He, Zhen Lei, Zhaoxiang Zhang, and Lei Zhang. Voxel mamba: Group-free state space models for point cloud based 3d object detection. *Advances in Neural Information Processing Systems*, 37:81489–81509, 2024. 12
- [74] Hao Zhang, Yao Feng, Peter Kulits, Yandong Wen, Justus Thies, and Michael J Black. Text-guided generation and editing of compositional 3d avatars. *arXiv preprint arXiv:2309.07125*, 2023. 2
- [75] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023. 7

- [76] Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 586–595, 2018. [5](#)
- [77] Shiwei Zhang, Jiayu Wang, Yingya Zhang, Kang Zhao, Hangjie Yuan, Zhiwu Qin, Xiang Wang, Deli Zhao, and Jingren Zhou. I2vgen-xl: High-quality image-to-video synthesis via cascaded diffusion models. *arXiv preprint arXiv:2311.04145*, 2023. [2](#)
- [78] Yabo Zhang, Yuxiang Wei, Dongsheng Jiang, Xiaopeng Zhang, Wangmeng Zuo, and Qi Tian. Controlvideo: Training-free controllable text-to-video generation. *arXiv preprint arXiv:2305.13077*, 2023. [7](#)
- [79] Zangwei Zheng, Xiangyu Peng, Tianji Yang, Chenhui Shen, Shenggui Li, Hongxin Liu, Yukun Zhou, Tianyi Li, and Yang You. Open-sora: Democratizing efficient video production for all. 2024. [2](#)
- [80] Xingchen Zhou, Ying He, F Richard Yu, Jianqiang Li, and You Li. Repaint-nerf: Nerf editing via semantic masks and diffusion models. *arXiv preprint arXiv:2306.05668*, 2023. [2](#)
- [81] Haiming Zhu, Yangyang Xu, Chenshu Xu, Tingrui Shen, Wenxi Liu, Yong Du, Jun Yu, and Shengfeng He. Stable score distillation. *arXiv preprint arXiv:2507.09168*, 2025. [1](#)
- [82] Jingyu Zhuang, Chen Wang, Liang Lin, Lingjie Liu, and Guanbin Li. Dreameditor: Text-driven 3d scene editing with neural fields. In *SIGGRAPH Asia 2023 Conference Papers*, pages 1–10, 2023. [2](#)
- [83] Matthias Zwicker, Mark Pauly, Oliver Knoll, and Markus Gross. Pointshop 3d: An interactive system for point-based surface editing. *ACM Transactions on Graphics (TOG)*, 21(3):322–329, 2002. [1](#)