

Exploring Automated Recognition of Instructional Activity and Discourse from Multimodal Classroom Data

Ivo Bueno^{1,2*} Ruikun Hou^{1,2*} Babette Bühler¹ Tim Fütterer³ James Drimalla⁴
Jonathan K. Foster⁵ Peter Youngs⁶ Peter Gerjets³ Ulrich Trautwein³ Enkelejda Kasneci^{1,2}

¹Technical University of Munich ²Munich Center for Machine Learning (MCML)

³University of Tübingen ⁴Gordon College

⁵State University of New York at Albany ⁶University of Virginia

ivo.bueno@tum.de, ruikun.hou@tum.de

Abstract

Observation of classroom interactions can provide concrete feedback to teachers, but current methods rely on manual annotation, which is resource-intensive and hard to scale. This work explores AI-driven analysis of classroom recordings, focusing on multimodal instructional activity and discourse recognition as a foundation for actionable feedback. Using a densely annotated dataset of 164 hours of video and 68 lesson transcripts, we design parallel, modality-specific pipelines. For video, we evaluate zero-shot multimodal LLMs, fine-tuned vision–language models, and self-supervised video transformers on 24 activity labels. For transcripts, we fine-tune a transformer-based classifier with contextualized inputs and compare it against prompting-based LLMs on 19 discourse labels. To handle class imbalance and multi-label complexity, we apply per-label thresholding, context windows, and imbalance-aware loss functions. The results show that fine-tuned models consistently outperform prompting-based approaches, achieving macro-F1 scores of 0.577 for video and 0.460 for transcripts. These results demonstrate the feasibility of automated classroom analysis and establish a foundation for scalable teacher feedback systems.

1. Introduction

High-quality feedback to teachers on their instructional practices is essential for improving teaching quality and is strongly associated with enhanced student achievement [37, 50]. However, current approaches to teacher feedback rely heavily on manual observation by trained annotators, either

in real time or through reviewing classroom video recordings [12, 29, 53]. Such methods are resource-intensive and impractical to scale to the frequency and granularity required for effective professional development [27, 34, 47].

Recent advances in artificial intelligence (AI), particularly in computer vision (CV) and natural language processing (NLP), have transformed high-stakes domains such as autonomous driving and medical diagnosis. This has sparked growing interest in leveraging these techniques in education to support and enhance teaching and learning [10, 13, 26, 36, 48, 52]. In this work, we investigate how state-of-the-art AI models can analyze multimodal classroom recordings—videos and transcripts—to achieve fine-grained recognition of instructional practices.

Crucially, we emphasize that the automatic recognition of teaching practices does not by itself constitute actionable feedback. Instead, it serves as scalable groundwork for systematic assessment by enabling the capture of classroom activities and discourse features at a scale infeasible through manual observation [27, 35]. This capability not only lays the foundation for higher-level interpretation, such as evaluating teaching quality and designing evidence-based feedback strategies, but also opens new opportunities for large-scale research on instructional practices across diverse educational contexts [19, 24, 62]. Translating this vision into practice requires addressing a concrete technical task: the accurate recognition of instructional practices from classroom recordings. Real-world classroom interactions consist of both visual activities (e.g., student engagement, teacher movement) and linguistic discourse (e.g., questioning strategies, feedback moves) [35, 57]. Identifying these multimodal signals reliably and at scale is therefore a prerequisite for developing feedback systems that can generalize across classrooms and for advancing empirical

*These authors contributed equally to this work.

research on teaching quality. This recognition task forms the central problem we address in this work.

Classroom data analysis presents several unique challenges. First, both activity and discourse recognition are inherently multi-label tasks, with each instance potentially involving multiple overlapping instructional practices. Second, the label distributions are highly imbalanced, with negative instances far outnumbering positives within each label, further complicating learning. Third, both modalities provide limited context: vision models classify single one-second clips, and transcript models operate on sentence-level discourse units, making it difficult to capture broader pedagogical structures. Fourth, classrooms are visually complex environments, with variable camera angles, frequent occlusions caused by teacher and student movement, and additional challenges in recognizing children, whose gestures and expressions are less standardized than those of adults [29, 53]. Variability in classroom layouts, lighting conditions, and instructional materials (e.g., whiteboards, projectors, manipulatives) further complicates robust recognition [22]. Finally, recordings come from diverse classrooms and teaching conditions, introducing domain shifts that affect both visual and textual modalities and require models to generalize across heterogeneous contexts.

To address these challenges, we adopt a parallel, modality-specific pipeline rather than an early-fusion strategy. Figure 1 contains a visual representation of this pipeline. Each modality is optimized independently with architectures and training strategies tailored to its properties. For vision, we implement advanced video recognition approaches, including zero-shot prompting of multi-modal large language models (MLLMs), fine-tuning of vision-language discriminative models, and attentive probing of pre-trained video transformer encoders for instructional activity recognition. For transcripts, we employ zero- and few-shot prompting of LLMs and fine-tune an embedding-based classifier. We incorporate short visual temporal windows and prepend the two previous utterances as contextual input to enrich both video and textual representations. Finally, we perform per-label dynamic thresholding during evaluation, selecting thresholds that maximize the macro-F1 score and adapting to label-specific imbalances.

Our contributions are threefold:

1. We adapt state-of-the-art vision and language models to the domain of elementary school math and English language arts (ELA) lessons through parallel, modality-specific pipelines.
2. We provide a systematic comparison of prompting-based LLMs and fine-tuned specialized architectures for video and transcript data, providing insights into their relative strengths and limitations in this educational setting.
3. We evaluate practical strategies for addressing multi-label imbalance, including per-label thresholding, con-

text windows, and imbalance-aware loss functions, offering practical guidance for future applications in classroom discourse and activity recognition.

2. Related Work

2.1. Video Action Recognition

Action recognition has been a fundamental CV task, aiming to classify human actions and events in videos. Effective exploitation of both spatial and temporal information is essential for constructing robust video recognition models. Early research relied on 2D-CNNs combined with recurrent architectures such as LSTMs to capture temporal dependencies across frames [28, 64]. Subsequently, 3D-CNNs were introduced to jointly model spatio-temporal features [14, 23]. Given the limited receptive fields of CNN-based architectures, transformer models have recently become dominant in visual understanding. Vision transformers (ViTs) [21] partitioned images into a set of patches, embedded them as tokens, and applied self-attention [56] to capture long-range relationships. Their extensions to the video domain, such as *ViViT* [3] and *TimeSformer* [9], leveraged temporal attention mechanisms and showed promising performance on standard video benchmarks like *Kinetics-400* [14] and *Something-Something v2 (SSv2)* [31]. More recently, self-supervised video representation learning like *VideoMAE* [54] and *V-JEPA* [6] enabled scalable pretraining across massive video corpora, achieving strong generalizable performance across downstream recognition tasks.

In parallel, vision-language models (VLMs) have grown increasingly influential. Contrastive language-image pre-training (CLIP) [46] demonstrated the effectiveness of learning joint embedding spaces from large-scale image-text pairs. Several extensions adapted *CLIP* to video analysis, including *ActionCLIP* [58] and *X-CLIP* [43], enabling zero-shot recognition via video-to-text retrieval and achieving competitive performance when fine-tuned on domain-specific data. Meanwhile, MLLMs like *GPT-4V* [44], which combined vision encoders with LLMs, further expanded the possibilities of zero-shot video understanding through flexible prompting and natural language generation.

These advances in visual understanding have drawn growing attention to their applications in classroom scenarios, such as identifying teacher postures (e.g., writing on the blackboard and moving across the room) and student behaviors (e.g., hand-raising and taking notes). Prior research mainly focused on individual analysis by detecting each participant and then classifying their behaviors, applying various approaches ranging from CNN-based detectors [15, 53] and skeleton-driven action recognition [1, 12] to transformer-based architectures [60, 66]. In contrast, our work shifts the focus to whole-scene analysis, formulating this as a multi-label activity recognition task over a temporal

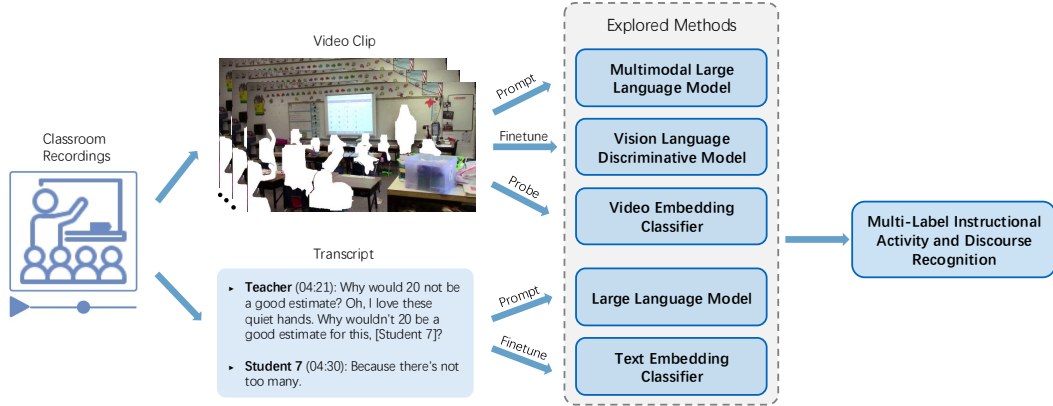


Figure 1. Overview of explored approaches to multi-label activity and discourse recognition in classroom video and transcripts. Individuals are removed for privacy.

clip, following Foster et al. [24]. This enables the capture of not only individual behaviors but also key interactions between teachers, students, and objects, which are essential for a comprehensive understanding of teaching quality. To this end, our present work explores and benchmarks state-of-the-art video recognition approaches on this real-world educational application, involving VLMs and video transformers.

2.2. Transcript Discourse Recognition

Discourse recognition has long been studied in NLP, particularly in the context of dialogue act classification. Early approaches relied on feature-based models using lexical, syntactic, and prosodic cues [51], but were limited by hand-crafted features and poor generalization across domains. Transformer-based models, beginning with *BERT* [20], marked a turning point by producing context-aware embeddings that serve as strong backbones for downstream tasks. Successive variants further improved efficiency and accuracy: *ALBERT* [38] introduced parameter sharing and a Sentence Ordering objective, *RoBERTa* [40] leveraged larger corpora and dynamic masking, and *DeBERTa* [32] added disentangled attention. Most recently, *DeBERTaV3* [33] advanced the state of the art with Replaced Token Detection and gradient-disentangled embedding sharing, improving both efficiency and representation quality.

LLMs have opened new directions by enabling zero- and few-shot discourse classification through prompt-based learning. Models such as *GPT* [11] and *LLaMA* [55] allow label semantics to be directly incorporated into prompts, proving especially useful in low-resource or domain-specific contexts. For example, Chen et al. [16] showed that mixing few-shot examples with prompt-augmented data can match or exceed state-of-the-art results using only 10% of the training data. Yet, LLM-based methods face challenges: predictions can be inconsistent, inference is costly, and pri-

vacy concerns arise when working with sensitive data such as classroom transcripts. Moreover, they do not fully resolve structural issues in discourse recognition, including multi-label classification, severe class imbalance, and limited sentence-level context. These challenges motivate complementary approaches such as imbalance-aware objectives, e.g., Focal Loss [39], Asymmetric Loss (ASL) [8], and contextualization through preceding utterances.

In the educational domain, discourse recognition is vital for analyzing instructional practices, including teacher questioning strategies and feedback moves. Classroom transcripts, however, exacerbate existing challenges: labels are highly imbalanced, multiple discourse acts may co-occur, and domain shifts across classrooms are common. Recent studies have begun to address these issues. Hou et al. [35] proposed a multimodal model combining a *BERT*-based encoder with visual and acoustic features to score discourse categories in the GTI protocol [7], finding that textual input was most predictive. Demszky and Hill [18] built a dataset of elementary math classroom transcripts and fine-tuned a *RoBERTa* model, achieving moderate to high accuracy across discourse categories. Long et al. [41] evaluated *GPT-4* [44] on middle school math and Chinese lessons, showing high inter-coder reliability with humans while highlighting the importance of context and the difficulty of subjective labels. Collectively, these studies underscore the potential of both fine-tuned transformers and LLMs for classroom discourse analysis, while emphasizing ongoing challenges in context modeling, subjectivity, and cross-domain generalization.

3. Methods

3.1. Dataset

The dataset originated from the Developing Ambitious Instruction project [65], comprising approximately 1000

hours of video recordings from mathematics and ELA lessons in elementary schools. For this work, we utilized a subset of 164 hours of videos across 195 lessons. In addition, the dataset provided human-transcribed audio for 68 of the 195 lessons, segmented by timestamps and attributed to either teacher or student turns. The videos were densely annotated at one-second intervals using ELAN [63], an open-source annotation tool, marking the occurrence of 24 instructional activities within each second, such as *small group activity*, and *presentation with technology*. Foster et al. [25] reported an average pairwise raw agreement for the 24 video instructional activities of 0.976, although there was a considerable variability for the pairwise positive agreement. In the transcripts, each discourse turn was annotated with 19 discourse labels (e.g., *elaborated feedback*, and *open-ended questions*), which we kept at an utterance level instead of aligning them to the activity labels' seconds level. A complete description of the 24 activities and 19 discourse labels is provided in the Supplementary Material. Both the instructional activity and discourse labels exhibited highly imbalanced, long-tail distributions. Some practices occurred frequently while others are rare, e.g., the activity label *Teacher writing* appeared in only $\sim 4\%$ of the data, whereas *Teacher standing* occurred in over 50% (see Supplementary Material for full distributions).

3.2. Problem Formulation

Let a classroom video be represented as a sequence of one-second clips $X^v = \{x_t^v\}_{t=1}^T$, where T is the video duration in seconds. We define the instructional activity label space as $\mathcal{Y}^v = \{L_1, \dots, L_{N^v}\}$, where N^v is the number of activity labels. Since multiple activities may co-occur, the task is formulated as a multi-label classification problem. Each clip x_t^v is associated with a ground-truth annotation $y_t^v = \{y_{t,i}^v\}_{i=1}^{N^v}$, where $y_{t,i}^v \in \{0, 1\}$ indicates the presence of label $i \in \mathcal{Y}^v$ at time t . Likewise, the classroom discourse is represented as a sequence of transcribed talk turns $X^d = \{x_k^d\}_{k=1}^K$, where each x_k^d is associated with start time s_k and end time e_k . We define the discourse label space as $\mathcal{Y}^d = \{L_1, \dots, L_{N^d}\}$, where N^d is the number of discourse labels. Each talk turn x_k^d is annotated with zero or more labels from \mathcal{Y}^d .

3.3. Vision Pathway

To address multi-label activity recognition in real-world classroom videos, we employed and evaluated three general approaches that spanned the spectrum from training-free to supervised methods: (1) zero-shot prompting of MLLMs, (2) fine-tuning of vision-language discriminative models (VLDMs), and (3) attentive probing of self-supervised video transformer encoders.

Video Input with Temporal Context. Contextual cues have been demonstrated to be essential to understand human activities [45, 49, 59]. Inspired by this, we extended the target clip to a τ -second temporal window $w_t^v = \{x_{t-\tau+1}^v, \dots, x_t^v\}$, enabling models to better capture classroom dynamics. Using preceding seconds as context was aligned with the practical application of providing real-time feedback to teachers through the dashboard.

Multimodal Large Language Models. Through multimodal pretraining objectives and instruction tuning, MLLMs extended LLMs' natural language generation capabilities to visual reasoning, enabling a wide range of downstream vision applications without task-specific training. As such, our work aimed to explore MLLMs' zero-shot ability to identify classroom activities in the wild. We adopted the open-source *Qwen2.5-VL* [5] model rather than commercial alternatives like *ChatGPT*, as (1) it enabled local deployment without sharing sensitive data externally, addressing privacy concerns when handling classroom recordings involving minors, and (2) avoided the significant API costs associated with processing video inputs.

The *Qwen2.5-VL* model took as input the frames from a window w_t^v , paired with a Chain-of-Thought (CoT) [61] prompt. The prompt (see Supplementary Material) positioned the model as an expert classroom observer, enumerated each activity label in \mathcal{Y}^v with a short description, and instructed it to describe which activities were present in the scene. The model generated a response in JSON format, representing a list of selected labels, which were then post-processed into a binary vector $\hat{y}_t^v \in \{0, 1\}^{N^v}$.

Vision-Language Discriminative Models. In addition to MLLMs, another family of VLMs consisted of discriminative models like *CLIP* [46], which learned a joint embedding space by aligning visual and textual representations through large-scale contrastive pretraining. For our task, we employed *X-CLIP* [43], which adapted *CLIP*'s language-image alignment framework to video temporal modeling.

Following *X-CLIP*, a window w_t^v was first encoded into a video embedding by the video encoder f_{θ_v} :

$$z_v = f_{\theta_v}(w_t^v). \quad (1)$$

Similarly, each label name L_i in \mathcal{Y}^v was fed into the text encoder f_{θ_t} :

$$z_{L_i} = f_{\theta_t}(L_i), i = 1, \dots, N^v. \quad (2)$$

Afterward, the cosine similarity between the video and label L_i was computed as

$$\text{sim}_i = \frac{z_v z_{L_i}}{\|z_v\| \|z_{L_i}\|}. \quad (3)$$

These similarity scores served as logits for multi-label classification. We applied a binary cross-entropy (BCE) loss to maximize similarity scores for present activities at time step t while minimizing scores for absent ones. Class weights were incorporated to address label imbalance.

Video Transformer Encoders. In contrast to *X-CLIP*, which formulated activity recognition as a vision-language matching problem, video transformers relied specifically on visual supervision. The effectiveness of pretrained masked autoencoders through self-supervised learning has been demonstrated in downstream video understanding tasks [4, 54]. Building on this line of work, we adopted the state-of-the-art video encoder *V-JEPA 2* [4], capable of producing high-quality video representations by scaling self-supervised pretraining to extensive collections of internet videos. For downstream tasks, *V-JEPA 2* trained an attentive probe on top of the frozen encoder to aggregate the generated sequential representation through self- and cross-attention mechanisms.

We fed a window w_t^v into the frozen encoder f_θ , yielding a sequence of spatiotemporal token embeddings:

$$H = f_\theta(w_t^v) \in \mathbb{R}^{N \times D}, \quad (4)$$

where N was the number of tokens and D was the embedding dimension. Afterward, these embeddings H were passed to a trainable attentive probe, comprised of three self-attention layers and one cross-attention layer over a learnable query token q :

$$H^{(\ell)} = \text{SelfAttn}_\ell(H^{(\ell-1)}), \quad \ell = 1, 2, 3, \quad (5)$$

$$z = \text{CrossAttn}(q, H^{(3)}) \in \mathbb{R}^D, \quad (6)$$

where $H^{(0)} = H$ and z was the pooled representation of the video window w_t^v . Finally, a linear classification head was stacked on top of the attentive probe to perform multi-label classification, optimized with the weighted BCE loss.

3.4. Transcript Pathway

In parallel with the vision pathway, we explored three approaches for multi-label classification of discourse activities in classroom transcripts: (1) zero-shot prompting of LLMs, (2) few-shot prompting of LLMs, and (3) fine-tuning an embedding-based classifier.

Large Language Models. As in the vision experiments, we relied on open-source models, since privacy is paramount when working with classroom transcripts. Specifically, we evaluated two variants of instruction-tuned LLMs: *Llama3 Instruct* [2], in both its *8B* and *70B* variants.

All models were evaluated with the same prompt structure. For the zero-shot setting, the prompt began with a task description, followed by the complete list of 19 discourse labels and a short explanation. We also included examples of label pairings: some that frequently co-occur (e.g., *Cognitive-Demand-Analysis-Request* and *Expl-Just-Teacher-Request*), and others that are mutually exclusive (e.g., *Questions-Closed-Ended* and *Questions-Open-Ended*). The speaker information preceded each transcript excerpt, and the models were asked to return a JSON object with all labels and their predictions. The same prompt was augmented with two real transcript examples and their corresponding labels in the few-shot setting. Full prompt templates are provided in the Supplementary Material.

Model Fine-tuning. Besides prompting LLMs, we fine-tuned a transformer-based model for the multi-label classification task. First, the transcript data were preprocessed to standardize both the speaker annotation and the temporal boundaries of each utterance. To incorporate conversational context, we appended the two preceding utterances, marked with the tokens $\langle ctx_{i-2} \rangle$ and $\langle ctx_{i-1} \rangle$, to the target utterance, marked by $\langle curr \rangle$. Special tokens indicating the beginning and end of each segment were added to the tokenizer. A maximum sequence length of 576 was set, which covered 99% of all utterances without truncation.

The model architecture consisted of a transformer-based encoder and a single linear classification head. We experimented with several *BERT*-derived models [20], with *DeBERTaV3* [33] yielding the best performance. *DeBERTaV3* extends *DeBERTa* [32] by replacing the Masked Language Modeling objective with Replaced Token Detection and introducing disentangled embedding sharing, an enhanced embedding-sharing mechanism inspired by *ELECTRA* [17]. The encoder was initialized using the Hugging-Face implementation of *DeBERTaV3*, and the $[\text{CLS}]$ token representation was used as the sequence embedding. Both the encoder and the classification head were fine-tuned jointly, with no layers frozen.

Given the large number of labels and the severe imbalance, we evaluated three different loss functions: BCE [30], Focal Loss [39], and Asymmetric Loss (ASL) [8], with or without positive label weighting.

Binary Cross-Entropy. In the first approach, we used standard BCE but weighted the positive labels to counter class imbalance. For each label j , the positive weight is computed as the ratio of negative to positive examples in

the training data:

$$\text{pos_weight}_j = \begin{cases} \frac{\text{neg_counts}[j]}{\text{pos_counts}[j]}, & \text{for positive weighting,} \\ 1, & \text{otherwise.} \end{cases} \quad (7)$$

where $\text{neg_counts}[j]$ and $\text{pos_counts}[j]$ denote the number of negative and positive instances of label j , respectively. The weighted BCE loss for a single label j is then:

$$\ell_j(p, y) = -\left(y \cdot \log(\sigma(p) \cdot \text{pos_weight}_j) + (1 - y) \cdot \log(1 - \sigma(p))\right), \quad (8)$$

where p are the raw logits, y is the gold label, and σ denotes the sigmoid function.

Focal Loss. The second approach employed Focal Loss, which down-weights easy-to-classify examples, allowing the model to focus on harder, minority-class instances:

$$\text{FL}(p) = -\alpha \cdot (p)^\gamma \cdot \log(p) \cdot \text{pos_weight}_j - (1 - \alpha) \cdot (1 - p)^\gamma \cdot \log(1 - p), \quad (9)$$

where p is the predicted probability of the true class ($1 - p$ for negatives). The parameter $\alpha \in [0, 1]$ balances positive and negative classes, while $\gamma \geq 0$ controls the degree of down-weighting applied to easy examples.

Asymmetric Loss. Finally, we evaluated Asymmetric Loss, which introduces separate focusing parameters for positive and negative classes (γ_+ and γ_-). This allows the model to suppress easy negatives ($\gamma_- > 0$) while not suppressing positives ($\gamma_+ \approx 0$). The formulation is:

$$\text{ASL}(p, y) = -y \cdot (1 - p)^{\gamma_+} \cdot \log(p) \cdot \text{pos_weight}_j - (1 - y) \cdot (p_m)^{\gamma_-} \cdot \log(1 - p_m), \quad (10)$$

where p is the predicted probability, y is the true label, and $p_m = \max(p - m, 0)$ introduces a margin m for negative examples.

4. Experiments

4.1. Dataset Setup and Evaluation Metrics

We adopted a lesson-independent split of the dataset (Sec. 3.1), such that all clips from the same lesson remained within a single partition, enabling the evaluation of models’ generalizability to unseen lessons. The resulting split contained 115 hours of videos and 21,208 transcript turns for training, 23 hours and 7,386 turns for validation, and 26 hours and 4,473 turns for testing. Given the dataset’s class imbalance, we evaluated models using macro-F1 to ensure that both rare and frequent classes were weighted equally.

4.2. Implementation Details

Vision Pathway. For zero-shot prompting MLLMs, we used *Qwen2.5-VL-32B-Instruct* with default generation hyperparameters. For finetuning VLDMs, we employed *X-CLIP* [43] with both *ViT-B/16* [21] and *ViT-L/14* backbones, initialized with weights pre-trained on *Kinetics-400* [14] at a resolution of 224×224 and 336×336 , respectively. Following [43], the video encoder was fine-tuned, while the text encoder was frozen. Training was conducted for 10 epochs using the AdamW optimizer [42], with a batch size of 8 and a learning rate of 8×10^{-6} . For the video encoder approach, we explored *V-JEPA 2* [4] with both *ViT-L/16* (256×256 resolution) and *ViT-G/16* (384×384 resolution) backbones. For both backbones, we initialized the attentive probe from weights pretrained from *SSv2* [31] and subsequently finetuned it on our dataset. Optimization followed the same setup for *X-CLIP*, except with a learning rate of 1×10^{-3} , since only the final attention-wise classifier was trained. For all approaches, we uniformly sampled each one-second clip x_t^v into $F = 8$ frames and, unless otherwise specified, set the temporal window duration to $\tau = 2$ seconds. Additionally, since adjacent clips often exhibit low visual variation, we temporally selected every 5th clip during training and validation to reduce redundancy and computational cost. We used the complete set of clips for testing to ensure a comprehensive evaluation.

Transcript Pathway. For zero-shot and few-shot prompting of LLMs, we evaluated *Llama3 Instruct* [2] (8B, 70B). For fine-tuning, we employed *DeBERTaV3* [33], initialized from HuggingFace pretrained weights, with a single linear classification head. Both encoder and classifier were finetuned jointly. Training was performed for up to 30 epochs, with early stopping after 10 consecutive epochs with no improvement, using AdamW [42] with learning rate 1×10^{-5} , batch size 32, warmup ratio 0.1, weight decay 0.01, dropout 0.1, and a cosine scheduler.

Decision Thresholding. During evaluation, both the vision and transcript models output probabilities for each label using the sigmoid of the logits. Since these probabilities must be binarized, we searched for optimal per-label thresholds instead of applying a fixed cutoff (e.g., 0.5). Specifically, for each label j , candidate thresholds $T_j \in [0, 1]$ were tested in increments of 0.05, and the value that maximized macro-F1 on the validation set was selected. The best-performing set of thresholds from the best validation epoch was then applied to the test set.

4.3. Main Results

Vision Pathway. Table 1 presents the performance of the investigated approaches for instructional activity recogni-

tion in classroom videos. The zero-shot prompting of *Qwen2.5-VL* achieved a macro-F1 of 0.423, indicating the potential of MLLMs to transfer some generalizable knowledge to classroom activity understanding. Nevertheless, its performance and throughput consistently lagged behind fine-tuned approaches, reflecting the value of domain-specific adaptation. Among task-specialized methods, *X-CLIP* with *ViT-L/14* backbone resulted in the best overall performance, with a macro-F1 of 0.577. Notably, it outperformed the larger *V-JEPA 2 ViT-G/16* by 0.03, suggesting natural language supervision through label descriptions provided beneficial semantic guidance for our real-world activity recognition task. It also outperformed the BaS-Net model from Foster et al. [24], using the same dataset and labels. Moreover, the consistent improvements from larger model variants within each family, i.e., *X-CLIP ViT-L/14* over *ViT-B/16*, and *V-JEPA 2 ViT-G/16* over *ViT-L/16*, indicated that increased model capacity contributed to a better understanding of classroom dynamics.

Transcript Pathway. Table 2 presents the performance of the investigated approaches for instructional discourse recognition in classroom transcripts. Few-shot prompting with *Llama3* improved slightly over the zero-shot setting, but both variants achieved very low macro-F1 (≤ 0.079), highlighting the difficulty of applying LLM prompting to this multi-label task and their tendency to generate inconsistent outputs. In contrast, fine-tuned *DeBERTaV3* models achieved substantially higher scores, underscoring the effectiveness of task-specific adaptation. Among the evaluated loss functions, Asymmetric Loss with positive-label weighting (PW) yielded the best performance with a macro-F1 of 0.460, confirming its suitability for rare-label prediction in imbalanced multi-label classification. Notably, while positive weighting improved results for both BCE and ASL, it degraded performance for Focal Loss. This was likely due to the interaction between its focusing term and additional weighting, which may have overemphasized positives, harmed calibration, and reduced precision.

Effect of temporal context. To examine the role of temporal context in multi-label classroom activity recognition, we compared performance across different contextual lengths using the best-performing *X-CLIP ViT-L/14* model. As shown in Table 3, adding one second of prior context improved macro-F1 from 0.558 to 0.577 over using the target clip alone, while extending the window to three seconds yielded a slight drop of 0.01. For discourse recognition, we tested the best-performing *DeBERTaV3* model with and without two preceding utterances. In this case, removing context caused a substantial decline in macro-F1 (0.460 to 0.392). These findings suggested that short-term temporal cues are beneficial for visual activity recognition,

while sentence-level context is crucial for discourse modeling. However, excessively long windows may introduce irrelevant dynamics that hinder fine-grained prediction.

5. Discussion

Our experiments demonstrate the feasibility of applying advanced vision and language models to the recognition of instructional practices in authentic classroom data. Across both modalities, domain-specific fine-tuning consistently outperforms prompting-based approaches, while incorporating short-term temporal context improves recognition of classroom activities. These findings highlight the need to tailor model architectures and training strategies to the multimodal, imbalanced, and noisy nature of classroom data in order to effectively transfer advances in vision and language modeling to the educational domain.

The demonstrated feasibility of automated classroom analysis opens several avenues for educational applications. The macro-F1 scores achieved (0.577 for video, 0.460 for transcripts) represent meaningful progress but fall short of the reliability required for real-world deployment. Instead, these systems are better positioned as supplementary tools for teacher professional growth and large-scale research, with pilot studies involving educators playing a key role in validating their pedagogical usefulness. For instance, automatic recognition of small-group discussions or extended teacher explanations could be aggregated into time-based summaries, allowing teachers to reflect on the balance between student- and teacher-led activities. Similarly, identifying frequent transitions between activities could highlight classroom management patterns. Such outputs provide concrete and interpretable signals that can be translated into actionable feedback for instructional practice.

Several limitations warrant consideration. First, our approach relies on parallel, modality-specific pipelines rather than joint fusion models, due to the nature of the annotations, where activity labels are derived only from videos and discourse from transcripts. Initial attempts at fusion—either training a single model to predict all 43 labels or applying weighted fusion between video and transcript classifiers—underperformed compared to unimodal pipelines. Further exploration of effective fusion mechanisms remains an important avenue for future research. Second, recognition performance is uneven across labels: low-frequency practices such as *on task student talking with student* (visual) and *student request* (discourse) remain particularly challenging. This reflects both class imbalance and the complexity of subtle, interaction-rich practices, underscoring the need for methods that better handle rare classes, such as data augmentation or few-shot learning. Third, practical deployment raises throughput constraints. The best-performing *X-CLIP ViT-L/14* processes roughly 9 clips/s on high-end GPUs, which may be insufficient for real-time

Method	Model	Variant	#Params	Resolution	Throughput	Macro-F1
Zero-shot	Qwen2.5-VL	32B-Inst.	32B	dynamic	0.07	0.423
Fine-tuning	X-CLIP	ViT-B/16	0.2B	224	29.21	0.513
		ViT-L/14	0.6B	336	9.09	0.577
	V-JEPA 2	ViT-L/16	0.4B	256	14.21	0.525
		ViT-G/16	1.1B	384	6.55	0.547
Foster et al. [24]	BaS-Net	–	–	–	–	0.469

Table 1. Performance of different approaches for instructional activity recognition in classroom videos. All methods were evaluated with a temporal context window of 2 seconds (i.e., 16 frames in total) as input. Throughput (clips/s) was measured on an A100 GPU. Foster et al. [24] was added as comparison, since they worked with the same dataset and labels.

Method	Model	Variant	Macro-F1
Zero-shot	LLaMA	8B Inst.	0.060
		70B Inst.	0.091
Few-shot	LLaMA	8B Inst.	0.079
		70B Inst.	0.265
Fine-tuning	DeBERTaV3	BCE	0.422
		BCE + PW	0.441
		Focal	0.434
		Focal + PW	0.428
		ASL	0.403
		ASL + PW	0.460

Table 2. Macro-F1 scores for different models and loss functions. BCE, Focal, and ASL refer to Binary Cross-Entropy loss, Focal loss, and Asymmetric loss, respectively. These losses were used with or without weighting of the positive labels (PW).

	Input Setting	#Frames	Macro-F1
Video	Target clip only	8	0.558
	+1s context	16	0.577
	+3s context	32	0.567
Text	Target sentence only	-	0.392
	+2 sent. context	-	0.460

Table 3. Results of video-based instructional activity recognition (X-CLIP ViT-L/14) and text-based instructional discourse recognition (DeBERTaV3 Embedding Classifier with Asymmetric loss and positive label weighting) across different temporal and textual context lengths.

classroom feedback. Bridging this gap between research-grade models and lightweight, cost-effective solutions for schools will require approaches such as knowledge distillation or streaming architectures. Finally, our models are trained solely on elementary mathematics and ELA class-

rooms. Therefore, generalization to other subjects, grade levels, and diverse student–teacher demographics requires further validation.

Applying AI to classroom recordings raises serious ethical concerns, particularly when processing sensitive data involving entire classrooms of minors [12, 35, 53]. Our choice to rely on open-source models deployable locally mitigates some privacy risks, but other concerns remain. Models may exhibit algorithmic biases, performing differently across teaching styles, student demographics, or cultural contexts. Moreover, transparency and informed consent are critical: students and teachers must be aware of how their data is used and retain the option to opt out. Ultimately, AI-driven systems should provide interpretable, actionable guidance to teachers, who remain responsible for final judgments and feedback, ensuring that technology supports rather than replaces human expertise.

6. Conclusion

This work demonstrates that advanced vision and language models can be adapted to recognize multimodal instructional practices from authentic classroom data, with fine-tuned pipelines clearly outperforming zero- and few-shot prompting approaches. By systematically benchmarking video- and transcript-based methods on a large, lesson-independent dataset, we provide the first evidence that domain-specific adaptation is crucial for robust instructional recognition. While current performance does not yet support high-stakes evaluation, our results establish a foundation for scalable, automated teacher feedback systems that can augment professional development and large-scale educational research. Moving forward, advances in multimodal fusion, generalization to broader contexts, and ethically grounded deployment will be key to transforming these technical capabilities into trustworthy and pedagogically meaningful classroom tools.

References

- [1] Karan Ahuja, Dohyun Kim, Francesca Xhakaj, Virag Varga, Anne Xie, Stanley Zhang, Jay Eric Townsend, Chris Harrison, Amy Ogan, and Yuvraj Agarwal. Edusense: Practical classroom sensing at scale. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 3(3):1–26, 2019. 2
- [2] AI@Meta. Introducing llama 3.1: Our most capable models to date, 2024. blog post. 5, 6
- [3] Anurag Arnab, Mostafa Dehghani, Georg Heigold, Chen Sun, Mario Lučić, and Cordelia Schmid. Vivit: A video vision transformer. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6836–6846, 2021. 2
- [4] Mido Assran, Adrien Bardes, David Fan, Quentin Garrido, Russell Howes, Mojtaba, Komeili, Matthew Muckley, Ammar Rizvi, Claire Roberts, Koustuv Sinha, Artem Zhohus, Sergio Arnaud, Abha Gejji, Ada Martin, Francois Robert Hogan, Daniel Dugas, Piotr Bojanowski, Vasil Khalidov, Patrick Labatut, Francisco Massa, Marc Szafraniec, Kapil Krishnakumar, Yong Li, Xiaodong Ma, Sarath Chandar, Franziska Meier, Yann LeCun, Michael Rabbat, and Nicolas Ballas. V-jepa 2: Self-supervised video models enable understanding, prediction and planning. *arXiv preprint arXiv:2506.09985*, 2025. 5, 6
- [5] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhao-hai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2. 5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025. 4
- [6] Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mahmoud Assran, and Nicolas Ballas. Revisiting feature prediction for learning visual representations from video. *arXiv preprint arXiv:2404.08471*, 2024. 2
- [7] C. Bell, Y. Qi, M. Witherspoon, M. Barragan, and H. Howell. Annex a: Talis video observation codes: Holistic domain ratings and components. Technical report, OECD, Paris, France, 2018. 3
- [8] Emanuel Ben-Baruch, Tal Ridnik, Nadav Zamir, Asaf Noy, Itamar Friedman, Matan Protter, and Lihi Zelnik-Manor. Asymmetric loss for multi-label classification. *arXiv preprint arXiv:2009.14119*, 2020. 3, 5
- [9] Gedas Bertasius, Heng Wang, and Lorenzo Torresani. Is space-time attention all you need for video understanding? In *Proceedings of the International Conference on Machine Learning (ICML)*, page 4, 2021. 2
- [10] Efe Bozkir, Christian Kosel, Tina Seidel, and Enkelejda Kasneci. Automated visual attention detection using mobile eye tracking in behavioral classroom studies. In *Proceedings of the 18th International Conference on Educational Data Mining*, pages 104–118, Palermo, Italy, 2025. International Educational Data Mining Society. 1
- [11] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*, pages 1877–1901. Curran Associates, Inc., 2020. 3
- [12] Babette Bühler, Ruikun Hou, Efe Bozkir, Patricia Goldberg, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. Automated hand-raising detection in classroom videos: A view-invariant and occlusion-robust machine learning approach. In *International Conference on Artificial Intelligence in Education*, pages 102–113. Springer, 2023. 1, 2, 8
- [13] Babette Bühler, Efe Bozkir, Patricia Goldberg, Ömer Sümer, Sidney D’Mello, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. From the lab to the wild: Examining generalizability of video-based mind wandering detection. *International Journal of Artificial Intelligence in Education*, 35(2):823–857, 2025. 1
- [14] Joao Carreira and Andrew Zisserman. Quo vadis, action recognition? a new model and the kinetics dataset. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6299–6308, 2017. 2, 6
- [15] Henghuai Chen and Jiansheng Guan. Teacher–student behavior recognition in classroom teaching based on improved yolo-v4 and internet of things technology. *Electronics*, 11(23):3998, 2022. 2
- [16] Maximillian Chen, Alexandros Papangelis, Chenyang Tao, Andy Rosenbaum, Seokhwan Kim, Yang Liu, Zhou Yu, and Dilek Hakkani-Tur. Weakly supervised data augmentation through prompting for dialogue understanding. *arXiv preprint arXiv:2210.14169*, 2022. 3
- [17] Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. Electra: Pre-training text encoders as discriminators rather than generators. *arXiv preprint arXiv:2003.10555*, 2020. 5
- [18] Dorottya Demszky and Heather Hill. The NCTE transcripts: A dataset of elementary math classroom transcripts. In *Proceedings of the 18th Workshop on Innovative Use of NLP for Building Educational Applications (BEA 2023)*, pages 528–538, Toronto, Canada, 2023. Association for Computational Linguistics. 3
- [19] Dorottya Demszky, Jing Liu, Heather C Hill, Dan Jurafsky, and Chris Piech. Can automated feedback improve teachers’ uptake of student ideas? evidence from a randomized controlled trial in a large-scale online course. *Educational Evaluation and Policy Analysis*, 46(3):483–505, 2024. 1
- [20] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages

- 4171–4186, Minneapolis, Minnesota, 2019. Association for Computational Linguistics. 3, 5
- [21] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020. 2, 6
 - [22] James Drimalla, Matthew Korban, and Jonathan Foster. Investigating racial and skin tone biases in automated classification of teachers’ activities in classroom videos. In *International Conference on Artificial Intelligence in Education*, pages 190–202. Springer, 2025. 2
 - [23] Christoph Feichtenhofer, Haoqi Fan, Jitendra Malik, and Kaiming He. Slowfast networks for video recognition. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6202–6211, 2019. 2
 - [24] Jonathan K Foster, Matthew Korban, Peter Youngs, Ginger S Watson, and Scott T Acton. Automated classification of activities in classroom videos. *Computers and Education: Artificial Intelligence*, 6, 2024. 1, 3, 7, 8
 - [25] Jonathan K. Foster, Peter Youngs, Rachel van Aswegen, Samarth Singh, Ginger S. Watson, and Scott T. Acton. Automated classification of elementary instructional activities: Analyzing the consistency of human annotations. *Journal of Learning Analytics*, 11(3):142–159, 2024. 4
 - [26] Tim Fütterer, Patricia Goldberg, Babette Bühler, Vlasta Sikimić, Ulrich Trautwein, Peter Gerjets, Kathleen Stürmer, and Enkelejda Kasneci. Artificial intelligence in classroom management: A systematic review on educational purposes, technical implementations, and ethical considerations. *Computers and Education: Artificial Intelligence*, page 100483, 2025. 1
 - [27] Tim Fütterer, Ruikun Hou, Babette Bühler, Efe Bozkir, Courtney Bell, Enkelejda Kasneci, Peter Gerjets, and Ulrich Trautwein. Validating automated assessments of teaching effectiveness using multimodal data. *Learning and Instruction*, 101:102264, 2026. 1
 - [28] Harshala Gammulle, Simon Denman, Sridha Sridharan, and Clinton Fookes. Two stream lstm: A deep fusion framework for human action recognition. In *2017 IEEE winter conference on applications of computer vision (WACV)*, pages 177–186. IEEE, 2017. 2
 - [29] Patricia Goldberg, Ömer Sümer, Kathleen Stürmer, Wolfgang Wagner, Richard Göllner, Peter Gerjets, Enkelejda Kasneci, and Ulrich Trautwein. Attentive or not? toward a machine learning approach to assessing students’ visible engagement in classroom instruction. *Educational Psychology Review*, 33(1):27–49, 2021. 1, 2
 - [30] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016. <http://www.deeplearningbook.org>. 5
 - [31] Raghav Goyal, Samira Ebrahimi Kahou, Vincent Michalski, Joanna Materzyńska, Susanne Westphal, Heuna Kim, Valentin Haenel, Ingo Fruend, Peter Yianilos, Moritz Mueller-Freitag, Florian Hoppe, Christian Thureau, Ingo Bax, and Roland Memisevic. The ”something something” video database for learning and evaluating visual common sense. In *Proceedings of the IEEE international conference on computer vision*, pages 5842–5850, 2017. 2, 6
 - [32] Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. Deberta: Decoding-enhanced bert with disentangled attention. *arXiv preprint arXiv:2006.03654*, 2021. 3, 5
 - [33] Pengcheng He, Jianfeng Gao, and Weizhu Chen. Debertav3: Improving deberta using electra-style pre-training with gradient-disentangled embedding sharing. *arXiv preprint arXiv:2111.09543*, 2023. 3, 5, 6
 - [34] Ruikun Hou, Tim Fütterer, Babette Bühler, Efe Bozkir, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. Automated assessment of encouragement and warmth in classrooms leveraging multimodal emotional features and chatgpt. In *Artificial Intelligence in Education*, pages 60–74, Cham, 2024. Springer Nature Switzerland. 1
 - [35] Ruikun Hou, Babette Buhler, Tim Futterer, Efe Bozkir, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. Multi-modal assessment of classroom discourse quality: A text-centered attention-based multi-task learning approach. In *Proceedings of the 18th International Conference on Educational Data Mining*, pages 241–253, Palermo, Italy, 2025. International Educational Data Mining Society. 1, 3, 8
 - [36] Enkelejda Kasneci, Kathrin Sessler, Stefan Küchemann, Maria Bannert, Daryna Dementieva, Frank Fischer, Urs Gasser, Georg Groh, Stephan Günnemann, Eyke Hüllermeier, Stephan Krusche, Gitta Kutyniok, Tilman Michaeli, Claudia Nerdel, Jürgen Pfeffer, Oleksandra Poquet, Michael Sailer, Albrecht Schmidt, Tina Seidel, Matthias Stadler, Jochen Weller, Jochen Kuhn, and Gjergji Kasneci. Chatgpt for good? on opportunities and challenges of large language models for education. *Learning and individual differences*, 103:102274, 2023. 1
 - [37] Matthew A. Kraft, David Blazar, and Dylan Hogan. The effect of teacher coaching on instruction and achievement: A meta-analysis of the causal evidence. *Review of Educational Research*, 88(4):547–588, 2018. 1
 - [38] Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*, 2020. 3
 - [39] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. Focal loss for dense object detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(2):318–327, 2020. 3, 5
 - [40] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019. 3
 - [41] Yuchen Long, Haoran Luo, and Yizhou Zhang. Evaluating large language models in analysing classroom dialogue. *npi Science of Learning*, 9(1):60, 2024. 3
 - [42] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017. 6
 - [43] Bolin Ni, Houwen Peng, Minghao Chen, Songyang Zhang, Gaofeng Meng, Jianlong Fu, Shiming Xiang, and Haibin

Ling. Expanding language-image pretrained models for general video recognition. *arXiv preprint arXiv:2208.02816*, 2022. 2, 4, 6

- [44] OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altmenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Felipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rim-
- bach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 2, 3
- [45] Zhiwu Qing, Haisheng Su, Weihao Gan, Dongliang Wang, Wei Wu, Xiang Wang, Yu Qiao, Junjie Yan, Changxin Gao, and Nong Sang. Temporal context aggregation network for temporal action proposal refinement. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 485–494, 2021. 4
- [46] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 2, 4
- [47] Anand Ramakrishnan, Brian Zylich, Erin Ottmar, Jennifer LoCasale-Crouch, and Jacob Whitehill. Toward automated classroom observation: Multimodal machine learning to estimate class positive climate and negative climate. *IEEE transactions on affective computing*, 14(1):664–679, 2021. 1
- [48] Kathrin Seßler, Maurice Fürstenberg, Babette Bühler, and Enkelejda Kasneci. Can ai grade your essays? a comparative analysis of large language models and teacher ratings in multidimensional essay scoring. In *Proceedings of the 15th International Learning Analytics and Knowledge Conference*, pages 462–472, 2025. 1
- [49] Tao Shi and Shao-Lun Huang. Multiemo: An attention-based correlation-aware multimodal fusion framework for emotion recognition in conversations. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14752–14766, 2023. 4
- [50] Matthew Steinberg and Lauren Sartain. Does teacher evaluation improve school performance? experimental evidence from chicago’s excellence in teaching project. *Education Finance and Policy*, 10:1–38, 2015. 1
- [51] Andreas Stolcke, Klaus Ries, Noah Coccaro, Elizabeth Shriberg, Rebecca Bates, Daniel Jurafsky, Paul Taylor,

- Rachel Martin, Carol Van Ess-Dykema, and Marie Meteer. Dialogue act modeling for automatic tagging and recognition of conversational speech. *Computational Linguistics*, 26(3): 339–374, 2000. [3](#)
- [52] Omer Sumer, Patricia Goldberg, Kathleen Sturmer, Tina Seidel, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. Teachers’ perception in the classroom. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*, pages 2315–2324, 2018. [1](#)
- [53] Ömer Sümer, Patricia Goldberg, Sidney D’Mello, Peter Gerjets, Ulrich Trautwein, and Enkelejda Kasneci. Multimodal engagement analysis from facial videos in the classroom. *IEEE Transactions on Affective Computing*, 14(2):1012–1027, 2021. [1](#), [2](#), [8](#)
- [54] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *Advances in Neural Information Processing Systems*, 35:10078–10093, 2022. [2](#), [5](#)
- [55] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. [3](#)
- [56] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in Neural Information Processing Systems*, 30, 2017. [2](#)
- [57] Deliang Wang, Yang Tao, and Gaowei Chen. Artificial intelligence in classroom discourse: A systematic review of the past decade. *International Journal of Educational Research*, 123:102275, 2024. [1](#)
- [58] Mengmeng Wang, Jiazheng Xing, and Yong Liu. Actionclip: A new paradigm for video action recognition. *arXiv preprint arXiv:2109.08472*, 2021. [2](#)
- [59] Xuan Wang and Zhigang Zhu. Context understanding in computer vision: A survey. *Computer Vision and Image Understanding*, 229:103646, 2023. [4](#)
- [60] Zhifeng Wang, Minghui Wang, Chunyan Zeng, and Longlong Li. Scb-detr: Multiscale deformable transformers for occlusion-resilient student learning behavior detection in smart classroom. *IEEE Transactions on Computational Social Systems*, 2025. [2](#)
- [61] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Proceedings of the 36th International Conference on Neural Information Processing Systems*, Red Hook, NY, USA, 2022. Curran Associates Inc. [4](#)
- [62] Jacob Whitehill and Jennifer LoCasale-Crouch. Automated evaluation of classroom instructional support with llms and bows: Connecting global predictions to specific feedback. *arXiv preprint arXiv:2310.01132*, 2023. [1](#)
- [63] Peter Wittenburg, Hennie Brugman, Albert Russel, Alex Klassmann, and Han Sloetjes. Elan: A professional framework for multimodality research. In *5th international conference on language resources and evaluation (LREC 2006)*, pages 1556–1559, 2006. [4](#)
- [64] Zuxuan Wu, Xi Wang, Yu-Gang Jiang, Hao Ye, and Xiangyang Xue. Modeling spatial-temporal clues in a hybrid deep learning framework for video classification. In *Proceedings of the 23rd ACM international conference on Multimedia*, pages 461–470, 2015. [2](#)
- [65] Peter Youngs, Lauren Molloy Elreda, Dorothea Anagnostopoulou, Julie Cohen, Corey Drake, and Spyros Konstantopoulou. The development of ambitious instruction: How beginning elementary teachers’ preparation experiences are associated with their mathematics and english language arts instructional practices. *Teaching and Teacher Education*, 110:103576, 2022. [3](#)
- [66] Jinhua Zhao, Hongye Zhu, and Lei Niu. Bitnet: A lightweight object detection network for real-time classroom behavior recognition with transformer and bi-directional pyramid network. *Journal of King Saud University-Computer and Information Sciences*, 35(8):101670, 2023. [2](#)

A. Instructional Labels

The dataset contains 43 labels: 24 instructional activity labels (see Table 4) and 19 instructional discourse labels (see Table 5). For the discourse labels, the dataset includes information of labels that are usually paired together:

- **Analysis Request (Teacher) and Explanation/Justification Teacher Request.**
- **Analysis Give (Teacher) and Explanation/Justification Teacher Give.**
- **Feedback Neutral, Uptake Restating, and Feedback Unelaborated.**

B. Label Distribution

Table 6 reports the distribution of positive labels for both Instructional Activity and Instructional Discourse categories. For Activity labels, annotations are provided at the per-second level of the video; thus, the percentages reflect the proportion of seconds in which a given label is active. In contrast, Discourse labels are annotated at the utterance level. To enable comparison across modalities, we report both the proportion of utterances containing each label (% Utt) and a time-based measure showing the proportion of seconds in which the label occurs (% Sec).

The distributions highlight the strong imbalance across labels. For instance, highly frequent activity labels such as Teacher standing (52.4%) and Whole class activity (51.9%) dominate the dataset, while more fine-grained instructional practices like Teacher writing (4.1%) or On-task student talking with student (4.2%) are comparatively rare. A similar skew is evident in the discourse dimension: labels such as Report-Request appear in 20.5% of utterances, whereas others like Analysis-Give (0.5%) and Student-Request (0.2%) occur only sporadically. This imbalance underscores the difficulty of reliably detecting rare but pedagogically important practices, and motivates our exploration of imbalance-aware objectives and dynamic thresholding strategies.

C. Language Models Prompts

C.1. Multimodal Large Language Models

Figure 2 shows the prompt for zero-shot for MLLMs.

C.2. Large Language Models

Figure 3 shows the prompt for zero-shot and Figure 4 show the prompt for few-shot for LLMs.

D. F1 Score Per Label

In this section, we report per-label F1 scores. Table 7 presents results for Instructional Activity labels using MLLMs and fine-tuned models, while Table 8 shows results for Instructional Discourse labels using LLMs and

fine-tuned models. Activity scores were computed on a per-second basis, and discourse scores on a per-utterance basis. Some labels are clearly more difficult to predict than others. For instructional activities, the best-performing model struggled with labels such as On-task student talking with student (0.080 macro-F1) and Teacher supporting multiple students without student interaction (0.169), while labels like Teacher standing (0.877) and Presentation with technology (0.870) achieved much higher scores. A similar pattern is seen in discourse recognition: Analysis-Give (0.115) and Teacher-Give (0.235) were among the lowest, while Feedback-Affirming (0.625) and Uptake-Restating (0.556) ranked highest. These discrepancies reflect both the rarity of certain labels (see Section B) and the inherent difficulty of modeling complex, fine-grained instructional practices.

Instructional Activity Label	Description
Whole class activity	All students are involved in one activity, with the teacher leading the learning (e.g., lecture, presentation, carpet time).
Individual activity	Students work independently (e.g., practice, reading), no interaction with peers.
Small group activity	Students working together with peers (e.g., think-pair-share, book club).
Transition	Teacher/students move between activities or locations; no meaningful instruction.
On-task student talking with student	Students conversing with each other without teacher support; can overlap with small group activity.
Student raising hand	Hand up for more than 1 second, clearly and purposefully.
Teacher sitting	Teacher seated (chair, stool, floor, crouching, kneeling, on desk).
Teacher standing	Teacher standing in the same spot/orientation to students.
Teacher walking	Teacher walking with purpose to change orientation.
Students sitting on carpet or floor	Students seated on the carpet/floor.
Students sitting at group tables	Students seated at tables.
Sitting at desks	Students seated at individual desks.
Students standing or walking	One or more students standing or moving around.
Teacher supporting one student	Teacher assists one student verbally or non-verbally.
Teacher supporting multiple students with interaction	Teacher assists multiple students who are also interacting with one another.
Teacher supporting multiple students without interaction	Teacher assists multiple students who are not interacting with one another.
Using or holding book	Book is used/held by teacher or student.
Using or holding worksheet	Worksheet is used/held by teacher or student.
Presentation with technology	Smartboard, Elmo, projector used to show content.
Using or holding instructional tool	Object (e.g., ruler, manipulative) used/held for instruction (not pen/pencil/-furniture).
Using or holding notebook	Notebook is used/held by teacher or student.
Individual technology	Laptop, tablet, or other personal tech used by student or teacher.
Teacher writing	Teacher writes/erases on paper, board, or document camera.
Student writing	Student writes/erases on paper or board.

Table 4. Instructional activity labels.

Instructional Discourse Labels	Description
Analysis Give (Teacher)	Teacher analyzes content (e.g., compare, justify, synthesize, connect).
Analysis Request (Teacher)	Teacher asks students to analyze content (e.g., why/how, connect ideas).
Report Give (Teacher)	Teacher states facts, definitions, or procedures.
Report Request (Teacher)	Teacher asks students to recall or report facts, definitions, or methods.
Questions Open-Ended	Teacher asks open content-related questions without a pre-scripted answer.
Questions Closed-Ended	Teacher asks content-related questions with a pre-scripted/fluency answer (e.g., yes/no).
Questions Task Related Prompt	Teacher reads/restates a task question/prompt from instructional materials.
Explanation/Justification Teacher Request	Teacher requests an explanation or justification.
Explanation/Justification Teacher Give	Teacher provides an explanation or justification, possibly a solution strategy.
Explanation/Justification Student Request	Student requests an explanation or justification.
Explanation/Justification Student Give	Student provides an explanation or justification.
Feedback Affirming	Teacher positively evaluates student's response (e.g., "Excellent").
Feedback Disconfirming	Teacher negatively evaluates correctness of a response (e.g., "No").
Feedback Neutral	Teacher neither confirms nor disconfirms, may repeat student's contribution.
Feedback Elaborated	Teacher expands on student's response or thinking.
Feedback Unelaborated	Teacher acknowledges, evaluates, or superficially uses a student's idea.
Uptake Restating	Teacher repeats/summarizes a student's idea without building on it.
Uptake Building	Teacher incorporates/clarifies or expands on a student's idea.
Uptake Exploring	Teacher probes further into a student's idea with follow-up questions.

Table 5. Instructional discourse labels.

Task Description

You are an expert classroom activity observer. You are given a one-second video clip from a classroom lesson. Carefully analyze the clip, think step-by-step, and identify all instructional activity labels that apply. You may select multiple labels. Each label is listed below with its definition to guide your judgment.

Instructional Activity Labels and Definitions

{Names and definitions of 24 instructional activity labels}

Instructions

Always return your answer as a JSON list containing the label names that exactly match those provided above (verbatim). If no labels apply, return an empty list. Do not include descriptions, explanations, commentary, or any modified text.

Figure 2. Prompt for multimodal large language models. *{Names and definitions of 24 instructional activity labels}* can be found in Section A.

Activity Labels	% Sec	Discourse Labels	% Utt	% Sec
Teacher standing	52.4	Report-Request	20.5	13.4
Whole class activity	51.9	Closed-Ended	13.4	7.8
Presentation with technology	44.5	Feedback-Neutral	10.0	6.0
Sitting at desks	43.2	Feedback-Unelaborated	10.8	6.0
Using or holding worksheet	40.6	Open-Ended	9.1	6.0
Students sitting at group tables	33.1	Feedback-Elaborated	4.9	4.0
Students standing or walking	30.3	Uptake-Restating	5.6	3.5
Students sitting on carpet or floor	29.0	Feedback-Affirming	4.9	3.3
Teacher sitting	26.8	Uptake-Building	3.1	2.6
Small group activity	22.1	Report-Give	2.3	2.3
Student writing	19.2	Analysis-Request	3.3	2.1
Using or holding notebook	18.7	Teacher-Request	2.6	1.4
Individual activity	17.6	Uptake-Exploring	3.9	1.4
Using or holding instructional tool	17.3	Task Related Prompt	0.7	1.4
Individual technology	14.0	Teacher-Give	0.9	1.3
Teacher supporting multiple students with student interaction	13.9	Analysis-Give	0.5	0.8
Using or holding book	13.3	Feedback-Disconfirming	0.8	0.7
Teacher walking	8.9	Student-Give	2.3	0.7
Student raising hand	6.5	Student-Request	0.2	0.1
Teacher supporting one student	6.5			
Transition	5.7			
Teacher supporting multiple students without student interaction	4.8			
On task student talking with student	4.2			
Teacher writing	4.1			

Table 6. Percentages of positive and negative labels for Activity and Discourse. For Discourse labels, we report both the proportion of utterances containing each label (% Utt) and the proportion of seconds in which the label occurs (% Sec), consistent with the time-based reporting used for Activity labels.

Task Description: For each of the following 19 categories, output 1 if that teaching activity appears in the given transcript excerpt, otherwise 0. Take into account who is the speaker and context of the transcript excerpt. Output exactly one JSON object with all 19 keys.

Categories:

{Names and definitions of 19 instructional discourse labels}

Further Instructions:

If you're unsure, assign 0 rather than inventing a 1.

Cognitive-Demand_Analysis-Request and Expl-Just_Teacher-Request are usually paired together.

Cognitive-Demand_Analysis-Give and Expl-Just_Teacher-Give are usually paired together.

Feedback_Neutral, Feedback_Unelaborated and Uptake_Restating are usually paired together.

Feedback_Affirming, Feedback_Disconfirming and Feedback_Neutral are mutually exclusive.

Feedback_Elaborated and Feedback_Unelaborated are mutually exclusive.

Uptake_Building, Uptake_Exploring and Uptake_Restating are mutually exclusive.

Questions_Closed-Ended and Questions_Open-Ended are mutually exclusive.

Output exactly one JSON object, no extra keys, no explanations.

Ensure valid JSON: double-quoted keys, commas between pairs, no trailing comma.

Task:

Context:

{Context sentence t-2}

{Context sentence t-1}

Speaker:

{Current speaker}

Transcript excerpt:

{Current sentence}

Result:

Figure 3. Prompts used for zero-shot prompting of *Llama3.1-Instruct* (8B and 70B). *{Names and definitions of 19 instructional discourse labels}* can be found in Section A, *{Context sentence t-2}* and *{Context sentence t-1}* are the two previous sentences, *{Current speaker}* is the speaker of the current sentence, and *{Current sentence}* is the sentence to be classified.

Task Description: For each of the following 19 categories, output 1 if that teaching activity appears in the given transcript excerpt, otherwise 0. Take into account who is the speaker and context of the transcript excerpt. Output exactly one JSON object with all 19 keys.

Categories:

{Names and definitions of 19 instructional discourse labels}

Further Instructions:

If you're unsure, assign 0 rather than inventing a 1.

Cognitive-Demand_Analysis-Request and Expl-Just_Teacher-Request are usually paired together.

Cognitive-Demand_Analysis-Give and Expl-Just_Teacher-Give are usually paired together.

Feedback_Neutral, Feedback_Unelaborated and Uptake_Restating are usually paired together.

Feedback_Affirming, Feedback_Disconfirming and Feedback_Neutral are mutually exclusive.

Feedback_Elaborated and Feedback_Unelaborated are mutually exclusive.

Uptake_Building, Uptake_Exploring and Uptake_Restating are mutually exclusive.

Questions_Closed-Ended and Questions_Open-Ended are mutually exclusive.

Output exactly one JSON object, no extra keys, no explanations.

Ensure valid JSON: double-quoted keys, commas between pairs, no trailing comma.

Example 1:

Context:

Teacher 1 (14:35): What about the boy? If you had to describe the boy, how would you describe him? [Student 8]'s hand shot up. [Student 8]. How would you describe him?

Student 8 (14:41): Greedy.

Speaker:

Teacher 1

Transcript excerpt:

Teacher 1 (14:42): Greedy? Why do you say greedy?

Result:

{Valid JSON}

Example 2:

Context:

Student 14 (16:07): And I know that four plus five is nine.

Teacher (16:08): Okay, so you knew that was nine. Student 5 turn around.

Speaker:

Student 14

Transcript excerpt:

Student 14 (16:16): I know that 10 plus seven is 17, so I put five and four together and it made nine. And then six and then [00:16:30] that would make 16.

Result:

{Valid JSON}

Task:

Context:

{Context sentence t-2}

{Context sentence t-1}

Speaker:

{Current speaker}

Transcript excerpt:

{Current sentence}

Result:

Figure 4. Prompts used for few-shot prompting of *Llama3.1-Instruct* (8B and 70B). {Names and definitions of 19 instructional discourse labels} can be found in Section A, {Valid JSON} is a valid JSON output for the example, here shortened for space, {Context sentence t-2} and {Context sentence t-1} are the two previous sentences, {Current speaker} is the speaker of the current sentence, and {Current sentence} is the sentence to be classified.

Label	Qwen2.5-VL	X-CLIP		V-JEPA 2		Foster et al. (2024)
	32B-Instruct	ViT-B/16	ViT-L/14	ViT-L/16	ViT-G/16	
On task student talking with student	0.163	0.088	0.080	0.114	0.080	0.12
Student raising hand	0.640	0.549	0.668	0.670	0.705	0.36
Individual technology	0.698	0.520	0.774	0.553	0.612	0.35
Presentation with technology	0.851	0.865	0.870	0.798	0.840	0.63
Student writing	0.144	0.501	0.592	0.502	0.563	0.43
Teacher writing	0.423	0.284	0.501	0.431	0.454	0.23
Using or holding book	0.663	0.234	0.521	0.347	0.502	0.46
Using or holding instructional tool	0.098	0.406	0.437	0.314	0.443	0.40
Using or holding notebook	0.384	0.374	0.390	0.315	0.315	0.24
Using or holding worksheet	0.388	0.599	0.603	0.602	0.646	0.56
Sitting at desks	0.363	0.713	0.763	0.722	0.762	0.74
Students sitting at group tables	0.572	0.617	0.575	0.590	0.524	0.72
Students sitting on carpet or floor	0.429	0.776	0.845	0.798	0.760	0.64
Students standing or walking	0.373	0.719	0.762	0.776	0.788	0.62
Teacher sitting	0.638	0.747	0.759	0.592	0.755	0.78
Teacher standing	0.820	0.844	0.877	0.875	0.894	0.64
Teacher walking	0.014	0.465	0.538	0.606	0.624	0.34
Teacher supporting multiple students with student interaction	0.472	0.522	0.426	0.461	0.446	0.54
Teacher supporting multiple students without student interaction	0.202	0.157	0.169	0.175	0.091	0.40
Teacher supporting one student	0.067	0.197	0.286	0.190	0.269	0.27
Individual activity	0.165	0.299	0.491	0.299	0.299	0.38
Small group activity	0.627	0.652	0.633	0.610	0.528	0.55
Transition	0.106	0.371	0.426	0.423	0.386	0.38
Whole class activity	0.854	0.817	0.864	0.834	0.832	0.37
Macro F1	0.423	0.513	0.577	0.525	0.547	0.469

Table 7. Per-label F1 scores for instructional activity recognition in videos using different models.

Label	Llama 8B		Llama 70B		BCE		Focal		Asym	
	Zero	Few	Zero	Few	-	PW	-	PW	-	PW
Feedback-Affirming	0.093	0.192	0.096	0.405	0.604	0.571	0.594	0.576	0.516	0.625
Feedback-Neutral	0.161	0.161	0.095	0.348	0.659	0.634	0.628	0.659	0.612	0.654
Feedback-Disconfirming	0.042	0.100	0.018	0.234	0.294	0.220	0.277	0.299	0.084	0.322
Feedback-Elaborated	0.089	0.101	0.049	0.275	0.463	0.420	0.444	0.451	0.387	0.459
Feedback-Unelaborated	0.190	0.142	0.088	0.344	0.581	0.603	0.588	0.618	0.586	0.586
Uptake-Building	0.000	0.000	0.061	0.213	0.383	0.356	0.384	0.369	0.338	0.387
Uptake-Exploring	0.052	0.124	0.065	0.394	0.406	0.375	0.370	0.364	0.296	0.453
Uptake-Restating	0.100	0.173	0.075	0.329	0.543	0.554	0.514	0.534	0.511	0.556
Report-Give	0.000	0.037	0.064	0.163	0.242	0.348	0.296	0.376	0.333	0.340
Report-Request	0.000	0.000	0.031	0.176	0.765	0.763	0.742	0.763	0.760	0.740
Analysis-Give	0.000	0.093	0.000	0.171	0.065	0.140	0.176	0.143	0.214	0.115
Analysis-Request	0.049	0.086	0.084	0.256	0.511	0.511	0.439	0.480	0.517	0.480
Teacher-Give	0.007	0.000	0.022	0.223	0.071	0.214	0.225	0.154	0.294	0.235
Teacher-Request	0.050	0.108	0.071	0.244	0.502	0.500	0.464	0.493	0.482	0.505
Student-Give	0.064	0.074	0.063	0.337	0.571	0.523	0.506	0.495	0.473	0.526
Student-Request	0.000	0.038	0.029	0.087	0.125	0.200	0.200	0.000	0.033	0.200
Closed-Ended	0.077	0.095	0.118	0.262	0.657	0.629	0.644	0.650	0.623	0.635
Open-Ended	0.161	0.195	0.167	0.456	0.575	0.600	0.562	0.572	0.563	0.572
Task Related Prompt	0.012	0.006	0.065	0.117	0.000	0.222	0.194	0.136	0.040	0.344
Macro F1	0.060	0.091	0.066	0.265	0.422	0.441	0.434	0.428	0.403	0.460

Table 8. Per-label F1 scores of Instructional Discourse Labels for different large language models, prompted with zero-shot and few-shot prompts and fine-tuned model with different methods to overcome class imbalance: Binary Cross-Entropy loss (BCE), Focal loss (Focal), and Asymmetric loss (Asymmetric) in their normal variants (-), as well as their variants with positive label weighting (PW).