# Opportunities and Challenges for Data Quality in the Era of Quantum Computing

1<sup>st</sup> Sven Groppe Institute of Information Systems (IFIS) Universität zu Lübeck Lübeck, Germany 2<sup>nd</sup> Valter Uotila University of Helsinki Aalto University Helsinki, Finland

3<sup>rd</sup> Jinghua Groppe
Institute of Information Systems (IFIS)
Universität zu Lübeck
Lübeck, Germany

Abstract—In an era where data underpins decision-making across science, politics, and economics, ensuring high data quality is of paramount importance. Conventional computing algorithms for enhancing data quality, including anomaly detection, demand substantial computational resources, lengthy processing times, and extensive training datasets. This work aims to explore the potential advantages of quantum computing for enhancing data quality, with a particular focus on detection. We begin by examining quantum techniques that could replace key subroutines in conventional anomaly detection frameworks to mitigate their computational intensity. We then provide practical demonstrations of quantum-based anomaly detection methods, highlighting their capabilities. We present a technical implementation for detecting volatility regime changes in stock market data using quantum reservoir computing, which is a special type of quantum machine learning model. The experimental results indicate that quantum-based embeddings are a competitive alternative to classical ones in this particular example. Finally, we identify unresolved challenges and limitations in applying quantum computing to data quality tasks. Our findings open up new avenues for innovative research and commercial applications that aim to advance data quality through quantum technologies.

Index Terms—Data Quality, Quantum Computing, Anomaly Detection, Quantum Machine Learning, Quantum Reservoir Computing

#### I. INTRODUCTION

The cornerstone of reliable decision-making in modern data-driven systems is data quality, which consists of dimensions such as accuracy, completeness, consistency, timeliness, and uniqueness [1]. However, ensuring high-quality data remains a computationally intensive task, particularly as datasets grow in volume, velocity, and variety. Traditional data quality tasks-such as data cleaning, deduplication, schema matching, and anomaly detection often require extensive processing power and time, especially when dealing with highdimensional or noisy data. For instance, anomaly detection, which identifies outliers that deviate from expected patterns, involves complex statistical or machine learning algorithms that scale poorly with increasing data size, and often exhibit quadratic or higher computational complexity [2]. This complexity is exacerbated by the need to process real-time streams or massive historical datasets, and these render classical computing approaches inefficient for large-scale applications.

Quantum computing emerges as a promising paradigm to mitigate or even resolve some of these computational challenges. Built on the properties of quantum mechanics such as superposition, entanglement, interference, measurements and quantum parallelism, quantum algorithms offer - in comparison to algorithms designed for classical hardware - potential speedups for specific problems, for instance, unstructured search with quadratic speedups via Grover's algorithm [3] and linear algebra tasks like quantum principal component analysis with exponential speedups [4]. Table I provides a further list of quantum algorithms with quadratic and exponential<sup>1</sup> speedups. The key enabler for many of the speedups is the HHL algorithm, which is a quantum algorithm for linear systems of equations [6], [7]. These capabilities could significantly reduce the time and resource demands of data quality tasks, particularly for problems involving high-dimensional optimization or pattern recognition. As quantum hardware with noisy intermediate-scale quantum (NISQ) devices of high capabilities becomes more accessible and fault-tolerant quantum computers are on the agenda of most quantum computer vendors until the end of this decade, the feasibility of applying quantum techniques to practical data management issues increases.

TABLE I
SPEEDUPS OF A SELECTED LIST OF QUANTUM APPROACHES

Cnoodun	Method and Reference
Speedup	
Quad <u>rat</u> ic	Bayesian inference [8], [9]
$\mathcal{O}(\sqrt{N})$	Bayesian deep learning [10]
	Online perceptron [11]
	Classical Boltzmann machine [12]
	Quantum reinforcement learning [13]
	Mean Estimation [14]
	Grammar-based Compression [15]
	kNN [16]
	Gaussian process regression [17]
Exponential	Least-squares fitting [18]
$\mathcal{O}(\log(N))$	Quantum Boltzmann machine [19], [20]
	Quantum PCA [21]
	Quantum support vector machine [22]
	q-means [23]
	kNN (in certain cases) [16]
	Fourier Transform [24]
	Wavelet transform [25]
	Embeddings [26]
	Evaluation of Distances [23]
	Decision Trees [27]

<sup>&</sup>lt;sup>1</sup>Important caveats need to be considered that can limit the applicability of the quantum methods with exponential speedups [5].

Among data quality tasks, anomaly detection stands out as one of the most critical because it can address multiple quality dimensions simultaneously. Anomalies, whether they represent errors, fraud, or rare events, directly impact data accuracy since they introduce inconsistencies and lower reliability [28]. Anomalies also affect completeness (missing expected patterns) and timeliness (delayed detection of deviations), and these make anomaly detection a linchpin for maintaining data integrity across domains like finance, healthcare, and cybersecurity. Classical methods, such as knearest neighbors, autoencoders, or statistical thresholding, often struggle with scalability and sensitivity in noisy or highdimensional settings [29]. Quantum-enhanced approaches, for instance, quantum support vector machines or quantum neural networks, have shown preliminary promise in accelerating outlier detection and improving robustness, particularly in hybrid quantum-classical frameworks [30]-[33]. We argue that anomaly detection, as a computationally expensive yet essential data quality task, is an ideal candidate for quantum computing intervention, and its efficiency and effectiveness could potentially be revolutionized by quantum computing.

Our main contributions are as follows:

- A study of quantum algorithms that can replace the computing-intensive subroutines in classical anomaly detection approaches, to achieve potential benefits
- A study of current quantum-based approaches to anomaly detection
- An experimental study demonstrating the potential of quantum reservoir computing in detecting regime changes in time series data with the implementation publicly available on GitHub [34]
- Identifying open challenges and discussing future research directions

# II. POTENTIAL OF QUANTUM COMPUTING FOR DATA QUALITY

The integration of quantum computing into anomaly detection represents an underexplored yet promising frontier in enhancing data quality [35]. A review of existing research shows that there is currently a lack of "true" quantum anomaly detection methods—whether methods inspired by classical approaches or their variations—indicating that purely quantum-native solutions have not yet been established. This gap highlights the need for novel quantum algorithms tailored specifically for anomaly detection tasks.

One potential direction is to develop quantum variants of established classical methods, such as the AutoRegressive Integrated Moving Average (ARIMA) model. Preliminary proposals suggest quantum replacements for ARIMA subroutines [36]–[38], which could leverage quantum superposition and entanglement to enhance time-series anomaly detection. However, practical realizations remain speculative and require further investigation into quantum circuit design and error mitigation strategies.

Another avenue lies in approaches utilizing quantum drop-in replacements for classical subroutines (see Figure 1). For these

hybrid methods, detailed in subsequent sections, we propose replacing components such as machine learning kernels or transformation algorithms with their quantum equivalents. For instance, quantum variants of Peaks-Over-Threshold (POT) methods, commonly used in algorithms like DSPOT [39], have not yet been proposed despite related research [40], [41]. Such developments could extend quantum benefits to domains beyond anomaly detection and databases, potentially offering a higher impact if implemented successfully. The feasibility of these replacements, however, is hindered by unresolved challenges in practical implementation, including noise handling and scalability.

Conversely, certain classical approaches may not benefit from quantum enhancements due to their simplicity or the efficiency of existing classical implementations. Examples include MedianMethod [42], where quantum subroutines may introduce unnecessary complexity without performance gains. This underscores the importance of a context-specific evaluation to identify suitable candidates for quantum augmentation.

## A. Potential of Quantum Machine Learning

The potential of Quantum Machine Learning (QML) to enhance data quality offers a transformative paradigm for data-intensive applications. Preliminary investigations (as given e.g., in the referred quantum machine learning approaches in Figure 1) suggest that QML can achieve performance levels comparable to, and in some cases superior to, classical machine learning on conventional hardware, with significantly fewer parameters - just ≈100 parameters compared to the thousands, millions, or even billions in classical models. This reduction in parameter count translates to a substantially lower memory footprint, making QML particularly appealing for resource-constrained environments.

QML enables more compact representations and requires only a logarithmic number of qubits in contrast to the linear scaling of classical bits. This property, coupled with potentially faster convergence, less training data, and enhanced generalizability, positions QML as a promising approach for modeling complex distributions that pose significant challenges for classical methods. The utilization of richer feature maps facilitated by quantum circuits offers a potential for improved separability and accuracy gains. Intriguingly, noisy quantum gates may serve as a regularization technique [164]–[166], improving generalization by mitigating overfitting - a phenomenon that warrants further exploration.

The advantages of QML are, however, context-dependent. They are most pronounced with quantum-native data or when inputs can be efficiently prepared and encoded on quantum hardware. In classical benchmarking, its practical benefits are an active area of research, which is dedicated to addressing challenges such as data loading, noise management, and optimization issues.

Today, quantum hardware still lacks support for a very high number of parameters in quantum machine learning architectures (see Section II-A1). With today's classical supercomputers, we also reach simulation limits of complex quantum

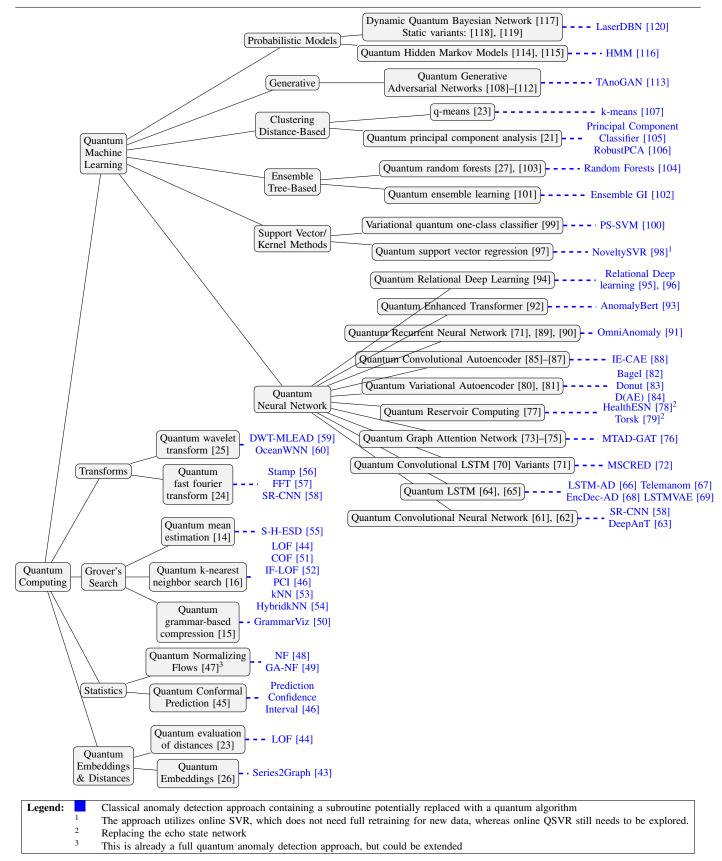


Fig. 1. Taxonomy of Quantum Computing algorithms that can serve as drop-in replacements of classical subroutines in the referenced approaches to anomaly detection.

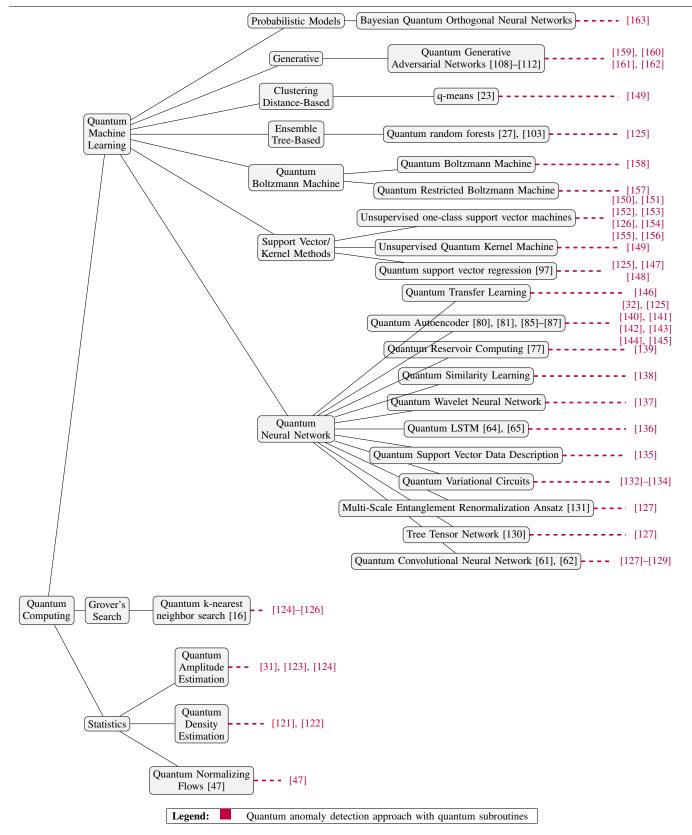


Fig. 2. Taxonomy of the Quantum Computing algorithms, which have been used in quantum anomaly detection approaches

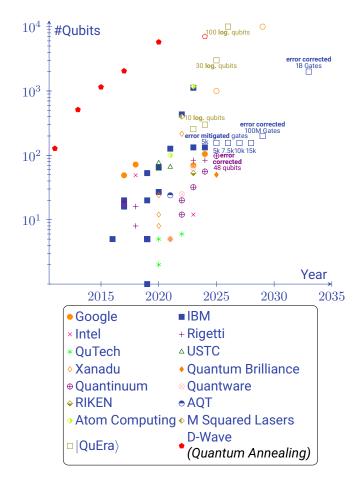


Fig. 3. Timeline of the development of quantum computers across various vendors

models (see Section II-A2). Hence, the impact of employing a very high number of parameters in QML that could alter the observed performance trends remains uncharted so far. We discuss these and other issues, like availability of appropriate training data (see Section II-A3), that hinder investigating and achieving the full potential of quantum machine learning in practice, in the following paragraphs.

1) Quantum Computer Wall: The evolution of quantum computing hardware, as detailed in the Figure 3 provides hints for the rapid advancements and inherent limitations in the field. The growth in the number of qubits across leading quantum computing platforms - spanning big players like IBM and Google, but also many smaller companies like Rigetti, QuTech, Xanadu, Quantum Brilliance, Quantinuum, Atom Computing, QuEra, D-Wave, and many more - illustrates a trajectory to over a thousand qubits in the year 2025. Projections based on roadmaps from these quantum computer vendors suggest a continued increase, with error-mitigated systems reaching from 5,000 to 15,000 gates and error-corrected systems potentially scaling to 100 million or even 1 billion gates by the early 2030s.

The transition from error-mitigated to error-corrected quantum systems, anticipated around 2026–2028 with 10 to 100

logical qubits, represents a critical threshold for practical quantum advantage. However, current systems remain constrained by noise and error rates, necessitating advanced error correction techniques to harness the full potential of large-scale quantum computers. These developments emphasize the need for continued investment in hardware innovation to overcome the quantum computer wall and enable real-world applications in data quality enhancement.

2) Simulation Wall: The "Simulation Wall" delineates the computational boundaries of simulating quantum systems on classical hardware [167], a key consideration for validating quantum algorithms. Simulations storing all amplitudes for 30–34 qubits are feasible on single computing nodes or desktops with GPUs, and this corresponds to tens of gigabytes of memory. Large high-performance computing (HPC) clusters can perform simulations of 45–50 qubits [168]–[170], which require hundreds of terabytes to a few petabytes. In general, when storing all amplitudes, the memory requirement doubles with each additional qubit. Hence, beyond 50 qubits, rendering a full simulation seems to be impractical with today's supercomputers due to astronomical resource demands.

However, approximations are possible for circuits with limited entanglement or shallow depth. For instance, reproducing Google's 53-qubit Sycamore approximate sampling experiment requires 512 GPUs over 15 hours [171], demonstrating the feasibility of hybrid approaches. These methods enable simulations of tens to over 1,000 qubits for specific tasks or circuits with reduced connectivity [172]. This simulation wall poses a significant challenge for testing quantum anomaly detection and data quality algorithms, showing the necessity for advancing the development of real quantum computers. Future research should focus on optimizing hybrid simulation techniques to bridge the gap between classical simulation capabilities and the demands of large-scale quantum computations.

3) Data (and Use Case) Wall: The "Data (and Use Case) Wall" indicates critical data-related constraints in leveraging quantum machine learning (QML) for data quality improvement. The availability of high-quality data remains a bottleneck. Recent studies indicate that the data pool for training large language models is nearing exhaustion [173], raising concerns about the scalability and further performance improvements of new machine learning architectures, including quantum variants, in general.

Noise within datasets can impede the prediction performance of learned models, such that there may exist inherent performance limits in terms of accuracy, mean squared error, etc., of a given use case. Neither classical machine learning nor quantum machine learning can surpass these performance limits. If classical machine learning methods have already reached these limits, the potential for quantum enhancement will be diminished. As a result, a dual approach is required: improving data preprocessing to mitigate noise and conducting empirical studies to identify use cases where QML can offer a decisive advantage. This data-centric wall highlights the interplay between data availability, quality, and the practical

#### A. Background on quantum reservoir computing

#### B. Potential of quantum computing in Anomaly Detection

We are interested in classical subroutines in anomaly detection approaches, which require significant computing resources, because it makes sense to explore the potential of quantum computing in speeding up their processing. To this end, we performed two extensive literature reviews.

The first literature review studied which classical anomaly detection approaches could benefit from quantum computing. Two research results were achieved from the study: 1) Identifying 44 classical anomaly detection approaches that could benefit from using the corresponding quantum methods to replace their computing-intensive subroutines. 2) Developing a taxonomy of Quantum Computing algorithms that can serve as drop-in replacements of classical subroutines in the anomaly detection approaches identified above. These research results are summarized in Figure 1. From this figure, we can also see that different types of anomaly detection techniques could potentially benefit from quantum subroutines.

Based on the results of the first literature review, we carried out the second one to investigate which quantum computing algorithms have been used in anomaly detection. The works that use quantum computing have mostly developed their own anomaly detection approaches and do not directly adopt the efficient classical approaches by replacing their computing-intensive subroutines with quantum counterparts. Based on the study, we developed the second taxonomy, presented in Figure 2.

From these two literature studies, we can see that although there have already been a significant number of quantum anomaly detection approaches proposed, there is still much space for future work, especially on developing quantum-based solutions that adopt efficient classical approaches but replace the time-consuming classical subroutines with quantum counterparts.

## III. EXPERIMENTAL STUDY ON QUANTUM RESERVOIR COMPUTING

In this experimental section, we demonstrate the usability of quantum computing by developing a quantum reservoir computing model, which is applied to a specific financial application: detecting volatility regime changes in time series market data [174]. In other words, this means that the developed model aims to predict when the standard deviation of the stock returns exceeds a given threshold. The experiment is designed to be suitable for current noisy intermediate-scale quantum computers, and the tackled finance use case has a concrete, practical motivation. The model also avoids the most common issues in quantum machine learning, such as flat training landscapes and a high number of evaluations for a quantum computer. Since predicting how the standard deviation or other moments evolve over time in time series data is a general challenge, this method is likely to have applications beyond finance.

Quantum reservoir computing is a special type of quantum machine learning paradigm, inspired by classical reservoir learning [175], [176]. The previous research has employed quantum reservoir computing for MNIST classification and Santa Fe laser data classification [177]. This work is also closely related to the quantum reservoir learning use case in [139], which develops an intrusion and anomaly detection framework for edge-IoT systems. Our work and [139] both develop a quantum reservoir learning model based on a similar type of quantum time evolution, measurements, and classical models. Both involve time series data with a window size. Our experimental implementation also differs from [139] in several ways: we compare a wider range of classical models following the quantum reservoir, use a slightly more involved measurement scheme that includes computing pairwise Pauli-Z expectation values, employ different Hamiltonians that encode the time series data, and address a different application domain. Our data preparation also demonstrates that the correspondence between the model's inputs and outputs is nonlinear by construction, which is crucial for reservoir learning models. Before introducing quantum reservoir learning, we explain certain essential quantum mechanical concepts behind

Quantum computing is a computing paradigm that leverages the principles of quantum mechanics [178]. Quantum computation is typically a physical process in which a quantum mechanical system evolves, and at the end, the system is measured. The measured result describes something regarding the computational problem. The standard introduction to quantum computing usually involves defining qubits, quantum logical operations, and measurements. Especially, the quantum logical gates are often used to describe this time evolution. In this work, we do not explicitly require quantum logical gates, but the time evolution is described by Hamiltonian matrices H. Every quantum logical gate is generated by some Hamiltonian, so that in practice, it is sometimes more convenient to develop quantum algorithms in terms of Hamiltonians instead of gates. If H is a Hamiltonian, then the unitary time evolution of the quantum mechanical system is described with

$$U(t) := e^{-iHt},$$

where U is a time-dependent unitary matrix defined by Hamiltonian H. The key idea is that instead of defining quantum computations in terms of gates, one can define them in terms of Hamiltonians.

Since the space of Hermitian operators forms a vector space, any Hamiltonian can be written as a linear combination of basis operators. The standard set of basis operators is the Pauli matrices I, Z, X, and Y [178]. While one can construct complex Hamiltonians with these Pauli matrices, this work

focuses on the following three Hamiltonians

$$H_X = A_X \sum_{i=0}^n X_i,\tag{1}$$

$$H_Z = A_Z \sum_{i=0}^{n} x_i Z_i, \tag{2}$$

$$H_{ZZ} = A_{ZZ} \sum_{i=0}^{n-1} (x_i + x_{i+1}) Z_i Z_{i+1},$$
 (3)

where  $x_i$  for i = 0, ..., n is a collection of datapoints that the Hamiltonians encode and  $A_X$ ,  $A_Z$ ,  $A_{ZZ}$  are scalers. The full Hamiltonian is the sum  $H = H_X + H_Z + H_{ZZ}$ . We select these Hamiltonians based on the ones that were used in quantum reservoir computing in neutral atom quantum computers [177].

After the Hamiltonian evolution has been implemented using suitable Hamiltonians, the quantum mechanical system has to be measured so that we can access the outcome of the computation [179]. In this work, we employ a measurement scheme similar to that proposed in [177]. The measurements are usually expressed in terms of measurement operators that, in this application, form a collection of single- and multi-qubit Pauli measurements in *Z*-basis as

$$\{\sigma_z^i \mid i = 1, \dots, n\} \text{ and } \{\sigma_z^i \sigma_z^j \mid 1 \le i < j \le n\}.$$
 (4)

Now, the quantum reservoir computing follows the idea of classical reservoir computing. In the first phase, the input data is fed into the quantum reservoir, which in this case is encoded using Hamiltonians whose coefficients  $x_i$  for  $i=0,\ldots,n$  represent the time series data. Then, the quantum mechanical system is measured, and the measurement results provide us with a vector that serves as an embedding in a higher-dimensional space. In the second phase, a classical, typically linear, model is fitted to the transformed data. If the classical model is fast and straightforward to compute, the reservoir training can be relatively fast.

#### B. Volatility regime change detection

The problem we want to tackle with quantum reservoir computing is detecting volatility regime changes in time series market data [174]. While the problem is not commonly referred to as an anomaly detection problem, it shares many features with anomaly detection methods, such as the use of time series data and threshold-based decision criteria. We focus on 29 publicly traded stocks in the Dow Jones Industrial Average stock market index, spanning five years from 2015 to 2020. The data is obtained with yfinance [180] from Yahoo! Finance's API. We then employed a standard financial data preparation process [181]. We have computed the expected returns  $\{p_t \mid t \in [t_{\text{start}}, t_{\text{end}}]\}$  and log-scaled their differences

$$R = \{ r_t = \ln(p_t/p_{t-1}) \mid t \in [t_{\text{start}}, t_{\text{end}}] .$$
 (5)

Next, we have fixed a window size w > 0. In this work, the window size coincides with the number of qubits, which is 9.

For this data, we have computed the standard deviation over the rolling window of size w as

$$\sigma_t^w = \sqrt{\frac{1}{1-w} \sum_{j=0}^{w-1} (r_{t-j} - \overline{r}_t^w)^2},$$
 (6)

where  $\overline{r}_t^w=\frac{1}{w}\sum_{j=0}^{w-1}r_{t-j}$  is the mean over the window. We have further normalized these values as

$$\tilde{\sigma}_t = \frac{\sigma_t^w - \mu_\sigma}{\sigma_t},$$

where  $\mu_{\sigma}=\frac{1}{|R|-w}\sum_{t=w}^{|R|}\sigma_{t}^{w}$  is mean over all rolling volatilities and

$$\sigma_t = \sqrt{\frac{1}{|R| - w - 1} \sum_{t=w}^{|R|} (\sigma_t^w - \mu_\sigma)^2}$$

is the standard deviation of these rolling volatilities. We further compute the mean  $\mu_{\tilde{\sigma}}$  that describes the mean of the normalized volatilities and  $\sigma_{\tilde{\sigma}}$ , which is the standard deviation of the normalized volatilities.

Then we concretely set the threshold, which we use to classify the volatility regimes, as  $\tau := \mu_{\tilde{\sigma}} + \lambda \sigma_{\tilde{\sigma}}$ , where we set  $\lambda = 1$ , but this can be adjusted depending on the investor's preferences. Then, we obtain a binary regime indicator as

$$c_t = \begin{cases} 1 & \text{if } \tilde{\sigma}_t > \tau, \\ 0 & \text{otherwise.} \end{cases}$$

As the previous calculations showed, the values  $c_t$  depend on the return values non-linearly and thus, one can expect that a linear model would not perform well in this classification task. This problem can also be easily refined into a multi-class classification, where we would have more fine-grained regimes for volatility. We could also consider not only volatility but also higher moments, such as skewness and kurtosis, which would likely increase the complexity of the classification task. We consider these refinements to be part of future research, as well as employing this model on real hardware with an increased window size.

#### C. Quantum reservoir learning model

As a result of this data preparation, we obtain a binary classification problem that can be addressed using various supervised machine learning methods. The input data to the model is the log-scaled return values in Equation 5 grouped into chunks of size w, and the output values are the corresponding binary values  $c_t$ . For each batch  $x_i$ , for  $i=0,\ldots,w$ , the corresponding values are substituted into the Hamiltonians in Equation 1. The quantum circuits representing these Hamiltonians function as reservoirs, mapping feature vectors into higher-dimensional Hilbert spaces. As a result, we obtain a vector consisting of expectation values for measurement operators in Equation 4.

The quantum reservoirs are constructed using Qiskit, which is the most widely used quantum computing package maintained by the Qiskit community and IBM. Quantum circuits in the model are simulated with Qiskit without noise. The classical reservoirs are constructed with ReservoirPy [182]. Most of the classical models are imported from scikit-learn [183] and PyTorch. We have utilized the grid search as a method for hyperparameter optimization. The implementation with the exact hyperparameter combinations is available on GitHub [34].

## D. Results

For each case, we perform a hyperparameter search and then measure both accuracy and average precision scores. We used the first 80% of the data for training and the rest 20% was for testing. We also present the precision scores since the classification task is not well-balanced and the class 0 is overrepresented. We average the accuracy and precision across the 29 stocks in the Dow Jones Industrial Average. The results on the test data set are presented in Table II, where we have selected the best-performing model from the grid search for each case.

TABLE II

QUANTUM RESERVOIR VS CLASSICAL RESERVOIR VS RAW

Embedding	Model	Avg. accuracy	Avg. precision
Quantum reservoir	Logistic Regression	0.923	0.890
	Support Vector Machine	0.921	0.885
	Ridge Classifier	0.913	0.884
	XGBoost	0.896	0.899
	Random Forest	0.852	0.850
	Vanilla Neural Network	0.849	0.793
	Gaussian Mixture	0.761	0.332
	Multi-layer Perceptron	0.757	0.668
Classical reservoir	Logistic Regression	0.895	0.835
	Ridge Classifier	0.895	0.859
	XGBoost	0.844	0.841
	Support Vector Machine	0.831	0.822
Raw, original data	Support Vector Machine	0.872	0.904
	XGBoost	0.859	0.844
	Random Forest	0.823	0.815
	Vanilla Neural Network	0.769	0.545
	Logistic Regression	0.766	0.473
	Gaussian Mixture	0.760	0.505
	Multi-layer Perceptron	0.759	0.462
	Ridge Classifier	0.758	0.474

These results demonstrate that quantum reservoir computing performs at least as well as classical reservoir computing, outperforming classical linear models in the task and also performing well against non-linear classical models, such as a support vector machine with a non-linear kernel. Considering that logistic regression and ridge classifiers are simple and fast to train, quantum reservoir computing may be a viable approach for pipelines where constant retraining and model adaptation are necessary. Additionally, we observe that applying reservoirs clearly improves the performance of the linear models in both quantum and classical reservoir cases. The initial results, which are comparable to those obtained with classical methods, are positive and encouraging, especially considering that this is preliminary work and we used only 9 qubits. These results will motivate further studies of quantum reservoir-based models in tasks where the learning task involves non-linearities.

# IV. OPEN CHALLENGES AND FUTURE RESEARCH DIRECTIONS

The integration of quantum computing into data quality management opens a frontier of opportunities and challenges. While preliminary investigations suggest significant potential—particularly for anomaly detection—extending these benefits to other data quality tasks such as data cleaning, deduplication, data imputation, and schema matching requires concerted research efforts. This section discusses future research directions and identifies the open challenges that must be overcome to realize the full promise of quantum-enhanced data quality solutions.

A primary direction is the development of quantum-native algorithms tailored to data quality tasks. Future work should focus on designing end-to-end quantum anomaly detectors that leverage quantum superposition and entanglement, potentially achieving exponential speedups in outlier identification. Beyond anomaly detection, quantum algorithms could address data cleaning by optimizing error correction in noisy datasets using quantum error mitigation techniques [184], or enhance deduplication through quantum clustering methods like qmeans [23]. Data imputation may utilize a similar set of quantum approaches to anomaly detection. Schema matching, which involves aligning heterogeneous data structures, could benefit from quantum graph neural networks to model complex relationships more efficiently [185].

Another promising avenue is the experimental validation of hybrid quantum-classical systems on NISQ devices. As quantum hardware evolves, pilot studies should evaluate the performance of quantum subroutines (e.g., quantum fast Fourier transforms for time-series anomalies) against classical baselines across diverse datasets. Additionally, the development of quantum software frameworks tailored for data quality tasks, integrating with existing platforms like Apache Spark, could accelerate adoption. Research into quantum data encoding strategies is also critical, ensuring efficient loading of classical data onto quantum hardware to mitigate the "data-loading bottleneck" [186].

Despite these opportunities, several challenges remain. First, the current limitations of NISQ devices (as described in Section II-A1), characterized by high error rates and limited qubit coherence, pose significant barriers. Noise mitigation strategies, such as those proposed in [184], need refinement to ensure robustness in data quality applications. Second, the "Simulation Wall" (as described in Section II-A2) restricts the ability to test quantum algorithms beyond 50–60 qubits on classical hardware, necessitating access to scalable quantum infrastructure. Third, the "Data Wall" (as described in Section II-A3) highlights the scarcity of high-quality training data and the impact of noise within datasets, which could undermine quantum advantages unless addressed through advanced preprocessing.

Specific to anomaly detection, the practical realization of quantum drop-in replacements is often hindered by unresolved issues in online learning and scalability. For data cleaning, the computational cost of quantum error correction may outweigh the benefits for simple datasets, requiring a cost-benefit analysis. Deduplication faces challenges in adapting quantum search algorithms (e.g., Grover's search [3]) to efficiently handle approximate string matching. Schema matching, meanwhile, demands robust quantum embeddings to capture semantic similarities, an area where current quantum graph methods are still immature [26].

#### V. SUMMARY AND CONCLUSIONS

In this visionary work, we study the potential of quantum computing for data quality. We first performed extensive literature studies and generated two taxonomies: One discovers a drop-in replacement categorization between classical and quantum subroutines, especially focusing on anomaly detection; the other provides a landscape of current research work on quantum-based solutions to anomaly detection. The taxonomies show that quantum computing presents a vast set of possibilities for exploring the potential benefits of quantum computing in data quality tasks. To concretely demonstrate the possibilities, we carried out an experimental evaluation of quantum reservoir computing for detecting regime changes in stock market data. The evaluation results indicated that quantum reservoir learning was a competitive alternative to the classical models in this specific task.

Ultimately, the interdisciplinary nature of this field necessitates collaboration among quantum physicists, data scientists, and database engineers to bridge theoretical advancements with practical applications. Ethical considerations, such as the energy consumption of quantum systems versus classical alternatives, also warrant investigation. Addressing these challenges through targeted research and international initiatives will be essential to unlocking the transformative potential of quantum computing for data quality tasks.

### REFERENCES

- C. Batini and M. Scannapieco, *Data Quality Concepts, Methodologies and Techniques*, ser. Data-Centric Systems and Applications. Berlin, Germany: Springer, 2006.
- [2] V. Chandola, A. Banerjee, and V. Kumar, "Anomaly detection: A survey," ACM Computing Surveys, vol. 41, no. 3, p. 1–58, Jul. 2009. [Online]. Available: http://dx.doi.org/10.1145/1541880.1541882
- [3] L. K. Grover, "A fast quantum mechanical algorithm for database search," in *Proceedings of the twenty-eighth annual ACM symposium* on *Theory of computing - STOC '96*, ser. STOC '96. ACM Press, 1996, p. 212–219. [Online]. Available: http://dx.doi.org/10. 1145/237814.237866
- [4] S. Lloyd, M. Mohseni, and P. Rebentrost, "Quantum principal component analysis," *Nature Physics*, vol. 10, no. 9, p. 631–633, Jul. 2014. [Online]. Available: http://dx.doi.org/10.1038/nphys3029
- [5] S. Aaronson, "Read the fine print," *Nature Physics*, vol. 11, no. 4, p. 291–293, Apr. 2015. [Online]. Available: http://dx.doi.org/10.1038/ nphys3272
- [6] A. W. Harrow, A. Hassidim, and S. Lloyd, "Quantum algorithm for linear systems of equations," *Physical Review Letters*, vol. 103, no. 15, p. 150502, Oct. 2009.
- [7] L. Wossnig, Z. Zhao, and A. Prakash, "Quantum linear system algorithm for dense matrices," *Physical Review Letters*, vol. 120, no. 5, p. 050502, Jan. 2018.
- [8] G. H. Low, T. J. Yoder, and I. L. Chuang, "Quantum inference on bayesian networks," *Physical Review A*, vol. 89, no. 6, Jun. 2014. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.89.062315

- [9] N. Wiebe and C. Granade, "Can small quantum systems learn?" 2015.[Online]. Available: https://arxiv.org/abs/1512.03145
- [10] Z. Zhao, A. Pozas-Kerstjens, P. Rebentrost, and P. Wittek, "Bayesian deep learning on a quantum computer," *Quantum Machine Intelligence*, vol. 1, no. 1, p. 41–51, May 2019.
- [11] N. Wiebe, A. Kapoor, and K. M. Svore, "Quantum perceptron models," 2016. [Online]. Available: https://arxiv.org/abs/1602.04799
- [12] —, "Quantum deep learning," 2014. [Online]. Available: https://arxiv.org/abs/1412.3489
- [13] V. Dunjko, J. M. Taylor, and H. J. Briegel, "Quantum-enhanced machine learning," *Physical Review Letters*, vol. 117, no. 13, Sep. 2016. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.117.130501
- [14] P. Shyamsundar, "Non-boolean quantum amplitude amplification and quantum mean estimation," 2021. [Online]. Available: https://arxiv.org/abs/2102.04975
- [15] D. Gibney and S. V. Thankachan, "Compressibility-aware quantum algorithms on strings," 2023. [Online]. Available: https://arxiv.org/abs/ 2302.07235
- [16] N. Wiebe, A. Kapoor, and K. Svore, "Quantum algorithms for nearest-neighbor methods for supervised and unsupervised learning," arXiv, 2014. [Online]. Available: https://arxiv.org/abs/1401.2142
- [17] Z. Zhao, J. K. Fitzsimons, and J. F. Fitzsimons, "Quantum-assisted gaussian process regression," *Phys. Rev. A*, vol. 99, p. 052331, May 2019. [Online]. Available: https://link.aps.org/doi/10.1103/PhysRevA. 99.052331
- [18] N. Wiebe, D. Braun, and S. Lloyd, "Quantum algorithm for data fitting," *Physical Review Letters*, vol. 109, no. 5, Aug. 2012. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.109.050505
- [19] M. H. Amin, E. Andriyash, J. Rolfe, B. Kulchytskyy, and R. Melko, "Quantum boltzmann machine," *Physical Review X*, vol. 8, no. 2, May 2018. [Online]. Available: http://dx.doi.org/10.1103/PhysRevX.8. 021050
- [20] M. Kieferová and N. Wiebe, "Tomography and generative training with quantum boltzmann machines," *Physical Review A*, vol. 96, no. 6, Dec. 2017. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA. 96.062327
- [21] S. Lloyd, M. Mohseni, and P. Rebentrost, "Quantum principal component analysis," *Nature Physics*, vol. 10, no. 9, p. 631–633, Jul. 2014. [Online]. Available: http://dx.doi.org/10.1038/nphys3029
- [22] P. Rebentrost, M. Mohseni, and S. Lloyd, "Quantum support vector machine for big data classification," *Physical Review Letters*, vol. 113, no. 13, Sep. 2014. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.113.130503
- [23] S. Lloyd, M. Mohseni, and P. Rebentrost, "Quantum algorithms for supervised and unsupervised machine learning," 2013. [Online]. Available: https://arxiv.org/abs/1307.0411
- [24] R. Asaka, K. Sakai, and R. Yahagi, "Quantum circuit for the fast fourier transform," *Quantum Information Processing*, vol. 19, no. 8, Aug. 2020. [Online]. Available: http://dx.doi.org/10.1007/ s11128-020-02776-5
- [25] M. Bagherimehrab and A. Aspuru-Guzik, "Efficient quantum algorithm for all quantum wavelet transforms," *Quantum Science and Technology*, vol. 9, no. 3, p. 035010, Apr. 2024. [Online]. Available: http://dx.doi.org/10.1088/2058-9565/ad3d7f
- [26] S. Lloyd, M. Schuld, A. Ijaz, J. Izaac, and N. Killoran, "Quantum embeddings for machine learning," 2020. [Online]. Available: https://arxiv.org/abs/2001.03622
- [27] N. Kumar, R. Yalovetzky, C. Li, P. Minssen, and M. Pistoia, "Des-q: a quantum algorithm to provably speedup retraining of decision trees," *Quantum*, vol. 9, p. 1588, Jan. 2025. [Online]. Available: http://dx.doi.org/10.22331/q-2025-01-13-1588
- [28] C. C. Aggarwal, Outlier Analysis. Springer International Publishing, 2017. [Online]. Available: http://dx.doi.org/10.1007/ 978-3-319-47578-3
- [29] F. M. Ghamry, G. M. El-Banby, A. S. El-Fishawy, F. E. A. El-Samie, and M. I. Dessouky, "A survey of anomaly detection techniques," *Journal of Optics*, vol. 53, no. 2, p. 756–774, Feb. 2024. [Online]. Available: http://dx.doi.org/10.1007/s12596-023-01147-4
- [30] S. Corli, L. Moro, D. Dragoni, M. Dispenza, and E. Prati, "Quantum machine learning algorithms for anomaly detection: A review," 2024. [Online]. Available: https://arxiv.org/abs/2408.11047
- [31] M. Guo, H. Liu, Y. Li, W. Li, F. Gao, S. Qin, and Q. Wen, "Quantum algorithms for anomaly detection using amplitude estimation," *Physica A: Statistical Mechanics and its Applications*, vol. 604, p. 127936,

- Oct. 2022. [Online]. Available: http://dx.doi.org/10.1016/j.physa.2022. 127936
- [32] R. Frehner and K. Stockinger, "Applying quantum autoencoders for time series anomaly detection," *Quantum Machine Intelligence*, vol. 7, no. 1, May 2025. [Online]. Available: http://dx.doi.org/10. 1007/s42484-025-00285-1
- [33] A. J. Aparcana-Tasayco, X. Deng, and J. H. Park, "A systematic review of anomaly detection in iot security: towards quantum machine learning approach," *EPJ Quantum Technology*, vol. 12, no. 1, Sep. 2025. [Online]. Available: http://dx.doi.org/10.1140/epjqt/ s40507-025-00414-6
- [34] V. Uotila, "quantum\_reservoir\_regime\_detection," 2025, gitHub repository, accessed 2025-11-09. [Online]. Available: https://github.com/valterUo/quantum\_reservoir\_regime\_detection
- [35] V. Uotila, S. Sahri, and S. Groppe, "Utilizing quantum computing to improve the quality of data," in *The 29th European Conference* on Advances in Databases and Information Systems (ADBIS), Tampere, Finland, 2025. [Online]. Available: https://doi.org/10.1007/ 978-3-032-05281-0\\_19
- [36] A. Daskin, "A walk through of time series analysis on quantum computers," 2022. [Online]. Available: https://arxiv.org/abs/2205.00986
- [37] P. Mujal, R. Martínez-Peña, G. L. Giorgi, M. C. Soriano, and R. Zambrini, "Time-series quantum reservoir computing with weak and projective measurements," npj Quantum Information, vol. 9, no. 1, Feb. 2023. [Online]. Available: http://dx.doi.org/10.1038/ s41534-023-00682-z
- [38] K. Donatella, Z. Denis, A. Le Boité, and C. Ciuti, "Dynamics with autoregressive neural quantum states: Application to critical quench dynamics," *Physical Review A*, vol. 108, no. 2, Aug. 2023. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.108.022210
- [39] A. Siffer, P.-A. Fouque, A. Termier, and C. Largouet, "Anomaly detection in streams with extreme value theory," in *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, ser. KDD '17. New York, NY, USA: Association for Computing Machinery, 2017, p. 1067–1075. [Online]. Available: https://doi.org/10.1145/3097983.3098144
- [40] M. Manceau, K. Y. Spasibko, G. Leuchs, R. Filip, and M. V. Chekhova, "Indefinite-mean pareto photon distribution from amplified quantum noise," *Physical Review Letters*, vol. 123, no. 12, Sep. 2019. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.123.123606
- [41] E. Rácz, K. Spasibko, M. Manceau, L. Ruppert, M. V. Chekhova, and R. Filip, "Quantifying optical rogue waves," 2023. [Online]. Available: https://arxiv.org/abs/2303.04615
- [42] S. Basu and M. Meckesheimer, "Automatic outlier detection for time series: an application to sensor data," *Knowledge and Information Systems*, vol. 11, no. 2, p. 137–154, 2006. [Online]. Available: http://dx.doi.org/10.1007/s10115-006-0026-6
- [43] P. Boniol and T. Palpanas, "Series2graph: graph-based subsequence anomaly detection for time series," *Proceedings of the VLDB Endowment*, vol. 13, no. 12, p. 1821–1834, Jul. 2020. [Online]. Available: http://dx.doi.org/10.14778/3407790.3407792
- [44] M. M. Breunig, H.-P. Kriegel, R. T. Ng, and J. Sander, "Lof: identifying density-based local outliers," ACM SIGMOD Record, vol. 29, no. 2, p. 93–104, 2000. [Online]. Available: http://dx.doi.org/10.1145/335191.335388
- [45] S. Park and O. Simeone, "Quantum conformal prediction for reliable uncertainty quantification in quantum machine learning," 2023. [Online]. Available: https://arxiv.org/abs/2304.03398
- [46] Y. Yu, Y. Zhu, S. Li, and D. Wan, "Time series outlier detection based on sliding window prediction," *Mathematical Problems in Engineering*, vol. 2014, no. 1, Jan. 2014. [Online]. Available: http://dx.doi.org/10.1155/2014/879736
- [47] B. Rosenhahn and C. Hirche, "Quantum normalizing flows for anomaly detection," *Physical Review A*, vol. 110, no. 2, Aug. 2024. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.110.022443
- [48] A. Ryzhikov, M. Borisyak, A. Ustyuzhanin, and D. Derkach, "Nfad: fixing anomaly detection using normalizing flows," *PeerJ Computer Science*, vol. 7, p. e757, Nov. 2021. [Online]. Available: http://dx.doi.org/10.7717/peerj-cs.757
- [49] E. Dai and J. Chen, "Graph-augmented normalizing flows for anomaly detection of multiple time series," in *International Conference* on *Learning Representations (ICLR)*, 2022. [Online]. Available: https://openreview.net/forum?id=45L\\_dgP48Vd

- [50] P. Senin, J. Lin, X. Wang, T. Oates, S. Gandhi, A. P. Boedihardjo, C. Chen, and S. Frankenstein, "Time series anomaly discovery with grammar-based compression," 2015. [Online]. Available: https://openproceedings.org/2015/conf/edbt/paper-155.pdf
- [51] J. Tang, Z. Chen, A. W.-c. Fu, and D. W. Cheung, Enhancing Effectiveness of Outlier Detections for Low Density Patterns. Springer Berlin Heidelberg, 2002, p. 535–548. [Online]. Available: http://dx.doi.org/10.1007/3-540-47887-6\\_53
- [52] Z. Cheng, C. Zou, and J. Dong, "Outlier detection using isolation forest and local outlier factor," in *Proceedings of the Conference on Research in Adaptive and Convergent Systems*, ser. RACS '19. ACM, Sep. 2019, p. 161–168. [Online]. Available: http://dx.doi.org/10.1145/3338840.3355641
- [53] S. Ramaswamy, R. Rastogi, and K. Shim, "Efficient algorithms for mining outliers from large data sets," in *Proceedings of the 2000 ACM SIGMOD international conference on Management of data*, ser. SIGMOD/PODS00. ACM, 2000, p. 427–438. [Online]. Available: http://dx.doi.org/10.1145/342009.335437
- [54] H. Song, Z. Jiang, A. Men, and B. Yang, "A hybrid semi-supervised anomaly detection model for high-dimensional data," *Computational Intelligence and Neuroscience*, vol. 2017, p. 1–9, 2017. [Online]. Available: http://dx.doi.org/10.1155/2017/8501683
- [55] J. Hochenbaum, O. S. Vallis, and A. Kejariwal, "Automatic anomaly detection in the cloud via statistical learning," 2017. [Online]. Available: https://arxiv.org/abs/1704.07706
- [56] C.-C. M. Yeh, Y. Zhu, L. Ulanova, N. Begum, Y. Ding, H. A. Dau, D. F. Silva, A. Mueen, and E. Keogh, "Matrix profile i: All pairs similarity joins for time series: A unifying view that includes motifs, discords and shapelets," in 2016 IEEE 16th International Conference on Data Mining (ICDM). IEEE, Dec. 2016, p. 1317–1322. [Online]. Available: http://dx.doi.org/10.1109/ICDM.2016.0179
- [57] F. Rasheed, P. Peng, R. Alhajj, and J. Rokne, Fourier Transform Based Spatial Outlier Mining. Springer Berlin Heidelberg, 2009, p. 317–324. [Online]. Available: http://dx.doi.org/10.1007/978-3-642-04394-9\\_39
- [58] H. Ren, B. Xu, Y. Wang, C. Yi, C. Huang, X. Kou, T. Xing, M. Yang, J. Tong, and Q. Zhang, "Time-series anomaly detection service at microsoft," in *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, ser. KDD '19. ACM, Jul. 2019, p. 3009–3017. [Online]. Available: http://dx.doi.org/10.1145/3292500.3330680
- [59] M. Thill, W. Konen, and T. B"ack, "Time series anomaly detection with discrete wavelet transforms and maximum likelihood estimation," in *Proceedings of the International Conference on Time Series Fore*casting (ITISE 2017), 2017.
- [60] Y. Wang, L. Han, W. Liu, S. Yang, and Y. Gao, "Study on wavelet neural network based anomaly detection in ocean observing data series," *Ocean Engineering*, vol. 186, p. 106129, 2019. [Online]. Available: http://dx.doi.org/10.1016/j.oceaneng.2019.106129
- [61] I. Cong, S. Choi, and M. D. Lukin, "Quantum convolutional neural networks," *Nature Physics*, vol. 15, no. 12, p. 1273–1278, 2019. [Online]. Available: http://dx.doi.org/10.1038/s41567-019-0648-8
- [62] M. Yousif, B. Al-Khateeb, and B. Garcia-Zapirain, "A new quantum circuits of quantum convolutional neural network for x-ray images classification," *IEEE Access*, vol. 12, p. 65660–65671, 2024. [Online]. Available: http://dx.doi.org/10.1109/access.2024.3396411
- [63] M. Munir, S. A. Siddiqui, A. Dengel, and S. Ahmed, "Deepant: A deep learning approach for unsupervised anomaly detection in time series," *IEEE Access*, vol. 7, p. 1991–2005, 2019. [Online]. Available: http://dx.doi.org/10.1109/ACCESS.2018.2886457
- [64] S. Y.-C. Chen, S. Yoo, and Y.-L. L. Fang, "Quantum long short-term memory," 2020. [Online]. Available: https://arxiv.org/abs/2009.01783
- [65] S. Z. Khan, N. Muzammil, S. Ghafoor, H. Khan, S. M. H. Zaidi, A. J. Aljohani, and I. Aziz, "Quantum long short-term memory (qlstm) vs. classical lstm in time series forecasting: a comparative study in solar power forecasting," *Frontiers in Physics*, vol. 12, Oct. 2024. [Online]. Available: http://dx.doi.org/10.3389/fphy.2024.1439180
- [66] P. Malhotra, L. Vig, G. Shroff, and P. Agarwal, "Long short term memory networks for anomaly detection in time series," in European Symposium on Artificial Neural Networks, Computational Intelligence and Machine Learning (ESANN). Bruges, Belgium, 2015. [Online]. Available: https://www.esann.org/sites/default/files/proceedings/legacy/es2015-56.pdf
- [67] K. Hundman, V. Constantinou, C. Laporte, I. Colwell, and T. Soderstrom, "Detecting spacecraft anomalies using lstms and

- nonparametric dynamic thresholding," in *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Many; Data Mining*, ser. KDD '18. ACM, 2018, p. 387–395. [Online]. Available: http://dx.doi.org/10.1145/3219819.3219845
- [68] P. Malhotra, A. Ramakrishnan, G. Anand, L. Vig, P. Agarwal, and G. Shroff, "Lstm-based encoder-decoder for multi-sensor anomaly detection," 2016. [Online]. Available: https://arxiv.org/abs/1607.00148
- [69] D. Park, Y. Hoshi, and C. C. Kemp, "A multimodal anomaly detector for robot-assisted feeding using an lstm-based variational autoencoder," *IEEE Robotics and Automation Letters*, vol. 3, no. 3, p. 1544–1551, Jul. 2018. [Online]. Available: http://dx.doi.org/10.1109/ LRA.2018.2801475
- [70] Z. Xu, W. Yu, C. Zhang, and Y. Chen, "Quantum convolutional long short-term memory based on variational quantum algorithms in the era of nisq," *Information*, vol. 15, no. 4, p. 175, Mar. 2024. [Online]. Available: http://dx.doi.org/10.3390/info15040175
- [71] Y. Chen, A. Khaliq, and K. M. Furati, "Quantum recurrent neural networks with encoder-decoder for time-dependent partial differential equations," 2025. [Online]. Available: https://arxiv.org/abs/2502.13370
- [72] C. Zhang, D. Song, Y. Chen, X. Feng, C. Lumezanu, W. Cheng, J. Ni, B. Zong, H. Chen, and N. V. Chawla, "A deep neural network for unsupervised anomaly detection and diagnosis in multivariate time series data," *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 33, no. 01, p. 1409–1416, Jul. 2019. [Online]. Available: http://dx.doi.org/10.1609/aaai.v33i01.33011409
- [73] A. Ning, T. Y. Li, and N. Y. Chen, "Quantum graph attention network: A novel quantum multi-head attention mechanism for graph learning," 2025. [Online]. Available: https://arxiv.org/abs/2508.17630
- [74] P. Yan, L. Li, and D. Zeng, "Quantum probability-inspired graph attention network for modeling complex text interaction," *Knowledge-Based Systems*, vol. 234, p. 107557, Dec. 2021. [Online]. Available: http://dx.doi.org/10.1016/j.knosys.2021.107557
- [75] Y. Liao, X.-M. Zhang, and C. Ferrie, "Graph neural networks on quantum computers," 2024. [Online]. Available: https://arxiv.org/abs/ 2405 17060
- [76] H. Zhao, Y. Wang, J. Duan, C. Huang, D. Cao, Y. Tong, B. Xu, J. Bai, J. Tong, and Q. Zhang, "Multivariate time-series anomaly detection via graph attention network," 2020. [Online]. Available: https://arxiv.org/abs/2009.02040
- [77] K. Fujii and K. Nakajima, "Quantum reservoir computing: a reservoir approach toward quantum machine learning on near-term quantum devices," 2020. [Online]. Available: https://arxiv.org/abs/2011.04890
- [78] Q. Chen, A. Zhang, T. Huang, Q. He, and Y. Song, "Imbalanced dataset-based echo state networks for anomaly detection," *Neural Computing and Applications*, vol. 32, no. 8, p. 3685–3694, 2018. [Online]. Available: http://dx.doi.org/10.1007/s00521-018-3747-z
- [79] N. Heim and J. E. Avery, "Adaptive anomaly detection in chaotic time series with a spatially aware echo state network," 2019. [Online]. Available: https://arxiv.org/abs/1909.01709
- [80] A. Khoshaman, W. Vinci, B. Denis, E. Andriyash, H. Sadeghi, and M. H. Amin, "Quantum variational autoencoder," *Quantum Science and Technology*, vol. 4, no. 1, p. 014001, Sep. 2018. [Online]. Available: http://dx.doi.org/10.1088/2058-9565/aada1f
- [81] A. Rao, D. Madan, A. Ray, D. Vinayagamurthy, and M. S. Santhanam, "Learning hard distributions with quantum-enhanced variational autoencoders," 2023. [Online]. Available: https://arxiv.org/abs/2305.01592
- [82] Z. Li, W. Chen, and D. Pei, "Robust and unsupervised kpi anomaly detection based on conditional variational autoencoder," in 2018 IEEE 37th International Performance Computing and Communications Conference (IPCCC). IEEE, Nov. 2018, p. 1–9. [Online]. Available: http://dx.doi.org/10.1109/pccc.2018.8710885
- [83] H. Xu, Y. Feng, J. Chen, Z. Wang, H. Qiao, W. Chen, N. Zhao, Z. Li, J. Bu, Z. Li, Y. Liu, Y. Zhao, and D. Pei, "Unsupervised anomaly detection via variational auto-encoder for seasonal kpis in web applications," in *Proceedings of the 2018 World Wide Web Conference on World Wide Web WWW '18*, ser. WWW '18. ACM Press, 2018, p. 187–196. [Online]. Available: http://dx.doi.org/10.1145/3178876.3185996
- [84] M. Sakurada and T. Yairi, "Anomaly detection using autoencoders with nonlinear dimensionality reduction," in *Proceedings of the MLSDA 2014 2nd Workshop on Machine Learning for Sensory Data Analysis*, ser. MLSDA'14. ACM, Dec. 2014, p. 4–11. [Online]. Available: http://dx.doi.org/10.1145/2689746.2689747

- [85] T. Kit, K. Pov, K. Kea, W.-D. Chang, H. C. Park, and Y. Han, "Enhancing a convolutional autoencoder with a quantum approximate optimization algorithm for image noise reduction," 2024. [Online]. Available: https://arxiv.org/abs/2401.06367
- [86] L.-A. Lo, L.-Y. Hsu, and E.-J. Kuo, "Unsupervised feature extraction and reconstruction using parameterized quantum circuits," 2025. [Online]. Available: https://arxiv.org/abs/2502.07667
- [87] J. Orduz, P. Rivas, and E. Baker, "Quantum circuits for quantum convolutions: A quantum convolutional autoencoder," 2025. [Online]. Available: https://arxiv.org/abs/2509.00637
- [88] G. R. Garcia, G. Michau, M. Ducoffe, J. S. Gupta, and O. Fink, "Temporal signals to images: Monitoring the condition of industrial assets with deep learning image processing algorithms," *Proceedings* of the Institution of Mechanical Engineers, Part O: Journal of Risk and Reliability, vol. 236, no. 4, p. 617–627, Feb. 2021. [Online]. Available: http://dx.doi.org/10.1177/1748006x21994446
- [89] J. Bausch, "Recurrent quantum neural networks," *arXiv*, 2020. [Online]. Available: https://arxiv.org/abs/2006.14619
- [90] Y. Takaki, K. Mitarai, M. Negoro, K. Fujii, and M. Kitagawa, "Learning temporal data with a variational quantum recurrent neural network," *Physical Review A*, vol. 103, no. 5, May 2021. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.103.052414
- [91] Y. Su, Y. Zhao, C. Niu, R. Liu, W. Sun, and D. Pei, "Robust anomaly detection for multivariate time series through stochastic recurrent neural network," in *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Conference Mining*, ser. KDD '19. ACM, Jul. 2019, p. 2828–2837. [Online]. Available: http://dx.doi.org/10.1145/3292500.3330672
- [92] Prasanth, "Quantum-enhanced transformer: A variational quantum circuit approach to attention mechanisms," in Gavriel Salvendy International Symposium on Frontiers in Industrial Engineering Purdue Quantum AI, 2025. [Online]. Available: https://openreview.net/ forum?id=tdc6RrmUzh
- [93] Y. Jeong, E. Yang, J. H. Ryu, I. Park, and M. Kang, "Anomalybert: Self-supervised transformer for time series anomaly detection using data degradation scheme," 2023. [Online]. Available: https://arxiv.org/abs/2305.04468
- [94] M. Vogrin, R. Vogrin, S. Groppe, and J. Groppe, "Supervised learning on relational databases with quantum graph neural networks," in VLDB 2024 Workshop: The Second International Workshop on Quantum Data Science and Management (QDSM'24), Guangzhou, China, 2024. [Online]. Available: https://vldb.org/workshops/2024/ proceedings/QDSM/QDSM.5.pdf
- [95] M. Fey, W. Hu, K. Huang, J. E. Lenssen, R. Ranjan, J. Robinson, R. Ying, J. You, and J. Leskovec, "Relational deep learning: Graph representation learning on relational databases," 2023. [Online]. Available: https://arxiv.org/abs/2312.04615
- [96] V. P. Dwivedi, S. Jaladi, Y. Shen, F. López, C. I. Kanatsoulis, R. Puri, M. Fey, and J. Leskovec, "Relational graph transformer," 2025. [Online]. Available: https://arxiv.org/abs/2505.10960
- [97] A. Dalal, M. Bagherimehrab, and B. C. Sanders, "Quantum-assisted support vector regression," *Quantum Information Processing*, vol. 24, no. 3, Mar. 2025. [Online]. Available: http://dx.doi.org/10.1007/ s11128-025-04674-0
- [98] J. Ma and S. Perkins, "Online novelty detection on temporal sequences," in *Proceedings of the ninth ACM SIGKDD international* conference on Knowledge discovery and data mining, ser. KDD03. ACM, 2003, p. 613–618. [Online]. Available: http://dx.doi.org/10. 1145/956750.956828
- [99] G. Park, J. Huh, and D. K. Park, "Variational quantum one-class classifier," *Machine Learning: Science and Technology*, vol. 4, no. 1, p. 015006, Jan. 2023. [Online]. Available: http://dx.doi.org/10.1088/ 2632-2153/acafd5
- [100] J. Ma and S. Perkins, "Time-series novelty detection using oneclass support vector machines," in *Proceedings of the International Joint Conference on Neural Networks*, 2003., ser. IJCNN-03, vol. 3. IEEE, 2003, p. 1741–1745. [Online]. Available: http://dx.doi.org/10.1109/IJCNN.2003.1223670
- [101] A. Macaluso, L. Clissa, S. Lodi, and C. Sartori, "Quantum ensemble for classification," arXiv, 2020. [Online]. Available: https://arxiv.org/abs/2007.01028
- [102] Y. Gao, J. Lin, and C. Brif, "Ensemble grammar induction for detecting anomalies in time series," 2020. [Online]. Available: https://openproceedings.org/2020/conf/edbt/paper\\_45.pdf

- [103] M. Srikumar, C. D. Hill, and L. C. L. Hollenberg, "A kernel-based quantum random forest for improved classification," 2022. [Online]. Available: https://arxiv.org/abs/2210.02355
- [104] L. Breiman, "Random forests," *Machine Learning*, vol. 45, no. 1, p. 5–32, 2001. [Online]. Available: http://dx.doi.org/10.1023/a: 1010933404324
- [105] M.-L. Shyu, S. Chen, K. Sarinnapakorn, and L. Chang, "A novel anomaly detection scheme based on principal component classifier," in *IEEE Foundations and New Directions of Data Mining Workshop, in conjunction with the Third IEEE International Conference on Data Mining (ICDM'03)*, 2003. [Online]. Available: https://apps.dtic.mil/sti/tr/pdf/ADA465712.pdf
- [106] R. Paffenroth, K. Kay, and L. Servi, "Robust pca for anomaly detection in cyber networks," 2018. [Online]. Available: https://arxiv.org/abs/1801.01571
- [107] T. Yairi, Y. Kato, and K. Hori, "Fault detection by mining association rules from house-keeping data," in Proceeding of the 6th International Symposium on Artificial Intelligence and Robotics & Automation in Space: i-SAIRAS 2001, Canadian Space Agency, St-Hubert, Quebec, Canada, 2001. [Online]. Available: https://arabtec-eg.com/pdf/Fault\\_ Detection\\_by\\_Mining\\_Association\\_Ru-1516177895.pdf
- [108] P.-L. Dallaire-Demers and N. Killoran, "Quantum generative adversarial networks," *Physical Review A*, vol. 98, no. 1, Jul. 2018. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.98.012324
- [109] S. Lloyd and C. Weedbrook, "Quantum generative adversarial learning," *Physical Review Letters*, vol. 121, no. 4, Jul. 2018. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.121.040502
- [110] L. Hu, S.-H. Wu, W. Cai, Y. Ma, X. Mu, Y. Xu, H. Wang, Y. Song, D.-L. Deng, C.-L. Zou, and L. Sun, "Quantum generative adversarial learning in a superconducting quantum circuit," *Science Advances*, vol. 5, no. 1, Jan. 2019. [Online]. Available: http://dx.doi.org/10.1126/sciadv.aav2761
- [111] H.-L. Huang, Y. Du, M. Gong, Y. Zhao, Y. Wu, C. Wang, S. Li, F. Liang, J. Lin, Y. Xu, R. Yang, T. Liu, M.-H. Hsieh, H. Deng, H. Rong, C.-Z. Peng, C.-Y. Lu, Y.-A. Chen, D. Tao, X. Zhu, and J.-W. Pan, "Experimental quantum generative adversarial networks for image generation," *Physical Review Applied*, vol. 16, no. 2, Aug. 2021. [Online]. Available: http://dx.doi.org/10.1103/PhysRevApplied. 16.024051
- [112] C. Zoufal, A. Lucchi, and S. Woerner, "Quantum generative adversarial networks for learning and loading random distributions," npj Quantum Information, vol. 5, no. 1, Nov. 2019. [Online]. Available: http://dx.doi.org/10.1038/s41534-019-0223-2
- [113] M. A. Bashar and R. Nayak, "Tanogan: Time series anomaly detection with generative adversarial networks," in 2020 IEEE Symposium Series on Computational Intelligence (SSCI). IEEE, Dec. 2020, p. 1778–1785. [Online]. Available: http://dx.doi.org/10.1109/SSCI47803. 2020.9308512
- [114] V. Markov, V. Rastunkov, A. Deshmukh, D. Fry, and C. Stefanski, "Implementation and learning of quantum hidden markov models," 2022. [Online]. Available: https://arxiv.org/abs/2212.03796
- [115] S. Srinivasan, G. Gordon, and B. Boots, "Learning hidden quantum markov models," 2017. [Online]. Available: https://arxiv.org/abs/1710. 00016
- [116] J. Li, W. Pedrycz, and I. Jamal, "Multivariate time series anomaly detection: A framework of hidden markov models," *Applied Soft Computing*, vol. 60, p. 229–240, Nov. 2017. [Online]. Available: http://dx.doi.org/10.1016/j.asoc.2017.06.035
- [117] S. E. Borujeni and S. Nannapaneni, "Modeling time-dependent systems using dynamic quantum bayesian networks," 2021. [Online]. Available: https://arxiv.org/abs/2107.00713
- [118] S. E. Borujeni, S. Nannapaneni, N. H. Nguyen, E. C. Behrman, and J. E. Steck, "Quantum circuit representation of bayesian networks," *Expert Systems with Applications*, vol. 176, p. 114768, Aug. 2021. [Online]. Available: http://dx.doi.org/10.1016/j.eswa.2021.114768
- [119] C. Moreira and A. Wichert, "Quantum-like bayesian networks for modeling decision making," Frontiers in Psychology, vol. 7, Jan. 2016. [Online]. Available: http://dx.doi.org/10.3389/fpsyg.2016.00011
- [120] A. Ogbechie, J. Díaz-Rozo, P. Larrañaga, and C. Bielza, *Dynamic Bayesian Network-Based Anomaly Detection for In-Process Visual Inspection of Laser Surface Heat Treatment*. Springer Berlin Heidelberg, Nov. 2016, p. 17–24. [Online]. Available: http://dx.doi.org/10.1007/978-3-662-53806-7\\_3

- [121] J.-M. Liang, S.-Q. Shen, M. Li, and L. Li, "Quantum anomaly detection with density estimation and multivariate gaussian distribution," *Physical Review A*, vol. 99, no. 5, May 2019. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.99.052310
- [122] D. H. Useche, O. A. Bustos-Brinez, J. A. Gallego-Mejia, and F. A. González, "Quantum density estimation with density matrices: Application to quantum anomaly detection," *Physical Review A*, vol. 109, no. 3, Mar. 2024. [Online]. Available: http://dx.doi.org/10.1103/ PhysRevA.109.032418
- [123] M. Guo, S. Pan, W. Li, F. Gao, S. Qin, X. Yu, X. Zhang, and Q. Wen, "Quantum algorithm for unsupervised anomaly detection," *Physica A: Statistical Mechanics and its Applications*, vol. 625, p. 129018, Sep. 2023. [Online]. Available: http://dx.doi.org/10.1016/j.physa.2023. 129018
- [124] C. Pan, S. Hou, and C. Cui, "Quantum algorithm for density peak anomaly detection based on knn," in 2024 3rd International Conference on Computing, Communication, Perception and Quantum Technology (CCPQT). IEEE, Oct. 2024, p. 1–5. [Online]. Available: http://dx.doi.org/10.1109/CCPQT64497.2024.00008
- [125] M. Hdaib, S. Rajasegarar, and L. Pan, "Quantum deep learning-based anomaly detection for enhanced network security," *Quantum Machine Intelligence*, vol. 6, no. 1, May 2024. [Online]. Available: http://dx.doi.org/10.1007/s42484-024-00163-2
- [126] R. Kumar, V. Varghese, S. Vidhya, P. Vigneshkumar, S. P. Santhoshkumar, and D. Vikram, "Quantum machine learning-based anomaly detection for cybersecurity systems," in 2025 International Conference on Next Generation Computing Systems (ICNGCS). IEEE, Aug. 2025, p. 1–6. [Online]. Available: http://dx.doi.org/10.1109/ICNGCS64900.2025.11182700
- [127] A. Kukliansky, M. Orescanin, C. Bollmann, and T. Huffmire, "Network anomaly detection using quantum neural networks on noisy quantum computers," *IEEE Transactions on Quantum Engineering*, vol. 5, p. 1–11, 2024. [Online]. Available: http://dx.doi.org/10.1109/ TQE.2024.3359574
- [128] J. Amin, M. A. Anjum, K. Ibrar, M. Sharif, S. Kadry, and R. G. Crespo, "Detection of anomaly in surveillance videos using quantum convolutional neural networks," *Image and Vision Computing*, vol. 135, p. 104710, Jul. 2023. [Online]. Available: http://dx.doi.org/10.1016/j.imavis.2023.104710
- [129] M. Yasar Arafath and A. Niranjil Kumar, "Quantum computing based neural networks for anomaly classification in real-time surveillance videos," *Computer Systems Science and Engineering*, vol. 46, no. 2, p. 2489–2508, 2023. [Online]. Available: http://dx.doi.org/10.32604/csse.2023.035732
- [130] Y.-Y. Shi, L.-M. Duan, and G. Vidal, "Classical simulation of quantum many-body systems with a tree tensor network," *Physical Review A*, vol. 74, no. 2, Aug. 2006. [Online]. Available: http://dx.doi.org/10.1103/PhysRevA.74.022320
- [131] G. Vidal, "Class of quantum many-body states that can be efficiently simulated," *Physical Review Letters*, vol. 101, no. 11, Sep. 2008. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.101.110501
- [132] M. Wang, A. Huang, Y. Liu, X. Yi, J. Wu, and S. Wang, "A quantum-classical hybrid solution for deep anomaly detection," *Entropy*, vol. 25, no. 3, p. 427, Feb. 2023. [Online]. Available: http://dx.doi.org/10.3390/e25030427
- [133] S. Bhowmik and H. Thapliyal, "Quantum machine learning for anomaly detection in consumer electronics," 2024. [Online]. Available: https://arxiv.org/abs/2409.00294
- [134] M. Wang, J. Jiang, and P. V. Coveney, "Parameter-efficient quantum anomaly detection method on a superconducting quantum processor," *Physical Review Research*, vol. 7, no. 4, 2025. [Online]. Available: http://dx.doi.org/10.1103/cv9y-2cnj
- [135] H. Oh and D. K. Park, "Quantum support vector data description for anomaly detection," *Machine Learning: Science and Technology*, vol. 5, no. 3, p. 035052, Aug. 2024. [Online]. Available: http://dx.doi.org/10.1088/2632-2153/ad6be8
- [136] T.-H. Nguyen, V.-A. Truong, H.-V. Nguyen, T.-T. Le, P.-T. Nguyen, and T.-D. Nguyen, Integrating Quantum LSTM and Quantum Detector for Forecasting and Anomaly Detection for Load Data in Low-Voltage Power Distribution Networks. Springer Nature Switzerland, 2024, p. 750–757. [Online]. Available: http://dx.doi.org/10.1007/978-3-031-67195-1\_82
- [137] W. Huang, J. Zhang, H. Sun, H. Ma, and Z. Cai, "An anomaly detection method based on normalized mutual information feature

- selection and quantum wavelet neural network," *Wireless Personal Communications*, vol. 96, no. 2, p. 2693–2713, Jun. 2017. [Online]. Available: http://dx.doi.org/10.1007/s11277-017-4320-2
- [138] A. Hammad, M. M. Nojiri, and M. Yamazaki, "Quantum similarity learning for anomaly detection," *Journal of High Energy Physics*, vol. 2025, no. 2, Feb. 2025. [Online]. Available: http://dx.doi.org/10.1007/ JHEP02(2025)081
- [139] T. Ahmad, S. Khan, N. Nigar, E. M. Obaid, and S. Naaz, "Quantum reservoir-based intrusion detection for edge-iot systems," *IEEE Transactions on Consumer Electronics*, p. 1–1, 2025. [Online]. Available: http://dx.doi.org/10.1109/TCE.2025.3618827
- [140] V. S. Ngairangbam, M. Spannowsky, and M. Takeuchi, "Anomaly detection in high-energy physics using a quantum autoencoder," *Physical Review D*, vol. 105, no. 9, May 2022. [Online]. Available: http://dx.doi.org/10.1103/PhysRevD.105.095004
- [141] A. Sakhnenko, C. O'Meara, K. J. B. Ghosh, C. B. Mendl, G. Cortiana, and J. Bernabé-Moreno, "Hybrid classical-quantum autoencoder for anomaly detection," *Quantum Machine Intelligence*, vol. 4, no. 2, Sep. 2022. [Online]. Available: http://dx.doi.org/10.1007/ s42484-022-00075-z
- [142] J. Z. Ludmir, S. Rebello, J. Ruiz, and T. Patel, "Quorum: Zero-training unsupervised anomaly detection using quantum autoencoders," 2025. [Online]. Available: https://arxiv.org/abs/2504.13113
- [143] S. Kundu, D. Mishra, N. Tarasia, R. K. Lenka, and R. K. Barik, "Qea-fad: Quantum enhanced autoencoders for anomaly detection in finance and healthcare," in 2025 International Conference on Networks and Cryptology (NETCRYPT). IEEE, May 2025, p. 1280–1285. [Online]. Available: http://dx.doi.org/10.1109/NETCRYPT65877.2025.11102801
- [144] J. Y. Araz and M. Spannowsky, "The role of data embedding in quantum autoencoders for improved anomaly detection," 2024. [Online]. Available: https://arxiv.org/abs/2409.04519
- [145] K. J. B. Ghosh and S. Ghosh, "Exploring exotic configurations with anomalous features with deep learning: Application of classical and quantum-classical hybrid anomaly detection," *Physical Review B*, vol. 108, no. 16, Oct. 2023. [Online]. Available: http://dx.doi.org/10.1103/PhysRevB.108.165408
- [146] S. Bhowmik and H. Thapliyal, "Transfer learning based hybrid quantum neural network model for surface anomaly detection," 2024. [Online]. Available: https://arxiv.org/abs/2409.00228
- [147] K. Tscharke, S. Issel, and P. Debus, "Semisupervised anomaly detection using support vector regression with quantum kernel," in 2023 IEEE International Conference on Quantum Computing and Engineering (QCE). IEEE, Sep. 2023, p. 611–620. [Online]. Available: http://dx.doi.org/10.1109/QCE57702.2023.00075
- [148] K. Tscharke, M. Wendlinger, S. Issel, and P. Debus, "Quantum support vector regression for robust anomaly detection," 2025. [Online]. Available: https://arxiv.org/abs/2505.01012
- [149] V. Belis, K. A. Woźniak, E. Puljak, P. Barkoutsos, G. Dissertori, M. Grossi, M. Pierini, F. Reiter, I. Tavernelli, and S. Vallecorsa, "Quantum anomaly detection in the latent space of proton collision events at the lhc," *Communications Physics*, vol. 7, no. 1, Oct. 2024. [Online]. Available: http://dx.doi.org/10.1038/s42005-024-01811-6
- [150] O. Kyriienko and E. B. Magnusson, "Unsupervised quantum machine learning for fraud detection," 2022. [Online]. Available: https://arxiv.org/abs/2208.01203
- [151] D. Pranjić, F. Knäble, P. Kunst, D. Kutzias, D. Klau, C. Tutschku, L. Simon, M. Kraus, and A. Abedi, "Unsupervised quantum anomaly detection on noisy quantum processors," 2024. [Online]. Available: https://arxiv.org/abs/2411.16970
- [152] T. Cultice, M. S. H. Onim, A. Giani, and H. Thapliyal, "Anomaly detection for real-world cyber-physical security using quantum hybrid support vector machines," 2024. [Online]. Available: https://arxiv.org/abs/2409.04935
- [153] T. Tomono and K. Tsujimura, "Potential of multi-anomalies detection using quantum machine learning," 2025. [Online]. Available: https://arxiv.org/abs/2510.07055
- [154] K.-C. Chen, S. Y.-C. Chen, C.-Y. Liu, and K. K. Leung, "Federated quantum kernel learning for anomaly detection in multivariate iot timeseries," 2025. [Online]. Available: https://arxiv.org/abs/2511.02301
- [155] M. Kölle, A. Ahouzi, P. Debus, R. Müller, D. Schuman, and C. Linnhoff-Popien, "Towards efficient quantum anomaly detection: One-class syms using variable subsampling and randomized measurements," 2023. [Online]. Available: https://arxiv.org/abs/2312.09174

- [156] M. Grossi, N. Ibrahim, V. Radescu, R. Loredo, K. Voigt, C. von Altrock, and A. Rudnik, "Mixed quantum-classical method for fraud detection with quantum feature selection," *IEEE Transactions on Quantum Engineering*, vol. 3, p. 1–12, 2022. [Online]. Available: http://dx.doi.org/10.1109/TQE.2022.3213474
- [157] L. Moro and E. Prati, "Anomaly detection speed-up by quantum restricted boltzmann machines," *Communications Physics*, vol. 6, no. 1, Sep. 2023. [Online]. Available: http://dx.doi.org/10.1038/ s42005-023-01390-y
- [158] J. Stein, D. Schuman, M. Benkard, T. Holger, W. Sajko, M. Kölle, J. Nüßlein, L. Sünkel, O. Salomon, and C. Linnhoff-Popien, "Exploring unsupervised anomaly detection with quantum boltzmann machines in fraud detection," in *Proceedings of the 16th International Conference on Agents and Artificial Intelligence*. SCITEPRESS Science and Technology Publications, 2024, p. 177–185. [Online]. Available: http://dx.doi.org/10.5220/0012326100003636
- [159] D. Herr, B. Obert, and M. Rosenkranz, "Anomaly detection with variational quantum generative adversarial networks," *Quantum Science and Technology*, vol. 6, no. 4, p. 045004, Jul. 2021. [Online]. Available: http://dx.doi.org/10.1088/2058-9565/ac0d4d
- [160] E. Bermot, C. Zoufal, M. Grossi, J. Schuhmacher, F. Tacchino, S. Vallecorsa, and I. Tavernelli, "Quantum generative adversarial networks for anomaly detection in high energy physics," in 2023 IEEE International Conference on Quantum Computing and Engineering (QCE). IEEE, Sep. 2023, p. 331–341. [Online]. Available: http://dx.doi.org/10.1109/QCE57702.2023.00045
- [161] R. Kailasanathan, W. R. Clements, M. R. Boskabadi, S. M. Gibford, E. Papadakis, C. J. Savoie, and S. S. Mansouri, "Quantum enhanced ensemble gans for anomaly detection in continuous biomanufacturing," 2025. [Online]. Available: https://arxiv.org/abs/2508.21438
- [162] B. Kalfon, S. Cherkaoui, J. Laprade, O. Ahmad, and S. Wang, "Successive data injection in conditional quantum gan applied to time series anomaly detection," *IET Quantum Communication*, vol. 5, no. 3, p. 269–281, Feb. 2024. [Online]. Available: http://dx.doi.org/10.1049/qtc2.12088
- [163] N. Mathur, B. Coyle, N. Jain, S. Raj, A. Tandon, J. S. Krauser, and R. Stoessel, "Bayesian quantum orthogonal neural networks for anomaly detection," 2025. [Online]. Available: https://arxiv.org/abs/2504.18103
- [164] D. S. Bagaev, M. A. Gavreev, A. S. Mastiukova, A. K. Fedorov, and N. A. Nemkov, "Regularizing quantum loss landscapes by noise injection," 2025. [Online]. Available: https://arxiv.org/abs/2505.08759
- [165] L. Domingo, G. Carlo, and F. Borondo, "Taking advantage of noise in quantum reservoir computing," *Scientific Reports*, vol. 13, no. 1, May 2023. [Online]. Available: http://dx.doi.org/10.1038/ s41598-023-35461-5
- [166] E. T. Escudero, D. A. Alamo, O. M. Gómez, and P. G. Bringas, Assessing the Impact of Noise on Quantum Neural Networks: An Experimental Analysis. Springer Nature Switzerland, 2023, p. 314–325. [Online]. Available: http://dx.doi.org/10.1007/978-3-031-40725-3\\_27
- [167] A. Cicero, M. A. Maleki, M. W. Azhar, A. F. Kockum, and P. Trancoso, "Simulation of quantum computers: Review and acceleration opportunities," 2024. [Online]. Available: https://arxiv.org/abs/2410.12660
- [168] T. Häner and D. S. Steiger, "0.5 petabyte simulation of a 45-qubit quantum circuit," in *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, ser. SC '17. ACM, Nov. 2017, p. 1–10. [Online]. Available: http://dx.doi.org/10.1145/3126908.3126947
- [169] R. Li, B. Wu, M. Ying, X. Sun, and G. Yang, "Quantum supremacy circuit simulation on sunway taihulight," 2018. [Online]. Available: https://arxiv.org/abs/1804.04797
- [170] H. De Raedt, J. Kraus, A. Herten, V. Mehta, M. Bode, M. Hrywniak, K. Michielsen, and T. Lippert, "Universal quantum simulation of 50 qubits on europe's first exascale supercomputer harnessing its heterogeneous cpu-gpu architecture," 2025. [Online]. Available: https://arxiv.org/abs/2511.03359
- [171] F. Pan, K. Chen, and P. Zhang, "Solving the sampling problem of the sycamore quantum circuits," *Physical Review Letters*, vol. 129, no. 9, 2022. [Online]. Available: http://dx.doi.org/10.1103/PhysRevLett.129. 090502
- [172] S. Patra, S. S. Jahromi, S. Singh, and R. Orús, "Efficient tensor network simulation of ibm's largest quantum processors," *Physical*

- Review Research, vol. 6, no. 1, Mar. 2024. [Online]. Available: http://dx.doi.org/10.1103/PhysRevResearch.6.013326
- [173] P. Villalobos, A. Ho, J. Sevilla, T. Besiroglu, L. Heim, and M. Hobbhahn, "Will we run out of data? limits of llm scaling based on human-generated data," 2022. [Online]. Available: https://arxiv.org/abs/2211.04325
- [174] J. D. Hamilton, "A new approach to the economic analysis of nonstationary time series and the business cycle," *Econometrica*, vol. 57, no. 2, p. 357–384, 1989.
- [175] H. Zhang and D. V. Vargas, "A survey on reservoir computing and its interdisciplinary applications beyond traditional machine learning," *IEEE Access*, vol. 11, pp. 81 033–81 070, 2023.
- [176] P. Mujal, R. Martínez-Peña, J. Nokkala, J. García-Beni, G. L. Giorgi, M. C. Soriano, and R. Zambrini, "Opportunities in quantum reservoir computing and extreme learning machines," *Advanced Quantum Technologies*, vol. 4, no. 8, p. 2100027, 2021. [Online]. Available: https://advanced.onlinelibrary.wiley.com/doi/abs/10.1002/qute.202100027
- [177] M. Kornjača, H.-Y. Hu, C. Zhao, J. Wurtz, P. Weinberg, M. Hamdan, A. Zhdanov, S. H. Cantu, H. Zhou, R. A. Bravo, K. Bagnall, J. I. Basham, J. Campo, A. Choukri, R. DeAngelo, P. Frederick, D. Haines, J. Hammett, N. Hsu, M.-G. Hu, F. Huber, P. N. Jepsen, N. Jia, T. Karolyshyn, M. Kwon, J. Long, J. Lopatin, A. Lukin, T. Macri, O. Marković, L. A. Martínez-Martínez, X. Meng, E. Ostroumov, D. Paquette, J. Robinson, P. S. Rodriguez, A. Singh, N. Sinha, H. Thoreen, N. Wan, D. Waxman-Lenz, T. Wong, K.-H. Wu, P. L. S. Lopes, Y. Boger, N. Gemelke, T. Kitagawa, A. Keesling, X. Gao, A. Bylinskii, S. F. Yelin, F. Liu, and S.-T. Wang, "Large-scale quantum reservoir learning with an analog quantum computer," 2024. [Online]. Available: https://arxiv.org/abs/2407.02553
- [178] M. A. Nielsen and I. L. Chuang, Quantum computation and quantum information, 10th ed. Cambridge; New York: Cambridge University Press, 2010.
- [179] V. Uotila, I. Salmenpera, L. Becker, A. Meijer van de Griend, A. R. Shinde, and J. K. Nurminen, "Perspectives on Utilization of Measurements in Quantum Algorithms," in 2025 IEEE International Conference on Quantum Software (QSW). Los Alamitos, CA, USA: IEEE Computer Society, Jul 2025, pp. 1–12. [Online]. Available: https://doi.ieeecomputersociety.org/10.1109/QSW67625.2025.00016
- [180] R. Aroussi, "yfinance: Download market data from Yahoo! Finance's API," https://github.com/ranaroussi/yfinance, 2025, open-source Python library. Accessed: 2025-11-03.
- [181] R. A. Martin, "Pyportfolioopt: portfolio optimization in python," *Journal of Open Source Software*, vol. 6, no. 61, p. 3066, 2021. [Online]. Available: https://doi.org/10.21105/joss.03066
- [182] N. Trouvain, L. Pedrelli, T. T. Dinh, and X. Hinaut, "Reservoirpy: An efficient and user-friendly library to design echo state networks," in *Artificial Neural Networks and Machine Learning – ICANN 2020*, I. Farkaš, P. Masulli, and S. Wermter, Eds. Cham: Springer International Publishing, 2020, pp. 494–505.
- [183] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay, "Scikit-learn: Machine learning in Python," *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.
- [184] A. Zhang, H. Xie, Y. Gao, J.-N. Yang, Z. Bao, Z. Zhu, J. Chen, N. Wang, C. Zhang, J. Zhong, S. Xu, K. Wang, Y. Wu, F. Jin, X. Zhu, Y. Zou, Z. Tan, Z. Cui, F. Shen, T. Li, Y. Han, Y. He, G. Liu, J. Shen, H. Wang, Y. Wang, H. Dong, J. Deng, H. Li, Z. Wang, C. Song, Q. Guo, P. Zhang, Y. Li, and H. Wang, "Demonstrating quantum error mitigation on logical qubits," 2025. [Online]. Available: https://arxiv.org/abs/2501.09079
- [185] G. Verdon, T. McCourt, E. Luzhnica, V. Singh, S. Leichenauer, and J. Hidary, "Quantum graph neural networks," 2019. [Online]. Available: https://arxiv.org/abs/1909.12264
- [186] J. Biamonte, P. Wittek, N. Pancotti, P. Rebentrost, N. Wiebe, and S. Lloyd, "Quantum machine learning," *Nature*, vol. 549, no. 7671, p. 195–202, Sep. 2017. [Online]. Available: http://dx.doi.org/10.1038/nature23474