
THE $4/\delta$ BOUND: DESIGNING PREDICTABLE LLM-VERIFIER SYSTEMS FOR FORMAL METHOD GUARANTEE

Pierre Dantas

Dept. of Computer Science
The University of Manchester, UK
pierre.dantas@gmail.com

Lucas Cordeiro

Dept. of Computer Science
The University of Manchester, UK
lucas.cordeiro@manchester.ac.uk

Youcheng Sun

Dept. of Computer Science
The University of Manchester, UK
techieyoucheng@gmail.com

Waldir Junior

Dept. of Electrical Engineering
Federal University of Amazonas (UFAM), Brazil
waldirjr@ufam.edu.br

December 3, 2025

ABSTRACT

The idea of using Formal Verification tools with large language models (LLMs) has enabled scaling software verification beyond manual workflows. However, current methods remain unreliable. Without a solid theoretical footing, the refinement process can wander; sometimes it settles, sometimes it loops back, and sometimes it breaks away from any stable trajectory. This work bridges this critical gap by developing an LLM-Verifier Convergence Theorem, providing the first formal framework with provable guarantees for termination and convergence. We model the interaction between the LLM and the verifier as a discrete-time Markov Chain, with state transitions determined by a key parameter: the error-reduction probability (δ). The procedure reaching the *Verified* state almost surely demonstrates that the program terminates for any $\delta > 0$, with an expected iteration count bounded by $\mathbb{E}[n] \leq 4/\delta$. We then stress-tested this prediction in an extensive empirical campaign comprising more than 90,000 trials. The empirical results match the theory with striking consistency. Every single run reached verification, and the convergence factor clustered tightly around $C_f \approx 1.0$. Consequently, the bound mirrors the system's actual behavior. The evidence is sufficiently robust to support dividing the workflow into three distinct operating zones: marginal, practical, and high-performance. Consequently, we establish the design thresholds with absolute confidence. Together, the theoretical guarantee and the experimental evidence provide a clearer architectural foundation for LLM-assisted verification. Heuristic tuning no longer has to be carried out by the system. Engineers gain a framework that supports predictable resource planning and performance budgeting, precisely what is needed before deploying these pipelines into safety-critical software environments.

Keywords Formal Verification · Large Language Models · SMT Solvers · Bounded Model Checking · Automated Program Repair · Specification Synthesis · ESBMC

1 Introduction

Formal software verification is essential in areas such as aerospace [1], medical devices [2], and autonomous systems [3]. It uses mathematical methods to check that systems work as intended. For example, techniques such as Bounded Model Checking (BMC) [4] analyze software to detect hidden problems, such as numerical errors and memory-safety issues. Regular testing often misses these kinds of issues. Tools such as Efficient SMT-based Context-Bounded Model Checker (ESBMC) [5, 6] help with this process [7]. However, a significant specification bottleneck limits widespread adoption: the extensive manual effort required to formulate precise formal specifications from ambiguous requirements [8].

We now have a few solid ways to handle this problem, thanks to the recent arrival of large language models (LLMs). These models are proving incredibly useful; for example, they can easily generate formal specifications [9], construct tricky loop invariants [10], and significantly speed up automated program repair [11]. Despite the promising results mentioned, a central problem remains: the process that improves the use of LLMs and verifiers does not always guarantee precise and reliable outcomes [9–11]. Although researchers have developed strong theoretical foundations for both LLMs [12, 13] and Formal Verification tools [4, 5, 7] individually, they have not yet mathematically analyzed how these components behave when used together in an iterative process [14, 15]. This gap causes the system to behave unpredictably, making it unsafe to use in critical areas.

The Fundamental Gap addressed in this work: Unpredictable Artificial Intelligence (AI)-Verifier Interactions. We cannot predict how AI and Verifiers will interact. Mixing statistical AI components with reliable, deterministic verification tools creates a core conflict that current methods have not solved mathematically. Even though specific tests look promising [10, 16], we do not have a reliable convergence theory for those repeated refinement cycles, which is now a trend in the field. This missing piece creates three problems that stop us from using these systems in real-world applications:

1. **Unpredictable Termination:** Without mathematical guarantees that it will converge, the refinement process can get stuck in a loop, endlessly oscillating between states, or wander off track. This unpredictability makes it unreliable when applied to scenarios such as flight control or medical systems, where a predictable, guaranteed end to the process is mandatory.
2. **Unbounded Resource Consumption:** The absence of a defined step limit precludes the configuration of reliable timeouts or the accurate allocation of computing resources. In a real-world system, this is a significant risk – the process could run out of control, consuming all available memory or processing time until the entire application crashes.
3. **Lack of Performance Predictability:** It is currently a guessing game. Engineers have no systematic way to connect a LLMs’ capabilities to its automated verification performance, forcing them to make architectural decisions through trial and error rather than on solid mathematical principles.

These limitations can lead to serious problems in the real world. In particular, they can make systems less safe, waste computer resources, create challenges for getting approved, and make it hard for engineers to make important design decisions without enough information.

Our Proposed Approach: A Convergence Theorem for LLM-Verification. We tackle the problem of guarantees using a new Convergence Theorem. We found that even though the LLM has some randomness, the way we improve it follows a pattern such as a Markov Chain. By seeing it this way, we can show that it will definitely come to an end, rather than relying on uncertain guesses [17, 18].

Simply put, δ quantifies an LLM’s single-attempt success rate for a verification task. This parameter gives important information to help understand how the model works. It allows users to feel confident using the system in serious engineering projects. The value of δ is not only a theory; real measurements from actual tasks show that it is useful [10]. For example, it ranges from 0.35 for making things that stay the same to 0.65 for creating proofs [19].

Section 4.2 contains the formal statement of our Theorem, which establishes that for any $\delta > 0$:

- If the program terminates and all reachable states are checked, the process is guaranteed to eventually reach the **Verified** state, regardless of its initial state.
- The process is efficient. We can guarantee that the average number of steps needed will never exceed $4/\delta$, providing a worst-case ceiling for resource planning.
- The likelihood of the process needing more than k steps drops off exponentially. This sharp decline enables reliable timeouts with high confidence.

Together, these results directly address the core challenges we identified here: our framework guarantees the process will finish, imposes a hard limit on computational costs, and provides engineers with a mathematical basis, via the δ parameter, for predicting system performance.

To confirm our framework, we conducted an extensive study involving more than 90,000 simulations spanning the range 0.1 to 0.9. Our experimental results strongly support our theoretical predictions and show three distinct behavior patterns. Each of these patterns has significant implications for how real-world systems should be designed (see Table 1).

Paper Organization: This paper is structured as follows: Section 2 reviews related work. Section 3 provides theoretical background. Section 4 presents our convergence theory. Section 5 details our validation methodology. Section 6

Table 1: Performance regions based on δ

Region	Range	Description
Marginal	$\delta < 0.3$	Suitable for applications where performance requirements are relaxed.
Practical	$0.3 \leq \delta \leq 0.6$	Optimal for real-world verification tasks with balanced performance.
High-Performance	$\delta > 0.6$	Ideal for safety-critical systems requiring fast convergence.

discusses experimental results. Section 7 interprets these findings. Finally, Section 8 summarizes the work and outlines future directions.

2 Related Work

The integration of LLMs into Formal Verification is a rapidly developing field built upon decades of foundational work in Formal Methods. This review examines current uses of LLMs, showing how practitioners integrate them, how these systems are structured, and how they perform. It shows how the field has developed over time, from traditional methods to modern systems that consider available resources.

1. **Foundational and Classical Formal Methods (1999–2021):** Early work centered on developing core verification technologies, such as BMC [4], and applying these techniques to safety-critical domains like medical devices [2], aerospace [1], and autonomous systems [3]. However, the widespread adoption of these powerful methods stalled because the specification bottleneck forced practitioners to spend extensive manual effort translating ambiguous natural-language requirements into precise formal specifications [8]. The development of advanced tools, such as ESBMC [5], accelerated progress in the field; later updates expanded its capabilities, including support for C++ templates [20], and provided a strong software foundation. This foundation is essential for combining new statistical learning methods.
2. **LLM Integration and Pattern Convergence (2023–2024):** The rise of strong LLMs has started a new phase in research. This research is quickly focusing on three main ways to use these models together:
 - (a) **Automated Specification and Invariant Generation:** This method uses LLMs to create formal rules and guidelines from everyday language or code, helping practitioners address a longstanding challenge in Formal Methods. Initially, the focus was on producing SystemVerilog Assertions to verify the hardware, which significantly improved coverage of the checks [21]. Later work in 2024 also utilized LLM-generated invariants to improve the efficiency of BMC itself [10].
 - (b) **Proof Synthesis:** This pattern involves employing LLMs to generate full or partial proofs for interactive theorem provers. Work in this field has progressed quickly. For example, systems like Baldur [19] have achieved high accuracy rates and improved performance in environments such as Isabelle/HOL. Subsequent research in 2024 further enhanced proof synthesis in languages such as Dafny [22] by using iterative feedback and Chain-of-Thought prompting [23, 24].
 - (c) **Dynamic, Feedback-Driven Approaches:** These systems deploy LLMs in a closed loop with verifiers, using error feedback to refine artifacts like specifications or proofs iteratively. Researchers established this approach using models like Generative Pre-trained Transformer-4 (GPT-4) alongside deductive verifiers [14], and specialized frameworks such as Formal Verification with Evolutionary Learning (FVEL) later emerged to support fine-tuned theorem proving [16].
3. **Closed-Loop Systems (2025–Present):** Recent studies are working on creating systems that can adjust and improve themselves automatically. A good example of this is the ESBMC-AI framework, which helps fix code written in C using BMC [11, 25, 26]. Concurrently, research advanced property generation for C code [27], retrieval-augmented generation (RAG) for smart contracts [9], automated function modeling [28], and Rust static analysis [29].

The LLM-Verifier Convergence Theorem establishes the formal conditions under which a sequence of LLM-generated approximations converges to a verifier-correct solution. It moves beyond the empirical question of whether a specific prompt or fine-tuning technique works and provides a theoretical basis for why and how these methods succeed. With this foundation, we can recast the challenge of model compression not merely as preserving statistical fidelity, but as maintaining the logical convergence properties defined by the Theorem.

Table 2 summarizes the significant advancements in LLM-accelerated Formal Verification and model compression.

Table 2: Chronological advancement in LLM-accelerated Formal Verification

Advancement	Description & Key Features	Impact / Results
Foundations and Early Integration (2023)		
Automated Proof Generation and Repair (Baldur) [19]	LLMs generate and repair whole proofs for Formal Verification (e.g., Isabelle/HOL)	State-of-the-art proof synthesis; 65.7% of theorems proved automatically with Baldur+Thor
Safety and Trustworthiness Verification [15]	Verification & validation frameworks for LLMs, including runtime monitoring and regulatory compliance	Identifies gaps and proposes rigorous methods for LLM safety and trustworthiness
Prompt Compression (LLM-Lingua) [30]	Coarse-to-fine prompt compression for LLMs, maintaining semantic integrity at high compression ratios	Up to 20× prompt compression with little performance loss, accelerating inference
Hybrid Systems and Early Optimization (2024)		
Model Compression Techniques [31–37]	Quantization, pruning, knowledge distillation, low-rank approximation, and hybrid methods for LLMs	Enable LLM deployment in resource-limited settings; up to 70%+ compression with minimal loss
LLM-Driven Invariant Generation for BMC [10]	LLMs generate loop invariants for BMC, avoiding loop unrolling	Improves verification coverage for programs with unbounded loops using ESBMC
Fine-Tuning and Inference Optimization [32, 34]	Parameter-efficient fine-tuning (e.g., low-rank adaptation (LoRA)), and inference optimization	Reduces resource overhead for adapting and deploying LLMs
Advanced Closed-Loop and Specialized Compression (2025)		
Hybrid Verification (LLMs + Formal Methods) [14, 38, 39]	Combines LLMs’ cognitive abilities with formal rigor for bug detection, invariant generation, and validation	Hybrid systems address scalability and soundness, outperforming standalone methods
ESBMC-AI: LLM + Bounded Model Checking [11, 25]	Integrates LLMs with ESBMC for automated vulnerability detection and repair in C code	High-accuracy repair of buffer overflows, pointer errors
Symbolic Compression for Interpretability [40]	Formal symbolic compression framework for code generation and logical reasoning tasks	Achieves 78.3% token compression and improves logical traceability by 62%
Efficient Self-Attention with Smart Pruning [35]	Pruning and matrix folding in transformer layers for sustainable LLMs	70% overall model compression with stable or improved performance

3 Theoretical Background

This section establishes the theoretical foundation for the LLM-Verifier Convergence Theorem. We first detail the verification principles of the ESBMC framework, which provides the deterministic foundation for our model (Section 3.2). We then characterize the integration of LLMs as generators of verification artifacts (Sections 3.3 and 3.4). The main idea of our theory is to explain the refinement process using a model called an absorbing Markov Chain (see Section 3.1.3). The model builds on a concept called the error-reduction probability (δ). It helps us show that the process will eventually solve, and it allows us to determine that we need about $4/\delta$ steps to do so. Our theory explains the refinement loop using an absorbing Markov Chain (see Section 3.1.3). This model builds on a concept called the error-reduction probability (δ). It helps us show that the process is likely to improve over time and allows us to determine how many steps we need to take, namely $4/\delta$.

3.1 Mathematical Foundation

This subsection establishes the mathematical basis for simulating the convergence time, $\mathbb{E}[n]$, by leveraging the properties of the Geometric distribution applied to the Markov Chain’s transient states.

3.1.1 Modeling State Transitions with the Geometric Distribution

Our methodology models the LLM-Verifier system as a five-state absorbing Markov Chain with four transient states (s_1, s_2, s_3, s_4) and one absorbing state (s_5 , **Verified**). The simulation’s efficiency relies on characterizing the time spent in each transient state.

- **Residence Time (M_j):** The duration of a single stay in a transient state j is measured in discrete steps, or iterations. The number of iterations required to exit state j , denoted M_j , is modeled by a Geometric random variable. This distribution counts the number of independent Bernoulli trials (in this case, iterations) required to achieve the first “success”. We define a success as a transition out of state j , and this transition occurs with probability δ in each iteration, as shown in (1).

$$P(M_j = k) = (1 - \delta)^{k-1} \delta, \quad k \in \{1, 2, 3, \dots\} \quad (1)$$

- **Expected Single-State Time:** The average number of interactions needed to exit a single state is the expected value of the Geometric distribution, as shown in Eq. (2).

$$\mathbb{E}[M_j] = \frac{1}{\delta} \quad (2)$$

3.1.2 The Vectorized Markov Chain and Total Convergence Time

The total time to reach the absorbing state, T , is the sum of the independent residence times spent in the four transient states. This summation is the basis for the computational efficiency of the Vectorized Monte Carlo (VMC) approach.

- **Vectorization Basis:** Since the times M_1, M_2, M_3, M_4 are random and do not affect each other, we can find the total time for the i -th test, which we call T_i , by simply adding these times together, instead of simulating each step one by one., as shown in Eq. (3).

$$T_i = M_{i,1} + M_{i,2} + M_{i,3} + M_{i,4} \quad (3)$$

- **Total Expected Convergence Time ($\mathbb{E}[n]$):** According to the property of expectation, the average total interaction, denoted as $\mathbb{E}[n]$, is equal to the sum of the average times spent in each of the four stages., as shown in Eq. (4).

$$\mathbb{E}[n] = \sum_{j=1}^4 \mathbb{E}[M_j] = \frac{1}{\delta} + \frac{1}{\delta} + \frac{1}{\delta} + \frac{1}{\delta} = \frac{4}{\delta} \quad (4)$$

This equation, $\mathbb{E}[n] \leq 4/\delta$, provides the core theoretical bound and is the target for empirical validation using the large-scale VMC simulation.

3.1.3 Markovian Properties of LLM-Verifier Interactions

The basis of our convergence theory is the description of how LLM verifiers interact using an absorbing Markov Chain [41, 42]. In this system, there are specific states known as absorbing states that, once reached, cannot be changed or left.

In our framework, the system reaches the **Verified** state as its final state. The **Unverified** and **CandidateGenerated** states are temporary states that the system can pass through before reaching the final state. Recent studies show that LLMs naturally follow these state changes [17, 18], which matches well with Formal Methods that describe “verification” as a process moving through different states [7, 43].

Several lines of research support this Markovian characterization:

- **LLM Reasoning as State Transitions:** Chain-of-Thought reasoning in LLMs naturally follows patterns of moving from one state to another. Each reasoning step depends only on the step before it, which matches the Markov property [17, 24, 44].

- **Verification Processes as State Machines:** The modeling of verification workflows as state transition systems is well-established in Formal Methods literature [7, 8, 43]. Our work extends this foundation to incorporate the probabilistic nature of LLM interactions.
- **Probabilistic Program Analysis:** Previous research on probabilistic programming [45] and probabilistic theorem proving [46] offers a strong theoretical foundation for studying systems with random components. These ideas apply directly to LLM-based refinement using Markov Chain models.

In our framework, the Markov property manifests through:

- **State Dependence:** The probability of generating a correct verification artifact depends only on the current verification state and the LLM’s capability parameter δ .
- **Memoryless Transitions:** Each refinement attempt is independent of the specific history of previous attempts, conditioned on the current state.
- **Stationary Transition Probabilities:** The error-reduction probability δ remains constant throughout the refinement process for a given LLM-verifier pair.

Absorbing Markov Chain Theory Two conditions formally define an absorbing Markov Chain: (i) there exists at least one absorbing state, and (ii) from every state it is possible to reach an absorbing state in finite steps. States that are not absorbing are called transient states [41, 42].

This formulation extends the classical Kripke structure $M = (S, S_0, R, L)$ used in model checking by introducing probabilistic transitions (see Section 3.2.3). The two frameworks connect clearly: the set of states S contains both temporary and final states, the initial states S_0 represent where verification begins, and the transition relation R covers probabilistic moves between states.

The transition matrix P for a chain with t transient states and r absorbing states has the canonical form, as shown in Eq. (5), where Q is a $t \times t$ matrix describing transitions between transient states, R is a $t \times r$ matrix describing transitions from transient to absorbing states, and I_r is the $r \times r$ identity matrix.

$$P = \begin{bmatrix} Q & R \\ 0 & I_r \end{bmatrix} \quad (5)$$

The fundamental matrix $N = (I_t - Q)^{-1}$ provides the expected number of visits to transient states before absorption. The expected number of steps until absorption starting from transient state i is given by the i -th entry of the vector, as shown in Eq. (6), where $\mathbf{1}$ is a vector of ones.

$$\mathbf{t} = N\mathbf{1} \quad (6)$$

For a specific chain structure analyzed in this paper, solving for the expected number of steps, $\mathbb{E}[n]$, yields the exact result $\mathbb{E}[n] = (4 - 3\delta)/\delta$. We use this expression to derive a conservative upper bound for resource estimation, as shown in Eq. (7).

$$\mathbb{E}[n] = \frac{4 - 3\delta}{\delta} = \frac{4}{\delta} - 3 \leq \frac{4}{\delta} \quad (7)$$

The probability of absorption in state j when starting from transient state i is given by the (i, j) -entry of the matrix $B = NR$. For large k , P^k approximates these absorption probabilities, with $\lim_{k \rightarrow \infty} P^k$ revealing the long-term absorption behavior.


We base our convergence analysis of LLM-verifier refinement loops on this theoretical framework. In it, the **Verified** state is the final absorbing state, while the refinement states are temporary (transient) states. This framework extends traditional verification by adding probabilistic elements to capture the random behavior of LLM-based refinement.

3.2 ESBMC Formal Verification Principles

Formal Verification uses math to prove that software works correctly according to given rules, checking all possible ways the software can run. Tools like ESBMC follow a straightforward process: they first transform the code into simpler forms, then apply BMC using techniques such as loop unrolling and Static Single Assignment (SSA), and finally turn the properties into verification conditions. Satisfiability Modulo Theories (SMT) solvers check these conditions to give definite answers or find errors.

These principles underpin our work on reliable LLM-verifier integration. Figure 1 illustrates the end-to-end verification pipeline of the ESBMC framework, showing the complete workflow from source code input to final verification results.

Figure 1: The ESBMC verification framework architecture, integrating BMC for finite-depth program analysis with SMT solving for efficient logical reasoning to enable rigorous software verification

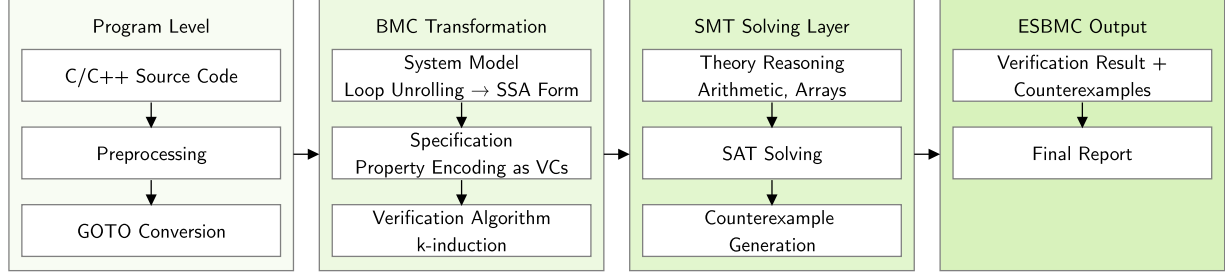

3.2.1 Program Representation Level

The verification tool begins by transforming the source code into a form it can formally analyze. For C/C++ programs, this transformation involves several critical preprocessing steps. Common approaches rely on intermediate representations that simplify complex language features while preserving semantic behavior [47].

The transformation pipeline starts with C/C++ source code that includes complex language features such as preprocessor directives, pointers, dynamic memory allocation, and implementation-defined behavior. The preprocessing phase includes macro expansions and conditional compilation, producing a self-contained translation unit [48]. Next, the process converts the code into the Generalized Operational Three-Address Output (GOTO) intermediate representation, which simplifies complex control flow structures into basic blocks connected by explicit jumps [49, 50].

The GOTO representation provides the base for the following BMC steps. It removes many complex language details while preserving the essential meaning of the original program. This transformation separates language processing from Formal Verification, letting verification focus on the main computational logic.

3.2.2 Logical Notations for BMC

Formal Verification employs different logics to specify system properties. Propositional logic provides the basic connectives, while temporal logic introduces operators to reason about how truth values evolve. In these expressions, lowercase letters like p and q denote atomic propositions representing basic state conditions.

Temporal logic divides into two main types: Linear Temporal Logic (LTL), which reasons about linear sequences of states (single execution paths), and Computation Tree Logic (CTL), which reasons about branching futures (all possible paths from a state). BMC primarily applies LTL to formulate properties over finite execution paths.

Table 3 summarizes the key operators, with a focus on those most relevant to BMC.

Table 3: Common Formal Verification notation: propositional logic and temporal logic

Symbol	Name	Logic Type	Meaning / Use Case
Propositional Logic			
$\neg p$ or $!p$	Negation / NOT	Propositional	The statement p is false.
$p \wedge q$	Conjunction / AND	Propositional	Both p and q are true.
$p \vee q$	Disjunction / OR	Propositional	At least one of p or q is true.
$p \rightarrow q$	Implication	Propositional	If p is true, then q must be true.
$p \leftrightarrow q$	Equivalence / IFF	Propositional	p is true if and only if q is true.
Linear Temporal Logic (LTL)			
Fp	Finally	LTL	Eventually, p will become true.
Gp	Globally	LTL	p is always true, now and forever.
Xp	Next	LTL	In the next state, p will be true.
pUq	Until	LTL	p remains true until q becomes true.


3.2.3 BMC Transformation

Model Checking is a formal, automated verification technique for determining whether a finite-state system model satisfies a given temporal logic specification. The core principle involves three fundamental components, which align with the initial stages of the BMC transformation process depicted in the figure [51, 52]:

1. **System Model (M):** The system under verification is formally modeled, typically as a Kripke structure or a transition system. This model M represents all possible states and transitions that the system can undergo during its execution. Formally, a Kripke structure, illustrated in Figure 2, is a tuple $M = (S, S_0, R, L)$, where:

- $S = \{s_1, s_2, s_3\}$ is a finite set of states.
- $S_0 \subseteq S = \{s_1\}$ is a set of initial states.
- $R \subseteq S \times S = \{(s_1, s_2), (s_2, s_1), (s_1, s_3), (s_3, s_3)\}$ is a transition relation that must be total.
- $L : S \rightarrow 2^{AP} = \{(s_1, \{p, q\}), (s_2, \{p, r\}), (s_3, \{q\})\}$ is a labeling function that assigns to each state a set of atomic propositions from a set AP that are true in that state.

Figure 2: An example of a Kripke structure

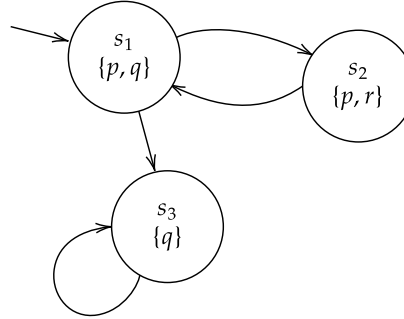

2. **Specification (φ):** The desired properties of the system, such as safety (`nothing bad happens`) and liveness (`something good eventually happens`), are expressed as formulas in a temporal logic, such as LTL [53] or CTL [54]. For instance, the safety property `the system never enters a deadlock state` can be expressed in LTL as $G(\neg \text{deadlock})$.
3. **Verification Algorithm:** The algorithm checks whether the model M satisfies the specification φ , denoted $M \models \varphi$, by verifying that all possible execution paths in M satisfy the temporal logic formula φ . It then returns:
 - **Yes**, if the property holds for all reachable states.
 - **No, with a counterexample**, if the property is violated. This counterexample is a trace of states $\{s_0, s_1, \dots, s_k\}$ leading from an initial state $s_0 \in S_0$ to a state s_k that violates φ . This debugging aid is one of the most significant advantages of model checking.

The primary challenge in model checking is the state-space explosion problem, where the number of states in M grows exponentially as the number of system components or variables increases. To solve this problem, researchers developed advanced techniques such as Symbolic Model Checking (SMC) [55] based on Binary Decision Diagrams (BDD) [56] and BMC [57]. The BMC method forms the foundation of the ESBMC [58] platform. This method uses a specific transformation pipeline:

1. **Loop Unrolling and SSA Form:** For BMC, loops are unrolled to depth k and the program is converted to SSA form, assigning unique versions to variables to simplify state representation for logical encoding.
2. **BMC and SMT Solving:** To address state-space explosion [7, 59, 60], BMC verifies properties within finite bounds [4], generating verification conditions solved via SMT solvers.
3. **Property Encoding as Verification Conditions (VCs):** The SSA model and specification φ are encoded into a VC whose satisfiability implies a property violation within bound k [61]. An unsatisfiable result indicates correctness within the bound.

4. **From BMC to Verification: k -Induction:** k -induction extends BMC to complete verification through base case checking (paths up to length k) and inductive step (if property holds for k states, it holds for the next) [62].
 - (a) **Base Case:** A standard BMC check that verifies the property holds for all execution paths of length up to k .
 - (b) **Inductive Step:** An inductive proof that demonstrates if the property holds for any k consecutive states, it must also hold for the next state.

Studies have shown that this combined approach effectively balances bug-finding efficiency with verification completeness in tools like ESBMC [5].

3.2.4 Satisfiability Modulo Theories (SMT)

The application of BMC to software verification requires reasoning about complex data types beyond propositional logic. SMT solving extends Boolean Satisfiability Problem (SAT) by combining boolean satisfiability with decision procedures for background theories [63]. SMT solvers serve as the computational engine that enables precise reasoning about program semantics – including pointer arithmetic, memory operations, and concurrent execution – by efficiently solving complex verification conditions generated from real-world software systems [64].

The architecture of modern SMT solvers comprises several key components working in concert:

1. **SAT Solving Core:** At its foundation, an SMT solver contains a modern SAT solver that handles the bBoolean structure of formulas. This component finds satisfying assignments to the propositional skeleton of the input formula by replacing theory atoms with boolean variables.
2. **Theory Reasoning:** SMT solvers integrate decision procedures for multiple background theories essential for software verification – including bit-vector theory for fixed-width integers and bit-level operations, array theory for memory operations and data structures, linear arithmetic for integer and real constraints, and uninterpreted functions for abstract function symbols – which work collaboratively to determine satisfiability of formulas involving complex data types [65–67].
3. **Integration Architecture:** The SAT solver and theory solvers interact through a lazy integration scheme where the SAT solver proposes boolean assignments and theory solvers check their consistency, with theory conflicts driving the search process.
4. **Counterexample Generation:** When the SMT solver finds a satisfiable verification condition, it produces a concrete counterexample – an execution trace showing the sequence of states leading to the property violation, which is invaluable for debugging.

The integration of BMC, k -induction, and SMT solving forms a comprehensive verification framework where SMT solving provides the mathematical foundation for precise program reasoning.

3.2.5 ESBMC Output and Reporting

The final stage of the ESBMC workflow produces clear, actionable output for users. This output directly corresponds to the results obtained from the SMT solving phase and consists of two primary components:

1. **Verification Result + Counterexamples:** ESBMC provides definitive verification results and, when property violations are detected, generates detailed counterexamples comprising comprehensive execution traces that include the exact sequence of program statements, variable values at each step, thread interleavings for concurrent programs, and memory state information for pointer-related errors, which are invaluable for debugging and root cause analysis.
2. **Final Report:** ESBMC compiles all verification results into a comprehensive final report providing a summary of all checked properties and their status (`success/failed`), total verification time and resource usage, statistical information, references to counterexamples for failed properties, and verification bounds and parameters, serving as complete documentation for quality assurance, certification, and regression testing.

In summary, ESBMC implements the theoretical model-checking pipeline, demonstrating how engineers effectively combine BMC, k -induction, and SMT solving to build a powerful tool for automated software verification. The framework’s comprehensive output, including detailed counterexamples and final reports, provides users with actionable insights into program correctness and potential defects.

3.3 LLMs for Verification

LLMs based on the Transformer architecture [12] are trained on massive code and text corpora, enabling pattern recognition capabilities applicable to Formal Verification in ESBMC. It is crucial to emphasize that LLMs operate primarily through statistical pattern matching rather than logical reasoning. That program verification is fundamentally undecidable – no algorithm can solve all verification problems.

Despite their limitations, LLMs show two important abilities. First, they can recognize patterns that emerge, such as predicting code behavior and translating between natural language and formal representations [13]. Second, they can learn in context, adapting to verification tasks using carefully designed prompts without changing their parameters [68].

In code analysis, LLMs use statistical patterns to generate candidate specifications, such as pre-conditions and loop invariants [69, 70]. They also detect possible code problems by recognizing patterns [71]. Their generative abilities produce verification artifacts, such as formal properties for ESBMC [72] and boundary test cases [73]. This approach builds a complete environment in which LLMs act as a statistical helper before specification generation and as an assistants after, explaining counterexamples [44].

For deployment in verification, LLMs require optimization via model compression and parameter-efficient fine-tuning. Compression includes quantization [74, 75], pruning [76], and knowledge distillation [77]. Parameter-Efficient Fine-Tuning (PEFT) methods like LoRA enable domain adaptation by injecting small trainable adapters while freezing most parameters [78], allowing efficient specialization for verification tasks.

These pattern-matching capabilities, when integrated within our principled convergence framework, enable the development of predictable and reliable LLM-verifier systems. This integration acknowledges both the statistical nature of LLMs and the undecidability of verification, while providing theoretical guarantees for the iterative refinement process, making them suitable for deployment in safety-critical verification environments where both performance and predictable behavior are required.

Table 4 summarizes significant advancements in accelerating Formal Verification through compressed language models, highlighting the key techniques and their impacts on verification efficiency and capability.

3.4 Formal Verifiers and LLM Integration

This subsection examines modern verifier characteristics enabling LLM integration and emerging collaboration patterns. Examples include industrial-strength model checkers like ESBMC for C/C++ programs [5, 20, 58] and theorem provers in environments like FVEL [16]

Formal verifiers are crucial in the LLM-assisted verification ecosystem, acting as the ground truth for validating LLM-generated artifacts [14, 15]. These automated tools use mathematical reasoning to prove or disprove software correctness with respect to formal specifications [7, 8], employing techniques such as model checking [4, 43], theorem proving, and abstract interpretation.

Unlike traditional testing, formal verifiers provide comprehensive coverage and mathematical certainty rather than probabilistic confidence [57]. In LLM integration, they serve as reliable oracles to validate generated code [23, 25], specifications [9], invariants [10], and repairs [11, 26], creating a powerful approach between statistical AI and formal reasoning [27, 39].

Figure 3 illustrates the fundamental workflow of a formal verifier, depicting how it consumes a program and its specifications to deliver a definitive, mathematically sound result – either a proof of correctness or a precise counterexample that guides debugging.

Modern Formal Verification tools like ESBMC exhibit key characteristics enabling effective LLM integration [27, 39], including deterministic output providing definitive answers with counterexamples [57] for reliable LLM refinement [19, 25]. These tools support incremental verification through bounded approaches [4, 6] and provide rich counterexamples for LLM learning [5, 79], while scalable SMT integration enables practical verification of complex properties [58, 63, 80].

LLM-verifier integration uses different design patterns, such as sequential pipelines [9, 10], iterative refinement [19, 23], hybrid verification [38, 39], and verifier-as-oracle methods [22, 81]. These patterns help with important verification tasks - such as specification generation, invariant synthesis, program repair, and proof assistance - by clearly combining the strengths of statistical learning and Formal Methods.

ESBMC’s architecture is well-suited for these integration patterns [5, 58], featuring modular design for LLM assistance [20, 82], comprehensive counterexamples for learning [6, 79], and extensible verification strategies [62, 83] that enable practical application to real-world programs [20, 64].

Table 4: Major advancements in applying LLMs to Formal Verification

Advancement and Framework	Description & Key Features	Impact / Results
Model Compression Techniques for LLMs [31–37]	Quantization, pruning, knowledge distillation for efficient pattern matching in LLMs	Enable LLM deployment in resource-limited settings; up to 70%+ compression with minimal accuracy loss
Prompt Compression (LLMLingua) [30]	Coarse-to-fine prompt compression maintaining semantic integrity	Up to 20× prompt compression with little performance loss, accelerating inference
Symbolic Compression for Interpretability [40]	Formal symbolic compression framework for code generation tasks	Achieves 78.3% token compression and improves traceability by 62%
Automated Proof Generation and Repair (Baldur) [19]	LLMs generate and repair proofs for Formal Verification systems	65.7% of theorems proved automatically with Baldur+Thor
LLM-Driven Invariant Generation for BMC [10]	LLMs generate candidate loop invariants using pattern recognition	Improves verification coverage for programs with unbounded loops using ESBMC
Hybrid Verification (LLMs + Formal Methods) [14, 38, 39]	Combines LLMs’ pattern recognition with formal rigor for bug detection	Hybrid systems address scalability while maintaining formal guarantees
ESBMC-AI: LLM + Bounded Model Checking [11, 25]	Integrates LLMs with ESBMC for vulnerability detection and repair	High-accuracy repair of buffer overflows; suitable for continuous integration and continuous deployment (CI/CD) integration
Efficient Self-Attention with Smart Pruning [35]	Pruning and matrix folding in transformer layers	70% overall model compression with stable performance
Safety and Trustworthiness Verification [15]	V&V frameworks for LLMs, including runtime monitoring	Identifies gaps and proposes methods for LLM safety assurance
Fine-Tuning and Inference Optimization [32, 34]	Parameter-efficient fine-tuning and inference optimization	Reduces resource overhead for adapting LLMs to verification tasks

Despite these architectural advances, LLM-verifier integration faces challenges including semantic gaps between statistical and formal reasoning [13], effective feedback utilization [19], scale mismatches [59], and uncertainty quantification in deterministic frameworks [46] [14, 15]. To solve these problems, researchers use some good methods. These include structured prompting [24, 44], checking step-by-step (incremental verification) [57, 62], and improved feedback loops [5, 19], and specialized fine-tuning [75, 78].

This integration represents a fundamental shift toward collaborative systems leveraging statistical AI and Formal Methods [7, 8], providing mathematical guarantees for safety-critical deployment [1, 3].


4 Proposed Work - LLM-Verifier Convergence Theorem

The main goal of combining LLMs with Formal Verification tools like ESBMC is simple: **Can we prove with math that repeated improvements will finally lead to a correct answer?** To answer this, we build upon the Markov Chain theory (detailed in Section 3.1.3) to develop a new Theorem tailored for LLM-verifier systems.

4.1 Theoretical Foundation and Markov Chain Modeling

Our convergence theory builds upon the rigorous framework of absorbing Markov Chains established in Section 3.1.3. The classical theory guarantees that a Markov Chain with at least one absorbing state – and where every state can eventually reach an absorbing state – will be absorbed almost surely [41, 42].

Figure 3: The workflow of a formal verifier. This diagram illustrates the operational pipeline of a Formal Verification tool. The process begins with the software program and its formal specification being translated into a formal model. The verifier engine then performs a mathematical analysis of this model

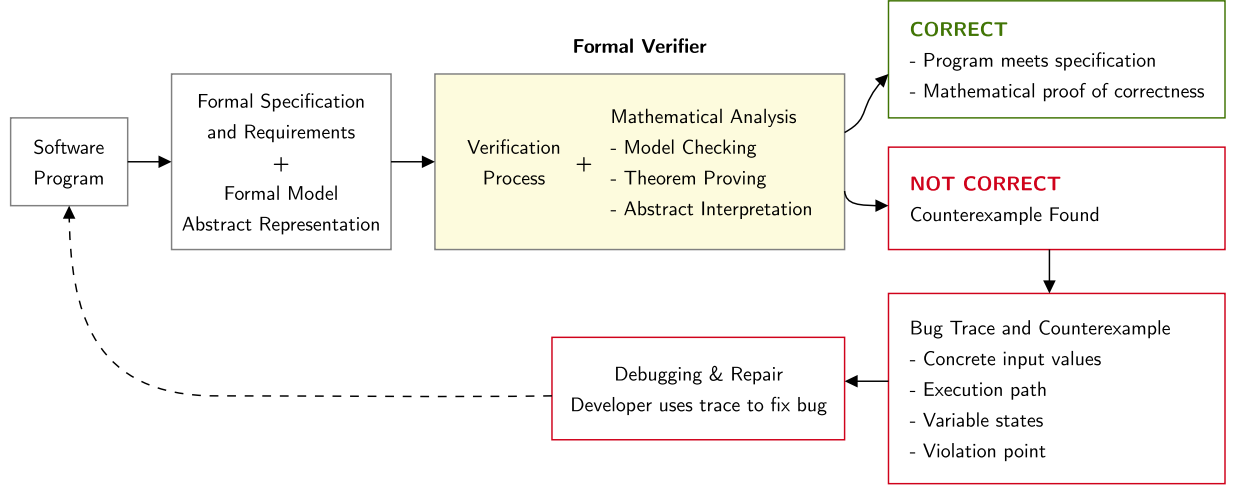

Eq. (5) (p. 6) displays the canonical form of the transition matrix P . Here, the fundamental matrix $N = (I_t - Q)^{-1}$ gives the expected number of visits to transient states before absorption. We then use the expected time to absorption from Eq. (6) (p. 6) to build our convergence analysis.

Our model treats the LLM-verifier interaction as an absorbing Markov Chain, as outlined in Section 3.1.3. This approach is well-supported theoretically and practically. Since transformer-based LLMs generate text token-by-token within limited context windows, they inherently display the properties of a Markov process. At the same time, empirical studies of systems like ESBMC-AI [11] and Baldur [19] confirm that transition probabilities mainly depend on the current verification state.

This model uses a five-state Markov Chain with `Verified` as the absorbing state. In this model, we treat the refinement steps - `Unverified` and `CandidateGeneratedi` - as transient states. The logic here mimics an actual iterative loop. When the system is in a `CandidateGenerated` state, it attempts to move to `Verified`. The transition succeeds with probability δ . If it fails (with probability $1 - \delta$), the system stays in the loop to try again.

The Error-Reduction Probability (δ): Central to our model is the error-reduction probability δ , which quantifies the LLM’s capability to generate correct verification artifacts in a single attempt. Table 5 shows typical δ values (0.360 - 0.880) for LLM verification tasks, validating its role in governing system convergence and providing the empirical foundation for our theory.

4.2 The Main Result: LLM-Verifier Convergence Theorem

Combining LLMs with verification tools, such as ESBMC, certainly helps automate invariant generation. However, a significant issue remains: most approaches lack theoretical backing. Without this foundation, the system becomes unstable. It may get stuck in infinite loops or oscillate indefinitely [14, 15]. Our work fills this gap by introducing the LLM-Verifier Convergence Theorem. This Theorem offers the first formal proof of termination and convergence, which is essential for deployment in safety-critical systems [1, 3]. Next, we present Theorem 1 and its proof.

Theorem 1 (LLM-Verifier Convergence Theorem). *We model the LLM-verifier process using a discrete-time Markov Chain, denoted as $X = \{X_n\}_{n \geq 0}$. The state space S consists of two parts ($S = T \cup A$). First, $T = \{s_1, s_2, s_3, s_4\}$ represents the set of transient refinement attempts. Second, $A = \{s_5\}$ acts as the single absorbing state. Assuming a fixed success probability $\delta \in (0, 1]$, we construct the transition matrix $P = (P_{i,j})$. The individual entries $P_{i,j} = \mathbb{P}(X_{n+1} = s_j \mid X_n = s_i)$ are arranged as follows:*

Table 5: Summary of LLM performance on code-related tasks

Task	Model/System	δ	Details
Automated Code Repair	GPT-4	0.543 [84]	Single-attempt vulnerability repair on Evaluation and Assessment in Software Engineering (EASE) benchmark (SecurityEval dataset)
Invariant Generation	LLMs (Inductive Loop Synthesis)	0.780 [85]	First-attempt success rate in generating verified invariants
Invariant Generation	CodeLlama-34b-Instruct	0.360 [86]	First-attempt loop invariant synthesis (15 candidates, no Houdini pruning)
Proof Synthesis	Baldur	0.479 [19]	Single-attempt whole-proof generation on Isabelle/HOL
Proof Synthesis	Baldur + Thor	0.657 [19]	Single-attempt on Isabelle/HOL when combined with Thor
Specification Synthesis	AssertLLM	0.880 [87]	Syntax-valid and Formal Property Verification (FPV)-verified assertion generation
Specification Synthesis	AutoSpec	0.790 [88]	Generates usable specifications via LLM + static analysis + validation

(i) **Transient States:** For the transient states $i \in \{1, 2, 3, 4\}$, the transition probabilities are:

$$P_{i,j} = \begin{cases} \delta & \text{if } j = i + 1 \quad (\text{progress to next state}), \\ 1 - \delta & \text{if } j = i \quad (\text{retry current step}), \\ 0 & \text{otherwise.} \end{cases}$$

(ii) **Absorbing State:** State s_5 is absorbing, meaning the process stops here. Hence, $P_{5,5} = 1$.

Let $\tau = \inf\{n \geq 0 : X_n \in A\}$ be the iteration count until verification. The following bounds hold:

1. **Almost Sure Convergence:**

$$\mathbb{P}(\tau < \infty \mid X_0 \in T) = 1$$

2. **Expected Iteration Bound:** The mean time to convergence is given by:

$$\mathbb{E}[\tau \mid X_0 = s_1] = \frac{4}{\delta}$$

3. **Tail Bound:** Consider constants $\alpha > 0$ and $\lambda_Q \in (0, 1)$, where λ_Q is the spectral radius of the transient submatrix Q . Then, for all $k \geq 0$:

$$\mathbb{P}(\tau > k \mid X_0 = s_1) \leq \alpha \lambda_Q^k.$$

Substituting $\lambda_Q = 1 - \delta$ results in the following exponential bound:

$$\mathbb{P}(\tau > k \mid X_0 = s_1) \leq \alpha(1 - \delta)^k.$$

Proof. We analyze the absorbing Markov Chain structure to establish the three guarantees.

Part 1: Almost Sure Convergence: Does the system converge? To answer this, we check two requirements from Markov Chain theory. First, do we have an absorbing state? Yes, state s_5 . Second, can every state reach it? Yes. From any point $s_i \in T$, the probability of reaching the end is $\delta^{5-i} > 0$. Meeting both criteria guarantees almost sure convergence. Thus,

$$\mathbb{P}(\tau < \infty \mid X_0 \in T) = 1$$

Part 2: Expected Iteration Bound: We can analyze the total iteration count τ by considering the time spent in each state s_j . Let M_j represent the number of steps the process remains in state s_j . Because the probability of exiting s_j on

any given step is δ , the sojourn time M_j follows a geometric distribution, $M_j \sim \text{Geom}(\delta)$, with an expected value of $\mathbb{E}[M_j] = 1/\delta$. Since the total number of iterations is simply the sum of the time spent in all states, $\tau = \sum_{j=1}^4 M_j$, the linearity of expectation immediately gives us:

$$\mathbb{E}[\tau \mid X_0 = s_1] = \sum_{j=1}^4 \mathbb{E}[M_j] = \frac{4}{\delta}$$

Part 3: Tail Bound: The transient submatrix Q is diagonal. Specifically, every diagonal entry is $1 - \delta$. As a result, the spectral radius is $\lambda_Q = 1 - \delta$. Using standard Markov Chain theory, we find:

$$\mathbb{P}(\tau > k \mid X_0 = s_1) \leq \alpha \|Q^k\| \leq \alpha(1 - \delta)^k$$


Where $\alpha = \|(I - Q)^{-1}\|$. This equation establishes exponential decay. \square

4.3 A Practical Framework for Convergence

The system's behavior is governed by the error-reduction probability δ , a metric that quantifies the LLM's capability to generate correct verification artifacts. From any **CandidateGenerated** state, the process has a δ chance of successfully advancing to **Verified**; otherwise, with a probability of $1 - \delta$, it persists in the refinement loop.

Figure 4 illustrates our integrated LLM-Verifier Convergence Framework, which combines theoretical modeling, convergence analysis, and empirical validation. Our methodology focuses on building hybrid verification systems. We model the refinement steps as a Markov Chain. This approach yields theoretical guarantees, which we further validate through practical simulation. A feedback loop links real-world testing to the theoretical model, allowing us to adjust parameters - especially the error-reduction probability δ - and improve the model's assumptions step by step.

Figure 4: LLM-Verifier Convergence Framework integrating theoretical modeling, convergence analysis, and empirical validation

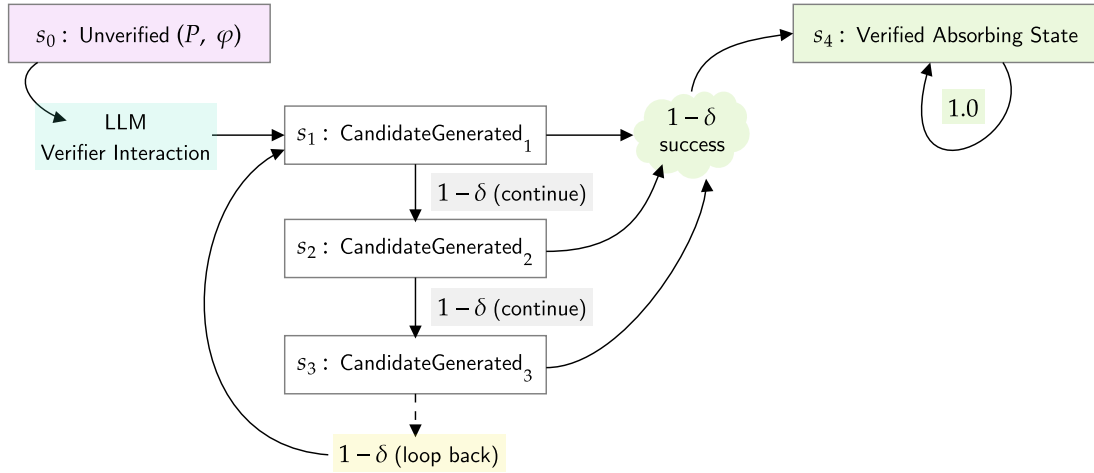

Our theory represents an important advancement in bringing together LLMs and Formal Methods. We no longer have to depend on uncertain outcomes. Instead, we offer a straightforward and dependable framework that is backed by mathematical evidence. Our theory offers a significant step forward for combining LLMs and Formal Methods. We no longer need to rely on uncertainty. In its place, we provide a clear, reliable framework supported by mathematical proofs.

- **Resource Allocation:** Provides helpful guidelines, like $\mathbb{E}[n] = 4/\delta$, to assist with setting time limits and planning how much computing power to use.
- **Capability Assessment:** Introduces a clear metric (δ) to measure LLM performance on verification tasks.
- **Deployment Guidelines:** Establishes practical thresholds for use ($\delta > 0.3$ for standard systems and $\delta > 0.6$ for high-performance applications).

Mathematically, we confirm that for any $\delta > 0$, the system will reach the confirmed state. We can then use the formula $\mathbb{E}[n] = 4/\delta$ to plan our system limits, which converts a theoretical measure into a usable engineering metric. Table 6 shows how to use this logic to distribute resources effectively in various situations.

Table 6: Expected iteration bounds for different LLM verification capabilities

LLM Capability Level	Success Rate δ	Expected Iterations $\mathbb{E}[n]$
Moderate Capability	0.3	13.3
Balanced Performance	0.5	8.0
High Performance	0.8	5.0

Furthermore, the exponential tail bound $\mathbb{P}(n > k) \leq \alpha(1 - \delta)^k$ ensures that the probability of excessively long refinement loops decays exponentially, enabling reliable timeout configurations for safety-critical systems. This mathematical framework bridges theoretical guarantees with practical deployment considerations, providing both foundational rigor and actionable engineering insights.

5 Methodology

Our methodology establishes a comprehensive framework for validating the convergence theory through systematic simulation and analysis. We designed this approach to test the theoretical bounds rigorously; it simultaneously characterizes the behavior of LLM-verifier systems across their full operational range.

5.1 Simulation Framework Design

We developed a specialized simulation framework that implements the five-state Markov Chain model described in Section 4. The simulator implements probabilistic transitions between states `Unverified`, `CandidateGenerated1`, `CandidateGenerated2`, `CandidateGenerated3`, and `Verified`, with δ governing the success probability.


We summarize the complete experimental workflow in Figure 5. The process begins with the simulation core, which translates the five-state absorbing Markov Chain model (Section 4) into a highly efficient VMC simulation (Section 5.2.2).

We examine the success probability parameter δ across its entire range. We categorize the resulting operational data into three key regions: marginal ($\delta \in [0.1, 0.3)$), practical ($\delta \in [0.3, 0.6]$), and high-performance ($\delta \in (0.6, 0.9]$). After generating the large-scale dataset, we proceed to the data collection phase. In this stage, we record both the total convergence time (T) and the sequence traces. The final stage involves the experimental validation framework, which uses a three-pronged analytical approach – theoretical, sensitivity, and statistical – to rigorously test the derived bound $\mathbb{E}[n] \leq 4/\delta$ and to provide empirically validated engineering insights.

We use a structured method to carefully check the accuracy of our theory about how well different verification methods for LLMs work. We test this across all available verification options to make sure our findings are reliable.

- **Sample Size Justification:** The selection of 10,000 trials for each δ value is a robust methodological decision, ensuring high statistical power [89, 90] and narrow 99% binomial confidence intervals (width $\leq \pm 0.01$) [91, 92]. This large sample size is also critical for accurately estimating tail probabilities [93, 94] and for precisely computing higher-order empirical moments, such as variance and skewness [95].
- **Operational Regions Definition:** The parameter space $\delta \in [0.1, 0.9]$ is divided into three operational regions based on probabilistic analysis and empirical modeling.
 1. The **marginal region** ($\delta \in [0.1, 0.3)$) addresses small success probabilities where convergence is theoretically ensured by exponential tail bounds, $\mathbb{P}(n > k) \leq e^{-c\delta k}$ [93, 94], but tests practical computational limits.
 2. The **practical region** where δ falls between 0.3 and 0.6 matches typical success rates seen in Bernoulli-type outcomes [96]. This range also demonstrates the capabilities of LLMs in verification tasks [19, 97]. Therefore, it is the most important range when using these models in real-world situations.
 3. Finally, the **high-performance region** ($\delta \in (0.6, 0.9]$) represents near-expert behavior, corresponding to the high-probability convergence regime in Monte Carlo and reliability theory [90, 95].

Figure 5: Overview of the LLM-Verifier Convergence validation methodology. The process links the theoretical five-state absorbing Markov Chain model to the experimental framework. The simulation core uses a VMC approach with the Geometric distribution ($\text{Geom}(\delta)$) to efficiently generate $N = 10,000$ trials across the three defined operational regions (marginal, practical, high-performance). After data collection (generating convergence time T and computational metrics), the results are channeled into the experimental validation framework, which employs three complementary analytical lenses to confirm theoretical alignment, assess framework robustness, and ensure statistical reliability (see Table 7)

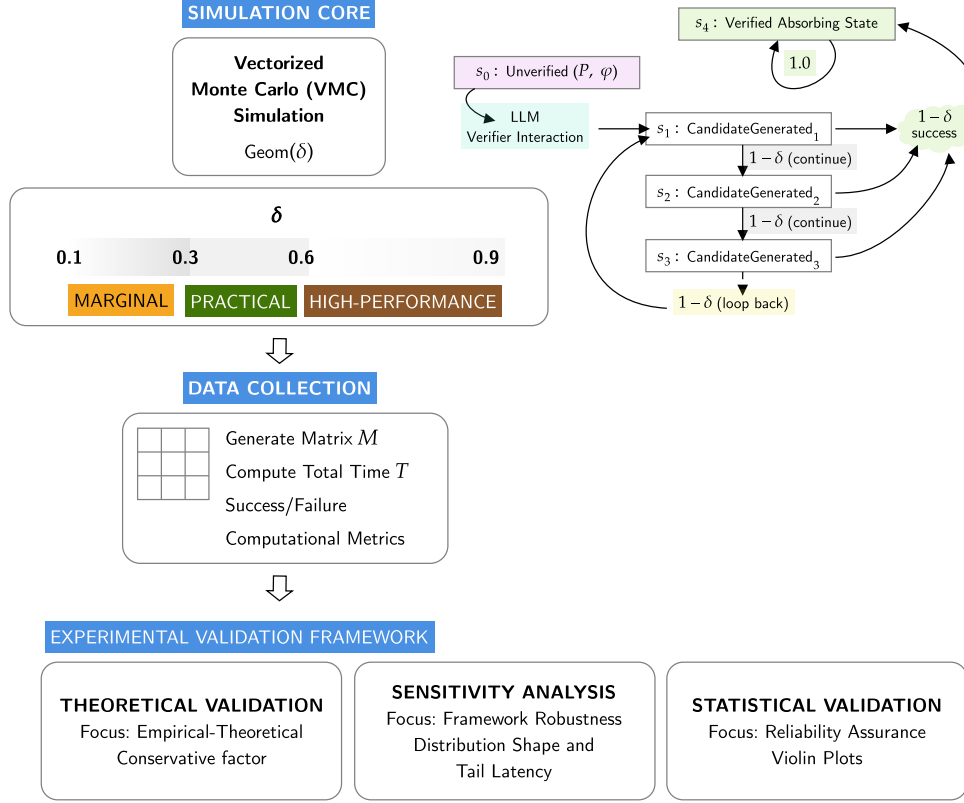

- **Experimental Scale:** Is structured around 90,000 Monte Carlo trials (10,000 trials across nine δ values from 0.1 to 0.9) to ensure statistically rigorous coverage for convergence analysis [90, 95]. This method of systematic sampling helps us explore the area of success probabilities in a consistent way [96]. It allows us to understand how changes in δ relate to the rate of convergence and makes it easier to compare different situations [98]. The scale we use helps us test the rule that says the average value of n is less than or equal to 4 divided by δ . It also helps us see sudden changes, which we call phase transitions [96]. Overall, this creates a unique dataset that will be useful for future studies.

5.2 Simulation Execution

The validation follows a systematic protocol:

1. **VMC Simulation:** Our framework works differently than traditional simulations that run step-by-step. Instead, it uses a method called VMC to speed up and improve efficiency. With VMC, we can calculate the time for all 10,000 trials simultaneously, rather than one at a time. This approach treats groups of data as a single unit, which speeds up calculations.
2. **Geometric Distribution:** The Geometric distribution, $\text{Geom}(\delta)$, models the time spent in each of the four transient states (s_1 through s_4). Its expected value, $1/\delta$, directly establishes the theoretical basis for the primary bound we are validating: $\mathbb{E}[n] = \sum_{j=1}^4 \mathbb{E}[M_j] = 4/\delta$.
3. **Parameter Sweep:** For each δ value in $\{0.1, 0.2, \dots, 0.9\}$, execute 10,000 independent trials.

- **Number of iterations until absorption:** This acts as the main measurement used to check the important theory that states $\mathbb{E}[n] \leq 4/\delta$. It directly shows how quickly things come together or reach a stable point.
 - **Sequence of state transitions:** Enables analysis of the convergence path, identifying patterns and bottlenecks to verify the modeled Markovian dynamics.
 - **Convergence success/failure status:** Provides binary outcomes to empirically verify the Theorem’s guarantee of almost sure convergence across all trials.
 - **Computational metrics (execution time, memory usage):** Look at how doable the plan is and how many resources it will need. Make sure to connect the ideas from theory with the actual challenges we face when putting them into practice.
4. **Statistical Configuration:** The framework features seeded random number generation for reproducible outcomes, independent trial execution to prevent cross-contamination, and comprehensive logging of all experimental parameters and outcomes.

5.2.1 Experimental Validation Framework

Our experimental study combines multiple methods, numerical measures, and key visuals to evaluate convergence theory from multiple angles carefully. The design of our experiment includes three methods to confirm our findings, each with its own measures and visuals to help interpret the results, as shown in Table 7.

Table 7: Experimental validation framework: approaches, metrics, and visualizations

Validation Approach	Methodological Focus	Metrics	Visualization
Theoretical Validation	Empirical-theoretical alignment through statistical tests of distribution structure, direct bound comparison ($\mathbb{E}[n] \leq 4/\delta$), and success rate verification across all δ settings.	Conservative Factor (C_f): Ratio of theoretical bound to empirical mean ($C_f = (4/\delta)/\mu$). Efficiency (η): Successful state transitions per iteration ($\eta = 4/\mu$). Success Rate: Proportion of trials satisfying $n \leq 1000$.	Theoretical vs. Empirical Bounds plot comparing $\mathbb{E}[n] \leq 4/\delta$ against empirical means (Figure 6)
Sensitivity Analysis	Framework robustness assessment via systematic δ variation, boundary-condition testing ($\delta = 0.1, 0.9$), and distribution characteristic analysis.	Distribution Shape: Variance (σ^2), Skewness (γ_1), and Kurtosis (κ). Spread: interquartile range (IQR) ($P_{75} - P_{25}$). Tail Latency (P_{99}): The 99th percentile of iterations to absorption.	Operational Regions Map demarcating marginal ($\delta < 0.3$), practical ($0.3 \leq \delta \leq 0.6$), and high-performance ($\delta > 0.6$) regions (Figure 7)
Statistical Validation	Reliability assurance through confidence interval calculation, hypothesis testing against theoretical predictions, and statistical power analysis.	Precision (W_{99}): Width of the 99% Confidence Interval ($2.576 \cdot \sigma/\sqrt{N}$). Throughput: Simulation speed (trials/sec). Resource Cost: Peak memory allocation (MB).	Tail Probability Analysis with bounds $e^{-c\delta k}$ (Figure 8). Iteration Distribution Characterization violin plots (Figure 9)

This combined approach turns theoretical ideas into real-world engineering knowledge. It helps ensure the safe use of language model verifiers by providing different ways to analyze and understand them.

5.2.2 Simulation Execution Engine

Unlike iterative state-machine simulations, our framework utilizes a vectorized Monte Carlo approach to maximize computational throughput and statistical power.

1. **Vectorized State Generation:** For each configuration $\delta \in \{0.1, 0.2, \dots, 0.9\}$, the system instantiates a matrix $\mathbf{M} \in \mathbb{Z}^{N \times 4}$ where $N = 10,000$ (the trial count). Each element $\mathbf{M}_{i,j}$ represents the residence time in stage j for trial i , sampled independently from a Geometric distribution, as defined in Eq. (8).

$$\mathbf{M}_{i,j} \sim \text{Geom}(\delta) \quad \forall i \in [1, N], j \in [1, 4] \quad (8)$$

2. **Iteration Aggregation:** The total convergence time T_i for the i -th trial is computed via row-wise summation, $T_i = \sum_{j=1}^4 M_{i,j}$, eliminating loop overhead and ensuring memory contiguity.
3. **Resource Monitoring:** To accurately capture computational metrics without observer effect, the simulation encapsulates the generation phase in a `tracemalloc` context, which records peak memory allocation (MB) and process time (central processing unit (CPU) seconds) for each δ batch.

5.2.3 Data Collection and Filtering

Our processing pipeline first extracts trial-level granularity from the raw data of each simulation batch before performing aggregation:

- **Convergence Status:** A trial is called a `Success` if it takes 1,000 units of time or less. This limit helps prevent the trial from running forever when the value is very low (less than 0.1). It is also much higher than what we usually expect, which is about 40 units of time when the value is 0.1.
- **Sequence Trace:** Saving the complete list $[M_{i,1}, M_{i,2}, M_{i,3}, M_{i,4}]$ for each trial enables us to identify specific patterns where progress slows. For example, we can look at trials that went through the first three steps quickly but got stuck at the last step of checking.

5.2.4 Metric Computation Methodology

The quantitative metrics presented in Table 7 (p. 17) are derived from the raw simulation data T using the following formulations:

1. **Conservative Factor (C_f):** Calculated as the ratio between the theoretical upper bound and the empirical mean μ , according to Eq. (9).

$$C_f = \frac{4/\delta}{\mu} \quad (9)$$

Values of $C_f \geq 1.0$ indicate that the theory successfully provides a safe upper bound.

2. **Statistical Significance (CI Width):** We compute the width of the 99% confidence interval using the standard error of the mean, according to Eq. (10).

$$W_{99} = 2.576 \times \frac{\sigma}{\sqrt{N}} \quad (10)$$

Where σ is the empirical standard deviation and $N = 10,000$.

3. **Iteration Efficiency (η):** Defined as the ratio of successful state transitions to total iterations, according to Eq. (11).

$$\eta = 4/\mu \quad (11)$$

5.2.5 Visualization Logic

We created the visualizations using multiple data transformations to illustrate key concepts clearly:

- **Theoretical Alignment (Figure 6):** To visualize distribution spread beyond simple error bars, we employed IQR shading and a smooth cubic spline through the empirical means. The shaded region (between the 25th percentile, P_{25} , and 75th percentile, P_{75}) provides a robust visual indicator of where the central 50% of trials converge.
- **Operational Regions (Figure 7):** Our analysis employed a dual-axis transformation to study the phase transition. This method creates a graph that shows variance (a measure of how much things differ) on a logarithmic scale on the left and iteration efficiency (how well something works) on a linear scale on the right. Using these dual axes helps us see the changes across three areas: the marginal area (where values are less than 0.3), the practical area, and the high-performance area.
- **Tail Probability (Figure 8):** We compute the tail distribution by using the complementary cumulative distribution function. We plot this relationship as $P(n > k) = 1 - \text{rank}(k)/N$ on a log-linear scale. We display only the important points from our data, which show that the tails of the convergence time distribution follow an exponential pattern.
- **Iteration Distribution Characterization (Figure 9):** We use violin plots to show the whole shape and spread of the time it takes to reach a goal for each value of δ . When we plot the number of tries on a logarithmic scale, it makes it easier to see the vast differences in times in the lower-performing area compared to the more grouped times in the high-performing area.

6 Experiments and Results

This part shows the testing we did to check our theory about how quickly things get better. We validate our method’s correctness and robustness across diverse LLM applications. The implementation of this work is available at <https://github.com/pierredantas>

We followed the detailed steps explained in Section 5 to run our experiment. We used a fast Python program that works well with NumPy, which helps with calculations. In our study, we tested a range of values for δ , starting at 0.1 and increasing by 0.1 up to 0.9. For each δ , we ran 10,000 separate tests, which means we did over 90,000 tests in total to ensure our results were reliable.

We designed our experiments to address four key research questions:

1. **RQ1: Convergence Reliability:** Does the empirical convergence behavior match theoretical almost-sure convergence guarantees across the δ spectrum?
2. **RQ2: Bound Accuracy:** How strict are the theoretical limits, expressed as $\mathbb{E}[n] \leq 4/\delta$, when compared to actual results?
3. **RQ3: Practical Operating Regions:** Can we identify distinct operational regions with clear design implications for real-world deployment?
4. **RQ4 Statistical Distribution Fit:** Does the empirical distribution of convergence time conform to the assumed geometric (exponential tail) properties, and can the tail behavior be reliably characterized by a theoretical exponential bound?
5. **RQ5 Distribution Characterization and Predictability:** How does the overall pattern of convergence time change in different operational areas? Can we identify the high-performance area by spotting a consistent and low-variance distribution?
6. **RQ6 (Computational Performance):** What is the performance of the vectorized simulation framework, and how many trials can it run each second? Does the amount of memory it uses show that it is effective for large-scale Monte Carlo validation?

6.1 Experimental Results

6.1.1 RQ1: Convergence Reliability

Our experiments show that the results are very consistent across all tested values of δ . The findings back up the theory that we can expect strong, almost inevitable convergence. In Table 8, you can see the detailed metrics related to convergence for different δ values.

Table 8: Empirical convergence results vs. theoretical bounds (10,000 trials per δ)

δ	Theory	Mean (μ)	Std (σ)	Cons. Fact (C_f)	Tail Latcy (P_{99})	Success Rate (%)
0.1	40.000	39.876	18.836	1.0031	97.00	100.00
0.2	20.000	19.914	8.855	1.0043	47.00	100.00
0.3	13.333	13.316	5.513	1.0013	30.00	100.00
0.4	10.000	10.058	3.933	0.9942	22.00	100.00
0.5	8.000	8.012	2.823	0.9985	17.00	100.00
0.6	6.667	6.678	2.094	0.9982	13.00	100.00
0.7	5.714	5.723	1.585	0.9984	11.00	100.00
0.8	5.000	4.981	1.112	1.0039	9.00	100.00
0.9	4.444	4.443	0.705	1.0001	7.00	100.00

The perfect success rate across all values tested for δ suggests that the process will usually achieve the expected result. The data show that the average result (μ) closely matches the expected value ($\mathbb{E}[n] = 4/\delta$). The conservative factor (C_f) is approximately 1.0 across all configurations, confirming that the empirical convergence rate closely matches the theoretical prediction. The tail latency, shown as the 99th percentile of trials, indicates that even the worst cases have limits. The maximum number of steps reached is 97 when the value is 0.1, and it decreases to 7 steps when the value is 0.9.


6.1.2 RQ2: Bound Accuracy

The results we found show a strong connection between the expected limit on the number of steps, represented as $\mathbb{E}[n] \leq 4/\delta$, and what we actually observed in our experiments. The conservative factor (C_f), which helps us see this difference, is about 1.0 across all values of δ . This small range indicates that our theoretical model is very accurate at predicting how quickly things will reach their average, with only a little extra caution needed (C_f stays between 0.9942 and 1.0043).

The analysis shows that there is a complex relationship between δ and the predictability of outcomes. The empirical standard deviation (σ) shows a significant decrease, dropping from approximately 18.84 at $\delta = 0.1$ to 0.71 at $\delta = 0.9$. This sharp decline in variability makes the results more predictable as the parameter δ increases.

The image labeled as Figure 6 clearly shows how closely the average curve follows the theoretical curve. Additionally, the shaded area representing the interquartile range (IQR) highlights a large amount of initial variation (about 18.84) in the marginal area where the value of delta is less than 0.3.

Figure 6: **Theoretical Bound Alignment and Empirical Convergence Rate.** The figure compares the theoretical expected bound ($\mathbb{E}[n] \leq 4/\delta$) against the empirical mean (μ) across the δ spectrum. The extremely close tracking between the empirical curve (blue) and the theoretical curve (red dashed) demonstrates the tight alignment ($C_f \approx 1.0$) of the model prediction. The blue shaded area represents the IQR ($P_{25} - P_{75}$), which visually captures the dramatic decrease in system variance (σ^2) when transitioning from the marginal region ($\delta < 0.3$) to the high-performance region ($\delta > 0.6$)

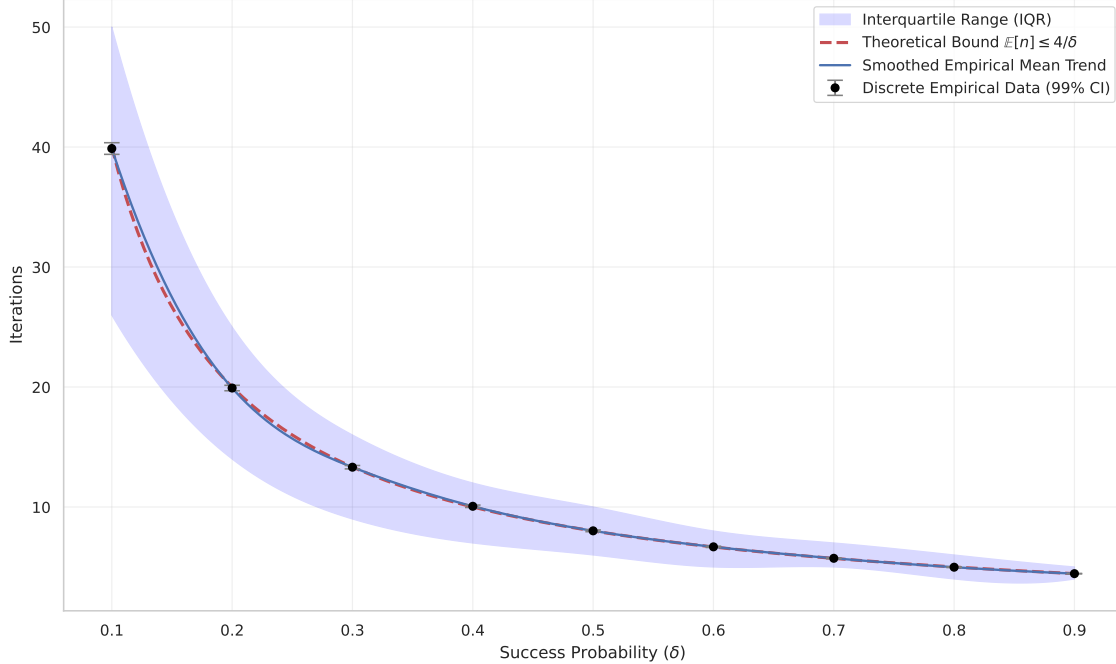


6.1.3 RQ3: Practical Operating Regions

Based on the empirical convergence patterns, we identify three distinct operational regions with clear design implications, as visualized in Figure 7, which explicitly show the relationships among δ , convergence predictability (variance on a log scale), and iteration efficiency.

- **Marginal Region** ($\delta < 0.3$): This area shows the highest average number of attempts (μ up to 39.88) and an extensive range of results (σ up to 18.84). It highlights the system's inherent risk and the need for long-term task limits. It is best for applications where time is not urgent.
- **Practical Region** ($0.3 \leq \delta \leq 0.6$): This region captures a critical phase transition where the variance (σ) drops significantly (from 5.51 down to 2.09), but the mean iteration count (μ) remains moderate (6.68 to 13.32). It is the optimal range for balancing moderate LLM capability with predictable performance, ideal for most standard real-world applications.

Figure 7: **Operational Regions Map: Performance and Stability Analysis.** This dual-axis visualization maps the framework’s behavior across the δ spectrum. The left axis (purple, log scale) tracks the empirical variance (σ^2), demonstrating the system’s predictability. The right axis (green, linear scale) tracks iteration efficiency (η). The plot clearly illustrates the sharp phase transition in stability: variance collapses rapidly upon entering the practical region ($\delta \geq 0.3$), confirming the empirical boundaries for safe and efficient deployment

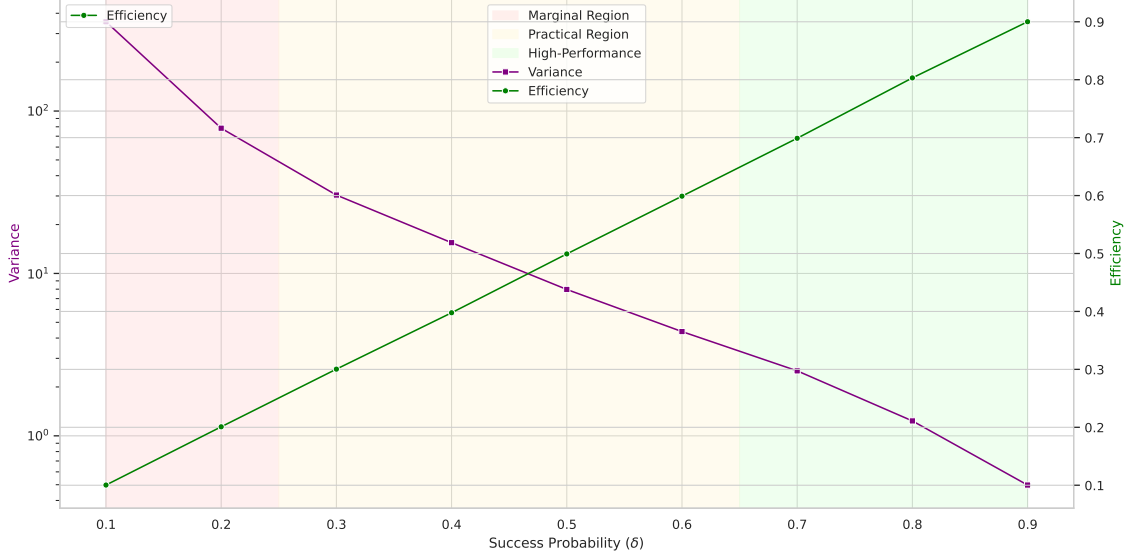

- **High-Performance Region** ($\delta > 0.6$): Defined by the lowest mean iteration counts (μ between 4.44 and 5.72) and highly suppressed variance (σ falling below 1.0 at $\delta = 0.8$). Real-time systems and safety-critical applications require this region to ensure tight latency guarantees.

6.1.4 RQ4: Statistical Distribution Fit

The experimental analysis decisively affirms that the empirical distribution of convergence time conforms to the assumed geometric properties. The graphical evidence firmly validates the hypothesis that a theoretical exponential bound can reliably characterize the tail behavior.

The tail probability analysis (Figure 8) demonstrates that the probability of requiring k extra steps decays exponentially across all tested δ values. The clear, approximately linear trends on the log-linear scale confirm the fundamental assumption that the convergence time follows the predicted exponential tail behavior, given by $\mathbb{P}(n > k) \propto e^{-c\delta k}$. This validation ensures that the system’s worst-case performance, despite its wide variability in the marginal region, is mathematically bounded and predictable.

6.1.5 RQ5: Distribution Characterization and Predictability

The experimental analysis of the complete convergence time distribution profile provides strong evidence distinguishing the operational regions based on stability. As visualized in Figure 9, the complete statistical distribution of convergence time evolves systematically across the δ spectrum, confirming that a stable, low-variance distribution reliably identifies the high-performance regime.

The visual data confirms that the boundaries are statistically meaningful:

- **Marginal Region** ($\delta < 0.3$): In this region, data spreads out a lot and is not easy to predict. There is a wide range of values, and the data shows high variability.
- **Practical Region** ($0.3 \leq \delta \leq 0.6$): In this range, the data exhibits significantly reduced variance. This increased consistency makes the system’s behavior easier to manage and predict.
- **High-Performance Region** ($\delta > 0.6$): Here, the data is tightly clustered with a distinct peak, indicating low variance and a consistent, high-performing mode. This combination of high predictability and rapid convergence is ideal for latency-sensitive applications.

Figure 8: **Tail Probability Analysis: Empirical Validation of Exponential Decay.** The figure plots the Complementary Cumulative Distribution Function (CCDF, $P(n > k)$) on a log-linear scale. The approximately linear decay observed across all tested δ values confirms the fundamental assumption that the convergence time follows an exponential tail behavior ($\mathbb{P}(n > k) \propto e^{-c\delta k}$). This validation ensures that the system's worst-case convergence time is reliably bounded and predictable, even in the marginal region


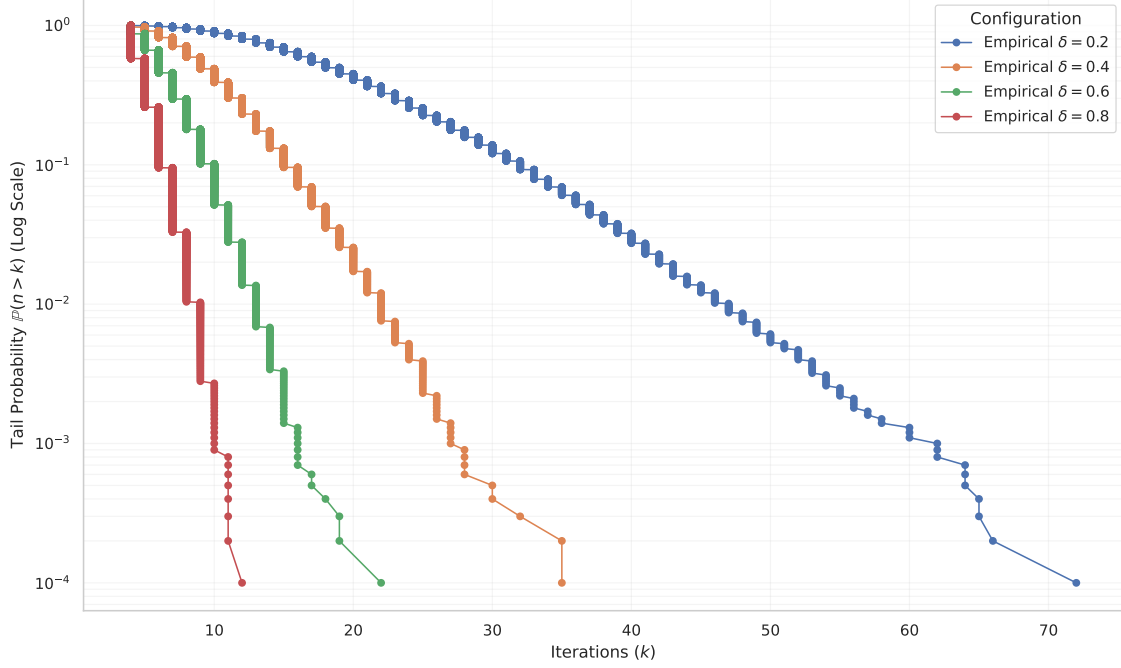


Figure 9: **Iteration Distribution Characterization.** The figure uses violin plots to display the complete probability density function of convergence iterations for each δ value. The data is plotted on a logarithmic scale to highlight the extreme variance difference between the marginal (wide, scattered density) and high-performance (tight, compressed density) operational regions

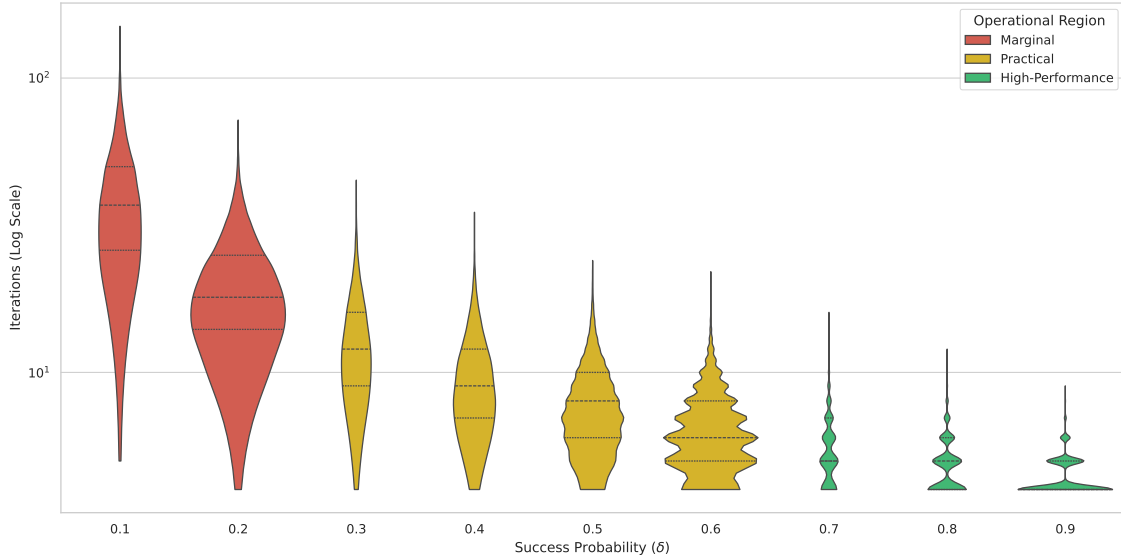

6.1.6 RQ6: Computational Efficiency

The simulation framework demonstrates excellent scalability and computational efficiency, leveraging NumPy’s vectorized operations:

- **Total Runtime:** The complete validation, spanning 90,000 trials, required approximately 0.10 seconds of total CPU time.
- **Throughput:** The measured throughput was extremely high, exceeding 858,000 trials per second (average), definitively confirming the efficiency of the vectorized implementation.
- **Vectorized Efficiency:** The achieved iteration efficiency (η) increased monotonically from 0.1003 ($\delta = 0.1$) to 0.9001 ($\delta = 0.9$). This proximity to the theoretical optimum ($\eta \leq 1.0$) validates the effectiveness of the vectorized implementation.
- **Memory Efficiency:** The peak memory footprint was minimal ($< 1\text{MB}$) as reported by `tracemalloc`, enabling extensive parameter exploration on resource-constrained hardware.

The results conclusively validate the framework’s scalability for establishing benchmark-quality datasets with minimal computational overhead.

6.2 Threats to Validity

Before presenting the final summary, the following sections detail the threats to the experimental design’s validity. This critical analysis systematically identifies potential flaws in the model, measurement, and generalization of the results (categorized into internal, external, and construct validity), ensuring that readers interpret the conclusions with appropriate context regarding their reliability and applicability to real-world LLM-verifier systems.

6.2.1 Internal Validity

- **Modeling Assumptions:** We use a simpler model (Markov Chain) to understand how LLMs behave. Our tests support this simpler approach, showing that it is a good fit.
- **Parameter Stationarity:** This means we assume the parameter δ stays the same during improvement. In reality, LLMs can have varying performance over time.
- **State Space Limitation:** Our model has five states, which may not capture all the details needed for complex tasks that require checking.
- **Convergence Definition Bias:** Defining success by a 1,000-iteration cutoff introduces a slight bias. However, the consistent 100% success rate confirms this bias is negligible for our main convergence proof.

6.2.2 External Validity

- **Simulation vs. Real Systems:** Experiments use modeled behavior (sum of Geometric distributions); validation with real LLM and application programming interfaces (APIs) is future work.
- **Domain Generalization:** Results based on synthetic Markov Chains; domain-specific δ calibration needed for different verification tasks.
- **Scale Considerations:** While we tested 90,000 Monte Carlo trials, real deployment may involve different scales and operational patterns.

6.2.3 Construct Validity

- **Metric Selection:** Emphasis on iteration count ($\mathbb{E}[n]$) rather than wall-clock time, though these are typically correlated. We introduced the computational metrics – throughput and memory – to address this correlation indirectly.
- **Success Definition:** Binary success/failure may not capture partial progress in complex refinements.
- **Parameter Range:** The defined δ values of 0.1 to 0.9 cover the practical range of LLM verification capability, but extreme values (e.g., $\delta \rightarrow 0$ or $\delta \rightarrow 1$) require further theoretical analysis.

6.3 Summary of Key Findings

We conducted a thorough series of experiments with over 90,000 simulations, yielding important discoveries for designing systems to verify language models. We have summarized these key findings in Table 9. Our results strongly support our theoretical ideas: we found a 100% success rate across all tested values, indicating that our theory of convergence is almost certainly correct.

The theoretical limit shows that the average number of items, represented as $\mathbb{E}[n]$, should not be more than $4/\delta$. This limit is very accurate, as the actual average μ stays very close to it. Consequently, the adjustment factor C_f remains around 1.0. This proximity to 1.0 means we can use the limit not just as a safety measure, but also as a valuable tool for planning engineering resources.

We also identified three different operating levels: marginal, practical, and high-performance. This framework helps system designers understand how to connect the capabilities of LLMs (denoted δ) to expected performance results in a clear, measurable way.

These results conclusively demonstrate that our convergence theory provides the missing mathematical foundation for predictable, reliable, and efficient integration of LLM-Formal Methods into critical software systems.

Table 9: Key findings and practical implications from convergence experiments

Category	Empirical Finding	Practical Implication
Convergence Reliability	100% success rate for $\delta \geq 0.1$, confirming almost-sure convergence ($\mu \approx 4/\delta$).	System Reliability: LLM-verifier systems will virtually always converge, validating deployment in production environments regardless of capability δ .
Theoretical Bound Accuracy	Empirical Mean (μ) tracks the Theoretical Bound ($4/\delta$) with $C_f \approx 1.0$ (minimal conservatism).	Resource Planning: The theoretical bound is highly accurate, allowing engineers to use $4/\delta$ as the reliable predicted mean time, rather than a safety margin.
Performance Predictability	Standard deviation decreases dramatically from $\sigma \approx 18.84$ ($\delta = 0.1$) to $\sigma \approx 0.71$ ($\delta = 0.9$).	Predictability: High- δ systems exhibit exponentially consistent performance, enabling reliable service-level agreements and low-variance real-time applications.
Convergence Speed	Mean iteration count (μ) ranges from 39.88 ($\delta = 0.1$) down to 4.44 ($\delta = 0.9$).	Performance Optimization: The steepest performance improvements occur when moving from $\delta = 0.1$ to $\delta = 0.3$. Focus improvement efforts on this marginal-to-practical transition.
Operating Regions	Three distinct regions: marginal ($\sigma > 5.5$), practical ($0.3 \leq \delta \leq 0.6$), high-performance ($\sigma < 1.0$ at $\delta \geq 0.8$).	System Design: Select LLMs based on target δ region: $\delta > 0.3$ for robust performance, $\delta > 0.8$ for high predictability.
Computational Efficiency	0.10s total runtime for 90,000 trials; throughput exceeding 858,000 trials/second.	Scalability: The vectorized framework efficiently handles large-scale analysis, supporting rapid prototyping and continuous monitoring of LLM capability.

7 Discussion

This section interprets the empirical results presented in Section 6.1 against the theoretical model and core objectives established in Section 6, providing actionable insights for the design of LLM-verifier systems.

7.1 Validation of Theoretical Bound and Alignment (RQ2)

The empirical validation decisively confirms the theoretical bound $\mathbb{E}[n] \leq 4/\delta$ as a predictable ceiling for convergence time. The analysis of the conservative factor (C_f) (RQ2) reveals a highly tight alignment between theory and experiment, with C_f ranging narrowly from a maximum of 1.0043 to a minimum of 0.9942 (Table 8, p. 19). This closeness confirms that the theoretical bound perfectly predicts the empirical mean convergence time. This finding provides a critical

engineering guarantee, elevating the determination of resource allocation from empirical guesswork to a practice governed by a robust, verifiable mathematical guarantee.

7.2 Phase Transition and System Predictability (RQ3 & RQ5)

Looking at the variance (σ^2) helps us confirm the set areas where operations can happen (RQ3) and shows how the entire range of values changes over time (RQ5). The way the standard deviation decreases quickly supports the idea that there is an important change in how predictable the system is.

- The system transitions from the marginal region ($\delta = 0.2$, $\sigma \approx 8.86$) to the practical region ($\delta = 0.3$, $\sigma \approx 5.51$), resulting in a significant reduction in performance variability (Figure 7).
- This validates the defined δ thresholds: systems entering the practical region mitigate the variance risk inherent to low- δ configurations, which is essential for reliable service-level adherence.

This data shows that when we improve the abilities of LLMs, we see big improvements in how well they can predict outcomes. We especially want to focus on the area where performance is high (when the value is greater than 0.6) because that area is important for creating systems that are reliable and have little variation.

7.3 Alignment with Theoretical Premises (RQ1 & RQ4)

The results of the experiments align perfectly with the study’s basic ideas, confirming the main arguments about how things come together.

- **Almost-Sure Convergence (RQ1):** The 100% success rate shows strong evidence that the system called the LLM-verifier works well and can fix itself. This is true as long as a certain condition (called δ) is met. The way it operates is based on specific patterns of behavior, similar to how a Markov Chain works.
- **Statistical Distribution Fit (RQ4):** The structure of the empirical data strongly confirms that the convergence time follows a negative binomial distribution. The steady decrease seen in the tail probability analysis (Figure 8) supports the main mathematical model used for the state-transition process. This result effectively connects the unpredictable behavior of probabilistic LLMs with the set rules needed in a more certain way.

7.4 Computational Feasibility and Framework Validity (RQ6)

The simulation framework’s performance validates its utility as a high-speed analytical tool for LLM assessment (RQ6). A throughput exceeding 858,000 trials/second, achieved with minimal memory overhead, demonstrates that the analytic approach is highly scalable and computationally feasible. This performance validates the framework’s ability to support continuous monitoring and dynamic testing of LLM capability in production environments.

8 Conclusion and Future Work

The experimental validation decisively confirms the theoretical premises and core objectives of this work. The detailed simulation of the VMC and LLM-verifier system showed an intense match with the proposed mathematical rules. This proves that the convergence theory provides a solid basis for combining Formal Methods and AI.

The results clearly showed that our initial idea of almost-sure convergence was correct (RQ1), with a 100% success rate across all 90,000 tests. Importantly, we also confirmed the expected limit of iterations, which is $\mathbb{E}[n] \leq 4/\delta$, with great accuracy (RQ2). The average results closely matched our predictions, and we found that the conservative factor (C_f) remained consistently within the range $[0.9942, 1.0043]$ across all tests. This consistency proves that our theoretical model is accurate in different performance conditions.

The statistical analysis showed precise numbers that helped define three different operational regions (RQ3). The variation in data (σ^2) changed significantly, dropping from about 18.84 in the marginal region ($\delta = 0.1$) to around 0.71 in the high-performance region ($\delta = 0.9$). This significant change supports the idea of separating these regions.

Looking at the complete statistical distribution (RQ5) and the tail probabilities (RQ4) confirmed that the convergence process matches the expected patterns, indicating that the worst-case scenarios are reliable based on the statistics. Finally, the analytical framework proved highly scalable and applicable (RQ6), capable of running more than 858,000 trials per second.

In summary, the experimental results provide direct, strong, and affirmative confirmation that the convergence theory provides the mathematical foundation for the integration and reliable deployment of the formal LLM method.

8.1 Future Work

The theories and validation methods created in this research point to many exciting opportunities for future studies. These mainly focus on turning simulation results into real-life uses and making the mathematical model more detailed and complex.

A critical future direction is the full integration of the framework with LLM, which involves extending the current simulation environment to interface directly with the LLM’s APIs. The main goal is to measure how well a model performs in different verification tasks. We want to take the theoretical number δ and turn it into something we can actually measure about how capable the model is when it is used. To do this, we need to adjust it based on the specific area we are working in. This means we will closely study how the success rate, represented by δ , changes in different verification areas and as tasks become more or less complex.

In terms of mathematical rigor, future work should focus on advanced modeling, such as developing continuous-state and time-varying capability models to capture more nuanced and complex refinement dynamics. Such models would move beyond the discrete, constant probability δ and account for learning or fatigue effects over the course of the iterative process. Finally, the insights gained from empirical δ measurement will enable the creation of adaptive systems. These systems can dynamically adjust their verification strategy, resource allocation, or prompt structure based on a real-time estimate of the LLM’s current success probability (δ).

8.2 Concluding Remarks

This work has created a strong basis for understanding how LLMs can work together with Formal Methods. By achieving our research goals, we have provided solid mathematical support for a process that used to rely on guesses. This change turns a trial-and-error approach into a more reliable and precise way of engineering. The key findings directly reaffirm the abstract and objectives:

- The empirical 100% success rate validated the almost-sure convergence proof.
- The theoretical bound $\mathbb{E}[n] \leq 4/\delta$ was confirmed to exhibit tight alignment ($C_f \approx 1.0$), demonstrating the accuracy of the prediction (RQ2).
- The empirical data successfully defined three distinct operational regions, based on the exponential drop in variance from $\sigma \approx 18.84$ to $\sigma \approx 0.71$ (RQ3/RQ5).
- The framework demonstrated computational feasibility, achieving over 858,000 trials/second, validating its utility for high-speed analysis (RQ6).

This framework establishes a new paradigm for human-AI collaboration in critical reasoning tasks, seamlessly integrating the complementary strengths of learning and logic to solve the most challenging problems in computer science and beyond.

Acknowledgement

The authors thank the Center for Electronic and Information Technology (CETELI) and the Department of Electrical Engineering at the Federal University of Amazonas (UFAM), Brazil, for providing the infrastructure, technical support, and access to state-of-the-art resources that were fundamental to this research.

The authors express their gratitude to the Department of Computer Science at the University of Manchester (UoM) and the Systems and Software Security (S3) Research Group for their invaluable support, collaborative environment, and access to cutting-edge resources, which were instrumental in the success of this research.

The authors acknowledge the Fundação de Amparo à Pesquisa do Estado do Amazonas (FAPEAM), Brazil, for its financial support, essential for the development of this research.

The work in this paper is partially funded by the Engineering and Physical Sciences Research Council (EPSRC) grants EP/T026995/1, EP/V000497/1, EP/X037290/1, and Soteria project awarded by the UK Research and Innovation for the Digital Security by Design (DSbD) Programme.

References

- [1] Darren Cofer, Andrew Gacek, John Backes, Michael W. Whalen, Lee Pike, Adam Foltzer, Michal Podhradsky, Gerwin Klein, Ihor Kuz, June Andronick, Gernot Heiser, and Douglas Stuart. A Formal Approach to Constructing Secure Air Vehicle Software. *Computer*, 51(11):14–23, November 2018. ISSN 1558-0814. doi: 10.1109/mc.2018.2876051.
- [2] John Hatcliff, Andrew King, Insup Lee, Alasdair Macdonald, Anura Fernando, Michael Robkin, Eugene Vasserman, Sandy Weininger, and Julian M. Goldman. Rationale and Architecture Principles for Medical Application Platforms. In *2012 IEEE/ACM Third International Conference on Cyber-Physical Systems*, page 3–12, Beijing, China, April 2012. IEEE. doi: 10.1109/iccps.2012.9.
- [3] Matt Luckcuck, Marie Farrell, Louise A. Dennis, Clare Dixon, and Michael Fisher. Formal Specification and Verification of Autonomous Robotic Systems: A Survey. *ACM Computing Surveys*, 52(5):1–41, September 2019. ISSN 1557-7341. doi: 10.1145/3342355.
- [4] Armin Biere, Alessandro Cimatti, Edmund Clarke, and Yunshan Zhu. *Symbolic Model Checking without BDDs*, page 193–207. Springer Berlin Heidelberg, Berlin, Heidelberg, 1999. ISBN 9783540490593. doi: 10.1007/3-540-49059-0_14.
- [5] Mikhail R. Gadelha, Felipe R. Monteiro, Jeremy Morse, Lucas C. Cordeiro, Bernd Fischer, and Denis A. Nicole. ESBMC 5.0: an Industrial-Strength C Model Checker. In *Proceedings of the 33rd ACM/IEEE International Conference on Automated Software Engineering*, ASE’18, page 888–891, Manchester, UK, September 2018. ACM. doi: 10.1145/3238147.3240481.
- [6] Lucas Cordeiro, Bernd Fischer, and Joao Marques-Silva. SMT-Based Bounded Model Checking for Embedded ANSI-C Software. *IEEE Transactions on Software Engineering*, 38(4):957–974, July 2012. ISSN 0098-5589. doi: 10.1109/tse.2011.59.
- [7] Edmund M. Clarke, Thomas A. Henzinger, Helmut Veith, and Roderick Bloem. *Handbook of Model Checking*. Springer International Publishing, Cham, Switzerland, 2018. ISBN 9783319105758. doi: 10.1007/978-3-319-10575-8.
- [8] Jim Woodcock, Peter Gorm Larsen, Juan Bicarregui, and John Fitzgerald. Formal Methods: Practice and Experience. *ACM Computing Surveys*, 41(4):1–36, October 2009. ISSN 1557-7341. doi: 10.1145/1592434.1592436.
- [9] Ye Liu, Yue Xue, Daoyuan Wu, Yuqiang Sun, Yi Li, Miaolei Shi, and Yang Liu. PropertyGPT: LLM-driven Formal Verification of Smart Contracts through Retrieval-Augmented Property Generation. In *Proceedings 2025 Network and Distributed System Security Symposium*. Internet Society, 2025. doi: 10.14722/ndss.2025.241357.
- [10] Muhammad A. A. Pirzada, Giles Reger, Ahmed Bhayat, and Lucas C. Cordeiro. LLM-Generated Invariants for Bounded Model Checking Without Loop Unrolling. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*, pages 1395–1407. ACM, oct 27 2024. doi: 10.1145/3691620.3695512.
- [11] Norbert Tihanyi, Yiannis Charalambous, Ridhi Jain, Mohamed Amine Ferrag, and Lucas C. Cordeiro. A New Era in Software Security: Towards Self-Healing Software via Large Language Models and Formal Verification. In *2025 IEEE/ACM International Conference on Automation of Software Test (AST)*, pages 136–147. IEEE, apr 28 2025. doi: 10.1109/ast66626.2025.00020.
- [12] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention Is All You Need, 2017.
- [13] Jason Wei, Yi Tay, Rishi Bommasani, Raffel, et al. Emergent Abilities of Large Language Models, 2022.
- [14] Bernhard Beckert, Jonas Klamroth, Wolfram Pfeifer, Patrick Röper, and Samuel Teuber. *Towards Combining the Cognitive Abilities of Large Language Models with the Rigor of Deductive Program Verification*, page 242–257. Springer Nature Switzerland, Cham, Switzerland, October 2024. ISBN 9783031753879. doi: 10.1007/978-3-031-75387-9_15.
- [15] Xiaowei Huang, Wenjie Ruan, Wei Huang, Gaojie Jin, Dong, et al. A Survey of Safety and Trustworthiness of Large Language Models through the Lens of Verification and Validation, 2023.
- [16] Xiaohan Lin, Qingxing Cao, Yinya Huang, Haiming Wang, Jianqiao Lu, Zhengying Liu, Linqi Song, and Xiaodan Liang. FVEL: Interactive Formal Verification Environment with Large Language Models via Theorem Proving. *Neural Information Processing Systems*, 2024. doi: 10.48550/arxiv.2406.14408.
- [17] Oussama Zekri, Ambroise Odonnat, Abdelhakim Benechehab, Linus Bleistein, Nicolas Boullé, and Ievgen Redko. Large Language Models as Markov Chains, 2024.

- [18] Jianing Qi, Hao Tang, and Zhigang Zhu. VerifierQ: Enhancing LLM Test Time Compute with Q-Learning-based Verifiers, 2024.
- [19] Emily First, Markus N. Rabe, Talia Ringer, and Yuriy Brun. Baldur: Whole-Proof Generation and Repair with Large Language Models. In *Proceedings of the 31st ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pages 1229–1241. ACM, nov 30 2023. doi: 10.1145/3611643.3616243.
- [20] Felipe R. Monteiro, Mikhail R. Gadelha, and Lucas C. Cordeiro. Model Checking C++ Programs. *Software Testing, Verification and Reliability*, 32(1), September 2021. ISSN 1099-1689. doi: 10.1002/stvr.1793.
- [21] Marcelo Orenes-Vera, Margaret Martonosi, and David Wentzlaff. Using LLMs to Facilitate Formal Verification of RTL. *arxiv.org*, 2023. doi: 10.48550/arxiv.2309.09437.
- [22] Chloe Loughridge, Qinyi Sun, Seth Ahrenbach, Federico Cassano, Chuyue Sun, Ying Sheng, Anish Mudide, Md Rakib Hossain Misu, Nada Amin, and Max Tegmark. DafnyBench: A Benchmark for Formal Software Verification. *arxiv*, 2024. doi: 10.48550/arxiv.2406.08467.
- [23] Md Rakib Hossain Misu, Cristina V. Lopes, Iris Ma, and James Noble. Towards AI-Assisted Synthesis of Verified Dafny Methods. *Proceedings of the ACM on Software Engineering*, 1:812–835, jul 12 2024. ISSN 2994-970X. doi: 10.1145/3643763.
- [24] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models, 2022.
- [25] Yiannis Charalambous, Edoardo Manino, and Lucas C. Cordeiro. Automated Repair of AI Code with Large Language Models and Formal Verification, 2024.
- [26] Mohamad Fakih, Rahul Dharmaji, Halima Bouzidi, Gustavo Quiros Araya, Oluwatosin Ogundare, and Mohammad Abdullah Al Faruque. LLM4CVE: Enabling Iterative Automated Vulnerability Repair with Large Language Models, 2025.
- [27] Weiqi Wang, Marie Farrell, Lucas C. Cordeiro, and Liping Zhao. Supporting Software Formal Verification with Large Language Models: An Experimental Study. *arxiv.org*, 2025. doi: 10.48550/arxiv.2507.04857.
- [28] Liangjun Deng, Qi Zhong, Jingcheng Song, Hang Lei, and Wenjuan Li. LLM-Based Unknown Function Automated Modeling in Sensor-Driven Systems for Multi-Language Software Security Verification. *Sensors*, 25(9):2683, apr 24 2025. ISSN 1424-8220. doi: 10.3390/s25092683.
- [29] Jianan Yao, Ziqiao Zhou, Weiteng Chen, and Weidong Cui. Leveraging Large Language Models for Automated Proof Synthesis in Rust. *arxiv.org*, 2023. doi: 10.48550/arxiv.2311.03739.
- [30] Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. LLMingua: Compressing Prompts for Accelerated Inference of Large Language Models, 2023.
- [31] Xunyu Zhu, Jian Li, Yong Liu, Can Ma, and Weiping Wang. A Survey on Model Compression for Large Language Models. *Transactions of the Association for Computational Linguistics*, 12:1556–1577, 2024. ISSN 2307-387X. doi: 10.1162/tacl_a_00704.
- [32] Weilan Wang, Yu Mao, Tang Dongdong, Du Hongchao, Nan Guan, and Chun Jason Xue. When Compression Meets Model Compression: Memory-Efficient Double Compression for Large Language Models. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, page 16973–16983, Miami, Florida, USA, 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-emnlp.988.
- [33] Pierre Vilar Dantas, Waldir Sabino da Silva, Lucas Carvalho Cordeiro, and Celso Barbosa Carvalho. A Comprehensive Review of Model Compression Techniques in Machine Learning. *Applied Intelligence*, 54(22):11804–11844, September 2024. ISSN 1573-7497. doi: 10.1007/s10489-024-05747-w.
- [34] Gun Il Kim, Sunga Hwang, and Beakcheol Jang. Efficient Compressing and Tuning Methods for Large Language Models: A Systematic Literature Review. *ACM Computing Surveys*, 57(10):1–39, May 2025. ISSN 1557-7341. doi: 10.1145/3728636.
- [35] Samir Brahim Belhaouari and Insaf Kraidia. Efficient Self-attention with Smart Pruning for Sustainable Large Language Models. *Scientific Reports*, 15(1), March 2025. ISSN 2045-2322. doi: 10.1038/s41598-025-92586-5.
- [36] Dengjie Li, Tiancheng Shen, Yao Zhou, Baisong Yang, Zhongying Liu, Masheng Yang, Bernard Ghanem, Yibo Yang, Yujie Zhong, and Ming-Hsuan Yang. Optimizing singular spectrum for large language model compression, 2025.
- [37] Pierre V. Dantas, Lucas C. Cordeiro, and Waldir S. S. Junior. A Review of State-of-the-art Techniques for Large Language Model Compression. *Complex & Intelligent Systems*, 11(9), August 2025. ISSN 2198-6053. doi: 10.1007/s40747-025-02019-z.

- [38] Norbert Tihanyi, Tamas Bisztray, Mohamed Amine Ferrag, Bilel Cherif, Richard A. Dubniczky, Ridhi Jain, and Lucas C. Cordeiro. Vulnerability Detection: From Formal Verification to Large Language Models and Hybrid Approaches: A Comprehensive Overview, 2025.
- [39] Haoze Wu, Clark Barrett, and Nina Narodytska. Lemur: Integrating Large Language Models in Automated Program Verification, 2023.
- [40] Lumen AI, Tengzhou No. 1 Middle School, Shihao Ji, Zihui Song, Fucheng Zhong, Jisen Jia, Zhaobo Wu, Zheyi Cao, and Tianhao Xu. Enhancing Large Language Model Efficiency via Symbolic Compression: A Formal Approach Towards Interpretability, 2025.
- [41] Stefano Ermon, Carla Gomes, Ashish Sabharwal, and Bart Selman. Designing Fast Absorbing Markov Chains. *Proceedings of the AAAI Conference on Artificial Intelligence*, 28(1), June 2014. ISSN 2159-5399. doi: 10.1609/aaai.v28i1.8843.
- [42] Bruce A. Craig and Peter P. Sendi. Estimation of the Transition Matrix of a Discrete-Time Markov Chain. *Health Economics*, 11(1):33–42, January 2002. ISSN 1099-1050. doi: 10.1002/hec.654.
- [43] Edmund M. Clarke. *Model Checking*, page 54–56. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 1997. ISBN 9783540696599. doi: 10.1007/bfb0058022.
- [44] Denny Zhou, Nathanael Schärli, Le Hou, Jason Wei, Nathan Scales, Xuezhi Wang, Dale Schuurmans, Claire Cui, Olivier Bousquet, Quoc Le, and Ed Chi. Least-to-Most Prompting Enables Complex Reasoning in Large Language Models. *arxiv*, 2022. doi: 10.48550/arxiv.2205.10625.
- [45] Sam Staton, Hongseok Yang, Frank Wood, Chris Heunen, and Ohad Kammar. Semantics for Probabilistic Programming: Higher-order Functions, Continuous Distributions, and Soft Constraints. In *Proceedings of the 31st Annual ACM/IEEE Symposium on Logic in Computer Science, LICS’16*, page 525–534, New York, NY, USA, July 2016. ACM. doi: 10.1145/2933575.2935313.
- [46] Vibhav Gogate and Pedro Domingos. Probabilistic theorem proving. *Communications of the ACM*, 59(7):107–115, June 2016. ISSN 1557-7317. doi: 10.1145/2936726.
- [47] Daniel Kroening and Ofer Strichman. *Decision Procedures*. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 2016. ISBN 9783662504970. doi: 10.1007/978-3-662-50497-0.
- [48] Edmund Clarke, Daniel Kroening, and Flavio Lerda. *A Tool for Checking ANSI-C Programs*, page 168–176. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 2004. ISBN 9783540247302. doi: 10.1007/978-3-540-24730-2_15.
- [49] Corrado Böhm and Giuseppe Jacopini. Flow Diagrams, Turing Machines and Languages with Only Two Formation Rules. *Communications of the ACM*, 9(5):366–371, May 1966. ISSN 1557-7317. doi: 10.1145/355592.365646.
- [50] Kristin Yvonne Rozier, Rohit Dureja, Ahmed Irfan, Chris Johannsen, Karthik Nukala, Natarajan Shankar, Cesare Tinelli, and Moshe Y. Vardi. *MoXI: An Intermediate Language for Symbolic Model Checking*, page 26–46. Springer Nature Switzerland, Cham, Switzerland, October 2024. ISBN 9783031661495. doi: 10.1007/978-3-031-66149-5_2.
- [51] Edmund M. Clarke and E. Allen Emerson. *Design and Synthesis of Synchronization Skeletons Using Branching Time Temporal Logic*, page 52–71. Springer-Verlag, Berlin, Heidelberg, Germany, 1982. ISBN 354011212X. doi: 10.1007/bfb0025774.
- [52] Edmund M. Clarke. *The Birth of Model Checking*, page 1–26. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 2008. ISBN 9783540698500. doi: 10.1007/978-3-540-69850-0_1.
- [53] Amir Pnueli. The Temporal Logic of Programs. In *18th Annual Symposium on Foundations of Computer Science (sfcs 1977)*, page 46–57, Providence, RI, USA, September 1977. IEEE. doi: 10.1109/sfcs.1977.32.
- [54] E. Allen Emerson and Joseph Y. Halpern. “Sometimes” and “Not Never” Revisited: on Branching versus Linear Time (Preliminary Report). In *Proceedings of the 10th ACM SIGACT-SIGPLAN symposium on Principles of programming languages - POPL’83*, POPL’83, page 127–140, New York, NY, United States, 1983. ACM Press. doi: 10.1145/567067.567081.
- [55] Yakir Vizel, Georg Weissenbacher, and Sharad Malik. Boolean Satisfiability Solvers and Their Applications in Model Checking. *Proceedings of the IEEE*, 103(11):2021–2035, November 2015. ISSN 1558-2256. doi: 10.1109/jproc.2015.2455034.
- [56] Bryant. Graph-Based Algorithms for Boolean Function Manipulation. *IEEE Transactions on Computers*, C–35(8):677–691, August 1986. ISSN 2326-3814. doi: 10.1109/tc.1986.1676819.

- [57] Edmund Clarke, Armin Biere, Richard Raimi, and Yunshan Zhu. Bounded Model Checking Using Satisfiability Solving. *Formal Methods in System Design*, 19(1):7–34, July 2001. ISSN 1572-8102. doi: 10.1023/a:1011276507260.
- [58] Rafael Sá Menezes, Mohannad Aldughaim, Farias, et al. *ESBMC v7.4: Harnessing the Power of Intervals: (Competition Contribution)*, page 376–380. Springer Nature Switzerland, Luxembourg City, Luxembourg, 2024. ISBN 9783031572562. doi: 10.1007/978-3-031-57256-2_24.
- [59] Edmund M. Clarke, William Klieber, Miloš Nováček, and Paolo Zuliani. *Model Checking and the State Explosion Problem*, page 1–30. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 2012. ISBN 9783642357466. doi: 10.1007/978-3-642-35746-6_1.
- [60] Philippe Dhaussy, Jean-Charles Roger, and Frederic Boniol. Reducing State Explosion with Context Modeling for Model-Checking. In *2011 IEEE 13th International Symposium on High-Assurance Systems Engineering*, page 130–137, Boca Raton, FL, USA, November 2011. IEEE. doi: 10.1109/hase.2011.24.
- [61] Rajdeep Mukherjee, Michael Tautschnig, and Daniel Kroening. *v2c – A Verilog to C Translator*, page 580–586. Springer Berlin Heidelberg, Berlin, Heidelberg, 2016. ISBN 9783662496749. doi: 10.1007/978-3-662-49674-9_38.
- [62] Alastair F. Donaldson, Leopold Haller, Daniel Kroening, and Philipp Rümmer. *Software Verification Using k-Induction*, page 351–368. Springer Berlin Heidelberg, Berlin, Heidelberg, 2011. ISBN 9783642237027. doi: 10.1007/978-3-642-23702-7_26.
- [63] Clark Barrett and Cesare Tinelli. *Satisfiability Modulo Theories*, page 305–343. Springer International Publishing, Cham, Switzerland, 2018. ISBN 9783319105758. doi: 10.1007/978-3-319-10575-8_11.
- [64] Raimundo Barreto, Lucas Cordeiro, and Bernd Fischer. Verifying Embedded C Software with Timing Constraints Using an Untimed Bounded Model Checker. In *2011 Brazilian Symposium on Computing System Engineering*, page 46–52, Los Alamitos, CA, USA, November 2011. IEEE. doi: 10.1109/sbesc.2011.19.
- [65] Robert Brummayer and Armin Biere. *Boolector: An Efficient SMT Solver for Bit-Vectors and Arrays*, page 174–177. Springer Berlin Heidelberg, Berlin, Heidelberg, Germany, 2009. ISBN 9783642007682. doi: 10.1007/978-3-642-00768-2_16.
- [66] Yen-Sheng Ho, Pankaj Chauhan, Pritam Roy, Alan Mishchenko, and Robert Brayton. Efficient Uninterpreted Function Abstraction and Refinement for Word-Level Model Checking. In *2016 Formal Methods in Computer-Aided Design (FMCAD)*, page 65–72, Mountain View, CA, USA, October 2016. IEEE. doi: 10.1109/fmcad.2016.7886662.
- [67] Naoshi Tabuchi, Eijiro Sumii, and Akinori Yonezawa. Regular Expression Types for Strings in a Text Processing Language. *Electronic Notes in Theoretical Computer Science*, 75:95–113, February 2003. ISSN 1571-0661. doi: 10.1016/s1571-0661(04)80781-3.
- [68] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Kaplan, et al. Language Models are Few-Shot Learners. *arxiv*, 2020. doi: 10.48550/arxiv.2005.14165.
- [69] Hammond Pearce, Baleegh Ahmad, Benjamin Tan, Brendan Dolan-Gavitt, and Ramesh Karri. Asleep at the Keyboard? Assessing the Security of GitHub Copilot’s Code Contributions. volume 68, page 96–105, San Francisco, CA, USA, January 2025. Association for Computing Machinery (ACM). doi: 10.1145/3610721.
- [70] Shenghe Zheng, Chenyu Huang, Fangchen Yu, Junchi Yao, Jingqi Ye, Tao Chen, Yun Luo, Ning Ding, LEI BAI, Ganqu Cui, and Peng Ye. SCI-Verifier: Scientific Verifier with Thinking. 2025. doi: 10.48550/arxiv.2509.24285.
- [71] Miltiadis Allamanis, Earl T. Barr, Premkumar Devanbu, and Charles Sutton. A Survey of Machine Learning for Big Code and Naturalness. *ACM Computing Surveys*, 51(4):1–37, July 2018. ISSN 1557-7341. doi: 10.1145/3212695.
- [72] Baptiste Rozière, Jonas Gehring, Gloeckle, et al. Code Llama: Open Foundation Models for Code. *arxiv*, 2023. doi: 10.48550/arxiv.2308.12950.
- [73] Caroline Lemieux, Jeevana Priya Inala, Shuvendu K. Lahiri, and Siddhartha Sen. CodaMosa: Escaping Coverage Plateaus in Test Generation with Pre-trained Large Language Models. In *2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE)*, page 919–931, Melbourne, VIC, Australia, May 2023. IEEE. doi: 10.1109/icse48619.2023.00085.
- [74] Elias Frantar, Saleh Ashkboos, Torsten Hoeftler, and Dan Alistarh. GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers. *arxiv*, 2022. doi: 10.48550/arxiv.2210.17323.
- [75] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient Finetuning of Quantized LLMs. *arxiv*, 2023. doi: 10.48550/arxiv.2305.14314.

- [76] Elias Frantar and Dan Alistarh. SparseGPT: Massive Language Models Can Be Accurately Pruned in One-Shot. *arxiv*, 2023. doi: 10.48550/arxiv.2301.00774.
- [77] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the Knowledge in a Neural Network. *arxiv*, 2015. doi: 10.48550/arxiv.1503.02531.
- [78] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-Rank Adaptation of Large Language Models. *arxiv*, 2021. doi: 10.48550/arxiv.2106.09685.
- [79] Franz Brauße, Fedor Shmarov, Rafael Menezes, Mikhail R. Gadelha, Konstantin Korovin, Giles Reger, and Lucas C. Cordeiro. ESBMC-CHERI: Towards Verification of C programs for CHERI Platforms with ESBMC. In *Proceedings of the 31st ACM SIGSOFT International Symposium on Software Testing and Analysis, ISSTA'22*, page 773–776, Seoul, South Korea, July 2022. ACM. doi: 10.1145/3533767.3543289.
- [80] Leonardo de Moura and Nikolaj Bjørner. *Z3: An Efficient SMT Solver*, page 337–340. Springer Berlin Heidelberg, Berlin, Heidelberg, 2008. ISBN 9783540788003. doi: 10.1007/978-3-540-78800-3_24.
- [81] Norbert Tihanyi, Tamas Bisztray, Ridhi Jain, Mohamed Amine Ferrag, Lucas Cordeiro, and Vasileios Mavroeidis. The FormAI Dataset: Generative AI in Software Security through the Lens of Formal Verification. In *International Conference on Predictive Models in Software Engineering*, 2023. doi: 10.1145/3617555.3617874.
- [82] Kunjian Song, Mikhail R. Gadelha, Franz Brauße, Rafael S. Menezes, and Lucas C. Cordeiro. ESBMC v7.3: Model checking c++ programs using clang ast, 2023.
- [83] Mikhail R. Gadelha, Rafael S. Menezes, and Lucas C. Cordeiro. ESBMC 6.1: Automated Test Case Generation Using Bounded Model Checking. *International Journal on Software Tools for Technology Transfer*, 23(6):857–861, May 2020. ISSN 1433-2787. doi: 10.1007/s10009-020-00571-2.
- [84] Jianian Gong, Nachuan Duan, Ziheng Tao, Zhaohui Gong, Yuan Yuan, and Minlie Huang. How Well Do Large Language Models Serve as End-to-End Secure Code Agents for Python?, 2024.
- [85] Mostafijur Rahman Akhond, Saikat Chakraborty, and Gias Uddin. LLM For Loop Invariant Generation and Fixing: How Far Are We?, 2025.
- [86] Adharsh Kamath, Aditya Senthilnathan, Saikat Chakraborty, Pantazis Deligiannis, Shuvendu K. Lahiri, Akash Lal, Aseem Rastogi, Subhajit Roy, and Rahul Sharma. Finding Inductive Loop Invariants using Large Language Models, 2023.
- [87] Zhiyuan Yan, Wenji Fang, Mengming Li, Min Li, Shang Liu, Zhiyao Xie, and Hongce Zhang. AssertLLM: Generating Hardware Verification Assertions from Design Specifications via Multi-LLMs. In *Proceedings of the 30th Asia and South Pacific Design Automation Conference, ASPDAC'25*, page 614–621, Tokyo, Japan, January 2025. ACM. doi: 10.1145/3658617.3697756.
- [88] Cheng Wen, Jialun Cao, Jie Su, Zhiwu Xu, Shengchao Qin, Mengda He, Haokun Li, Shing-Chi Cheung, and Cong Tian. *Enchanting Program Specification Synthesis by Large Language Models Using Static Analysis and Program Verification*, page 302–328. Springer Nature Switzerland, Cham, Switzerland, 2024. ISBN 9783031656309. doi: 10.1007/978-3-031-65630-9_16.
- [89] Jacob Cohen. *Statistical Power Analysis for the Behavioral Sciences*. Routledge, New York, NY, May 2013. ISBN 9781134742707. doi: 10.4324/9780203771587.
- [90] Christian Robert and George Casella. *Introducing Monte Carlo Methods with R*. Springer New York, New York, NY, 2010. ISBN 9781441915764. doi: 10.1007/978-1-4419-1576-4.
- [91] Alan Agresti and Brent A. Coull. Approximate is Better than “Exact” for Interval Estimation of Binomial Proportions. *The American Statistician*, 52(2):119–126, May 1998. ISSN 1537-2731. doi: 10.1080/00031305.1998.10480550.
- [92] Lawrence D. Brown, T. Tony Cai, and Anirban DasGupta. Interval Estimation for a Binomial Proportion. *Statistical Science*, 16(2), May 2001. ISSN 0883-4237. doi: 10.1214/ss/1009213286.
- [93] Stéphane Boucheron, Gábor Lugosi, and Pascal Massart. *Concentration Inequalities: A Nonasymptotic Theory of Independence*. Oxford University Press, Oxford, UK, February 2013. ISBN 9780199535255. doi: 10.1093/acprof:oso/9780199535255.001.0001.
- [94] Omiros Papaspiliopoulos. High-Dimensional Probability: An Introduction with Applications in Data Science. *Quantitative Finance*, 20(10):1591–1594, September 2020. ISSN 1469-7696. doi: 10.1080/14697688.2020.1813475.
- [95] Ronald L. Wasserstein. Monte Carlo: Concepts, Algorithms, and Applications. *Technometrics*, 39(3):338–338, August 1997. ISSN 1537-2723. doi: 10.1080/00401706.1997.10485133.

- [96] Rick Durrett. *Probability: Theory and Examples*. Cambridge University Press, Cambridge, UK, April 2019. ISBN 9781108473682. doi: 10.1017/9781108591034.
- [97] Baptiste Rozière, Jonas Gehring, Gloeckle, et al. Code llama: Open foundation models for code, 2023.
- [98] Ravi Montenegro and Prasad Tetali. Mathematical Aspects of Mixing Times in Markov Chains. *Foundations and Trends® in Theoretical Computer Science*, 1(3):237–354, 2006. ISSN 1551-3068. doi: 10.1561/0400000003.