

# Safeguarded Stochastic Polyak Step Sizes for Non-smooth Optimization: Robust Performance Without Small (Sub)Gradients

Dimitris Oikonomou<sup>1,2</sup>  
doikono1@jh.edu

Nicolas Loizou<sup>1,3</sup>  
nloizou@jhu.edu

<sup>1</sup>Mathematical Institute for Data Science (MINDS), Johns Hopkins University

<sup>2</sup>Department of Computer Science, Johns Hopkins University

<sup>3</sup>Department of Applied Mathematics and Statistics, Johns Hopkins University

## Abstract

The stochastic Polyak step size (SPS) has proven to be a promising choice for stochastic gradient descent (SGD), delivering competitive performance relative to state-of-the-art methods on smooth convex and non-convex optimization problems, including deep neural network training. However, extensions of this approach to non-smooth settings remain in their early stages, often relying on interpolation assumptions or requiring knowledge of the optimal solution. In this work, we propose a novel SPS variant — Safeguarded SPS (SPS<sub>safe</sub>) — for the stochastic subgradient method, and provide rigorous convergence guarantees for non-smooth convex optimization with no need for strong assumptions. We further incorporate momentum into the update rule, yielding equally tight theoretical results. Comprehensive experiments on convex benchmarks and deep neural networks corroborate our theory: the proposed step size accelerates convergence, reduces variance, and consistently outperforms existing adaptive baselines. Finally, in the context of deep neural network training, our method demonstrates robust performance by addressing the vanishing gradient problem.

## 1 Introduction

Adaptive optimization methods have become fundamental tools in machine learning, offering robustness and eliminating the need for manual learning rate tuning. Among the most prominent are AdaGrad and Adam. AdaGrad [Choudhury et al., 2024, Duchi et al., 2011] adapts the learning rate individually for each parameter by accumulating past squared gradients, making it well-suited for sparse features but often suffering from decreasing learning rates over time. Adam [Kingma and Ba, 2015] extends this idea by maintaining exponential moving averages of both the gradient and its squared values, and correcting for initialization bias. As a result, Adam has demonstrated strong empirical performance and has become a standard optimizer in deep learning applications due to its stability and ease of use, [Guo et al., 2022, Peebles and Xie, 2023, Vaswani et al., 2017].

In a different direction, adaptive optimization algorithms using Polyak-type step sizes have started gaining recognition for their simplicity and strong practical performance. Unlike traditional adaptive methods that rely solely on gradient information, these approaches determine the learning rate using function values. The classical Polyak step size (PS), originally introduced by Polyak [1987], was proposed as an efficient rule for step size selection in gradient descent for solving convex optimization problems. Although rooted in early optimization literature, these ideas have recently seen a resurgence, particularly in machine learning applications. The Polyak step size was recently extended to stochastic settings. Loizou et al. [2021] proposed and analyzed stochastic gradient descent (SGD) with Stochastic Polyak Step size (SPS) and demonstrated convergence guarantees for convex and non-convex problems while retaining the simplicity of the original rule. The proposed SPS comes with strong convergence guarantees and competitive performance in training DNNs, and it is particularly useful when training over-parameterized models [Loizou et al., 2021]. In the last few years, many other works have

explored the use of stochastic Polyak step sizes in different training algorithms, including SGD [Garrigos et al., 2023, Gower et al., 2021, Jiang and Stich, 2023, Orabona and D’Orazio, 2025, Orvieto et al., 2022], Stochastic Mirror Descent [D’Orazio et al., 2023], Local SGD [Mukherjee et al., 2024], and SGD with Momentum [Gower et al., 2025, Oikonomou and Loizou, 2025, Schaipp et al., 2024, Wang et al., 2023]. Nevertheless, nearly all existing analyses assume *convexity and smoothness* while robust guarantees in the non-smooth regime remain scarce [Orabona and D’Orazio, 2025]. The understanding of practical and efficient stochastic Polyak-type step sizes in the arguably more challenging non-smooth regime is precisely the main focus of our work.

**Problem Setup and Main Algorithms.** We focus on the unconstrained finite-sum optimization problem

$$\min_{x \in \mathbb{R}^d} \left[ f(x) = \frac{1}{n} \sum_{i=1}^n f_i(x) \right], \quad (1)$$

where each component function  $f_i : \mathbb{R}^d \rightarrow \mathbb{R}$  is *convex*, *Lipschitz* and ***non-smooth*** as well as lower bounded by  $\ell_i^*$ . Let  $X^*$  denote the set of minimizers of (1). We assume that  $X^* \neq \emptyset$ . This problem is the cornerstone of many machine learning tasks, [Hastie et al., 2009], where the vector  $x$  represents the model parameters,  $f_i(x)$  is the loss related to the training point  $i$ , and the goal is to minimize the empirical risk  $f(x)$  across all training points.

Two widely used algorithms for solving stochastic, non-smooth convex optimization problems of the form (1) are (i) the *Stochastic Subgradient Method* (SSM) and (ii) the more recent *Iterate Moving Average* (IMA), an equivalent algorithm to the stochastic subgradient method with momentum [Sebbouh et al., 2021].

SSM, tracing back to the seminal work of Robbins and Monro [1951] and later formalized for convex objectives by Shor [1985] and Nedić and Bertsekas [2001]. It has the following update rule

$$x^{t+1} = x^t - \gamma_t g_i^t, \quad (\text{SSM})$$

where  $g_i^t \in \partial f_i(x^t)$  is the stochastic subgradient,  $i$  is uniformly drawn from  $\{1, \dots, n\}$ , and a  $\gamma_t > 0$  is the step size of the method.

IMA extends SSM by adding a new iterate ( $z^t$ ): Each iteration first performs a subgradient step on  $z^t$  and then averages the result with the previous iterate  $x^t$ . The update rule is given by:

$$\begin{aligned} z^{t+1} &= z^t - \eta_t g_i^t, \quad \text{where} \quad g_i^t \in \partial f_i(x^t) \\ x^{t+1} &= \frac{\lambda_{t+1}}{\lambda_{t+1} + 1} x^t + \frac{1}{\lambda_{t+1} + 1} z^{t+1}. \end{aligned} \quad (\text{IMA})$$

Defazio and Gower [2021] shows that this two-sequence scheme is *algebraically equivalent* to the more familiar Stochastic Heavy Ball (SHB) momentum update rule  $x^{t+1} = x^t - \hat{\gamma}_t g_i^t + \beta(x^t - x^{t-1})$  with  $1 + \lambda_{t+1} = \lambda_t \beta_t$  and  $\eta_t = (1 + \lambda_{t+1}) \hat{\gamma}_t$ , [Kidambi et al., 2018, Liu et al., 2020, Ma and Yarats, 2019, Oikonomou and Loizou, 2025, Sebbouh et al., 2021].

In our work, we focus on adaptive variants of both SSM and IMA, and provide Polyak-type step-sizes  $\gamma_t$  for solving convex non-smooth optimization problems.

**Prior non-smooth Polyak-type Results.** For the Stochastic Subgradient Method (SSM) on convex and Lipschitz objectives, Loizou et al. [2021] proved that SSM with the step size  $\gamma_t = \frac{f_i(x^t) - f_i^*}{\|g_i^t\|^2}$ , where  $f_i^* = \inf_{x \in \mathbb{R}^d} f_i(x)$ , converges at a rate of  $\mathcal{O}(T^{-1/2})$  *only* under the strong *interpolation* assumption (i.e. there exists  $x^* \in X^*$  such that  $f_i(x^*) = f_i^*$  for all  $i$ ). Garrigos et al. [2023] later proposed the step size

$$\gamma_t = \frac{[f_i(x^t) - f_i(x^*)]_+}{\|g_i^t\|^2}, \quad (\text{SPS}^*)$$

Work	Step Size	No Interpolation?	No $f_i(x^*)$ ?	Rate
<i>Stochastic Subgradient Method</i>				
Loizou et al. [2021]	$\gamma_t = \frac{f_i(x^t) - f_i^*}{\ g_i^t\ ^2}$	✗	✓	$\mathcal{O}(1/\sqrt{T})$
Garrigos et al. [2023]	$\gamma_t = \frac{[f_i(x^t) - f_i(x^*)]_+}{\ g_i^t\ ^2}$	✓	✗	$\mathcal{O}(1/\sqrt{T})$
Theorem 3.1	$\gamma_t = \frac{f_i(x^t) - \ell_i^*}{\max\{\ g_i^t\ ^2, M\}}$	✓	✓	$\mathcal{O}(1/\sqrt{T} + \sigma^2)$
<i>IMA (Momentum)</i>				
Gower et al. [2025]	$\eta_t = \frac{[f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+}{\ g_i^t\ ^2}$	✓	✗	$\mathcal{O}(1/\sqrt{T})$
Theorem 3.4, Theorem 3.5	$\eta_t = \frac{[f_i(x^t) - \ell_i^* + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+}{\max\{\ g_i^t\ ^2, M\}}$	✓	✓	$\mathcal{O}(1/\sqrt{T} + \sigma^2)$

Table 1: Overview of methods with Polyak-type step sizes analyzed in the convex non-smooth stochastic setting. For every method we list the explicit rule, indicate whether the theory (i) holds *without* the interpolation assumption and (ii) avoids the oracle values  $f_i(x^*)$ , and report the proven convergence rate on convex–Lipschitz objectives. Rows shaded in green are the new contributions of this work. The constant  $M$  in our step sizes is the safeguard constant, for more details see Section 2 and the variance  $\sigma^2$  is defined in (2).

where  $[z]_+ = \max\{z, 0\}$ , obtaining the same  $\mathcal{O}(T^{-1/2})$  bound without interpolation, but at the cost of requiring knowledge of each individual optimal loss value (i.e.,  $f_i(x^*)$ ).

In the momentum setting, Gower et al. [2025] extended this idea to the Iterate Moving Average (IMA) update rule, showing that the IMA method with the step size

$$\eta_t = \frac{[f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+}{\|g_i^t\|^2}, \quad (\text{IMA-SPS})$$

achieves the same rate for both the Cesàro average and the last iterate, again assuming access to  $f_i(x^*)$ . For a summary of these results, we refer to Table 1.

More recently, the concurrent work Orabona and D’Orazio [2025], proves that several Polyak-type step-sizes for SSM can be interpreted as a gradient descent in a carefully selected surrogate loss. As a special case of their approach, they proved that the original SPS<sub>max</sub> update rule of Loizou et al. [2021],  $\gamma_t = \min\{\frac{f_i(x^t) - f_i^*}{\|g_i^t\|^2}, \gamma_b\}$  where  $\gamma_b > 0$ , works without any modification in the non-smooth regime. As we explain in Section 2.2, even if SPS<sub>max</sub> comes with nice convergence guarantees for different classes of problems through the approach of Orabona and D’Orazio [2025], this rule could be ineffective in ML tasks without the smoothing trick of the upper bound  $\gamma_b$  of Loizou et al. [2021]. In practice,  $\gamma_b$  is actually selected in the majority of iterations, making the impact of the actual Polyak step-size selection unclear. On the other hand, our proposed *Safeguarded* Polyak step sizes do not suffer from this issue; by construction, they avoid the use of a bound on the step-size selection and instead use a bound on the norm of the gradients. The results of Orabona and D’Orazio [2025] hold only for SSM and cannot trivially be extended to the momentum variants (IMA), which we also handle in our work.

**Limitations and our remedy.** Taken together, the existing variants of Polyak-type algorithms either (i) converge only under interpolation, or (ii) rely on oracle information such as  $f_i(x^*)$  that is unavailable in practice or (iii) in practice heavily depend on the selection of the upper bound  $\gamma_b$ . The step sizes we introduce in this work eliminate both drawbacks: they are *fully adaptive*, i.e., need no additional problem knowledge, and match the  $\mathcal{O}(T^{-1/2})$  rate for convex, Lipschitz objectives (up to a neighborhood) without extra information, in both plain SSM and its momentum variant IMA.

## 1.1 Main Contributions

Our main contributions are summarized below:

◊ **Safeguarded Polyak Step size for SSM.** We design a new Polyak-type rule, named safeguarded SPS ( $\text{SPS}_{\text{safe}}$ ) for **SSM**, that does not allow the subgradient used in the stochastic Polyak step size to become small. This single safeguard removes the need for any oracle information (e.g.  $f_i(x^*)$ ) and attains  $\mathcal{O}(T^{-1/2})$  convergence to a neighborhood of the solution, for stochastic, convex, and Lipschitz objectives *without* the interpolation assumption.

◊ **An in-depth understanding of  $\text{SPS}_{\text{safe}}$ .** We explain the benefits of  $\text{SPS}_{\text{safe}}$  in terms of theory and experiments compared to prior works on Polyak-type step sizes. The proposed rule is the first Polyak-type step size for **SSM** that remains *genuinely adaptive*: it never becomes a constant update, irrespective of the chosen safeguard threshold. Earlier variants [Loizou et al., 2021, Wang et al., 2023, Zhang et al., 2025] can yield a *constant* step size once a user-specified upper bound on the step size is small enough. In addition, we establish a connection between the proposed step size rule and the clipping mechanism used extensively in modern DNN training. The safeguarding mechanism can be interpreted as an *in-step* gradient-clipping operation, thereby supplying the first theoretical guarantees for Polyak-style *clipped* SSM, an update rule widely used to mitigate both exploding and vanishing gradients in DNNs.

◊ **Safeguarded Polyak-type step size for IMA and last-iterate convergence.** We extend the safeguarded step size ideas to the Iterate Moving Average (IMA) update rule, yielding the Safeguarded Polyak-type step size  $\text{IMA-SPS}_{\text{safe}}$ . For this step size selection, we prove  $\mathcal{O}(T^{-1/2})$  convergence for **IMA** in terms of *both* the Cesàro average and the last-iterate. Our proposed analysis provides the first convergence guarantees for an adaptive momentum method (through the equivalence of **IMA** and **SSM** with heavy ball momentum) that does not require any strong assumption (e.g., the knowledge of  $f_i(x^*)$ , [Gower et al., 2025]).

◊ **Numerical Evaluation.** In Section 4, we present extensive experiments validating different aspects of our theoretical results (sensitivity analysis of our step size and comparison with other Polyak step sizes in the non-smooth setting). We also assess the performance of  $\text{SPS}_{\text{safe}}$  and  $\text{IMA-SPS}_{\text{safe}}$  in training deep neural networks for multi-class image classification problems and compute the gradient norms under  $\text{SPS}_{\text{safe}}$ , confirming they do not collapse to small values. Reproducible code is provided with the submission.

## 2 Safeguarded Stochastic Polyak Step sizes

This section introduces the *Safeguarded* Polyak step sizes for **SSM** and **IMA** and we explain how our theory differs from previous works. Next, we show how the safeguarded step sizes improves practical behaviour in deep-network training. Finally, we show that the safeguard can be interpreted as an adaptive form of gradient clipping, thereby combining Polyak updates with clipped-SSM techniques.

**$\text{SPS}_{\text{safe}}$  for the Stochastic Subgradient Method.** To stabilise Polyak steps in the non-smooth setting we introduce

$$\gamma_t = \frac{f_i(x^t) - \ell_i^*}{\max\{\|g_i^t\|^2, M\}}, \quad (\text{SPS}_{\text{safe}})$$

where  $g_i^t \in \partial f_i(x^t)$  and  $M > 0$  is a user-chosen safeguard. The  $\max\{\cdot, M\}$  term prevents the denominator from approaching zero, thereby avoiding the *exploding step size* problem that arises when  $\|g_i^t\| \rightarrow 0$  in deep neural networks. Earlier work of Loizou et al. [2021] controlled the same phenomenon by clipping the *whole* polyak step size, taking  $\gamma_t = \min\{\text{Polyak step}, \gamma_b\}$  with a fixed upper bound  $\gamma_b$ . By contrast,  $\text{SPS}_{\text{safe}}$  keeps the numerator intact and instead boosts very small gradients, which empirically produces smoother step sizes and tight theoretical bounds (see Theorem 3.1).

In essence, the single hyper-parameter  $M$  replaces both the clipping constant  $\gamma_b$  of  $\text{SPS}_{\text{max}}$  and the oracle values  $f_i(x^*)$  required by  $\text{SPS}^*/\text{IMA-SPS}$ , yielding a fully adaptive, practically parameter-free step-size family for non-smooth optimization.

**IMA-SPS<sub>safe</sub> for momentum.** The Iterate-Moving-Average (IMA) framework of Gower et al. [2025] selects  $\eta_t = [f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+ / \|g_i^t\|^2$ , but requires the unknown optimal loss  $f_i(x^*)$ . We remove this oracle dependence and simultaneously safeguard against vanishing gradients with

$$\eta_t = \frac{[f_i(x^t) - \ell_i^* + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+}{\max\{\|g_i^t\|^2, M\}}, \quad (\text{IMA-SPS}_{\text{safe}})$$

where  $\lambda_t \geq 0$  is the usual IMA momentum parameter. When  $\lambda_t = 0$ , this reduces to  $\text{SPS}_{\text{safe}}$ , while for  $\lambda_t > 0$  it becomes a safeguarded analogue of stochastic heavy ball that enjoys last-iterate and Cesàro guarantees (Theorems 3.4 and 3.5) without any knowledge of  $f_i(x^*)$ .

## 2.1 Theoretical Comparison with Closely Related Works

**Comparison with Prior Results on Stochastic Subgradient Method.** To the best of our knowledge, the literature contained until recently two theoretical guarantees for Polyak-type step sizes in the convex–Lipschitz regime (non-smooth regime) [Garrigos et al., 2023, Loizou et al., 2021], both of which require strong, often impractical, assumptions. More recently, in concurrent work, Orabona and D’Orazio [2025] proved that the  $\text{SPS}_{\text{max}}$  rule of Loizou et al. [2021] can also be effective in the non-smooth regime.

Let  $f_i$  be convex and  $G$ -Lipschitz functions and let  $\bar{x}^T = \frac{1}{n} \sum_{t=0}^{T-1} x^t$ . Then the above three papers provide the below convergence guarantees:

- [Loizou et al., 2021]: Assume that *interpolation* condition holds. Consider the iterates of  $\text{SSM}$  with the step size given by  $\gamma_t = \frac{f_i(x^t) - f_i^*}{\|g_i^t\|^2}$ . Then  $\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{G\|x^0 - x^*\|}{\sqrt{T}}$ .
- [Garrigos et al., 2023]: Consider the iterates of  $\text{SSM}$  with the step size given by  $\gamma_t = \frac{[f_i(x^t) - f_i(x^*)]_+}{\|g_i^t\|^2}$ . Then  $\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{G\|x^0 - x^*\|}{\sqrt{T}}$ . The use of  $[z]_+$  is needed to enforce the step size to be positive.
- [Orabona and D’Orazio, 2025]: Consider the iterates of  $\text{SSM}$  with the step size given by  $\gamma_t = \min \left\{ \frac{f_i(x^t) - f_i^*}{\|g_i^t\|^2}, \gamma_b \right\}$ . Then  $\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{G\|x^0 - x^*\|}{\sqrt{T}} + \frac{\|x^0 - x^*\|^2}{\gamma_b T} + 2\hat{\sigma}^2 + G\sqrt{2\gamma_b \hat{\sigma}^2}$ , where  $\hat{\sigma}^2 = \mathbb{E}[f_i(x^*) - f_i^*]$ .

The first two papers above rely on conditions rarely met in practice: either (i) exact interpolation or (ii) full knowledge of  $f_i(x^*)$  for all  $i$ . Note also that when interpolation is assumed,  $f_i^* = f_i(x^*)$ , making the step size in both papers coincide. Using our proposed safeguarded step size  $\text{SPS}_{\text{safe}}$ , we achieve the same  $\mathcal{O}(T^{-1/2})$  convergence to a neighborhood of the solution, and the results hold *without* assuming interpolation and *without* oracle information. The final bound has the familiar smooth-setting structure: it converges to a neighborhood whose radius scales with the gradient variance and collapses to zero in the interpolated case, thereby recovering Loizou et al. [2021] as a special instance.

The concurrent work Orabona and D’Orazio [2025] managed to establish  $\mathcal{O}(T^{-1/2})$  convergence to a neighborhood for stochastic, convex non-smooth objectives *without* interpolation by directly employing the  $\text{SPS}_{\text{max}}$ . The  $\text{SPS}_{\text{max}}$  choice for the step-size, as we explain in the next subsection, has nice theoretical properties but could suffer in practical scenarios as the choice of the upper bound  $\gamma_b$  dictates the step-size selection ( $\gamma_b$  is selected in the majority of iterations).  $\text{SPS}_{\text{safe}}$  by construction, avoid the use of such a bound in step-size selection and instead use what we consider a more natural bound in the norm of gradients (part of the denominator in our step-size selection).

**Comparison with Prior Results on Iterative Moving Averaging (IMA/Momentum).** The only work that managed to have a Polyak-type stepsize for IMA for solving convex non-smooth problems is Gower et al. [2025], which proposes using  $\eta_t = [f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+ / \|g_i^t\|^2$ . This step-size selection, similar to Garrigos et al. [2023], requires a priori knowledge of the optimal loss values  $f_i(x^*)$ . For this step-size selection Gower et al. [2025] proved  $\mathcal{O}(1/\sqrt{T})$  convergence to the exact solution for both the average point  $\bar{x}^T = \frac{1}{n} \sum_{t=0}^{T-1} x^t$  and the last-iterate. In our work, we provide similar convergence guarantees (see Theorem 3.4 and Theorem 3.5) to a neighborhood of the solution without requiring the knowledge of  $f_i(x^*)$ .

## 2.2 Practical considerations in training of DNNs

**How often is a Polyak rule actually used?** Polyak step sizes are praised for being *adaptive*, yet in deep neural networks experiments, they can end up acting like fixed learning rates. To investigate this phenomenon we run ResNet-20 [He et al., 2016] on CIFAR-10 dataset [Krizhevsky et al., 2009]. Recall, Loizou et al. [2021] proposed the following step size

$$\gamma_t^{\text{SPS}_{\max}} = \min \{ \gamma_t^{\text{SPS}}, \gamma_b \}, \quad \gamma_t^{\text{SPS}} = \frac{f_i(x^t) - \ell_i^*}{c \|g_i^t\|^2}. \quad (\text{SPS}_{\max})$$

For  $\text{SPS}_{\max}$ , we swept the constant  $c$  over  $c \in \{0.1, 0.2, \dots, 1.0\}$ , set  $\gamma_b = 1$  and  $\ell_i^* = 0$ , and trained for 100 epochs. The best accuracy, which reached 87.88%, occurred at  $c = 0.4$ . However, a counter revealed that in **31.8%** of the iterations the algorithm selected the constant value  $\gamma_b$  rather than the "true" Polyak step  $\gamma_t^{\text{SPS}}$ . Thus almost one-third of the updates were effectively constant.

In order to increase performance, Loizou et al. [2021] use the following smoothing rule for the clipping hyperparameter<sup>1</sup>  $\gamma_b^t = \tau^{b/n} \gamma_{t-1}$  with  $\tau = 2$ , batch size  $b$ , and dataset size  $n$ . The step size then takes the following form:

$$\gamma_t^{\text{Smooth SPS}_{\max}} = \min \{ \gamma_t^{\text{SPS}}, \gamma_b^t \} = \min \left\{ \gamma_t^{\text{SPS}}, \tau^{b/n} \gamma_{t-1}^{\text{Smooth SPS}_{\max}} \right\}. \quad (\text{Smooth SPS}_{\max})$$

Adopting this rule and retuning  $c$  over  $c \in \{0.1, 0.2, \dots, 1.0\}$ , lifts accuracy to 89.79% for  $c = 0.5$ , but at a hidden cost: **98.45%** of the step s now use  $\gamma_t = \gamma_b^t$ . In practice, the method behaves almost like a decreasing learning-rate scheme, the step size is plotted in Figure 1.

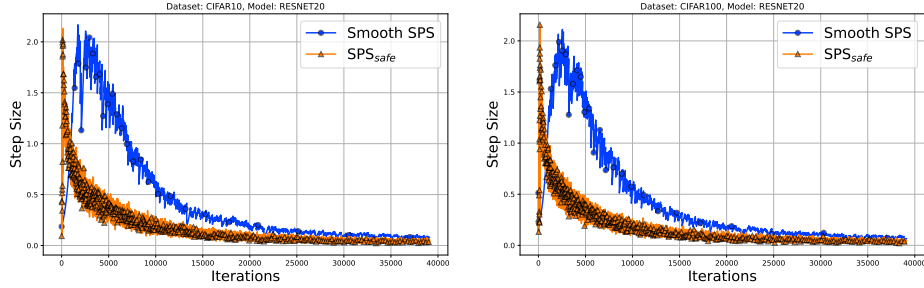


Figure 1: Comparison of  $\text{Smooth SPS}_{\max}$  and  $\text{SPS}_{\text{safe}}$  in the training of ResNet20 in CIFAR-10 (left plot) and CIFAR-100 (right plot).

**Safeguarded Polyak.** Replacing  $\text{SPS}_{\max}$  with our safeguarded step  $\text{SPS}_{\text{safe}}$  yields 90.39% accuracy, competitive with the smoothed baseline, while *never* collapsing to a constant value.  $\text{SPS}_{\text{safe}}$  also exhibits a smoothing behaviour similar to  $\text{Smooth SPS}_{\max}$ , see Figure 1 for a direct comparison between the two step sizes. Crucially, this behaviour is backed by explicit convergence guarantees, whereas the smoothed heuristic offers none.

## 2.3 Connections with Clipping: Adaptive Clipped SSM via $\text{SPS}_{\text{safe}}$

A convenient way to stabilise stochastic subgradient methods is to clip each individual gradient before applying the update. Given a threshold  $c > 0$ , define the clipping operator

$$\text{clip}_c(g) := \min \left\{ 1, \frac{c}{\|g\|} \right\} g,$$

<sup>1</sup>Similar smoothing procedures have been used in Tan et al. [2016], Vaswani et al. [2019]



which leaves gradients with  $\|g\| \leq c$  unchanged and rescales larger ones to have norm exactly  $c$ . The *clipped* stochastic subgradient method (clipped SSM) therefore has the following update rule:

$$x^{t+1} = x^t - \tilde{\gamma}_t \text{clip}_c(g_i^t) = x^t - \tilde{\gamma}_t \min \left\{ 1, \frac{c}{\|g_i^t\|} \right\} g_i^t, \quad (\text{Clipped SSM})$$

with step size  $\tilde{\gamma}_t > 0$ . By capping overly large updates and boosting very small ones, clipping simultaneously protects against exploding gradients and mitigates the vanishing-gradient phenomenon.

The following proposition explained how  $\text{SPS}_{\text{safe}}$  can be modified for **Clipped SSM**, thus providing an adaptive step size for **Clipped SSM**. For the proof we refer to the appendix.

**Proposition 2.1.** **SSM** with  $\text{SPS}_{\text{safe}}$  and  $M = c^2$  is algebraically equivalent to **Clipped SSM** with the *adaptive* step size  $\tilde{\gamma}_t = \frac{f_i(x^t) - \ell_i^*}{c \max\{c, \|g_i^t\|\}}$ .

**Small subgradients (vanishing gradient phenomenon).** Gradient clipping augments **SSM** with a simple safety mechanism: whenever a stochastic gradient’s norm falls outside a user-set bound, it is rescaled. This single mechanism tackles both extremes of training instability. By capping very large updates, it prevents the exploding gradient spikes that can derail optimization, while simultaneously boosting tiny gradients to a usable magnitude, it mitigates the ‘vanishing-gradient’ stall common in deep neural networks. In the same spirit, the safeguard in our step-size formula  $\text{SPS}_{\text{safe}}$  prevents the learning rate from blowing up by effectively normalising updates when subgradients become extremely small. There is a growing deterministic literature that combines Polyak step sizes with **Clipped SSM** in the non-smooth setting, notably the recent analyses of [Gorbunov et al. \[2025\]](#) and [Takezawa et al. \[2024\]](#). These results, however, target  $(L_0, L_1)$ -smooth objectives, whereas we focus on globally Lipschitz, but otherwise non-smooth, functions and operates in the *stochastic* regime.

### 3 Convergence Analysis

This section states the convergence guarantees for  $\text{SPS}_{\text{safe}}$  and  $\text{IMA-SPS}_{\text{safe}}$ , full proofs are deferred to the appendix. Throughout, each loss  $f_i$  is convex and  $G$ -Lipschitz.

**Variance measure.** To quantify gradient noise in the non-smooth setting we use

$$\sigma^2 := \left( \mathbb{E}_i \left[ (f_i(x^*) - \ell_i^*)^2 \right] \right)^{\frac{1}{2}}. \quad (2)$$

The standard definition of the variance in the Stochastic Polyak step sizes literature [[Loizou et al., 2021](#), [Oikonomou and Loizou, 2025](#), [Wang et al., 2023](#), [Zhang et al., 2025](#)] is given by  $\hat{\sigma}^2 := \mathbb{E}_i [f_i(x^*) - \ell_i^*]$ . Note that by Jensen’s inequality we have that  $\hat{\sigma}^2 \leq \sigma^2$ . Moreover,  $\sigma^2 < \infty$  whenever each  $f_i$  is lower-bounded. When problem (1) is interpolated, i.e. there exists  $x^* \in X^*$  such that  $f_i(x^*) = f_i^*$ , then choosing  $\ell_i^* = f_i^*$  we get  $\sigma^2 = 0$ . Many modern machine learning models satisfy this condition. Examples include non-parametric regression [[Liang and Rakhlin, 2020](#)] and over-parameterized deep neural networks [[Ma et al., 2018](#), [Zhang et al., 2021](#)].

#### 3.1 Stochastic Subgradient Method

Firstly, we focus on the stochastic subgradient method, where we have the following theorem.

**Theorem 3.1.** Consider the iterates of **SSM** with the step size  $\text{SPS}_{\text{safe}}$ . Let  $\bar{x}^T = \frac{1}{T} \sum_{t=0}^{T-1} x^t$ . Then

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,$$

Theorem 3.1 eliminates two issues that limit the best previous bounds of Loizou et al. [2021] and Garrigos et al. [2023]: it needs neither the interpolation condition nor oracle access to the values  $f_i(x^*)$  and still achieves the rate  $\mathcal{O}(T^{-1/2})$ .

Because the safeguard acts solely through the denominator, the same result, via the equivalence in Proposition 2.1, yields the first stochastic guarantee for the clipped-SSM update (Clipped SSM). Furthermore, via the equivalency established in Proposition 2.1, this theorem provides convergence guarantees for Clipped SSM. On a different note, the coefficient of  $\sigma^2$  is decreasing with respect to  $M$ , a trend we confirm empirically in Section 4.1. However, a limitation remains: the radius of that neighborhood is independent of  $\gamma_t$ , so a simple decreasing step size cannot force convergence to the exact optimum when gradient noise is present.

Now consider two notable specializations of Theorem 3.1. First, in the *interpolated* regime, where every sample can be fitted exactly, we choose the lower bounds  $\ell_i^* = f_i^*$ . The variance term then disappears and we obtain an exact convergence rate.

**Corollary 3.2** (Interpolation). Under interpolation with  $\ell_i^* = f_i^*$ ,

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}}.$$

When  $M = 0$  this reproduces the step size and rate of Loizou et al. [2021], as seen in Section 2.1, thus recovering earlier results as a special case of the safeguarded framework. Next, we concentrate on the deterministic or full batch regime.

**Corollary 3.3** (Deterministic SSM). In the deterministic regime, we have  $\sigma^2 = 0$ , so Theorem 3.1 suggests

$$\min_{t \in [T]} \{f(x^t) - f(x^*)\} \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}}.$$

There is a plethora of Polyak step size analyses in the deterministic regime assuming non-smoothness. Polyak’s seminal work in Polyak [1964] on deterministic subgradient descent with the Polyak step size already established an  $\mathcal{O}(G\|x^0 - x^*\|/\sqrt{T})$  bound for nonsmooth convex objectives. Subsequent studies strengthened the guarantees under additional structure: Davis et al. [2018] proved *linear* convergence for the same step size when the objective is weakly convex and sharp, while Hazan and Kakade [2019] obtained an  $\mathcal{O}(1/T)$  rate for strongly convex, Lipschitz functions.

### 3.2 Iterate Moving Average (Momentum)

In this section we focus on IMA.

**Theorem 3.4.** Consider the iterates of IMA with the step size (IMA-SPS<sub>safe</sub>) and let  $(\lambda_t)_{t>0}$  be a decreasing sequence of nonnegative reals. Then

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] + \sum_{t=0}^{T-1} \frac{\lambda_t}{T} \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,$$

where  $\bar{x}^T = \frac{1}{T} \sum_{t=0}^{T-1} x^t$  and  $B_f(x, y) = f(x) - f(y) - \langle \partial f(y), x - y \rangle$  is the Bregman divergence.

The bound mirrors that of Theorem 3.1, but with an additional non-negative Bregman divergence term. The most common scenario for the sequence  $\lambda_t$  is being held fixed ( $\lambda_t = \lambda$ ). When  $\lambda = 0$  we recover exactly Theorem 3.1. However, when  $\lambda > 0$  we have an extra non-negative term on the left hand side. This suggests, but does not force, a speed-up over the plain subgradient method.

So far we have only provided guarantees for the Cesaro average. In the next theorem we prove convergence of the last iterate.



**Theorem 3.5.** Consider the iterates of **IMA** with the step size (**IMA-SPS<sub>safe</sub>**) and let  $\lambda_t = t$ . Then

$$\mathbb{E}[f(x^{T-1}) - f(x^*)] + \frac{1}{T} \sum_{t=0}^{T-1} t \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2.$$

This result provides an explicit guarantee for the *last* iterate, often the quantity of practical interest, while retaining the same rate as the Cesàro bound. Similar remarks as in the previous section hold about the neighborhood in this regime, namely the neighborhood is decreasing with respect to safeguard  $M$  (see also Section 4.1).

Fewer results exist for Polyak-type step sizes paired with momentum than for their momentum-free counterparts. Wang et al. [2023], treats a heavy-ball variant under *smooth* convex losses and achieves an  $\mathcal{O}(1/T)$  rate. Oikonomou and Loizou [2025] study the Stochastic Heavy Ball momentum via **IMA**, again assuming smooth objectives. The only work that drops smoothness is the analysis of Gower et al. [2025], which attains the  $\mathcal{O}(T^{-1/2})$  rate in the convex, Lipschitz setting, but at the cost of requiring the quantities  $f_i(x^*)$ . Our safeguarded momentum rule removes this oracle dependence while preserving the same rate.

## 4 Numerical Experiments

We now examine the empirical behaviour of the safeguarded step sizes **SPS<sub>safe</sub>** and **IMA-SPS<sub>safe</sub>**. The first series of experiments targets convex, *non-smooth* objectives and is designed to validate the theory developed in Section 3. The second series moves to deep-learning benchmarks, measuring the impact of the step sizes on classification accuracy.

### 4.1 Validation of the theory on SVMs and Phase Retrieval

In this part, we empirically validate our theoretical results and illustrate the main properties of **SPS<sub>safe</sub>** and **IMA-SPS<sub>safe</sub>** that our theory suggests in Section 3. In these experiments, we focus on Support Vector Machines (SVMs) and Phase Retrieval problems and we evaluate the performance of our step sizes on synthetic data. Recall that we want to solve the problem  $\min_{x \in \mathbb{R}^d} f(x) = \frac{1}{n} \sum_{i=1}^n f_i(x)$ . Let  $\mathbf{A} \in \mathbb{R}^{n \times d}$  denote the feature matrix and  $b \in \mathbb{R}^n$  the labels.

**SVM.** The individual loss and subgradient is given by

$$f_i(x) = |\langle A_i, x \rangle^2 - b_i|, \quad \partial f_i(x) = 2\langle A_i, x \rangle \text{sgn}(\langle A_i, x \rangle - b_i) A_i,$$

where  $\text{sgn}(\cdot)$  denotes the sign function.

**Phase Retrieval.** The individual loss and subgradient are given by

$$f_i(x) = \max(0, 1 - b_i \langle A_i, x \rangle), \quad \partial f_i(x) = -\delta_{b_i \langle A_i, x \rangle \leq 1} b_i A_i,$$

where  $\delta_X = 1$  if condition  $X$  holds, otherwise  $\delta_X = 0$ .

**Sensitivity to the safeguard  $M$ .** We study how the choice of the threshold  $M$  influences both the plain and momentum variants of our proposed step sizes. The experiment is a synthetic phase-retrieval task with  $n = 300$  samples and dimension  $d = 10$ ; rows of  $\mathbf{A}$  and the vector  $b$  are drawn i.i.d. from  $\mathcal{N}(0, 1)$ . We run **SSM** equipped with **SPS<sub>safe</sub>** and **IMA** equipped with **IMA-SPS<sub>safe</sub>** for 100 epochs, using a batch size of  $n/10 = 30$ . Three values of the safeguard are tested,  $M \in \{1, 10, 100\}$ , and for the momentum experiment, we set  $\lambda_t = 9$ , which is equivalent to the heavy-ball parameter  $\beta = 0.9$ . Each configuration is averaged over three independent trials; mean curves and one-standard-deviation bands are reported in Figures 2a and 2b. Consistent with the bounds of Theorems 3.1 and 3.4, a larger  $M$  tightens the neighborhood: both algorithms converge to progressively lower error plateaus as the safeguard increases.

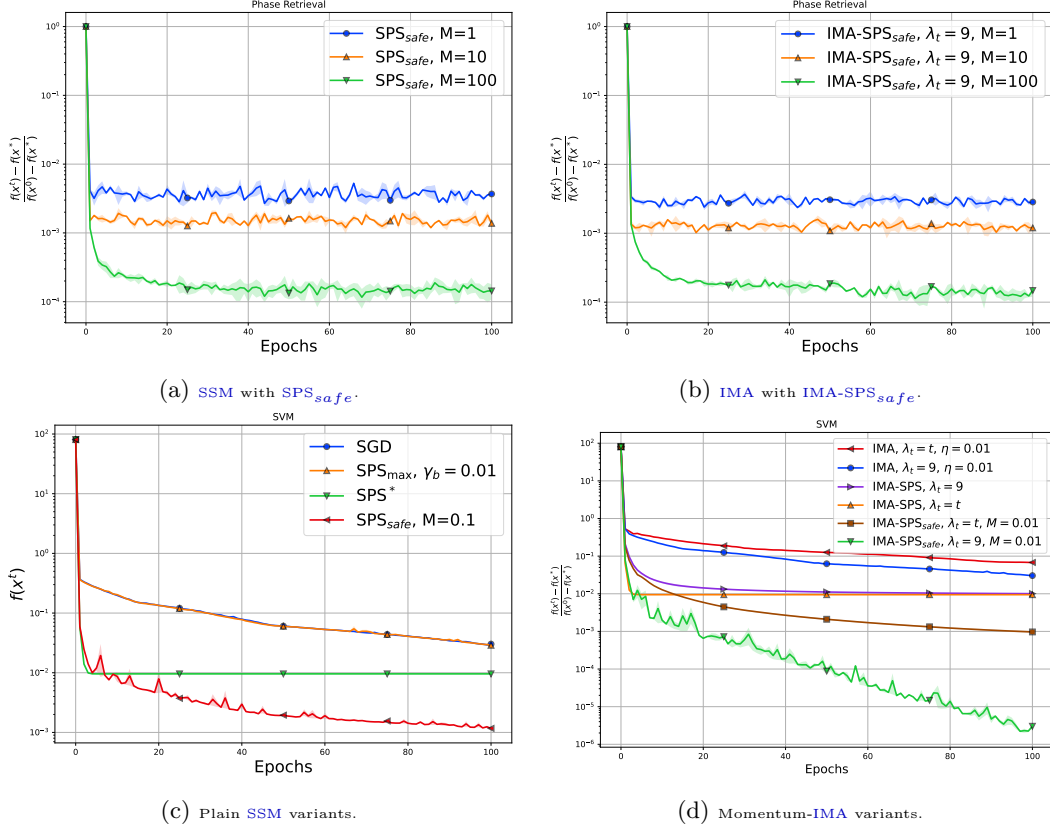


Figure 2: Sensitivity analysis of the safeguarded Polyak step size to the threshold  $M$  (Panels a-b for Phase Retrieval) and comparison against SPS variants (Panels c-d for SVM).

**Comparison with existing Polyak step sizes.** We next benchmark the safeguarded rules against their best-tuned classical counterparts. The task is a synthetic SVM with  $n = 300$  samples and dimension  $d = 100$ ; both the feature matrix  $\mathbf{A}$  and the label vector  $b$  are drawn from  $\mathcal{N}(0, 1)$  as in the previous section. For  $\text{SPS}_{\text{safe}}$  and  $\text{SPS}_{\text{safe}}$  we sweep the safeguard over  $M \in \{0.01, 0.1, 1.0, 1.0, 10.0, 100.0\}$ . The plain  $\text{SSM}$  is tuned over four learning rates  $\gamma \in \{10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}\}$ , while the constant step size  $\text{IMA}$  baseline is tuned over  $\eta \in \{10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}\}$  for two momentum choices:  $\lambda_t = 9$  (equivalent to  $\beta = 0.9$ ) and  $\lambda_t = t$ .  $\text{SPS}^*$  [Garrigos et al., 2023] and  $\text{IMA-SPS}$  [Gower et al., 2025] require the exact optimal values  $f_i(x^*)$ . To approximate these quantities we run deterministic (full-batch) subgradient descent for 50,000 iterations and treat the final iterate as  $x^*$ . All methods are trained for 100 epochs with batch size  $n/10 = 30$ . Every experiment is repeated three times with independent data draws; mean trajectories and one-standard-deviation bands are plotted in Figures 2c and 2d.

The safeguarded Polyak rules dominate the competition on this non-smooth problem. In the plain- $\text{SSM}$  setting (left panel) the best tuned  $\text{SPS}_{\text{safe}}$  consistently outperforms both tuned fixed-step size  $\text{SSM}$  and  $\text{SPS}^*$ , achieving lower final error and faster early progress. The  $\text{IMA}$  experiments (right panel) paint the same picture:  $\text{IMA-SPS}_{\text{safe}}$  is superior to  $\text{IMA-SPS}$ , and the momentum coefficient  $\lambda_t = 9$  is clearly preferable to  $\lambda_t = t$ . These results confirm that the safeguard delivers practical gains in addition to its theoretical advantages.

## 4.2 Applications on DNNs

**Comparison with other optimizers.** We assess the safeguarded step sizes on image-classification benchmarks. ResNet-20/32 [He et al., 2016] models are trained on CIFAR-10/100 [Krizhevsky et al., 2009] with standard augmentation (random crop, horizontal flip, channel-wise normalisation [DeVries, 2017]). All runs are executed on NVIDIA RTX 6000 Ada GPUs for 100 epochs. Baselines include tuned  $\text{SSM}$ , tuned  $\text{IMA}$  with  $\lambda_t = 9$ , Adam

[Kingma and Ba, 2015], and  $\text{SPS}_{\max}$  and  $\text{IMA-SPS}$ . We compare these against the proposed safeguarded rules  $\text{SPS}_{\text{safe}}$  and  $\text{IMA-SPS}_{\text{safe}}$ . For more details and more experiments we refer to the appendix. In Figure 3, we observe that in both  $\text{SSM}$ -based and  $\text{IMA}$ -based methods our proposed safeguarded step size have superior generalization performance.

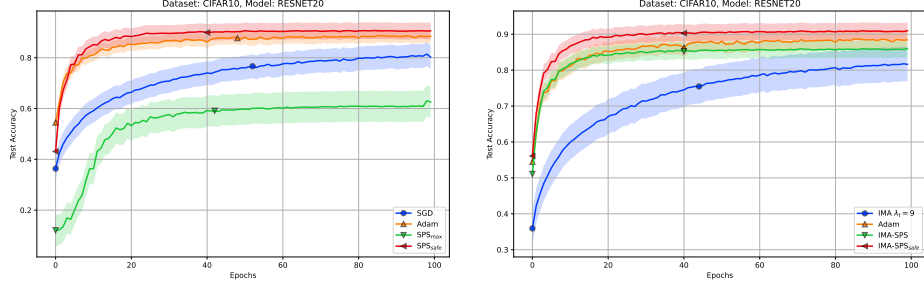


Figure 3: Test accuracy of ResNet20 on CIFAR-10. **Left:**  $\text{SSM}$ -based methods. **Right:**  $\text{IMA}$ -based methods.

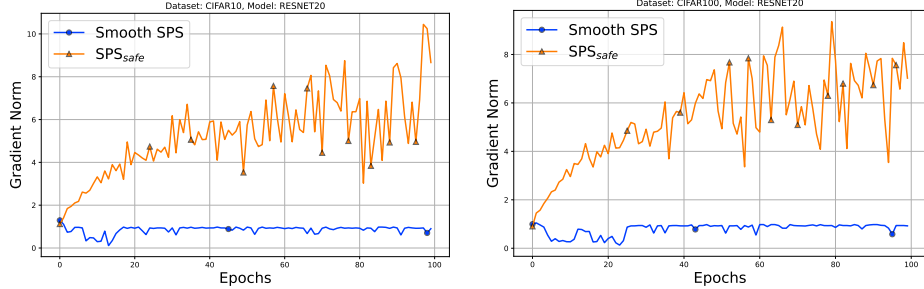


Figure 4: Gradient Norms during training of ResNet20. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

**Comparison of Gradient Norms.** In Figure 4, we track the subgradient magnitude  $\|g_i^t\|$  at the end of each epoch when training with Smooth  $\text{SPS}_{\max}$  versus  $\text{SPS}_{\text{safe}}$  for ResNet-20 in CIFAR-10/100. Empirically, Smooth  $\text{SPS}_{\max}$  drives (sub)gradients to very small values, whereas  $\text{SPS}_{\text{safe}}$  maintains noticeably larger norms. This behaviour is desirable: the safeguarded Polyak rule in  $\text{SPS}_{\text{safe}}$  not only prevents division by vanishing gradients in its denominator, but also mitigates gradient collapse by preventing the gradient norms themselves from approaching zero.

The gradient norms increase during the training run. However, this increase does not lead to a loss in generalization performance. This observation has recently been studied in Defazio [2025] where the author provides a theoretical explanation for this phenomenon. Here we provide evidence that this phenomenon appears in the safeguarded version of SPS.

## 5 Conclusion

In this work, we introduced *safeguarded* Polyak step sizes providing convergence rate  $\mathcal{O}(T^{-1/2})$  for stochastic, convex-Lipschitz objectives, one of the first Polyak rules to do so without assuming interpolation or the knowledge of  $f_i(x^*)$ . We extend the same idea to  $\text{IMA}$ , providing convergence for both the Cesàro average and the *last* iterate. Future work could explore techniques that eliminate the constant safeguard  $M$  while retaining the current rates thus making the method parameter-free. Another promising direction is to extend the analysis to structured non-convex settings, such as weakly convex or PL objectives.

## References

- Farshed Abdulkhakimov, Chulu Xiang, Dmitry Kamzolov, and Martin Takáč. Stochastic gradient descent with preconditioned polyak step-size. *Computational Mathematics and Mathematical Physics*, 64(4):621–634, 2024.
- Sayantana Choudhury, Nazarii Tupitsa, Nicolas Loizou, Samuel Horváth, Martin Takac, and Eduard Gorbunov. Remove that square root: A new efficient scale-invariant version of adagrad. *NeurIPS*, 2024.
- Damek Davis, Dmitriy Drusvyatskiy, Kellie J MacPhee, and Courtney Paquette. Subgradient methods for sharp weakly convex functions. *Journal of Optimization Theory and Applications*, 179(3):962–982, 2018.
- Aaron Defazio. Why gradients rapidly increase near the end of training. *arXiv preprint arXiv:2506.02285*, 2025.
- Aaron Defazio and Robert M Gower. The power of factorial powers: New parameter settings for (stochastic) optimization. In *Asian Conference on Machine Learning*, pages 49–64. PMLR, 2021.
- Terrance DeVries. Improved regularization of convolutional neural networks with cutout. *arXiv preprint arXiv:1708.04552*, 2017.
- Ryan D’Orazio, Nicolas Loizou, Issam H Laradji, and Ioannis Mitliagkas. Stochastic mirror descent: Convergence analysis and adaptive variants via the mirror stochastic polyak stepsize. *Trans. Mach. Learn. Res.*, 2023.
- John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12(7), 2011.
- Guillaume Garrigos, Robert M Gower, and Fabian Schaipp. Function value learning: Adaptive learning rates based on the polyak stepsize and function splitting in erm. *arXiv preprint arXiv:2307.14528*, 2023.
- Eduard Gorbunov, Nazarii Tupitsa, Sayantan Choudhury, Alen Aliev, Peter Richtárik, Samuel Horváth, and Martin Takáč. Methods for convex  $(L_0, L_1)$ -smooth optimization: Clipping, acceleration, and adaptivity. In *ICLR*, 2025.
- Robert Gower, Othmane Sebbouh, and Nicolas Loizou. SGD for structured nonconvex functions: Learning rates, minibatching and interpolation. In *AISTATS*, 2021.
- Robert M Gower, Mathieu Blondel, Nidham Gazagnadou, and Fabian Pedregosa. Cutting some slack for SGD with adaptive polyak stepsizes. *arXiv preprint arXiv:2202.12328*, 2022.
- Robert M Gower, Guillaume Garrigos, Nicolas Loizou, Dimitris Oikonomou, Konstantin Mishchenko, and Fabian Schaipp. Analysis of an idealized stochastic polyak method and its application to black-box model distillation. *arXiv preprint arXiv:2504.01898*, 2025.
- Meng-Hao Guo, Tian-Xing Xu, Jiang-Jiang Liu, Zheng-Ning Liu, Peng-Tao Jiang, Tai-Jiang Mu, Song-Hai Zhang, Ralph R Martin, Ming-Ming Cheng, and Shi-Min Hu. Attention mechanisms in computer vision: A survey. *Computational visual media*, 8(3):331–368, 2022.
- Trevor Hastie, Robert Tibshirani, and Jerome H Friedman. *The Elements of Statistical Learning: Data Mining, Inference, and Prediction*, volume 2. Springer, 2009.
- Elad Hazan and Sham Kakade. Revisiting the polyak step size. *arXiv preprint arXiv:1905.00313*, 2019.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *CVPR*, 2016.
- Samuel Horváth, Konstantin Mishchenko, and Peter Richtárik. Adaptive learning rates for faster stochastic gradient methods. *arXiv preprint arXiv:2208.05287*, 2022.
- Rustem Islamov, Niccolò Ajroldi, Antonio Orvieto, and Aurelien Lucchi. Loss landscape characterization of neural networks without over-parametrization. In *NeurIPS*, 2024.

- Xiaowen Jiang and Sebastian U Stich. Adaptive SGD with polyak stepsize and line-search: Robust convergence and variance reduction. In *NeurIPS*, 2023.
- Rahul Kidambi, Praneeth Netrapalli, Prateek Jain, and Sham Kakade. On the insufficiency of existing momentum schemes for stochastic optimization. In *Information Theory and Applications Workshop (ITA)*, pages 1–9. IEEE, 2018.
- Diederik Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *ICLR*, 2015.
- Alex Krizhevsky et al. Learning Multiple Layers of Features from Tiny Images. Technical report, University of Toronto, 2009.
- Changhao Li, Zhixin Ma, Dazhi Sun, Guoming Zhang, and Jinming Wen. Stochastic iht with stochastic polyak step-size for sparse signal recovery. *IEEE Signal Processing Letters*, 2024.
- Tengyuan Liang and Alexander Rakhlin. Just interpolate: Kernel “ridgeless” regression can generalize. *The Annals of Statistics*, 48(3):1329–1347, 2020.
- Chenchen Liu and Yakui Huang. Stochastic polyak stepsize for sgd with variance reduction and momentum. *Optimization Letters*, pages 1–24, 2025.
- Yanli Liu, Yuan Gao, and Wotao Yin. An improved analysis of stochastic gradient descent with momentum. In *NeurIPS*, 2020.
- Nicolas Loizou, Sharan Vaswani, Issam Hadj Laradji, and Simon Lacoste-Julien. Stochastic polyak step-size for SGD: An adaptive learning rate for fast convergence. In *AISTATS*, 2021.
- Jerry Ma and Denis Yarats. Quasi-hyperbolic momentum and adam for deep learning. In *ICLR*, 2019.
- Siyuan Ma, Raef Bassily, and Mikhail Belkin. The power of interpolation: Understanding the effectiveness of SGD in modern over-parametrized learning. In *ICML*, 2018.
- Sohom Mukherjee, Nicolas Loizou, and Sebastian U Stich. Locally adaptive federated learning. *Transactions on Machine Learning Research*, 2024.
- Angelia Nedić and Dimitri P. Bertsekas. Incremental subgradient methods for nondifferentiable optimization. *SIAM Journal on Optimization*, 12(1):109–138, 2001.
- Dimitris Oikonomou and Nicolas Loizou. Stochastic polyak step-sizes and momentum: Convergence guarantees and practical performance. *ICLR*, 2025.
- Francesco Orabona and Ryan D’Orazio. New perspectives on the polyak stepsize: Surrogate functions and negative results. In *NeurIPS*, 2025.
- Antonio Orvieto and Lin Xiao. An adaptive stochastic gradient method with non-negative gauss-newton stepsizes. *arXiv preprint arXiv:2407.04358*, 2024.
- Antonio Orvieto, Simon Lacoste-Julien, and Nicolas Loizou. Dynamics of SGD with stochastic polyak stepsizes: Truly adaptive variants and convergence to exact solution. In *NeurIPS*, 2022.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4195–4205, 2023.
- Boris T Polyak. Some methods of speeding up the convergence of iteration methods. *USSR Computational Mathematics and Mathematical Physics*, 4(5):1–17, 1964.
- Boris T Polyak. *Introduction to Optimization*. New York, Optimization Software, 1987.
- Tianqi Qiao and Marie Maros. Sparse polyak: an adaptive step size rule for high-dimensional m-estimation. In *NeurIPS*, 2024.

- Herbert Robbins and Sutton Monro. A stochastic approximation method. *The Annals of Mathematical Statistics*, pages 400–407, 1951.
- Fabian Schaipp, Robert M. Gower, and Michael Ulbrich. A stochastic proximal polyak step size. *Transactions on Machine Learning Research*, 2023.
- Fabian Schaipp, Ruben Ohana, Michael Eickenberg, Aaron Defazio, and Robert M Gower. Momo: Momentum models for adaptive learning rates. In *ICML*, 2024.
- Othmane Sebbouh, Robert M Gower, and Aaron Defazio. Almost sure convergence rates for stochastic gradient descent and stochastic heavy ball. In *COLT*, 2021.
- Zheng Shi, Abdurakhmon Sadiev, Nicolas Loizou, Peter Richtárik, and Martin Takáč. Ai-sarah: Adaptive and implicit stochastic recursive gradient methods. *Transactions on Machine Learning Research*, 2023.
- N. Z. Shor. *Minimization Methods for Non-differentiable Functions*. Springer Series in Optimization and Its Applications. Springer, Berlin, 1985.
- Yuki Takezawa, Han Bao, Ryoma Sato, Kenta Niwa, and Makoto Yamada. Parameter-free clipped gradient descent meets polyak. In *NeurIPS*, 2024.
- Conghui Tan, Shiqian Ma, Yu-Hong Dai, and Yuqiu Qian. Barzilai-borwein step size for stochastic gradient descent. In *NeurIPS*, 2016.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Sharan Vaswani, Aaron Mishkin, Issam Laradji, Mark Schmidt, Gauthier Gidel, and Simon Lacoste-Julien. Painless stochastic gradient: Interpolation, line-search, and convergence rates. In *NeurIPS*, 2019.
- Xiaoyu Wang, Mikael Johansson, and Tong Zhang. Generalized polyak step size for first order optimization with momentum. In *ICML*, 2023.
- Moslem Zamani and François Glineur. Exact convergence rate of the subgradient method by using polyak step size. *arXiv preprint arXiv:2407.15195*, 2024.
- Chiyuan Zhang, Samy Bengio, Moritz Hardt, Benjamin Recht, and Oriol Vinyals. Understanding deep learning (still) requires rethinking generalization. *Communications of the ACM*, 64(3):107–115, 2021.
- Jiawei Zhang, Cheng Jin, and Yuantao Gu. Adaptive polyak step-size for momentum accelerated stochastic gradient descent with general convergence guarantee. *IEEE Transactions on Signal Processing*, 2025.



# Supplementary Material

The Supplementary Material is organized as follows: In Section A, we have more details on adaptive Polyak-type step sizes. Section B, presents the proofs of the theoretical guarantees from the main paper. In Section C, we provide additional experiments. In Section D we present more sensitivity analysis plots for DL and in Section E we present another practical way of calculating the safeguard  $M$ .

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Main Contributions . . . . .	3
<b>2</b>	<b>Safeguarded Stochastic Polyak Step sizes</b>	<b>4</b>
2.1	Theoretical Comparison with Closely Related Works . . . . .	5
2.2	Practical considerations in training of DNNs . . . . .	6
2.3	Connections with Clipping: Adaptive Clipped SSM via $\text{SPS}_{safe}$ . . . . .	6
<b>3</b>	<b>Convergence Analysis</b>	<b>7</b>
3.1	Stochastic Subgradient Method . . . . .	7
3.2	Iterate Moving Average (Momentum) . . . . .	8
<b>4</b>	<b>Numerical Experiments</b>	<b>9</b>
4.1	Validation of the theory on SVMs and Phase Retrieval . . . . .	9
4.2	Applications on DNNs . . . . .	10
<b>5</b>	<b>Conclusion</b>	<b>11</b>
<b>A</b>	<b>Further Related Work</b>	<b>16</b>
<b>B</b>	<b>Proofs</b>	<b>17</b>
B.1	Proof of Proposition 2.1 . . . . .	17
B.2	Proof of Theorem 3.1 . . . . .	17
B.3	Proofs of Theorems 3.4 and 3.5 . . . . .	19
<b>C</b>	<b>Further Numerical Experiments</b>	<b>23</b>
C.1	More deep learning experiments and parameter settings . . . . .	23
<b>D</b>	<b>Extra Sensitivity Analysis</b>	<b>25</b>
D.1	Convex . . . . .	25
D.2	Deep Learning . . . . .	25
<b>E</b>	<b>Smoothing trick for <math>M</math></b>	<b>28</b>

## A Further Related Work

Recent advances in Polyak-type step sizes have extended their theory and applicability in both smooth and non-smooth settings. For example, [Horváth et al. \[2022\]](#) introduced StoPS and GraDS, stochastic adaptive step size schemes based on Polyak’s rule (and gradient ”diversity”), and proved that these methods achieve near-deterministic convergence rates for strongly convex problems. [Gower et al. \[2022\]](#) recast SPS in an online learning framework, showing that SPS and its variants can be viewed as passive-aggressive algorithms, and proposed a single slack variable technique to stabilize the step size in non-interpolated models. This slack-based SPS variant comes with convergence guarantees and improved robustness in practice. To handle regularization, [Schaipp et al. \[2023\]](#) developed ProxSPS, a proximal Polyak step size that only requires a lower bound on the loss (not the entire objective), making it easier to tune and more stable under weight decay. Empirically, ProxSPS performs on par with well-tuned optimizers like AdamW, while requiring minimal tuning. In the non-smooth regime, [Zamani and Glineur \[2024\]](#) established an exact last-iterate convergence rate of the subgradient method with a Polyak step size, showing an  $O(N^{-1/4})$  rate that is tight, and proposed an adaptive Polyak step size variant that attains the optimal  $O(N^{-1/2})$  rate for convex problems.

Beyond the works discussed above, several recent papers further extend stochastic Polyak step sizes. [Liu and Huang \[2025\]](#) combine the Polyak rule with both variance reduction and momentum, obtaining a stochastic Polyak stepsize for SGD with variance reduction and momentum that improves robustness on ill-conditioned problems. Building on SPS in structured settings, stochastic Polyak steps have been integrated into sparse recovery and high-dimensional statistics: a stochastic IHT method with Polyak step sizes has been proposed for sparse signal recovery, see [Li et al. \[2024\]](#), while the ”Sparse Polyak” rule, [Qiao and Maros \[2024\]](#), tailors an adaptive Polyak-type step to high-dimensional M-estimation with sparsity constraints. Finally, preconditioned Polyak step sizes have been studied in the context of SGD, where the SPS denominator is modified by diagonal or adaptive preconditioners, bridging Polyak-type updates with AdaGrad/Adam-style geometry, see [Abdukhakimov et al. \[2024\]](#).

Complementary lines of work exploit loss-landscape structure and Gauss–Newton-type constructions to design related adaptive stepsizes. In [Islamov et al. \[2024\]](#), the authors analyze neural-network objectives beyond the heavily over-parameterized regime and identify geometric conditions (in the spirit of Polyak–Łojasiewicz-type properties) under which gradient methods enjoy fast convergence, thereby providing a landscape-based justification for adaptive step rules closely related to Polyak’s idea. [Shi et al. \[2023\]](#) provides an adaptive SARAH-type algorithm that explores and adapts to the local geometry. In a different direction, [Orvieto and Xiao \[2024\]](#) proposes an SGD variant whose effective learning rate is determined by a non-negative Gauss–Newton scaling of the loss; the resulting method exhibits an automatic warm-up and decay behaviour and is analyzed for smooth convex and non-convex problems, with explicit comparisons to Polyak-style and SPS-type stepsizes.

## B Proofs

In this section, we present the proofs of the main theoretical results presented in the main paper, i.e. Proposition 2.1 and the convergence guarantees of  $\text{SPS}_{\text{safe}}$  and  $\text{IMA-SPS}_{\text{safe}}$ . We restate the main theorems here for completeness.

### B.1 Proof of Proposition 2.1

**Proposition.** *SSM with  $\text{SPS}_{\text{safe}}$  and  $M = c^2$  is algebraically equivalent to  $\text{Clipped SSM}$  with the adaptive step size  $\tilde{\gamma}_t = \frac{f_i(x^t) - \ell_i^*}{c \max\{c, \|g_i^t\|\}}$ .*

*Proof.* We have

$$\begin{aligned} x^{t+1} &= x^t - \gamma_t g_i^t = x^t - \frac{f_i(x^t) - \ell_i^*}{\max\{c^2, \|g_i^t\|^2\}} g_i^t \\ &= x^t - \frac{f_i(x^t) - \ell_i^*}{\min\left\{1, \frac{c}{\|g_i^t\|}\right\} \max\{c^2, \|g_i^t\|^2\}} \min\left\{1, \frac{c}{\|g_i^t\|}\right\} g_i^t \\ &= x^t - \frac{f_i(x^t) - \ell_i^*}{\min\left\{1, \frac{c}{\|g_i^t\|}\right\} \max\{c^2, \|g_i^t\|^2\}} \text{clip}_c(g_i^t) \\ &= x^t - \frac{f_i(x^t) - \ell_i^*}{c \max\{c, \|g_i^t\|\}} \text{clip}_c(g_i^t), \end{aligned}$$

where the last equality follows by discriminating cases:

- If  $\|g_i^t\| \leq c$ , then:

$$\begin{aligned} \min\left\{1, \frac{c}{\|g_i^t\|}\right\} \max\{c^2, \|g_i^t\|^2\} &= 1 \cdot c^2 = c^2 \quad \text{and} \\ c \max\{c, \|g_i^t\|\} &= c\|g_i^t\|. \end{aligned}$$

- If  $\|g_i^t\| > c$ , then:

$$\begin{aligned} \min\left\{1, \frac{c}{\|g_i^t\|}\right\} \max\{c^2, \|g_i^t\|^2\} &= \frac{c}{\|g_i^t\|} \cdot \|g_i^t\|^2 = c\|g_i^t\| \quad \text{and} \\ c \max\{c, \|g_i^t\|\} &= c^2. \end{aligned}$$

This completes the proof.  $\square$

### B.2 Proof of Theorem 3.1

**Theorem.** *Consider the iterates of  $\text{SSM}$  with the step size  $(\text{SPS}_{\text{safe}})$ . Then*

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,$$

where  $\bar{x}^T = \frac{1}{T} \sum_{t=0}^{T-1} x^t$ .

*Proof of Theorem 3.1.* We have

$$\begin{aligned} \|x^{t+1} - x^*\|^2 - \|x^t - x^*\|^2 &\stackrel{\text{SSM}}{=} -2\gamma_t \langle g_i^t, x^t - x^* \rangle + \gamma_t^2 \|g_i^t\|^2 \\ &\stackrel{\text{convexity}}{\leq} -2\gamma_t [f_i(x^t) - f_i(x^*)] + \gamma_t^2 \|g_i^t\|^2 \\ &\stackrel{\text{SPS}_{\text{safe}}}{=} -\frac{2[f_i(x^t) - \ell_i^*][f_i(x^t) - f_i(x^*)]}{\max\{\|g_i^t\|^2, M\}} + \frac{[f_i(x^t) - \ell_i^*]^2}{(\max\{\|g_i^t\|^2, M\})^2} \|g_i^t\|^2 \end{aligned}$$

$$\begin{aligned}
&= -\frac{2[f_i(x^t) - \ell_i^*][f_i(x^t) - f_i(x^*)]}{\max\{\|g_i^t\|^2, M\}} + \frac{[f_i(x^t) - \ell_i^*]^2}{\max\{\|g_i^t\|^2, M\}} \frac{\|g_i^t\|^2}{\max\{\|g_i^t\|^2, M\}} \\
&\stackrel{(\star)}{\leq} -\frac{2[f_i(x^t) - \ell_i^*][f_i(x^t) - f_i(x^*)]}{\max\{\|g_i^t\|^2, M\}} + \frac{[f_i(x^t) - \ell_i^*]^2}{\max\{\|g_i^t\|^2, M\}} \\
&= \frac{-2[f_i(x^t) - \ell_i^*][f_i(x^t) - f_i(x^*)] + [f_i(x^t) - \ell_i^*]^2}{\max\{\|g_i^t\|^2, M\}} \\
&\stackrel{(\star\star)}{=} \frac{(f_i(x^*) - \ell_i^*)^2 - (f_i(x^t) - f_i(x^*))^2}{\max\{\|g_i^t\|^2, M\}} \\
&= -\frac{(f_i(x^t) - f_i(x^*))^2}{\max\{\|g_i^t\|^2, M\}} + \frac{(f_i(x^*) - \ell_i^*)^2}{\max\{\|g_i^t\|^2, M\}} \\
&\stackrel{(\star\star\star)}{\leq} -\frac{(f_i(x^t) - f_i(x^*))^2}{\max\{G^2, M\}} + \frac{(f_i(x^*) - \ell_i^*)^2}{M}. \tag{3}
\end{aligned}$$

The inequality  $(\star)$  follows from the fact that  $\max\{\|g_i^t\|^2, M\} \geq \|g_i^t\|^2$ , the equality  $(\star\star)$  follows from the identity  $-2xy + y^2 = (x - y)^2 - x^2$  with  $x = f_i(x^t) - f_i(x^*)$  and  $y = f_i(x^t) - \ell_i^*$ . Finally the inequality  $(3)$  follows from  $\max\{\|g_i^t\|^2, M\} \geq M$  and  $\|g_i^t\| \leq G$ . Taking expectation conditional on  $x^t$  at  $(*)$  we get

$$\begin{aligned}
\mathbb{E}[\|x^{t+1} - x^*\|^2 | x^t] - \|x^t - x^*\|^2 &\leq -\frac{\mathbb{E}([f_i(x^t) - f_i(x^*)])^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M} \\
&\leq -\frac{(\mathbb{E}[f_i(x^t) - f_i(x^*)])^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M} \\
&= -\frac{[f(x^t) - f(x^*)]^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M},
\end{aligned}$$

where the second inequality follows by Jensen's inequality. Taking expectation again and using the tower property we have

$$\mathbb{E} \|x^{t+1} - x^*\|^2 \leq \mathbb{E} \|x^t - x^*\|^2 - \frac{\mathbb{E}[f(x^t) - f(x^*)]^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M},$$

or equivalently, after rearranging:

$$\mathbb{E}[f(x^t) - f(x^*)]^2 \leq \max\{G^2, M\} \mathbb{E} \|x^t - x^*\|^2 - \max\{G^2, M\} \mathbb{E} \|x^{t+1} - x^*\|^2 + \frac{\max\{G^2, M\} \sigma^4}{M}. \tag{4}$$

Now summing up (4) for  $t = 0, \dots, T-1$  and telescoping we have

$$\begin{aligned}
\sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)]^2 &\leq \sum_{t=0}^{T-1} \left[ \max\{G^2, M\} \mathbb{E} \|x^t - x^*\|^2 - \max\{G^2, M\} \mathbb{E} \|x^{t+1} - x^*\|^2 + \frac{\max\{G^2, M\} \sigma^4}{M} \right] \\
&= \max\{G^2, M\} \|x^0 - x^*\|^2 - \max\{G^2, M\} \mathbb{E} \|x^T - x^*\|^2 + T \frac{\max\{G^2, M\} \sigma^4}{M} \\
&\leq \max\{G^2, M\} \|x^0 - x^*\|^2 + T \frac{\max\{G^2, M\} \sigma^4}{M}. \tag{5}
\end{aligned}$$

Now by Jensen's inequality (twice) we get

$$\begin{aligned}
\mathbb{E}[f(\bar{x}^T) - f(x^*)] &\stackrel{\text{Jensen}}{\leq} \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] \\
&\stackrel{\text{Jensen}}{\leq} \sqrt{\frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)]^2}
\end{aligned}$$

$$\begin{aligned}
&\stackrel{(5)}{\leq} \sqrt{\frac{\max\{G^2, M\} \|x^0 - x^*\|^2}{T}} + \frac{\max\{G^2, M\} \sigma^4}{M} \\
&\leq \frac{\sqrt{\max\{G^2, M\} \|x^0 - x^*\|^2}}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,
\end{aligned}$$

because  $\sqrt{x+y} \leq \sqrt{x} + \sqrt{y}$ . This completes the proof.  $\square$

### B.3 Proofs of Theorems 3.4 and 3.5

#### B.3.1 Preliminary Lemmas

Here we provide the two auxiliary lemmas we will use in the following proofs.

**Lemma B.1** ([Gower et al., 2025]: Lem. B.3). For any random variable  $X$  and positive-valued random variable  $Y$ , it holds

$$\mathbb{E} \left[ \frac{(X)_+^2}{Y} \right] \geq \frac{(\mathbb{E} X)_+^2}{\mathbb{E} Y}.$$

**Lemma B.2** ([Gower et al., 2025]: Lem. C.3). For any  $x^t, x^t, x^* \in \mathbb{R}^d$  and  $\lambda_t \geq 0$  it holds

$$\begin{aligned}
&f(x^t) - f(x^*) + \lambda_t \langle \partial f(x^t), x^t - x^{t-1} \rangle \\
&= (1 + \lambda_t)[f(x^t) - f(x^*)] - \lambda_t[f(x^{t-1}) - f(x^*)] + \lambda_t B_f(x^{t-1}, x^t),
\end{aligned}$$

where  $B_f(x, y) = f(x) - f(y) - \langle \partial f(y), x - y \rangle$  is the Bregman divergence.

#### B.3.2 Proof of Theorem 3.4

**Theorem.** Consider the iterates of *IMA* with the step size (*IMA-SPS<sub>safe</sub>*) and let  $(\lambda_t)_{t>0}$  be a decreasing sequence of nonnegative reals. Then

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] + \sum_{t=0}^{T-1} \frac{\lambda_t}{T} \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,$$

where  $\bar{x}^T = \frac{1}{T} \sum_{t=0}^{T-1} x^t$  and  $B_f(x, y) = f(x) - f(y) - \langle \partial f(y), x - y \rangle$  is the Bregman divergence.

*Proof.* We have

$$\begin{aligned}
&\|z^{t+1} - x^*\|^2 - \|z^t - x^*\|^2 \stackrel{(IMA)}{=} -2\eta_t \langle g_i^t, z^t - z^* \rangle + \eta_t^2 \|g_i^t\|^2 \\
&= -2\eta_t \langle g_i^t, x^t - x^* \rangle - 2\eta_t \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle + \eta_t^2 \|g_i^t\|^2 \\
&\stackrel{\text{convexity}}{\leq} -2\eta_t [f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle] + \eta_t^2 \|g_i^t\|^2 \\
&= -\frac{2[f_i(x^t) - \ell_i^* + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+ [f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]}{\max\{\|g_i^t\|^2, M\}} \\
&\quad + \frac{[f_i(x^t) - \ell_i^* + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+^2}{(\max\{\|g_i^t\|^2, M\})^2} \|g_i^t\|^2.
\end{aligned}$$

Now for easier notation we set  $q = f_i(x^t) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle$ , thus we continue:

$$\begin{aligned}
&\|z^{t+1} - x^*\|^2 - \|z^t - x^*\|^2 \\
&= \frac{-2(q - \ell_i^*)_+ \cdot (q - f_i(x^*))}{\max\{\|g_i^t\|^2, M\}} + \frac{(q - \ell_i^*)_+^2}{\max\{\|g_i^t\|^2, M\}} \cdot \frac{\|g_i^t\|^2}{\max\{\|g_i^t\|^2, M\}}
\end{aligned}$$

$$\begin{aligned}
&\leq \frac{-2(q - \ell_i^*)_+ \cdot (q - f_i(x^*))}{\max\{\|g_i^t\|^2, M\}} + \frac{(q - \ell_i^*)_+^2}{\max\{\|g_i^t\|^2, M\}} \\
&= \frac{-2(q - \ell_i^*)_+ \cdot (q - f_i(x^*)) + (q - \ell_i^*)_+^2}{\max\{\|g_i^t\|^2, M\}} \\
&\stackrel{(\star)}{\leq} \frac{(f_i(x^*) - \ell_i^*)^2 - (q - f_i(x^*))_+^2}{\max\{\|g_i^t\|^2, M\}} \\
&= -\frac{(f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle)_+^2}{\max\{\|g_i^t\|^2, M\}} + \frac{[f_i(x^*) - \ell_i^*]^2}{\max\{\|g_i^t\|^2, M\}} \\
&\stackrel{(\star\star)}{\leq} -\frac{[f_i(x^t) - f_i(x^*) + \lambda_t \langle g_i^t, x^t - x^{t-1} \rangle]_+^2}{\max\{G^2, M\}} + \frac{[f_i(x^*) - \ell_i^*]^2}{M}.
\end{aligned}$$

Let's explain inequality  $(\star)$ , which is:

$$-2(q - \ell_i^*)_+ \cdot (q - f_i(x^*)) + (q - \ell_i^*)_+^2 \leq (f_i(x^*) - \ell_i^*)^2 - (q - f_i(x^*))_+^2 \quad (\star)$$

Note that  $\ell_i^* \leq f_i(x^*)$  so  $q - \ell_i^* \geq q - f_i(x^*)$ . Hence if  $q - \ell_i^* \leq 0$  inequality  $(\star)$  reduces to the obvious  $0 \leq [f_i(x^t) - \ell_i^*]^2$ . Now assume that  $q - \ell_i^* > 0$ . Then

$$\begin{aligned}
-2(q - f_i^*)_+ \cdot (q - f_i(x^*)) + (q - f_i^*)_+^2 &= -2(q - f_i^*)(q - f_i(x^*)) + (q - f_i^*)^2 \\
&= (q - f_i^* - (q - f_i(x^*)))^2 - (q - f_i(x^*))^2 \\
&= (f_i(x^*) - f_i^*)^2 - (q - f_i(x^*))^2 \\
&\leq (f_i(x^*) - f_i^*)^2 - (q - f_i(x^*))_+^2,
\end{aligned}$$

as wanted. Now, inequality  $(\star\star)$  follows from  $\max\{\|g_i^t\|^2, M\} \geq M$  and  $\max\{\|g_i^t\|^2, M\} \leq \max\{G^2, M\}$  because  $f_i$  is  $G$ -Lipschitz.

Now taking expectation and using Lemmas B.1 and B.2 we get

$$\begin{aligned}
\mathbb{E} \|z^{t+1} - x^*\|^2 &\leq \mathbb{E} \|z^t - x^*\|^2 - \frac{\mathbb{E}[f(x^t) - f(x^*) + \lambda_t \langle \partial f(x^t), x^t - x^{t-1} \rangle]_+^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M} \\
&= \mathbb{E} \|z^t - x^*\|^2 - \frac{\mathbb{E}[(1 + \lambda_t)[f(x^t) - f(x^*)] - \lambda_t[f(x^{t-1}) - f(x^*)] + \lambda_t B_f(x^{t-1}, x^t)]_+^2}{\max\{G^2, M\}} + \frac{\sigma^4}{M},
\end{aligned}$$

so

$$\begin{aligned}
&\mathbb{E}[(1 + \lambda_t)[f(x^t) - f(x^*)] - \lambda_t[f(x^{t-1}) - f(x^*)] + \lambda_t B_f(x^{t-1}, x^t)]_+^2 \\
&\leq \max\{G^2, M\} \mathbb{E} \|z^t - x^*\|^2 - \max\{G^2, M\} \mathbb{E} \|z^{t+1} - x^*\|^2 + \frac{\max\{G^2, M\}}{M} \sigma^4.
\end{aligned}$$

Now let  $\Delta_t = (1 + \lambda_t)[f(x^t) - f(x^*)] - \lambda_t[f(x^{t-1}) - f(x^*)] + \lambda_t B_f(x^{t-1}, x^t)$ , sum for  $t = 0, \dots, T-1$  and use Jensen to get

$$\begin{aligned}
&\frac{\max\{G^2, M\} \|x^0 - x^*\|^2}{T} + \frac{\max\{G^2, M\}}{M} \sigma^4 \\
&\geq \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t]_+^2 \\
&\geq \left( \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t] \right)_+^2,
\end{aligned}$$



which means that

$$\begin{aligned} \left( \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t] \right)_+ &\leq \sqrt{\frac{G^2 \|x^0 - x^*\|^2}{T} + \frac{\max\{G^2, M\}}{M} \sigma^4} \\ &\leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2. \end{aligned} \quad (6)$$

Now

$$\begin{aligned} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t] &= \sum_{t=0}^{T-1} (1 + \lambda_t) \mathbb{E}[f(x^t) - f(x^*)] - \lambda_t \mathbb{E}[f(x^{t-1}) - f(x^*)] + \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] \\ &= \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] + \sum_{t=0}^{T-2} (\lambda_t - \lambda_{t+1}) \mathbb{E}[f(x^t) - f(x^*)] \\ &\quad + \lambda_{T-1} \mathbb{E}[f(x^{T-1}) - f(x^*)]. \end{aligned} \quad (7)$$

Since  $(\lambda_t)_{t \geq 0}$  is decreasing we get

$$\begin{aligned} &\sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] + \sum_{t=0}^{T-2} (\lambda_t - \lambda_{t+1}) \mathbb{E}[f(x^t) - f(x^*)] \\ &\quad + \lambda_{T-1} \mathbb{E}[f(x^{T-1}) - f(x^*)] \\ &\geq \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] \\ &\geq \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + T \cdot \mathbb{E}[f(\bar{x}^T) - f(x^*)], \end{aligned}$$

so we get

$$\mathbb{E}[f(\bar{x}^T) - f(x^*)] + \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2.$$

This completes the proof.  $\square$

### B.3.3 Proof of Theorem 3.5

**Theorem.** Consider the iterates of *IMA* with the step size  $(\text{IMA-SPS}_{safe})$  and let  $\lambda_t = t$ . Then

$$\mathbb{E}[f(x^{T-1}) - f(x^*)] + \frac{1}{T} \sum_{t=0}^{T-1} t \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2.$$

*Proof.* The proof is very similar to the proof of Theorem 3.5. Indeed by Equation (6) we have

$$\left( \frac{1}{T} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t] \right)_+ \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2,$$

and by Equation (7) we get

$$\begin{aligned} \sum_{t=0}^{T-1} \mathbb{E}[\Delta_t] &= \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] + \sum_{t=0}^{T-2} (\lambda_t - \lambda_{t+1}) \mathbb{E}[f(x^t) - f(x^*)] \\ &\quad + \lambda_{T-1} \mathbb{E}[f(x^{T-1}) - f(x^*)]. \end{aligned}$$

Now since  $\lambda_t = t$  we have

$$\begin{aligned}
& \sum_{t=0}^{T-1} \lambda_t \mathbb{E}[B_f(x^{t-1}, x^t)] + \sum_{t=0}^{T-1} \mathbb{E}[f(x^t) - f(x^*)] + \sum_{t=0}^{T-2} (\lambda_t - \lambda_{t+1}) \mathbb{E}[f(x^t) - f(x^*)] \\
& + \lambda_{T-1} \mathbb{E}[f(x^{T-1}) - f(x^*)] \\
& = \sum_{t=0}^{T-1} t \mathbb{E}[B_f(x^{t-1}, x^t)] + T \cdot \mathbb{E}[f(x^{T-1}) - f(x^*)] \geq 0,
\end{aligned}$$

so we get

$$\mathbb{E}[f(x^{T-1}) - f(x^*)] + \sum_{t=0}^{T-1} \frac{t}{T} \mathbb{E}[B_f(x^{t-1}, x^t)] \leq \frac{\sqrt{\max\{G^2, M\}} \|x^0 - x^*\|}{\sqrt{T}} + \sqrt{\frac{\max\{G^2, M\}}{M}} \sigma^2.$$

This completes the proof. □

## C Further Numerical Experiments

### C.1 More deep learning experiments and parameter settings

In this section, we list the parameters, architectures and hardware that we used for the deep learning experiments. The information is collected in Table 2. We also include some extra experiments (ResNet20 in CIFAR-100 and ResNet32 in CIFAR-10/100) in Figures 5 to 7.

Hyper-parameter	Value
Datasets	CIFAR-10/100 [Krizhevsky et al., 2009]
Architecture	ResNet 20/32 [He et al., 2016]
GPUs	1x Nvidia RTX 6000 Ada Generation
Batch-size	128
Epochs	100
Weight Decay	0.0

Table 2: Experimental details

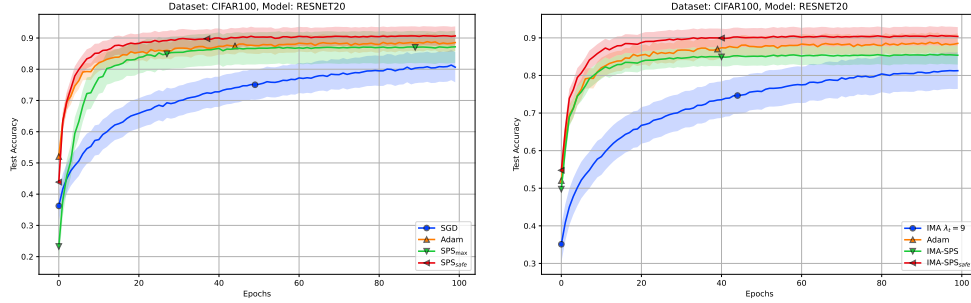


Figure 5: Test accuracy of ResNet20 on CIFAR-100. **Left:** SSM-based methods. **Right:** IMA-based methods.

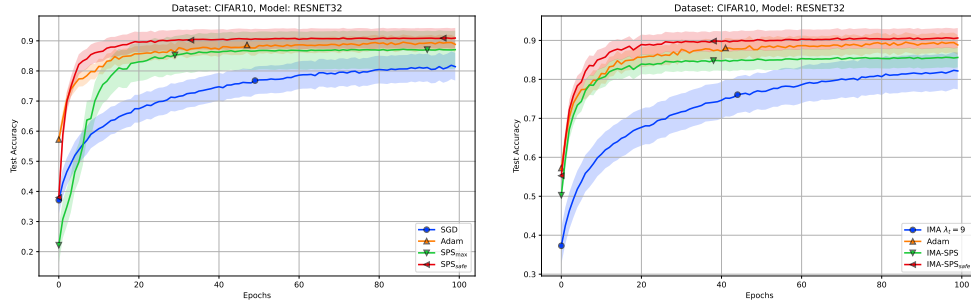


Figure 6: Test accuracy of ResNet32 on CIFAR-10. **Left:** SSM-based methods. **Right:** IMA-based methods.

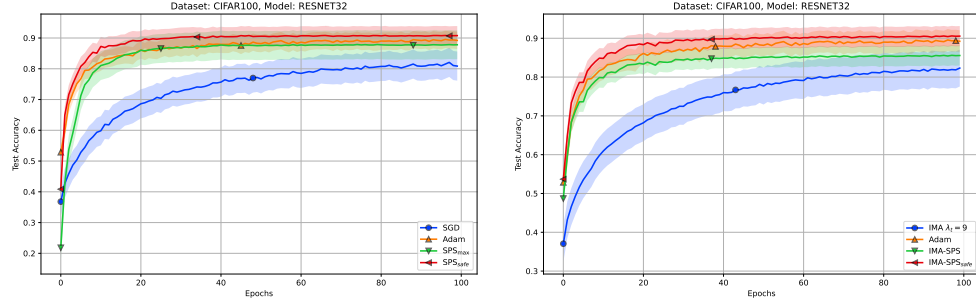


Figure 7: Test accuracy of ResNet32 on CIFAR-100. **Left:** SSM-based methods. **Right:** IMA-based methods.

### C.1.1 Comparison of the gradient norm

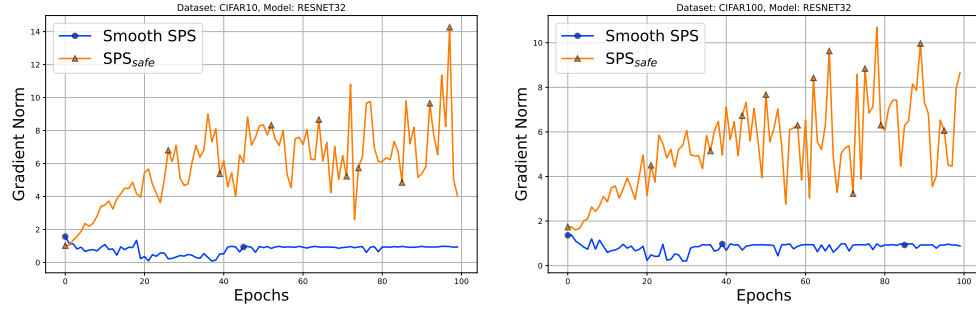


Figure 8: Gradient Norms during training of ResNet20. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

## D Extra Sensitivity Analysis

In this appendix we complement the main sensitivity study for the safeguard  $M$  by providing additional experiments on both convex and deep-learning benchmarks. We systematically vary  $M$  over a wide range and report the generalization performance vs the value of  $M$  for SSM and IMA variants. These plots illustrate that choosing  $M = 1.0$  works well in practice.

### D.1 Convex

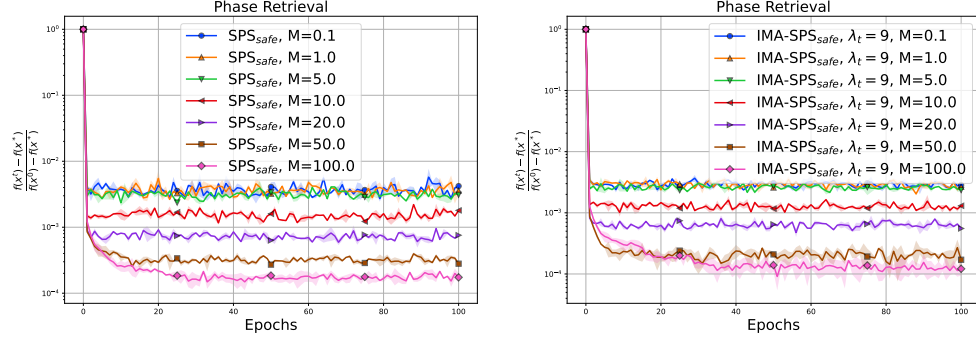


Figure 9: Sensitivity Analysis for various safeguards  $M$  for Phase Retrieval. **Left:** SSM. **Right:** IMA

### D.2 Deep Learning

#### D.2.1 SSM

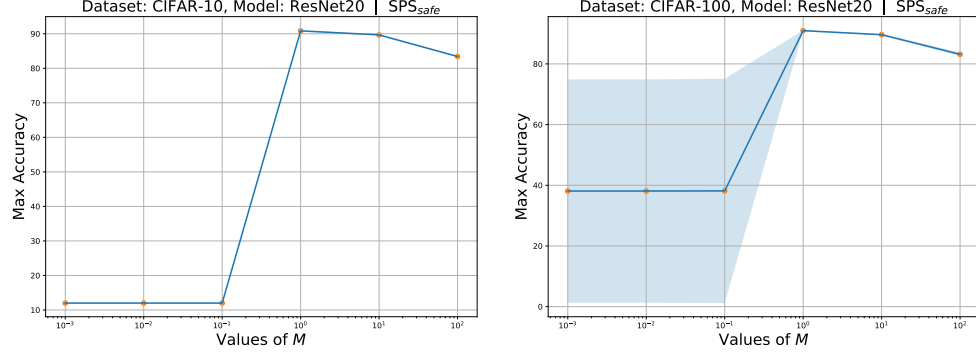


Figure 10: Sensitivity Analysis for various safeguards  $M$  for ResNet20. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

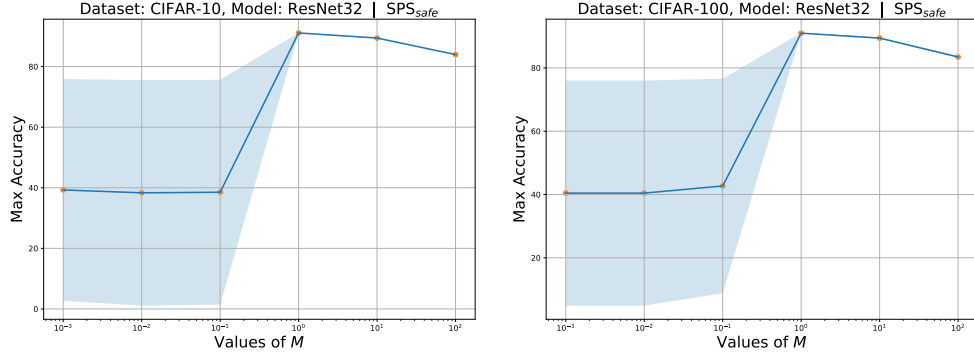


Figure 11: Sensitivity Analysis for various safeguards  $M$  for ResNet32. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

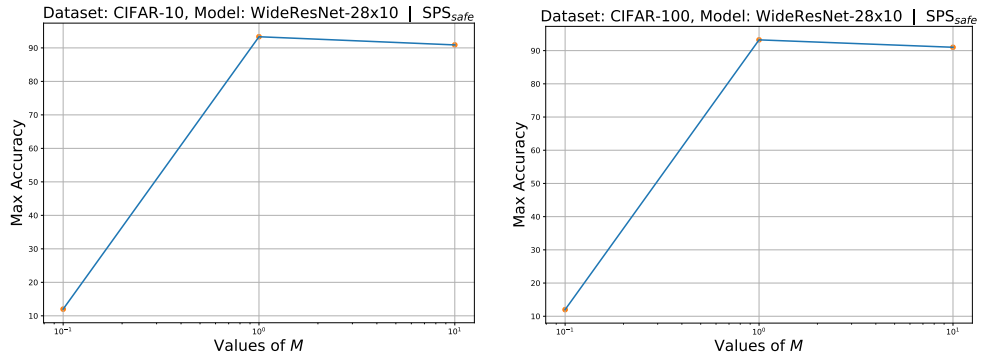


Figure 12: Sensitivity Analysis for various safeguards  $M$  for WideResNet 28x10. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

## D.2.2 IMA

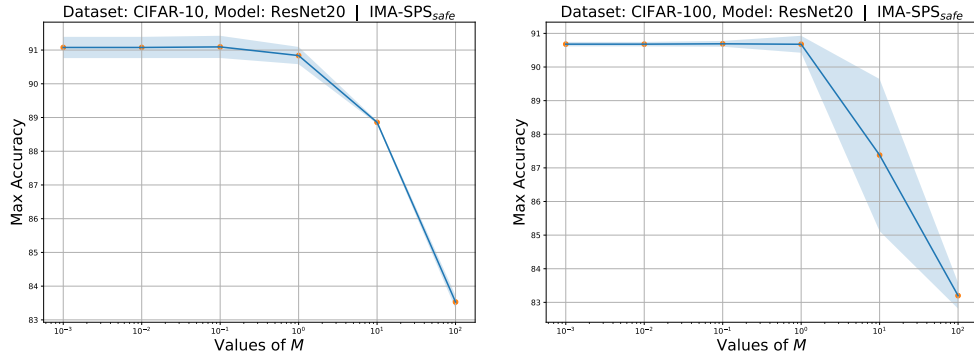


Figure 13: Sensitivity Analysis for various safeguards  $M$  for ResNet20. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.



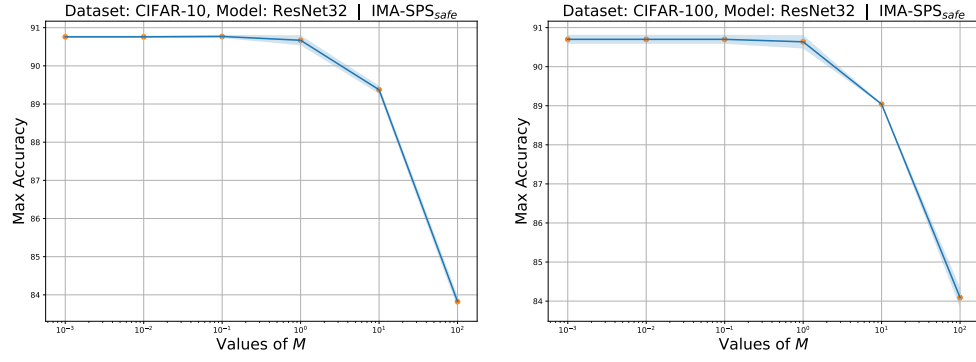


Figure 14: Sensitivity Analysis for various safeguards  $M$  for ResNet32. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

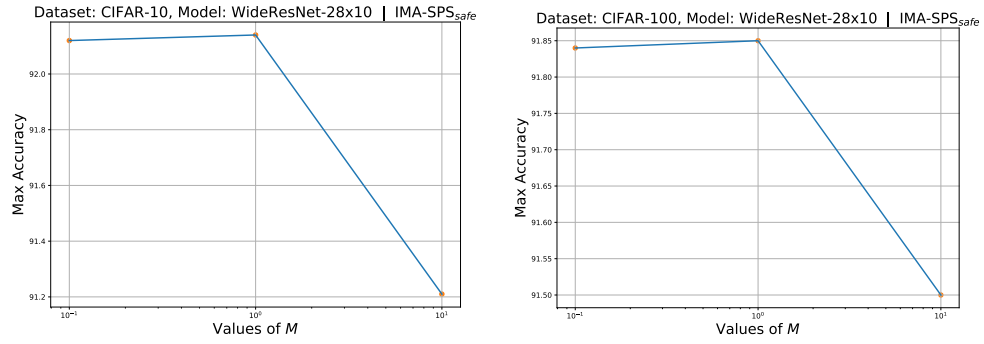


Figure 15: Sensitivity Analysis for various safeguards  $M$  for WideResNet 28x10. **Left:** Trained on CIFAR-10. **Right:** Trained on CIFAR-100.

## E Smoothing trick for $M$

Motivated by the sensitivity analyses above, in this appendix, we investigate a simple smoothing strategy that replaces the fixed safeguard  $M$  with an exponential moving average  $M_t$  of past squared gradients. This adaptive rule is designed to reduce manual tuning while preserving the stabilizing effect of the safeguard. We present the corresponding update, provide a practical recommendation for the smoothing parameter  $\beta$ , and compare the resulting  $M_t$  against the best-tuned fixed  $M$  on CIFAR-10/100 and several architectures.

The  $\text{SPS}_{safe}$  takes the following form:

$$\gamma_t = \frac{f_i(x^t) - \ell_i^*}{\max\{\|g_i^t\|^2, M_t\}}$$

$$M_t = \beta M_{t-1} + (1 - \beta)\|g_i^t\|^2,$$

with  $M_0 = \|g_i^0\|^2$ . For a good practical performance we recommend  $\beta = 0.9$ .

Table 3: Comparison of test accuracy of tuned  $M$  vs Smooth  $M_t$  for various model on CIFAR10.

Model	Best $M$	Smooth $M_t$ ( $\beta = 0.9$ )
ResNet20	90.84 $\pm$ 0.17	<b>90.97</b> $\pm$ 0.14
ResNet32	90.80 $\pm$ 0.04	<b>90.94</b> $\pm$ 0.13
WideResNet-28x10	<b>93.03</b>	92.99

Table 4: Comparison of test accuracy of tuned  $M$  vs Smooth  $M_t$  for various model on CIFAR100.

Model	Best $M$	Smooth $M_t$ ( $\beta = 0.9$ )
ResNet20	90.86 $\pm$ 0.12	<b>90.93</b> $\pm$ 0.16
ResNet32	90.97 $\pm$ 0.11	<b>91.11</b> $\pm$ 0.28
WideResNet-28x10	<b>93.24</b>	93.22