

ADORE: Autonomous Domain-Oriented Relevance Engine for E-commerce

Zheng Fang
Donghao Xie
fangzheng21@jd.com
xiedonghao1@jd.com
JD.COM
Beijing, China

Ming Pang*
Chunyu Yuan*
Xue Jiang
pangming8@jd.com
chunyuany93@outlook.com
jiangxue@jd.com
JD.COM
Beijing, China

Changping Peng
Zhangang Lin
Zheng Luo
pengchangping@jd.com
linzhangang@jd.com
lawching@jd.com
JD.COM
Beijing, China

Abstract

Relevance modeling in e-commerce search remains challenged by semantic gaps in term-matching methods (e.g., BM25) and neural models' reliance on the scarcity of domain-specific hard samples. We propose ADORE, a self-sustaining framework that synergizes three innovations: (1) A Rule-aware Relevance Discrimination module, where a Chain-of-Thought LLM generates intent-aligned training data, refined via Kahneman-Tversky Optimization (KTO) to align with user behavior; (2) An Error-type-aware Data Synthesis module that auto-generates adversarial examples to harden robustness; and (3) A Key-attribute-enhanced Knowledge Distillation module that injects domain-specific attribute hierarchies into a deployable student model. ADORE automates annotation, adversarial generation, and distillation, overcoming data scarcity while enhancing reasoning. Large-scale experiments and online A/B testing verify the effectiveness of ADORE. The framework establishes a new paradigm for resource-efficient, cognitively aligned relevance modeling in industrial applications.

CCS Concepts

• **Information systems** → **Language models**; **Sponsored search advertising**; *Relevance Modeling*; **Novelty in information retrieval**; **Online shopping**; • **Computing methodologies** → **Natural language processing**.

Keywords

Relevance Modeling, Large Language Model, Generative Model, E-Commerce Search, Information Retrieval

ACM Reference Format:

Zheng Fang, Donghao Xie, Ming Pang, Chunyu Yuan, Xue Jiang, Changping Peng, Zhangang Lin, and Zheng Luo. 2025. ADORE: Autonomous Domain-Oriented Relevance Engine for E-commerce. In *Proceedings of the*

*Authors are corresponding authors.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
SIGIR '25, Padua, Italy

© 2025 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM ISBN 979-8-4007-1592-1/2025/07
<https://doi.org/10.1145/3726302.3731944>

48th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '25), July 13–18, 2025, Padua, Italy. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/3726302.3731944>

1 Introduction

E-commerce applications, such as Amazon, Taobao, and JD, have changed people's shopping habits significantly. The relevance module is crucial for the user experience, as displaying irrelevant products can harm trust and revenue for e-commerce systems. Therefore, relevance modeling, which evaluates the match between search queries and products, is a basic part of e-commerce engines.

Traditional relevance models, such as term matching and vector matching methods, have been widely used in online e-commerce systems to ensure fundamental search experience. Term matching based methods apply TF-IDF, BM25 [14] and statistical features to compute the matching degree between query and product, but fail to capture semantic relevance and contextual understanding. Vector matching based approaches [10, 11, 19, 25] leverage BERT [3] and its variants [1, 7, 15, 23, 24] to understand the semantic relationships between queries and products and achieve remarkable improvement in relevance modeling.

Despite the progress made, vector matching based methods still face two challenges when tackling domain-specific relevance modeling tasks: (1) The first challenge is the lack of domain-specific hard samples. Most existing methods can achieve satisfactory results by leveraging a moderate amount of manually annotated data. However, further performance improvements often require a substantial number of hard samples, which are not only difficult to obtain but also challenging to annotate accurately. (2) The second challenge is the models' insufficient reasoning and representation capabilities. Constrained by their parameter size, online lightweight models often struggle with complex reasoning and relevance discrimination. To enhance reasoning and comprehension capabilities, large language models (LLMs) have been increasingly applied to relevance modeling tasks [2, 8, 12, 17, 18, 20, 22]. However, most prior LLM approaches primarily utilize the representation of the last token for relevance classification and employ soft labels from the classification layer to distill knowledge into smaller online models. This discriminative paradigm is unable to intuitively analyze which features impact relevance decisions, nor can it enhance the reasoning capabilities of the online student models.

To address the above issues, we propose the Autonomous Domain-Oriented Relevance Engine (ADORE), which consists of three parts:

a domain rule-aware relevance discrimination (RD) module, an error-type-aware data synthesis (DS) module, and a key-attribute-enhanced knowledge distillation (KD) module. To automate the construction of domain-specific hard samples, we propose a Chain-of-Thought (CoT) [21] based reasoning LLM model within the RD module. To ensure that LLM predictions align with domain rules and user behavior, we use Kahneman-Tversky Optimization (KTO) [5] to align LLM. Furthermore, to endow ADORE with autonomous error correction capabilities, we design an error-type-aware generation model in the DS component. Finally, to effectively transfer the reasoning capabilities of the LLM to the online model, we incorporate the key attributes derived from the CoT analysis into the model input in the KD module, thereby achieving explicit knowledge enhancement.

In summary, the main contributions of this paper are as follows.

- We propose the **Autonomous Domain-Oriented Relevance Engine (ADORE)**, which integrates a domain rule-aware relevance discrimination (RD) module, an error-type-aware data synthesis (DS) module, and a key-attribute-enhanced knowledge distillation (KD) module.
- We introduce a CoT-based reasoning LLM in the RD module, which automatically constructs domain-specific hard samples by relevance reasoning on online exposure products. Additionally, the DS module incorporates an error-type-aware generation model to autonomously produce various challenging samples, further enhancing the system's robustness. Key attribute features from CoT analysis are explicitly integrated into the KD module, enabling explicit knowledge enhancement and improving the reasoning and representation capabilities of the online student model.
- We conduct extensive experiments to evaluate the performance of ADORE, including large-scale offline dataset and online A/B testing. The results demonstrate that ADORE significantly outperforms existing state-of-the-art methods, delivering substantial improvements in both offline and online metrics. This highlights the practical applicability and effectiveness of ADORE in handling complex relevance modeling tasks in e-commerce.

2 METHODOLOGY

In our work, we formulate search relevance prediction as a binary classification problem. Given a query Q and a product P , relevance modeling in search engines aims to predict the relevance degree between them. Specifically, the model is designed to classify query-product pairs into one of two distinct relevance categories: Relevant and Irrelevant. Figure 1 illustrates the components of the Autonomous Domain-Oriented Relevance Engine (ADORE).

2.1 Rule-aware Relevance Discrimination

2.1.1 CoT Tuning. To identify hard samples that can enhance the performance of our online model, we have developed a relevance discrimination model based on Large Language Models. Previous research [9, 21] has demonstrated that Chain-of-Thought (CoT) prompting significantly enhances the reasoning accuracy of LLMs. Building on this insight, we fine-tune our LLM using a CoT-based approach. We initiate the process by utilizing GPT-4o to create CoT

labeled data. This is achieved by simulating the human annotation process, where GPT-4o is provided with domain-specific annotation guidelines and a few exemplary CoT instances. As a result, we generate a dataset enriched with detailed reasoning chains, mirroring the depth and nuance of human-like annotation. To further enhance the accuracy of the labeled data, we empirically construct only query-product data that can be validated using human-annotated labels and exclude any CoT data inconsistent with the human labels, forming our final training set. Subsequently, we employ these samples to further fine-tune the LLaMA-3 [4] model through optimization of a standard Language Model loss:

$$\mathcal{L}_{LM} = -\frac{1}{N} \sum_{i=1}^N \log P(w_i | w_{<i}) \quad (1)$$

The CoT output of the fine-tuned model is illustrated in the figure 1. In this output, the initial step involves extracting key attributes from the query and item descriptions, including product names, brands, model specifications, target audiences, and more. Subsequently, the relevance between the query and item is assessed by evaluating the compatibility of these attributes. Through CoT tuning, the LLM model not only accurately predicts relevance labels but also effectively explains the underlying reasons.

2.1.2 KTO Alignment. When analyzing the outputs of the fine-tuned LLM, we observe that it exhibits a bias towards stricter relevance discrimination. Specifically, the model tends to classify products as "Irrelevant" when some attributes mentioned in the query are absent from the product description, even if those attributes are non-essential and do not influence the user's purchasing decision. This tendency towards over-strictness leads to an increase in false negatives, which reduces the model's recall rate and negatively impacts the platform's transaction activity and revenue. To address this issue and ensure that the model's predictions align more closely with real user behavior and feedback, we align the fine-tuned model based on user purchasing behavior. Concretely, we use the fine-tuned model to predict query-purchased item pairs from historical logs and select those that the model classified as "Irrelevant" to form a preference training set. Specifically, we treat these overly strict predictions as loser and use GPT-4o to generate "Relevant" CoT reasoning results for the original query-purchased item pairs as winner. Subsequently, we employ the KTO algorithm to align the LLM with these preferences. In contrast to other alignment algorithms [13, 16], the KTO alignment algorithm directly utilizes individual binary labeled data for model alignment, making data construction simpler and more efficient.

After fine-tuning the LLM and aligning it using the KTO algorithm, we use it as a domain-specific data annotator to label online recalled and exposed items. Hard samples that are inaccurately predicted by the online BERT-based model will be incorporated into the training set, further improving the online model's performance.

2.2 Error-type-aware Data Synthesis

By leveraging the domain rule-aware LLM constructed within the RD module, we can quickly identify hard samples where the online model makes incorrect predictions. However, this piecemeal approach only addresses isolated errors and fails to systematically resolve a particular category of issues. When user search terms

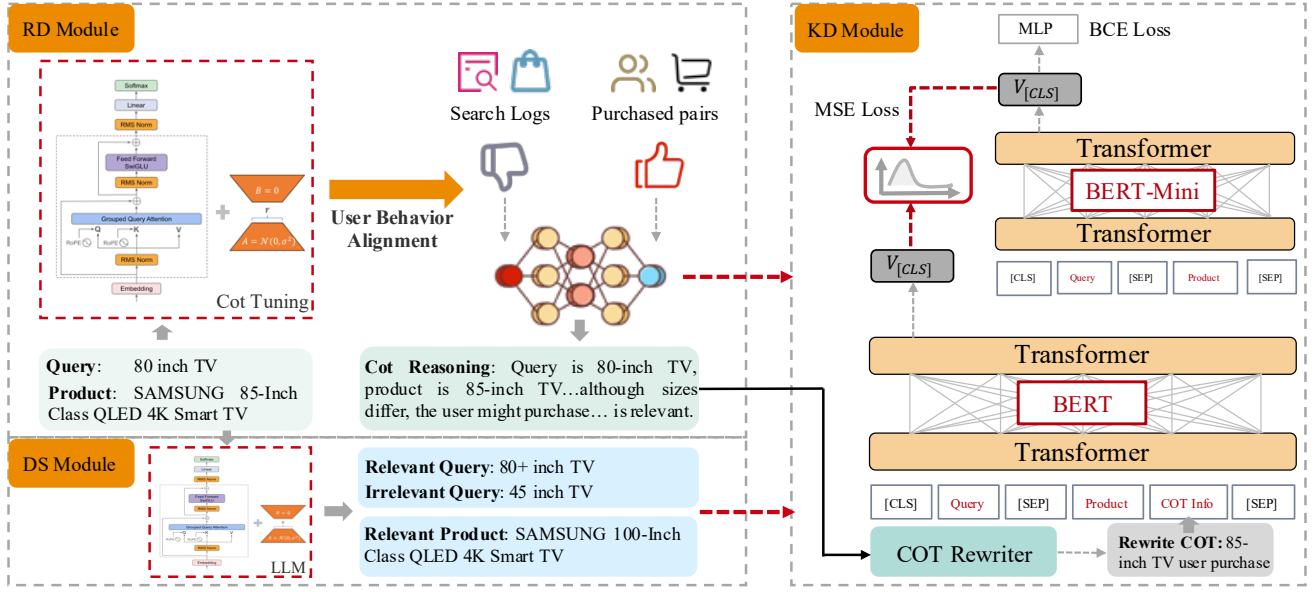


Figure 1: The architecture of the Autonomous Domain-Oriented Relevance Engine.

or product descriptions undergo subtle changes, the online model may still predict incorrectly. Based on this observation, we have developed an error-type-aware LLM generative model, which automatically synthesizes data that the online model is prone to mispredict, thereby enhancing the model’s generalization capability and accuracy. For any given query-product pair, our model can modify the attributes of the original query or product based on instruction prompts, generating new samples that fall into the two categories: Relevant and Irrelevant. Specifically, training samples at this stage are obtained using the GPT-4o model through few-shot prompting. To ensure that the generation model can fully capture the error patterns of the online model, we iteratively select the generated results where the online model made incorrect predictions as fine-tuning training samples for the LLM.

After building the error-type-aware LLM-based generative model, we directly sample data from online retrieval and exposed instances, and leverage the model to automatically generate hard samples that are likely to confuse the online model. To mitigate the impact of noisy data on the online model’s training, we further utilize the relevance discrimination model from the RD module to filter the generated results.

2.3 Key-attribute-enhanced Knowledge Distillation

Given real-time latency and cost considerations, our LLM or deep cross-encoder-based BERT classifier is challenging to scale to the online search system. Therefore, we employ a teacher-student distillation setup to distill a student relevance model, as illustrated in Figure 1. Our online model is a lightweight, shallow cross-encoder BERT. To ensure distributional consistency between the teacher model and the student model, we select a deep cross-encoder BERT, which is also encoder-only, as the teacher model, rather than employing an autoregressively trained LLM. Furthermore, to enable

the BERT-based model to learn the discriminative reasons for relevance between queries and products, we explicitly incorporate key attribute information mined by the relevance reasoning LLM from the RD module into the input of BERT, aiming for explicit knowledge enhancement. To address the noise and redundancy in lengthy CoT reasoning outputs, we introduce a CoT rewriting model that extracts and refines product attribute descriptions aligned or misaligned with the query. This process filters irrelevant information and reformulates key insights into a concise, structured format, enabling the lightweight BERT-based model to focus on discriminative reasoning. Additionally, since the student model cannot access the CoT results during real-time inference, we only integrate CoT information into the teacher BERT model to ensure consistency between online and offline inputs. Subsequently, the knowledge is transferred to the student model through representation alignment. The loss function is as follows:

$$\mathcal{L}_{kd} = \alpha \cdot - \sum_i y_i \log(\hat{y}_i) + (1 - \alpha) \cdot \frac{1}{H} \sum_{i=1}^H (h_i - \hat{h}_i)^2 \quad (2)$$

where y_i represents the class label, H denotes the dimension size of the $[CLS]$ vector, h_i and \hat{h}_i are the $[CLS]$ representation from the teacher and student model.

3 Experiment

3.1 Datasets and Metrics

There are no publicly available datasets for the Chinese e-commerce relevance task, we conduct a series of experiments on a large-scale real-world dataset collected from users’ search logs in the JD application. This dataset consists of human-annotated query-product pairs, where all annotations are provided by experienced human annotators. The statistics of the datasets are listed in Table 1.

Table 1: Dataset statistics.

Statistics	Train	Validation	Test
#Query-Product Pairs	3,226,439	100,000	50,961
#Uniq. Queries	2,862,473	87,706	45,464
#Uniq. Products	3,019,999	98,530	50,090

Table 2: The experimental results compared to the baselines on the test dataset.

Models	Precision	Recall	F1
DSSM (bi-encoder)	72.72%	78.54%	75.52%
BERT (cross-encoder)	84.21%	83.93%	84.07%
BERT-CoT (cross-encoder)	85.35%	84.41%	84.88%
LLM-Classify	84.12%	83.28%	83.70%
BERT-Mini (cross-encoder)	81.10%	83.52%	82.29%
BERT-CoT (+RD&DS)	86.82%	85.56%	86.19%
ADORE(+RD)	82.61%	84.56%	83.57%
ADORE(+RD&DS)	84.88%	83.96%	84.42%
ADORE(+RD&DS&KD)	85.92%	84.98%	85.45%

We evaluate ADORE by both offline and online metrics. In offline evaluation, since the human annotations are binary, the task is treated as a classification task, and we evaluate the model by precision, recall, and F1 score. For online evaluation, we conduct experiments in the search advertising and adopt the following business metrics: Ad. CTR (click-through rate), Ad. revenue (total ad revenue), and the Good rate provided by human experts.

3.2 Baselines

We compare ADORE with several strong baselines, including widely used BERT, LLAMA-3-8B and their respective variants. For BERT-based models, we compare the two-tower-based BERT [6] and the cross-encoder-based BERT. For the cross-encoder-based BERT, we further compare its mini version (which shares the same architecture and parameter size as our online model), the standard version, and the version enhanced with our proposed CoT information. As for the LLM model, we compare the approach that directly utilizes the representation of the last token for classification. Finally, we present ADORE, which extends BERT-Mini by integrating online data from the RD module, adversarial-style synthetic data from the DS module, and explicit attribute knowledge from the KD module.

3.3 Offline Experimental Results

The experimental results are shown in Table 2. Overall, the experimental results indicate that ADORE significantly outperforms all baselines on a large-scale real-world dataset. Specifically, we have the following observations: (1) The cross-encoder-based BERT model demonstrates superior performance compared to the bi-encoder-based BERT, and scaling up the model parameters further enhances its performance. Notably, the integration of CoT attributes leads to a marked improvement in BERT’s performance, demonstrating the effectiveness of explicit knowledge. Directly using LLM

Table 3: Online improvements of the ADORE. Improvements are statistically significant with $p < 0.05$ on paired t-test. All performances of ADORE and its variants are compared with the online model.

Models	CTR	Ad. revenue.	Rel.
Online	-	-	-
ADORE(+RD-CoT)	+0.48%	+0.23%	+0.50%
ADORE(+RD-CoT-Kto)	+0.98%	+1.28%	+1.17%
ADORE(+RD-CoT-Kto&DS)	+0.97%	+1.07%	+1.82%
ADORE(+RD-CoT-Kto&DS&KD)	+1.24%	+1.58%	+1.75%

for classification yields results that are even weaker than BERT model. (2) Leveraging the domain-rule-aware LLM within the RD module to generate hard samples significantly enhances model performance. The subsequent inclusion of adversarially crafted data from the DS module further elevates the model’s F1 score. Additionally, the explicit knowledge augmentation in the KD module enhances the model’s reasoning and generalization prowess, further improving its overall performance.

3.4 Online Experimental Results

To investigate the effectiveness of our ADORE, we conduct online A/B testing within JD.com’s advertising search engine. As shown in Table 3, ADORE has delivered significant improvements in human-evaluated relevance. Additionally, it has achieved substantial gains in click-through rate (CTR) and advertising revenue. We can observe that aligning with user behavior and incorporating explicit attribute knowledge results in a significant improvement in user click-through rates, thereby driving effective growth in advertising revenue. Furthermore, with the incorporation of automated mining and synthetic data, online relevance has been significantly enhanced.

4 Conclusion and Future Work

In this paper, we present the Autonomous Domain-Oriented Relevance Engine (ADORE), a novel framework designed to address the challenges of scarce domain-specific hard samples and insufficient reasoning capabilities in e-commerce relevance modeling. By leveraging CoT-based reasoning, KTO alignment, adversarial data generation and explicit knowledge-enhanced distillation, ADORE significantly enhances the accuracy, robustness, and reasoning capabilities of online relevance models. Extensive experiments on large-scale real-world datasets and online A/B testing demonstrate that ADORE achieves significant improvements in relevance modeling. The framework has been successfully deployed in JD.com’s search system, showcasing its practical applicability and effectiveness in handling complex relevance modeling tasks. For future work, we aim to further enhance ADORE by incorporating multi-modal information, such as product images and user behavior data. Additionally, we plan to explore personalized relevance modeling by integrating user preferences and historical interactions into the framework.

References

- [1] Ben Chen, Huangyu Dai, Xiang Ma, Wen Jiang, and Wei Ning. 2024. Robust Interaction-Based Relevance Modeling for Online e-Commerce Search. In *Machine Learning and Knowledge Discovery in Databases. Applied Data Science Track - European Conference, ECML PKDD 2024, Vilnius, Lithuania, September 9-13, 2024, Proceedings, Part IX (Lecture Notes in Computer Science, Vol. 14949)*, Albert Bifet, Tomas Krilavicius, Ioanna Miliou, and Sławomir Nowaczyk (Eds.). Springer, 55–71. doi:10.1007/978-3-031-70378-2_4
- [2] Zeyuan Chen, Wei Chen, Jia Xu, Zhongyi Liu, and Wei Zhang. 2023. Beyond Semantics: Learning a Behavior Augmented Relevance Model with Self-supervised Learning. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management, CIKM 2023, Birmingham, United Kingdom, October 21-25, 2023*, Ingo Frommholz, Frank Hopfgartner, Mark Lee, Michael Oakes, Mounia Lalmas, Min Zhang, and Rodrygo L. T. Santos (Eds.). ACM, 4516–4522. doi:10.1145/3583780.3615457
- [3] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). Association for Computational Linguistics, 4171–4186. doi:10.18653/V1/N19-1423
- [4] Abhimanyu Dubey, Abhinav Jauhri, Kevin Stone, and et al. 2024. The Llama 3 Herd of Models. CoRR abs/2407.21783 (2024). doi:10.48550/ARXIV.2407.21783 arXiv:2407.21783
- [5] Kavin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. 2024. Model Alignment as Prospect Theoretic Optimization. In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024*. OpenReview.net.
- [6] Po-Sen Huang, Xiaodong He, Jianfeng Gao, Li Deng, Alex Acero, and Larry P. Heck. 2013. Learning deep structured semantic models for web search using clickthrough data. In *22nd ACM International Conference on Information and Knowledge Management, CIKM '13, San Francisco, CA, USA, October 27 - November 1, 2013*, Qi He, Arun Iyengar, Wolfgang Nejdl, Jian Pei, and Rajeev Rastogi (Eds.). ACM, 2333–2338. doi:10.1145/2505515.2505665
- [7] Zhe Lin, Jiwei Tan, Dan Ou, Xi Chen, Shaowei Yao, and Bo Zheng. 2024. Deep Bag-of-Words Model: An Efficient and Interpretable Relevance Architecture for Chinese E-Commerce. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, KDD 2024, Barcelona, Spain, August 25-29, 2024*, Ricardo Baeza-Yates and Francesco Bonchi (Eds.). ACM, 5398–5408. doi:10.1145/3637528.3671559
- [8] Hong Liu, Saisai Gong, Yixin Ji, Kaixin Wu, Jia Xu, and Jinjie Gu. 2024. Boosting LLM-based Relevance Modeling with Distribution-Aware Robust Learning. In *Proceedings of the 33rd ACM International Conference on Information and Knowledge Management, CIKM 2024, Boise, ID, USA, October 21-25, 2024*, Edoardo Serra and Francesca Spezzano (Eds.). ACM, 4718–4725. doi:10.1145/3627673.3680052
- [9] Aman Madaan, Katherine Hermann, and Amir Yazdanbakhsh. 2023. What Makes Chain-of-Thought Prompting Effective? A Counterfactual Study. In *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, Houda Bouamor, Juan Pino, and Kalika Bali (Eds.). Association for Computational Linguistics, 1448–1535. doi:10.18653/V1/2023.FINDINGS-EMNLP.101
- [10] Kun-Peng Ning, Ming Pang, Zheng Fang, Xue Jiang, Xi-Wei Zhao, Chang-Ping Peng, Zhan-Gang Lin, Jing-He Hu, Jing-Ping Shao, and Li Yuan. 2024. Towards Better Search Query Classification with Distribution-Diverse Multi-Expert Knowledge Distillation in JD Ads Search. In *Proceedings of the 33rd ACM International Conference on Information and Knowledge Management*. 4786–4794.
- [11] Liang Pang, Yanyan Lan, Jiafeng Guo, Jun Xu, Shengxian Wan, and Xueqi Cheng. 2016. Text Matching as Image Recognition. In *Proceedings of the Thirtieth AAAI Conference on Artificial Intelligence, February 12-17, 2016, Phoenix, Arizona, USA*, Dale Schuurmans and Michael P. Wellman (Eds.). AAAI Press, 2793–2799. doi:10.1609/AAAILV30I1.10341
- [12] Ming Pang, Chunyuan Yuan, Xiaoyu He, Zheng Fang, Donghao Xie, Fanyi Qu, Xue Jiang, Changping Peng, Zhiqiang Lin, Zheng Luo, et al. 2025. Generative Retrieval and Alignment Model: A New Paradigm for E-commerce Retrieval. arXiv preprint arXiv:2504.01403 (2025).
- [13] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D. Manning, Stefano Ermon, and Chelsea Finn. 2023. Direct Preference Optimization: Your Language Model is Secretly a Reward Model. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*, Alice Oh, Tristan Naumann, Amir Globerson, Kate Saenko, Moritz Hardt, and Sergey Levine (Eds.).
- [14] Stephen E. Robertson, Steve Walker, Susan Jones, Micheline Hancock-Beaulieu, and Mike Gatford. 1994. Okapi at TREC-3. In *Proceedings of The Third Text Retrieval Conference, TREC 1994, Gaithersburg, Maryland, USA, November 2-4, 1994 (NIST Special Publication, Vol. 500-225)*, Donna K. Harman (Ed.). National Institute of Standards and Technology (NIST), 109–126.
- [15] Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. 2022. ColBERTv2: Effective and Efficient Retrieval via Lightweight Late Interaction. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL 2022, Seattle, WA, United States, July 10-15, 2022*, Marine Carpuat, Marie-Catherine de Marneffe, and Iván Vladimir Meza Ruiz (Eds.). Association for Computational Linguistics, 3715–3734. doi:10.18653/V1/2022.NAACL-MAIN.272
- [16] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal Policy Optimization Algorithms. CoRR abs/1707.06347 (2017). arXiv:1707.06347
- [17] Tian Tang, Zhixing Tian, Zhenyu Zhu, Chenyang Wang, Haiqing Hu, Guoyu Tang, Lin Liu, and Sulong Xu. 2025. LREF: A Novel LLM-based Relevance Framework for E-commerce. arXiv preprint arXiv:2503.09223 (2025).
- [18] Paul Thomas, Seth Spielman, Nick Craswell, and Bhaskar Mitra. 2024. Large Language Models can Accurately Predict Searcher Preferences. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2024, Washington DC, USA, July 14-18, 2024*, Grace Hui Yang, Hongning Wang, Sam Han, Claudia Hauff, Guido Zuccon, and Yi Zhang (Eds.). ACM, 1930–1940. doi:10.1145/3626772.3657707
- [19] Shengxian Wan, Yanyan Lan, Jun Xu, Jiafeng Guo, Liang Pang, and Xueqi Cheng. 2016. Match-SRNN: Modeling the Recursive Matching Structure with Spatial RNN. In *Proceedings of the Twenty-Fifth International Joint Conference on Artificial Intelligence, IJCAI 2016, New York, NY, USA, 9-15 July 2016*, Subbarao Kambhampati (Ed.). IJCAI/AAAI Press, 2922–2928.
- [20] Han Wang, Mukuntha Narayanan Sundararaman, Onur Gungor, Yu Xu, Krishna Kamath, Rakesh Chalasani, Kurchi Subhra Hazra, and Jinfeng Rao. 2024. Improving Pinterest Search Relevance Using Large Language Models. CoRR abs/2410.17152 (2024). doi:10.48550/ARXIV.2410.17152 arXiv:2410.17152
- [21] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. 2022. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. In *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*, Sanmi Koyejo, S. Mohamed, A. Agarwal, Danielle Belgrave, K. Cho, and A. Oh (Eds.). http://papers.nips.cc/paper_files/paper/2022/hash/9d5609613524ecf4f15af0f7b31abc4-Abstract-Conference.html
- [22] Kaixin Wu, Yixin Ji, Zeyuan Chen, Qiang Wang, Cunxiang Wang, Hong Liu, Baijun Ji, Jia Xu, Zhongyi Liu, Jinjie Gu, Yuan Zhou, and Linjian Mo. 2024. CPRM: A LLM-based Continual Pre-training Framework for Relevance Modeling in Commercial Search. CoRR abs/2412.01269 (2024). doi:10.48550/ARXIV.2412.01269 arXiv:2412.01269
- [23] Shaowei Yao, Jiwei Tan, Xi Chen, Juhao Zhang, Xiaoyi Zeng, and Keping Yang. 2022. ReprBERT: Distilling BERT to an Efficient Representation-Based Relevance Model for E-Commerce. In *KDD '22: The 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, Washington, DC, USA, August 14 - 18, 2022*, Aidong Zhang and Huzefa Rangwala (Eds.). ACM, 4363–4371. doi:10.1145/3534678.3539090
- [24] Wenwen Ye, Yiding Liu, Lixin Zou, Hengyi Cai, Suqi Cheng, Shuaiqiang Wang, and Dawei Yin. 2022. Fast Semantic Matching via Flexible Contextualized Interaction. In *WSDM '22: The Fifteenth ACM International Conference on Web Search and Data Mining, Virtual Event / Tempe, AZ, USA, February 21 - 25, 2022*, K. Selcuk Candan, Huan Liu, Leman Akoglu, Xin Luna Dong, and Jiliang Tang (Eds.). ACM, 1275–1283. doi:10.1145/3488560.3498442
- [25] Chunyuan Yuan, Ming Pang, Zheng Fang, Xue Jiang, Changping Peng, and Zhiqiang Lin. 2024. A Semi-supervised Multi-channel Graph Convolutional Network for Query Classification in E-commerce. In *Companion Proceedings of the ACM Web Conference 2024*. 56–64.

A Presenter Profiles

Zheng Fang is a researcher in the Department of Advertising at JD.com Beijing. He received his doctoral degree from the Institute of Information Engineering, Chinese Academy of Sciences. His research focuses on information retrieval.

Ming Pang is a researcher in the Department of Advertising at JD.com Beijing. He received his doctoral degree from Nanjing University. His research focuses on machine learning.

Chunyuan Yuan is a researcher in the Department of Advertising at JD.com Beijing. He received his doctoral degree from the Institute of Information Engineering, Chinese Academy of Sciences. His research focuses on information retrieval.