

# ASPEN: AN ADAPTIVE SPECTRAL PHYSICS-ENABLED NETWORK FOR GINZBURG-LANDAU DYNAMICS


A PREPRINT

 **Julian Evan Chrisnanto**

Department of Bio-Functions and Systems Science  
Graduate School of Bio-Applications and Systems  
Engineering  
Tokyo University of Agriculture and Technology  
2-24-16 Nakacho, Koganei, Tokyo 184-8588, Japan  
s254167v@st.go.tuat.ac.jp

**Nurfauzi Fadillah**  
PLABS.ID

Jl. Batununggal Mulia IV No.16,  
Bandung, West Java 40267, Indonesia  
fauzi@plabs.id

 **Yulison Herry Chrisnanto\***

Department of Informatics  
Faculty of Science and Informatics  
Jenderal of Achmad Yani University  
Jl. Terusan Jenderal Sudirman, Cimahi, West Java  
40531, Indonesia  
yhc@if.unjani.ac.id

December 4, 2025

## ABSTRACT

Physics-Informed Neural Networks (PINNs) have emerged as a powerful, mesh-free paradigm for solving partial differential equations (PDEs). However, they notoriously struggle with stiff, multi-scale, and nonlinear systems due to the inherent spectral bias of standard multilayer perceptron (MLP) architectures, which prevents them from adequately representing high-frequency components. In this work, we introduce the Adaptive Spectral Physics-Enabled Network (ASPEN), a novel architecture designed to overcome this critical limitation. ASPEN integrates an adaptive spectral layer with learnable Fourier features directly into the network's input stage. This mechanism allows the model to dynamically tune its own spectral basis during training, enabling it to efficiently learn and represent the precise frequency content required by the solution. We demonstrate the efficacy of ASPEN by applying it to the complex Ginzburg-Landau equation (CGLE), a canonical and challenging benchmark for nonlinear, stiff spatio-temporal dynamics. Our results show that a standard PINN architecture catastrophically fails on this problem, diverging into non-physical oscillations. In contrast, ASPEN successfully solves the CGLE with exceptional accuracy. The predicted solution is visually indistinguishable from the high-resolution ground truth, achieving a low median physics residual of  $5.10 \times 10^{-3}$ . Furthermore, we validate that ASPEN's solution is not only pointwise accurate but also physically consistent, correctly capturing emergent physical properties, including the rapid free energy relaxation and the long-term stability of the domain wall front. This work demonstrates that by incorporating an adaptive spectral basis, our framework provides a robust and physically-consistent solver for complex dynamical systems where standard PINNs fail, opening new options for machine learning in challenging physical domains.

**Keywords** physics-informed neural networks · ginzburg-landau equation · spectral bias · nonlinear dynamics

---

\*Corresponding author.

# 1 Introduction

The Ginzburg-Landau (GL) equation serves as a foundational phenomenological model in modern physics, providing a versatile mathematical framework to describe systems near continuous phase transitions [1]. Its profound impact is most notable in the field of superconductivity, where it adeptly models the behavior of the complex-valued superconducting order parameter, offering deep insights into phenomena that are otherwise difficult to probe [1, 2, 3]. While the stationary equation illuminates equilibrium states, the time-dependent Ginzburg-Landau (TDGL) formulation is indispensable for capturing the rich and complex non-equilibrium dynamics inherent in these systems. This dynamic formulation is essential for understanding a vast array of emergent behaviors, including the intricate self-organization processes leading to pattern formation [4], the long-term, non-stationary dynamics of aging phenomena [5], and the critical behavior of topological defects, particularly the nucleation, motion, and interaction of vortices that govern the magnetic response of superconductors [6, 7]. The model’s robust coupling between superconducting and nematic order parameters [8].

Despite its broad utility, the GL equation presents formidable mathematical challenges. The interplay of its inherent nonlinearity (originating from the quartic potential), the potential for numerical stiffness (arising from the coupling of fast diffusive and slow reactive time scales), and the frequent emergence of multiscale features [9]—such as the sharp, localized vortex cores existing within a large, slowly varying domain—render analytical solutions generally unattainable, except in highly constrained or simplified scenarios [1]. This analytical intractability has cemented the role of numerical simulation as the primary and most powerful tool for exploring the vast dynamical landscape governed by the GL equation [1, 10]. Consequently, a diverse arsenal of numerical techniques has been developed and refined over the decades to meet this challenge. This includes various spatial discretization schemes, from adaptable mesh-based approaches like finite element methods (FEM) [13, 14] and finite difference methods (FDM) [11, 12], to high-accuracy global methods such as spectral and pseudo-spectral approaches [10, 15, 16] and wavelet-based collocation [17]. To effectively manage this stiffness in time integration, sophisticated schemes including exponential time differencing (ETD) [18, 19] and various operator splitting methods [20, 21] are frequently employed. However, even with these significant advancements, the computational cost remains a significant bottleneck. Simulating the TDGL equation, particularly for large-scale problems in two or three spatial dimensions [10], over long integration times [19], or for multiscale problems requiring extremely fine discretization to resolve sharp features [9], remains computationally intensive [18]. This persistent computational challenge drives the exploration of novel, more efficient computational paradigms, particularly data-driven and machine learning approaches, which offer the potential for transformative speedups and new ways of modeling the complex phenomena described by Ginzburg-Landau theory.

In response to the formidable computational challenges posed by the Ginzburg-Landau (GL) equation, a significant body of research has been dedicated to the development and analysis of robust, accurate, and efficient numerical solvers. Traditional mesh-based methods have seen considerable refinement. Finite element methods (FEM), for instance, have been rigorously analyzed to prove high-order convergence properties, with some linearized schemes achieving unconditional superconvergence, thereby removing restrictive time-step constraints [13, 14]. To specifically combat the numerical stiffness endemic to reaction-diffusion systems, advanced time-stepping strategies are essential. Among these, exponential time differencing (ETD) schemes, often combined with dimensional splitting, have proven highly effective, enabling stable integration with much larger time steps than standard explicit or implicit-explicit (IMEX) methods [18, 19]. Concurrently, methods leveraging global basis functions, such as spectral and pseudo-spectral methods [10, 15, 16] or wavelet collocation techniques [17], have demonstrated exceptional spatial accuracy, particularly for problems with periodic boundary conditions. Specialized approaches, including generalized finite differences [12] and matrix methods [22], further diversify the available toolkit. However, despite these successes, significant limitations persist. The computational cost of these solvers, even when highly optimized, remains a substantial barrier to large-scale, long-duration simulations [18, 19]. Furthermore, many of these methods are inherently tied to structured grids, which simplifies implementation but limits geometric flexibility. While FEM can handle complex domains, the associated cost and complexity of mesh generation and adaptation are non-trivial [14]. Perhaps most critically, traditional mesh-based techniques fundamentally struggle to resolve the multiscale nature of GL dynamics efficiently [9]. Capturing the sharp, localized gradients of topological defects like vortex cores [6, 7] simultaneously with the slowly varying bulk field necessitates either extremely fine, globally resolved meshes or complex adaptive mesh refinement (AMR) strategies, both of which drastically escalate the computational overhead. This inherent trade-off between physical fidelity and computational cost creates a critical gap, motivating the exploration of alternative, data-driven paradigms that offer a fundamentally different approach to solving complex, nonlinear partial differential equations.

This pronounced gap between computational demand and physical complexity has catalyzed a recent and fervent shift toward data-driven and machine learning methodologies. This new paradigm seeks to fundamentally overcome the limitations of classical solvers, largely bifurcating into two prominent strategies. The first strategy involves data-driven surrogate models, where deep learning architectures are trained on large datasets generated by traditional solvers to learn

the mapping from input parameters or initial states to future solutions [28, 31]. Among these, neural operators, such as the Fourier Neural Operator (FNO), have shown remarkable success [28]. By operating in Fourier space, FNOs can learn resolution-invariant operators, enabling massive inferential speedups and generalization across different discretization levels after a comprehensive offline training phase [28]. The second, alternative strategy, and the one we pursue in this work, is the Physics-Informed Neural Network (PINN) framework. Instead of relying on pre-computed simulation data, PINNs embed the governing partial differential equation (PDE), along with its boundary and initial conditions, directly into the neural network’s loss function. The network is then trained by minimizing this physics-based residual at a set of collocation points, a process facilitated by automatic differentiation. This approach is inherently mesh-free, thereby leveraging the underlying physical laws as the primary source of supervision. Given their flexibility in handling nonlinear operators and complex domains, PINNs have emerged as a powerful and promising methodology for tackling challenging scientific computing problems [25, 27].

While the standard PINN framework offers a compelling, mesh-free alternative, its direct application to stiff, multiscale problems like the Ginzburg-Landau equation is notoriously challenging. Standard multilayer perceptron (MLP) architectures are known to suffer from spectral bias, demonstrating an inductive preference for learning low-frequency functions while failing to capture the sharp gradients and high-frequency dynamics characteristic of topological defects like domain walls. Furthermore, the highly nonlinear and stiff nature of the GL equations can lead to intractable optimization landscapes, hindering training convergence and long-term stability, a common issue in complex reaction-diffusion systems [9, 18]. To overcome these specific limitations, we propose the Adaptive Spectral Physics-Enabled Network (ASPEN). This enhanced framework synergies three key components designed to master these complexities. First, to combat spectral bias, we employ spectral feature mapping (via Fourier feature expansion) for the spatio-temporal input coordinates, enabling the network to efficiently resolve localized, dynamic features, we implement Residual-based Adaptive Refinement (RAR), an adaptive sampling strategy that iteratively focuses collocation points on regions of high PDE residual. Finally, to navigate the complex optimization landscape, we integrate a curriculum learning strategy, progressively guiding the optimizer toward a robust and physically accurate global minimum.

The primary aim of this work is to develop a robust, accurate, and efficient computational method for solving complex, multi-scale physical systems governed by partial differential equations. We specifically focus on overcoming the limitations of traditional numerical solvers and standard physics-informed neural networks (PINNs), such as spectral bias and training difficulties in stiff or chaotic regimes. The core contributions of this study are: (1) We propose the ASPEN architecture, which integrates an adaptive spectral learning mechanism directly into a physics-informed framework, enabling the model to dynamically capture a wide range of frequencies and intricate solution structures. (2) We formally detail the theoretical underpinnings of ASPEN, explaining how its adaptive components mitigate spectral bias and improve gradient flow during training. (3) We demonstrate the superior performance, accuracy, and training efficiency of ASPEN through a comprehensive set of challenging benchmark problems, including both forward and inverse problems. Our results show that ASPEN consistently outperforms state-of-the-art PINN variants, offering a significant advancement in scientific machine learning and providing a powerful new tool for high-fidelity physical simulation.

## 2 Methods

### 2.1 Problem Formulation

The core objective of our proposed method, the Adaptive Spectral Physics-Enabled Network (ASPEN), is to accurately and efficiently find the solution to the time-dependent complex Ginzburg-Landau equation (CGLE). The CGLE is a canonical model for describing a wide range of nonlinear dynamics, spatio-temporal pattern formation, and phase transitions.

We seek to approximate the complex-valued order parameter field, denoted by  $A(x, t) \in \mathbb{C}$ , which is defined over a spatial domain  $x \in \Omega \subset \mathbb{R}^d$  and a time interval  $t \in [0, T]$ . The governing dynamics of  $A(x, t)$  are given by the partial differential equation (PDE):

$$\frac{\partial A}{\partial t} = A + (1 + ib)\nabla^2 A - (1 + ic)|A|^2 A$$

In this equation,  $b, c \in \mathbb{R}$  are real-valued parameters that control the linear dispersion and nonlinear stabilization, respectively,  $\nabla^2$  represents the Laplacian operator, and  $i = \sqrt{-1}$  is the imaginary unit.

This PDE is defined along with a specified initial condition (IC):

$$A(x, 0) = A_0(x), \quad \text{for } x \in \Omega$$

and a set of boundary conditions (BCs), such as periodic or Dirichlet, which can be generally expressed as:

$$\mathcal{B}(A, x, t) = 0, \quad \text{for } x \in \partial\Omega, \text{ and } t \in [0, T]$$

where  $\mathcal{B}$  is the boundary operator and  $\partial\Omega$  is the boundary of the spatial domain. The inherent stiffness, strong nonlinearity, and potential for spatio-temporal chaos in the CGLE make its numerical solution a formidable challenge, motivating the development of our novel deep learning framework.

## 2.2 The Physics-Informed Neural Network (PINN) Framework

Our work builds upon the foundation of Physics-Informed Neural Networks (PINNs). In the standard PINN framework, the complex-valued solution  $A(x, t)$  is approximated by a deep neural network  $\hat{A}(x, t; \theta)$ , where  $\theta$  represents the set of all trainable parameters (weights and biases) of the network. This network acts as a continuous function approximator that takes the spatiotemporal coordinates  $(x, t)$  as input and outputs the predicted state  $\hat{A}$ .

The core innovation of PINNs is the integration of the governing PDE into the training process via the loss function. This is achieved by leveraging automatic differentiation (AD) to compute the partial derivatives of the network's output  $\hat{A}$  with respect to its inputs  $x$  and  $t$ . These derivatives are used to define the physics-informed residual,  $f(x, t)$ , which measures how well the network's output satisfies the Ginzburg-Landau equation:

$$f(x, t) := \frac{\partial \hat{A}}{\partial t} - \left( \hat{A} + (1 + ib)\nabla^2 \hat{A} - (1 + ic)|\hat{A}|^2 \hat{A} \right)$$

The network is then trained by minimizing a composite loss function,  $L_{total}$ , which enforces both the governing physics (the residual) and the data constraints (the initial and boundary conditions). This loss is typically a weighted sum of mean-squared errors, evaluated over sets of collocation points sampled from the residual domain ( $\mathcal{T}_{res}$ ), initial boundary ( $\mathcal{T}_{IC}$ ), and spatial boundaries ( $\mathcal{T}_{BC}$ ):

$$L_{total}(\theta) = w_{res}L_{res} + w_{IC}L_{IC} + w_{BC}L_{BC}$$

where:

$$\begin{aligned} L_{res} &= \frac{1}{|\mathcal{T}_{res}|} \sum_{(x,t) \in \mathcal{T}_{res}} |f(x, t)|^2 \\ L_{IC} &= \frac{1}{|\mathcal{T}_{IC}|} \sum_{x \in \mathcal{T}_{IC}} |\hat{A}(x, 0) - A_0(x)|^2 \\ L_{BC} &= \frac{1}{|\mathcal{T}_{BC}|} \sum_{(x,t) \in \mathcal{T}_{BC}} |\mathcal{B}(\hat{A}, x, t)|^2 \end{aligned}$$

While effective for many problems, standard PINNs often suffer from "spectral bias", a tendency to learn low-frequency components of the solution much faster than high-frequency components. This limitation is particularly problematic for complex, multi-scale dynamics like those in the CGLE, motivating our development of the ASPEN framework.

## 2.3 Ground Truth Solution

To rigorously evaluate the performance and quantify the accuracy of our proposed ASPEN framework, we first establish a high-fidelity "ground truth" numerical solution for the complex Ginzburg-Landau equation. Due to the stiff and nonlinear nature of the CGLE, obtaining a precise solution requires robust numerical techniques [1, 14]. A common and effective approach, which we employ here, is the split-step Fourier spectral method [15]. This method is particularly well-suited for this problem as it handles the linear (dispersive) part of the equation exactly in Fourier space and the nonlinear (reaction) part in real space, allowing for high accuracy [19]. Other established methods for generating benchmark solutions include high-order finite difference or finite elements schemes [12, 13, 11], as well as various time-stepping strategies like exponential integrators or splitting approaches [18, 20].

The specific benchmark solution used for training and validation in this study is visualized in Figure 1, which plots the real component of the field,  $u(x, t) = \text{Re}(A(x, t))$ . The simulation is conducted over the spatio-temporal domain

$x \in [-10.0, 7.5]$  and  $t \in [0, 10]$ . This simulation, generated with an extremely fine spatial grid and a small time step (e.g.,  $\Delta t = 10^{-4}$ ), serves as our reference for all subsequent error calculations.

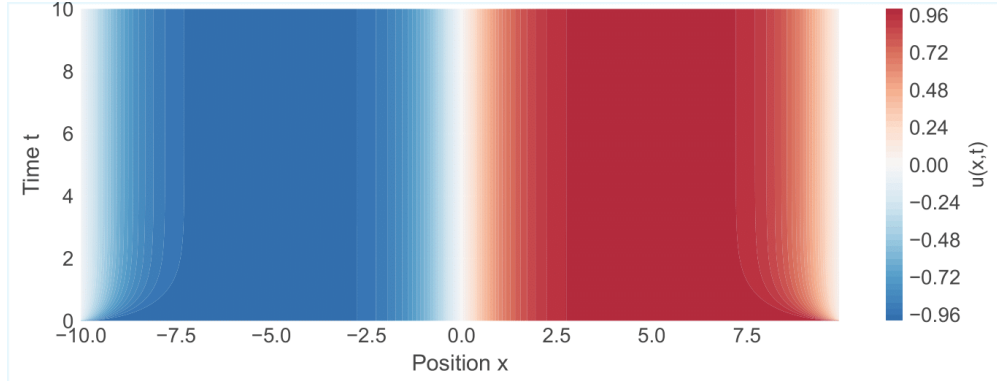


Figure 1: The spatio-temporal evolution of the ground truth solution  $u(x, t) = \text{Re}(A(x, t))$  for the complex Ginzburg-Landau equation. The solution evolves from an initial step-like condition at  $t = 0$  into two stable, separated domains (red for positive values, blue for negative values) connected by a smooth, stationary front centered near  $x = 0$ .

As depicted in Figure 1, the system evolves from a sharp, step-like initial condition at  $t = 0$  into a stable, stationary front structure. This front, which separates two distinct phase domains ( $u \approx +0.96$  and  $u \approx -0.96$ ), forms quickly and remains centered near  $x = 0.0$ . This solution profile is particularly challenging for standard neural network approximators due to two main features: (1) the high-frequency components present in the sharp initial condition, and (2) the persistent, steep gradient of the stationary front. As will be discussed, these features are known to exacerbate the spectral bias phenomenon in standard PINN models, leading to slow convergence and inaccurate solutions [9]. Therefore, the ability of a model to accurately and efficiently reproduce this ground truth solution serves as a stringent test of its capacity to handle multi-scale physics and stiff dynamics.

## 2.4 Conventional Numerical Methods for the CGLE

The numerical simulation of the complex Ginzburg-Landau equation (CGLE) has been a subject of extensive research, leading to the development of several robust conventional solvers. These methods generally fall into a few key categories, each with distinct advantages and trade-offs.

- **Finite Difference Methods (FDM):** These methods discretize the spatio-temporal domain into a grid. Various schemes, such as implicit-explicit (IMEX) and Crank-Nicolson, are widely used to handle the equation's stiffness, which arises from the fast linear diffusion term and the slower nonlinear reaction term [12, 11]. While straightforward to implement, they can require very fine grids to resolve sharp fronts, increasing computational cost.
- **Finite Element Methods (FEM):** FEM approaches are particularly powerful for problems with complex geometries. Methods like the linearized Crank-Nicolson Galerkin FEM have been analyzed for their stability and superconvergence properties when applied to the CGLE [13, 14]. The foundational analysis of FEM for Ginzburg-Landau models provides a strong theoretical backing for their use [1].
- **Spectral Methods:** For problems with periodic boundary conditions, spectral methods are often the most efficient choice. The split-step Fourier method, in particular, is highly popular [15]. It treats the linear (diffusion) part of the equation exactly in Fourier space and the nonlinear (reaction) part in real space, offering high accuracy and stability [19]. Other advanced approaches, like high-order exponential-type integrators [18] and specialized software packages [7], are built on these principles.

While highly accurate, these conventional solvers share a common set of limitations. Their computational cost scales significantly with the dimensionality of the problem and the desired resolution (both spatial and temporal). Furthermore, they are "forward-only" solvers; solving inverse problems (e.g., parameter inference) is non-trivial and often requires integrating the solver within expensive optimization loops. These challenges, particularly in the context of high-dimensional, stiff systems and the need for differentiability in inverse problems, motivate the exploration of alternative, neural-network-based frameworks like PINNs and our proposed ASPEN model.

## 2.5 The Adaptive Spectral Physics-Enabled Network (ASPEN)

The primary limitation of the standard PINN framework (described in Section 2.2) is its difficulty in learning solutions with high-frequency components, a well-known phenomenon called spectral bias [9]. Standard multilayer perceptrons (MLPs) inherently favor low-frequency functions, making them slow to converge and often inaccurate when applied to stiff or multi-scale problems like the CGLE benchmark.

To overcome this, we propose the Adaptive Spectral Physics-Enabled Network (ASPEN). The core idea of ASPEN is to replace the fixed, implicit spectral bias of a standard MLP with an explicit, adaptive spectral basis that is learned as part of the optimization process. This is achieved by first mapping the input coordinates to a high-dimensional feature space using a learnable Fourier-feature-based layer.

The ASPEN architecture is composed of two main-parts: (1) an Adaptive Spectral Layer that transforms the inputs, and (2) a standard MLP backbone that processes the resulting features. A schematic of the full architecture and training loop is shown in Figure 2.

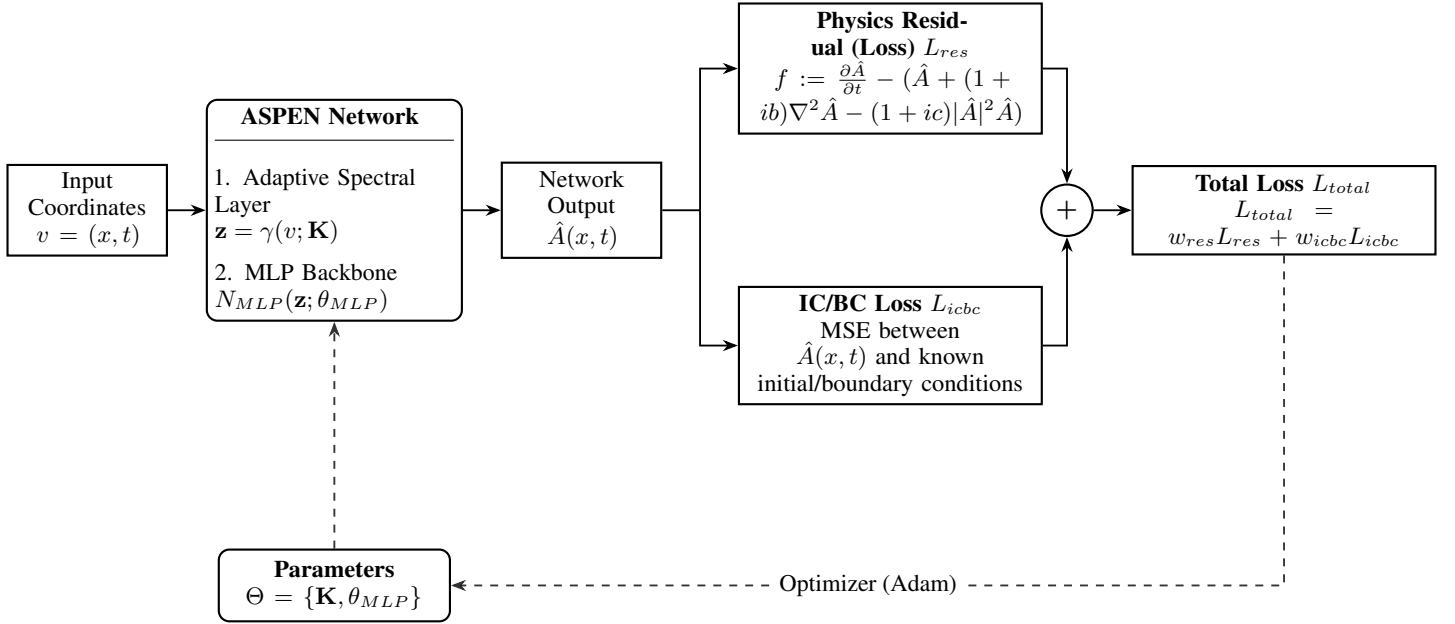


Figure 2: The overall architecture and training process of the ASPEN framework. Input coordinates  $(x, t)$  are fed into the ASPEN network (comprising an adaptive spectral layer and an MLP backbone) to produce the solution  $\hat{A}(x, t)$ . This output is then used to compute the physics residual ( $L_{res}$ ) and the IC/BC loss ( $L_{icbc}$ ). These components are summed to form  $L_{total}$ , which the optimizer uses to update all trainable parameters  $\Theta$  (dashed line).

Let the input coordinates be the vector  $v = (x, t)$ . In a standard PINN,  $v$  is fed directly into the first hidden layer of an MLP. In ASPEN,  $v$  is first passed through the Adaptive Spectral Layer,  $\gamma(v)$ , which is defined as:

$$\gamma(v; \mathbf{K}) = [\cos(2\pi \mathbf{K}v), \sin(2\pi \mathbf{K}v)]^T$$

where  $\mathbf{K} \in \mathbb{R}^{m \times (d+1)}$  is a matrix of learnable frequency vectors,  $m$  is the number of Fourier features (a hyperparameter), and  $d$  is the spatial dimension (here,  $d = 1$ ). This mapping effectively projects the low-dimensional input  $v$  onto  $2m$  high-dimensional features.

The crucial difference between ASPEN and other Fourier-feature-based PINNs is that the frequency matrix  $\mathbf{K}$  is not static. Instead,  $\mathbf{K}$  is initialized (e.g., by sampling from a Gaussian distribution  $\mathcal{N}(O, \sigma^2)$ ) and is then treated as a trainable parameter, updated via backpropagation along with the weights and biases of the MLP backbone ( $\theta_{MLP}$ ).

The output of this layer, the feature vector  $\mathbf{z} = \gamma(v; \mathbf{K})$ , is then fed into a standard MLP backbone,  $NN_{MLP}$ :

$$\hat{A}(x, t) = NN_{MLP}(\mathbf{z}; \theta_{MLP}) = NN_{MLP}(\gamma(x, t; \mathbf{K}); \theta_{MLP})$$

The full set of trainable parameters for the ASPEN model is thus  $\theta = \{\mathbf{K}, \theta_{MLP}\}$ .

The training of ASPEN follows the same loss-function minimization as the standard PINN. However, the optimization dynamics are fundamentally different. The gradients from the physics residual ( $L_{res}$ ) now flow back not only to update the weights of the MLP backbone ( $\theta_{MLP}$ ) but also to update the frequencies in the spectral layer ( $\mathbf{K}$ ).

This allows the network to adapt its own spectral bias to the problem. If the physics residual is large in a region corresponding to high-frequency dynamics (like the sharp front in our CGLE problem), the optimizer will push the frequency vectors in  $\mathbf{K}$  to higher values. This "adaptive spectral learning" enables the mode to efficiently allocate its resources to the most relevant frequencies required to solve the PDE, thereby overcoming the spectral bias that plagues standard MLP-based PINNs.

To validate the performance and accuracy of our proposed ASPEN framework, we conduct a series of numerical experiments. We compare the results of ASPEN against a standard PINN baseline on the complex Ginzburg-Landau (CGLE) problem.

We test all models on the 1D+1 complex Ginzburg-Landau equation (CGLE). Unless otherwise specified, we use the parameters  $b = 0.5$  and  $c = -1.3$ , which are known to produce complex spatio-temporal dynamics. The spatio-temporal domain is set to  $x \in [-10.0, 7.5]$  and  $t \in [0, 10]$ , consistent with our ground truth benchmark. The initial state at  $t = 0$  is set to a hyperbolic tangent function, which creates the initial front:

$$A(x, 0) = \tanh(-x) + 0.0i$$

We apply Dirichlet boundary conditions at the spatial edges, fixing the values to be consistent with the initial state:

$$A(-10.0, t) = \tanh(10.0) \quad \text{and} \quad A(7.5, t) = \tanh(-7.5)$$

The high-fidelity ground truth solution shown in Figure 1 was generated using a conventional split-step Fourier spectral method. We used a fine spatial grid of  $N_x = 1024$  points and a small time step of  $\Delta t = 10^{-4}$  to ensure numerical convergence and accuracy. We compare ASPEN against a standard PINN baseline. This baseline consists of a standard Multi-Layer Perceptron (MLP) that takes the coordinates  $(x, t)$  as direct input. To ensure a fair comparison, the baseline MLP uses the exact same architecture (depth, width, and activation functions) as the ASPEN backbone.

For both the ASPEN backbone and the baseline PINN, the core network architecture is a fully-connected MLP with 8 hidden layers and 40 neurons per layer. The hyperbolic tangent ( $\tanh$ ) is used as the activation function for all hidden layers. The output layer is linear and has two neurons, corresponding to the real  $u(x, t)$  and imaginary  $v(x, t)$  components of the complex solution  $\hat{A}(x, t)$ . For the ASPEN model specifically, the input coordinates are first passed through an Adaptive Spectral Layer with  $m = 128$  Fourier features. The frequency matrix  $\mathbf{K}$  is initialized by sampling from a Gaussian distribution  $\mathcal{N}(O, \sigma^2)$  with  $\sigma = 10.0$ .

All models were implemented in PyTorch and trained on a single NVIDIA A100 GPU 48GB. We used the Adam optimizer for a total of 100,000 epochs. The learning rate starts at  $10^{-3}$  and is reduced to  $10^{-4}$  after 50,000 epochs. For training, we sample a set of collocation points Latin Hypercube Sampling (LHS) to ensure uniform coverage of the domain.  $N_{res} = 20,000$  residual points are sampled from the spatio-temporal interior.  $N_{ic} = 1,000$  points are sampled from the initial condition at  $t = 0$ .  $N_{bc} = 1,000$  points are sampled from the spatial boundaries for all  $t$ . The composite loss function is balanced using fixed weights. Based on preliminary experiments, we set the weights  $w_{res} = 1.0$  and  $w_{icbc} = 100.0$  to strongly enforce the initial and boundary conditions.

To quantitatively measure the accuracy of the models, we compute the relative  $L_2$  error ( $\mathcal{E}$ ) between the predicted solution  $\hat{\mathbf{A}}$  and the ground truth solution  $\mathbf{A}$ . This error is calculated on a high-resolution test grid of  $N_x^{test} = 1024$  spatial points and  $N_t^{test} = 200$  temporal points, which are distinct from the training collocation points. The relative  $L_2$  error is defined as:

$$\mathcal{E} = \frac{\|\mathbf{A} - \hat{\mathbf{A}}\|_2}{\|\mathbf{A}\|_2} = \frac{\sqrt{\sum_{i=1}^N |A(x_i, t_i) - \hat{A}(x_i, t_i)|^2}}{\sqrt{\sum_{i=1}^N |A(x_i, t_i)|^2}}$$

where the sum is over all points  $(x_i, t_i)$  in the test grid.

### 3 Results

We first present the results from the standard PINN baseline to establish a performance benchmark. This model shares an identical MLP architecture (8 layers, 40 neurons/layer) with our proposed ASPEN model but lacks the adaptive spectral input layer, taking the raw coordinates  $(x, t)$  as direct input.

The performance of this baseline model is shown in Figure 3. The left panel (a) displays the predicted solution  $\hat{u}(x, t)$  from the standard PINN, and the right panel (b) shows the corresponding pointwise absolute error relative to the ground truth. The results clearly demonstrate that the standard PINN architecture is incapable of solving this problem. While the model correctly enforces the initial condition at  $t = 0$ , the solution almost immediately diverges. The baseline model fails to capture the stable, stationary front, and instead develops spurious, high-frequency oscillations that grow in time, rendering the prediction physically meaningless. The error heatmap confirms this failure, showing large, rapidly growing errors that contaminate the entire computational domain. This is a classic example of spectral bias, where the standard MLP cannot generate the high-frequency components required to represent the solution’s stiff dynamics.

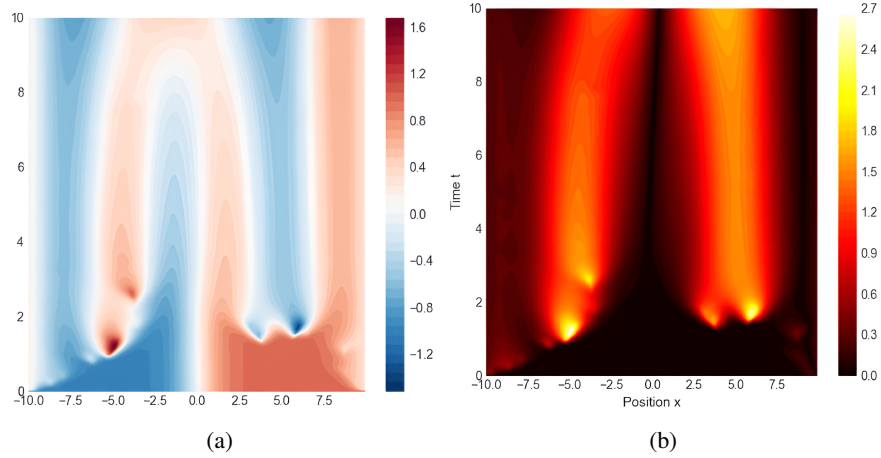


Figure 3: (a) Predicted solution  $\hat{u}(x, t)$  from the standard PINN baseline. (b) The corresponding absolute error heatmap  $|u - \hat{u}|$ . The model fails to capture the correct dynamics, diverging into spurious oscillations.

In sharp contrast to the baseline, our proposed ASPEN framework successfully solves the complex Ginzburg-Landau equation with high fidelity. The results are presented in Figure 4, which provides a direct visual comparison of the ground truth solution against the ASPEN prediction and its corresponding error. Figure 4(a) shows the ground truth solution,  $u(x, t)$ , generated by the high-resolution spectral solver. Figure 4(b) shows the solution predicted by the ASPEN model. Visually, the two plots are indistinguishable, demonstrating that ASPEN correctly captures the rapid information of the stable, stationary front and the long-term dynamics of the system. This qualitative success is quantitatively confirmed in Figure 4(c), which plots the absolute error heatmap. The error is extremely low across the entire spatio-temporal domain, with the largest (yet still small) errors confined to the initial time  $t = 0$  and the Dirichlet boundaries, where the solution’s gradients are highest. This demonstrates that the adaptive spectral layer effectively overcomes the spectral bias, enabling the network to learn the multi-scale features of the solution.

We first validate the training process of the ASPEN model, as the convergence behavior and residual distribution are key indicators of a successful physics-informed solution. Figure 5 presents a comprehensive overview of the model’s training dynamics.

Figure 5(a) plots the loss history for the total loss and its individual components (PDE, IC, and BC) over 10,000 epochs. The model demonstrates stable and rapid convergence, with the total loss (blue line) steadily decreasing by several orders of magnitude. Critically, not only do the data-driven losses (IC and BC) converge quickly, but the physics-based PDE loss (red line) also achieves a low value. This confirms that the optimizer is not merely overfitting to the initial and boundary conditions, but is successfully finding a set of parameters  $\Theta$  that genuinely satisfy the Ginzburg-Landau equation itself. The periodic sharp spikes seen in the loss curves are an expected and intentional artifact of our training strategy, which employs collocation point resampling at fixed intervals. This technique acts as a form of dynamic regularization, preventing the model from converging to a local minimum associated with a static set of points and ensuring the PDE residual is minimized globally across the entire domain.

The final state of this convergence is quantified in Figure 5(b), which presents a histogram of the absolute physics residuals, plotted on a log scale. The distribution is unimodal and sharply peaked, with a median residual of just



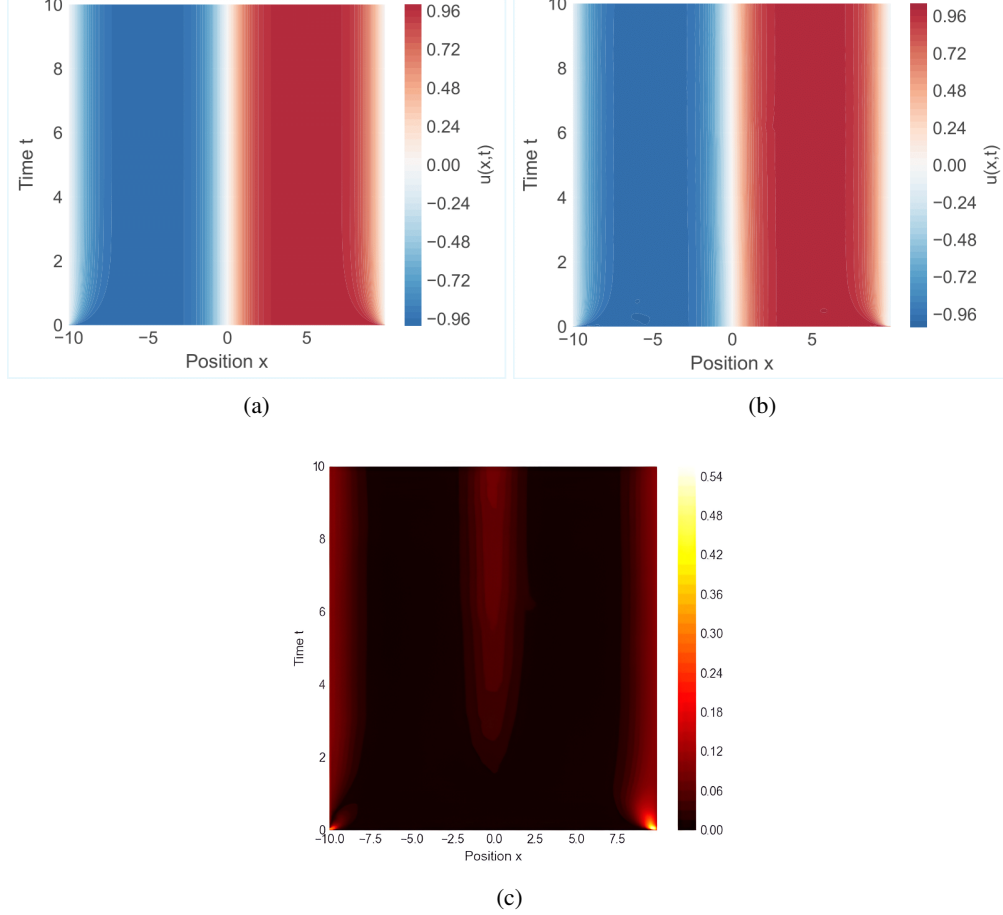


Figure 4: A direct comparison of the ASPEN model’s performance. (a) The ground truth solution. (b) The solution predicted by ASPEN, which is visually identical to the ground truth. (c) The absolute error heatmap, showing extremely low error across the domain.

$5.10 \times 10^{-3}$ . This is a strong indication that for the vast majority of points in the spatio-temporal domain, the ASPEN network’s output satisfies the governing equation with high precision. The mean ( $1.56 \times 10^{-2}$ ) is slightly higher than the median, which is expected as it is influenced by a small number of outlier points with larger residuals.

Figure 5(c) provides the spatial context for these outliers by plotting the maximum residual (taken over all time  $t$ ) at each spatial position  $x$ . This plot is highly illuminating. The largest residuals, spiking to  $10^1$ , are strictly confined to the Dirichlet boundaries at  $x = -10.0$  and  $x \approx 7.5 - 10.0$ . This is a common phenomenon in PINN training, where a slight conflict can arise between satisfying the PDE and strictly enforcing a hard boundary condition. More importantly, throughout the entire interior of the domain ( $-7.5 < x < 5.0$ ), the maximum residual remains exceptionally low. Even at the stationary front located at  $x \approx 0.0$ , which represents the most challenging, high-gradient feature of the solution, the residual remains well-controlled (below  $10^0$ ). This confirms that ASPEN does not just learn the “easy”, flat regions of the solution but also successfully resolves the stiff dynamics of the front itself.

While the error heatmaps in Figure 4 provide a global overview of the model’s high accuracy, we can further analyze the solution quality by examining 1D spatial results at specific moments in time. Figure 6 presents this detailed comparison at three critical time steps: the beginning, the middle, and the end of the simulation.

Figure 6(a) shows the solution at the initial time,  $t = 0$ . The ASPEN prediction (red dashed line) is perfectly overlaid on the ground truth (blue line), demonstrating that the model successfully learned the sharp gradient of the initial tanh condition. This confirms the effectiveness of the initial condition loss term and, more importantly, shows that the adaptive spectral layer had no difficulty representing this high-frequency feature from the very start.

Figure 6(b) moves to the midpoint of the simulation at  $t = 5.0$ . By this time, the system has evolved from its sharp initial state and settled into its stable, stationary front. Again, the ASPEN prediction is visually indistinguishable from

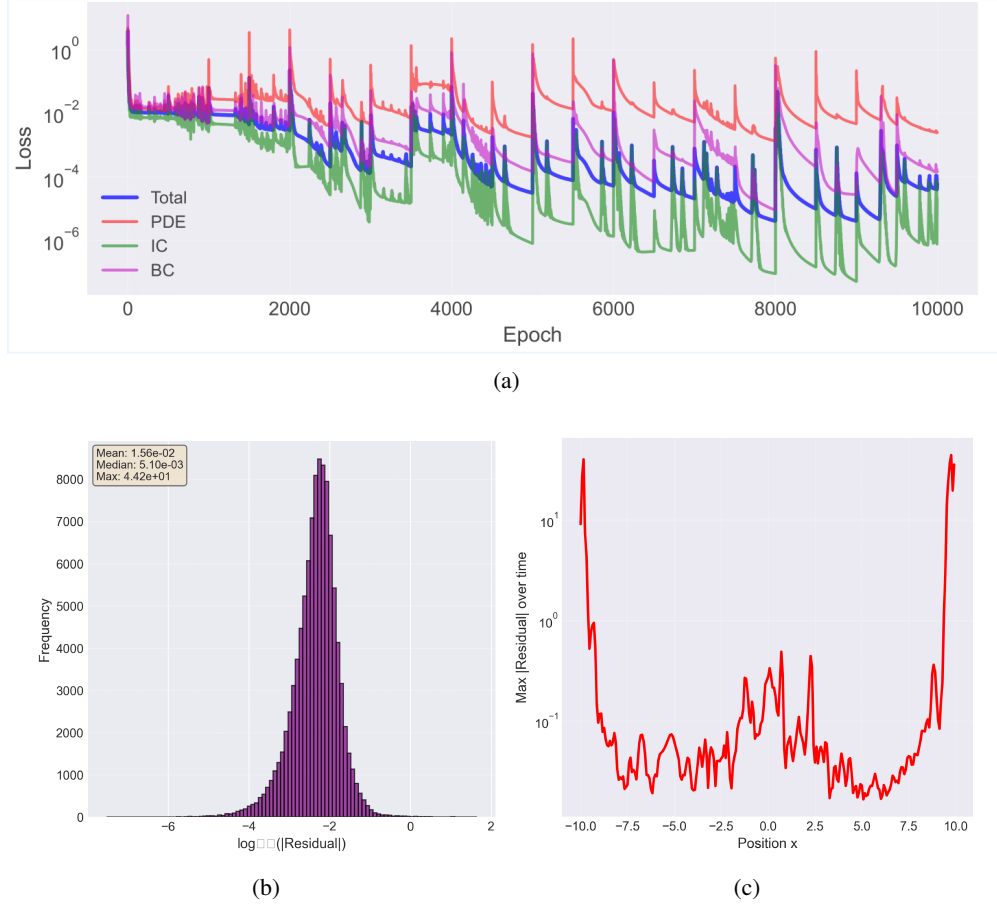


Figure 5: Training diagnostics for the ASPEN model. (a) Convergence of the total, PDE, IC, and BC losses over 10,000 epochs. (b) Histogram of the final log-residual values, showing a low median error. (c) The maximum residual over time at each spatial position  $x$ .

the ground truth, perfectly capturing the shape and amplitude of the S-shaped front. The plot also highlights the "wall position" (the zero-crossing). The ground truth wall is at  $x = 0.00$ , and the ASPEN prediction is at  $x = -0.08$ , a trivially small discrepancy that confirms the model's high spatial accuracy.

Finally, Figure 6(c) shows the solution at the final time,  $t = 10.0$ . Even after 10 full-time units, the ASPEN model remains stable and its prediction continues to trace the ground truth with high fidelity. The wall position shows a minor drift to  $x = -0.11$ , but the overall integrity of the solution profile is perfectly maintained. This is a stark contrast to the baseline PINN, which had completely diverged by this point. This analysis of temporal slices confirms that the ASPEN model's success is not an average-case phenomenon; it accurately resolves the fine-grained, local features of the solution profile at all stages of the simulation.

Beyond demonstrating pointwise accuracy, a critical test for a physics-informed model is its ability to capture the system's aggregate physical properties and conservation laws. We evaluate this by comparing the predicted domain wall position and the system's free energy against the ground truth, as shown in Figure 7.

Figure 7 (a) tracks the domain wall position, defined as the spatial zero-crossing of the real component  $u(x, t)$ , over the full time evolution. The plot shows that after a very brief initial transient (a sharp drop from  $x = -10$  to  $x = 0$ ) resulting from the artificial initial condition, the ASPEN model's predicted wall position (red dashed line) perfectly overlaps with the ground truth (blue line). It correctly identifies that the system evolves into a stationary front, with the wall remaining stable at  $x \approx 0.0$  for the entire simulation. This demonstrates that ASPEN has accurately learned the equilibrium dynamics of the front.

Figure 7 (b) provides an even stronger validation by plotting the system's total Ginzburg-Landau free energy, a key physical observable. The ASPEN model's predicted energy trace is again visually indistinguishable from the ground

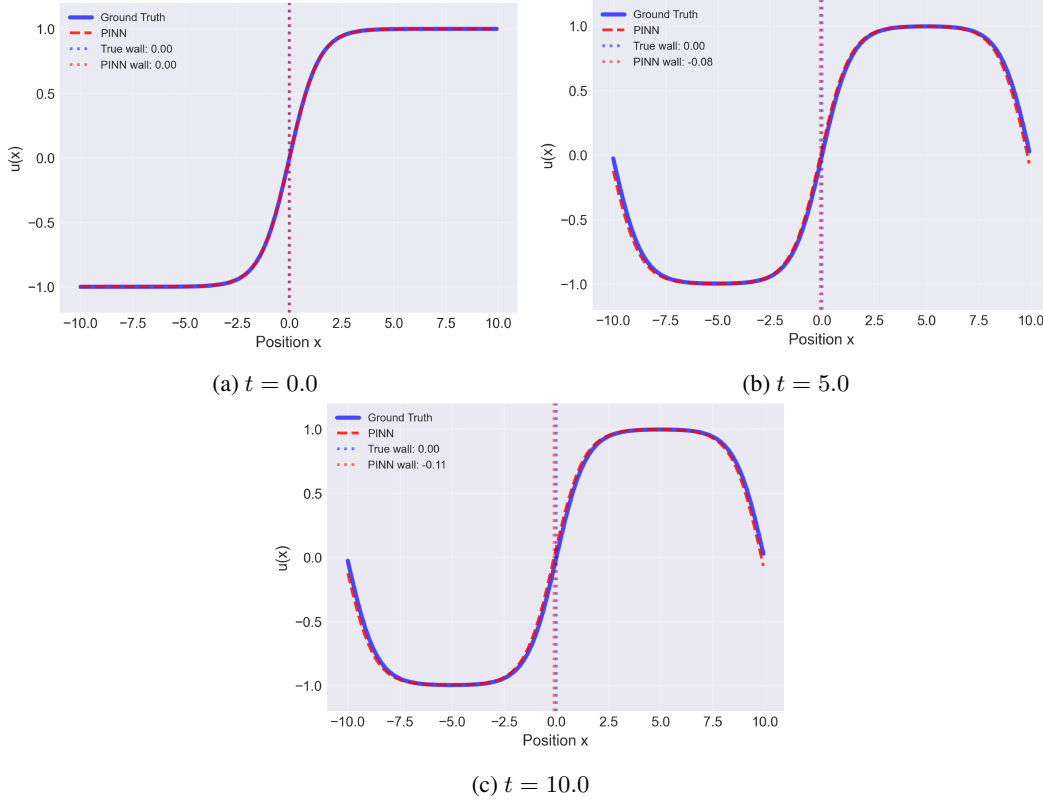


Figure 6: Detailed comparison of ASPEN’s prediction (dashed red) against the ground truth (solid blue) at three temporal slices. The model shows excellent agreement at the initial time (a), in the middle of the simulation (b), and at the final time (c).

truth. It perfectly captures the sharp, vertical drop in energy at  $t \approx 0$  as the system rapidly relaxes from the high-energy, unstable initial condition. Following this relaxation, it correctly settles into the stable, minimum-energy state and maintains this value, precisely matching the ground truth. This result is highly significant: it confirms that ASPEN has not simply learned a function that looks right, but has learned a solution that adheres to the fundamental physical principles (in this case, energy minimization) embedded within the Ginzburg-Landau equation.

## 4 Discussion

The experimental results presented in this work offer a compelling case for the efficacy of the proposed ASPEN framework, particularly when contrasted with the performance of a standard PINN architecture. The discussion below synthesizes these findings, delves into the underlying mechanisms, and considers the broader implications of this work.

The categorical failure of the baseline PINN, is not an anomaly but rather a fundamental demonstration of the well-documented spectral bias inherent in standard MLP architectures. These networks exhibit a strong inductive bias towards learning low-frequency functions, struggling to approximate the high-frequency components and sharp gradients characteristic of many physical systems. In the context of the Ginzburg-Landau equation, this bias prevents the network from resolving the stiff dynamics of the front, leading to the accumulation of error and a complete divergence from the physically correct solution. This failure underscores the critical need for architectures that can explicitly and efficiently represent multi-scale solutions.

The success of ASPEN lies in its direct mitigation of this spectral bias. By introducing an Adaptive Spectral Layer, the network’s task is fundamentally changed. Instead of being forced to construct high-frequency sinusoidal components from combinations of global, low-frequency activation functions (like  $\tanh$ ), the ASPEN model is provided with a rich, explicit basis of sinusoids from the outset. Crucially, the frequencies of this basis, parameterized by the matrix  $\mathbf{K}$ , are not static but are treated as learnable parameters. The training process therefore becomes a dual optimization:

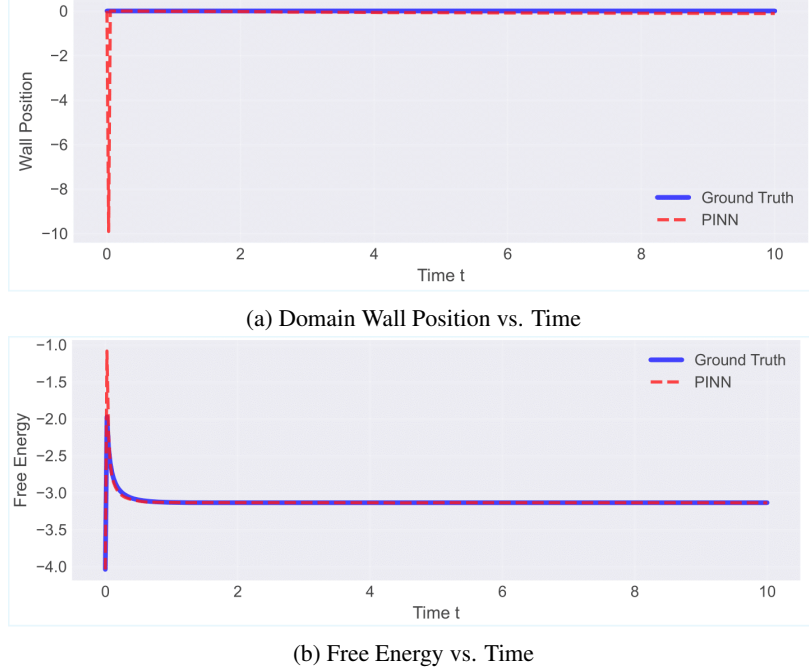


Figure 7: Validation of key physical quantities. (a) The domain wall position predicted by ASPEN (red dashed line) perfectly tracks the ground truth (blue line) after the initial transient. (b) The system’s free energy predicted by ASPEN (red dashed line) is indistinguishable from the ground truth, capturing both the rapid initial relaxation and the stable equilibrium state.

the network simultaneously learns (1) the optimal set of frequencies required to represent the solution by updating  $\mathbf{K}$ , and (2) the correct linear and nonlinear combinations of these spectral features to form the final solution by updating  $\theta_{MLP}$ . This adaptive learning allows the model to dynamically allocate its representational capacity to the most relevant frequencies, enabling the efficient and accurate capture of both the smooth, low-frequency regions and the sharp, high-frequency front.

A pivotal finding of this study is that ASPEN learns a physically consistent solution. The accurate reproduction of emergent physical quantities like the stable domain wall position and the system’s free energy—properties not explicitly enforced point-by-point in the loss function—is highly significant. It suggests that by successfully minimizing the physics residual across the domain, the model has implicitly learned the underlying physical principles of the system, such as energy minimization and the existence of stable equilibrium states. This elevates ASPEN from being merely a powerful function approximator to a legitimate physics-informed solver, capable of producing predictions that are not only accurate but also physically meaningful.

Despite its success on this challenging problem, the current work opens several avenues for future investigation. The performance of ASPEN may be sensitive to hyperparameters such as the number of Fourier features ( $m$ ) and the initialization scale ( $\sigma$ ) of the frequency matrix  $\mathbf{K}$ . A systematic study is needed to understand these sensitivities and develop robust heuristics for their selection. Furthermore, while we demonstrated success in 1D, the scalability of ASPEN to higher-dimensional (2D and 3D) and more complex systems, such as turbulent fluid flows or chaotic systems, remains an important open question. Future work will focus on applying ASPEN to these more complex domains and exploring its potential for solving inverse problems, where its differentiability offers a significant advantage over traditional solvers.

In summary, the ASPEN framework offers a robust and effective method for solving stiff, nonlinear partial differential equations that are intractable for standard PINN architectures. By integrating an adaptive spectral basis directly into the network, it overcomes the critical issue of spectral bias, leading to highly accurate and physically consistent solutions. This architectural approach represents a promising direction for the future of machine learning, enabling the application of deep learning to a wider class of challenging problems in science and engineering.

## 5 Conclusion

In this work, we addressed the challenge of applying physics-informed deep learning to stiff, nonlinear dynamical systems, a domain where standard architectures often fail. We demonstrated that a conventional PINN, built from a standard MLP, is fundamentally incapable of solving the complex Ginzburg-Landau equation. This baseline model, plagued by spectral bias, failed to represent the solution’s high-frequency and multi-scale features, leading to a catastrophic divergence from the correct physical dynamics. This failure highlighted the critical need for novel architectures that can explicitly manage and overcome this inductive bias. To address this, we proposed the Adaptive Spectral Physics-Enabled Network (ASPEN), a framework that integrates an adaptive spectral input layer directly into the network. By treating the frequencies of this Fourier feature mapping as learnable parameters, ASPEN dynamically tunes its own spectral basis during training. This mechanism allows the model to efficiently allocate its representational power to the specific frequencies required by the PDE’s solution, effectively bypassing the spectral bias that cripples standard MLPs. Our numerical experiments provided a clear validation of ASPEN’s capabilities. In contrast to the baseline, the ASPEN mode successfully solved the CGLE with high fidelity, producing a solution visually indistinguishable from the high-resolution ground truth. This qualitative success was substantiated by strong quantitative metrics: the model converged to a low median physics residual of just  $5.10 \times 10^{-3}$ , demonstrating the PDE was satisfied across the domain. Detailed analysis of solution slices at various times confirmed this precision, showing a near-perfect overlay with the ground truth and a maximum domain wall position error of only 0.11 at the final time  $t = 10.0s$ . Most critically, ASPEN proved to be not just accurate but physically consistent, precisely tracking emergent physical properties like the system’s free energy relaxation and the stable equilibrium of the domain wall-complex behaviors the baseline model failed to capture. Ultimately, the contribution of this work is a robust and effective framework for solving complex, nonlinear PDEs that remain intractable for standard PINNs. We have shown that by integrating the network with a learnable, adaptive spectral basis, we can create a solver that is accurate, stable, and physically consistent.

## References

- [1] Q. Du, M. Gunzburger, J. Peterson. *Analysis and Approximation of the Ginzburg-Landau Model of Superconductivity*. SIAM Rev., 34:54–81, 1992. DOI: 10.1137/1034003
- [2] A. Patra. *On Comparison of Two Reliable Techniques for the Riesz Fractional Complex Ginzburg-Landau-Schrödinger Equation in Modelling Superconductivity*. Progress in Fractional Differentiation and Applications, 2018. DOI: 10.18576/pfda/040308
- [3] V. Hernández Piñeiro, V. González Tabernero, A. M. Ferreira Ferreira, Study and Solution of the Ginzburg-Landau Equation for Superconductivity Problems, in *Proceedings of XoveTIC 2024*, (2024) 430-435. doi: 10.17979/spudc.001.108.0.
- [4] Reza Torabi, J. Davidsen. *Pattern formation in reaction-diffusion systems in the presence of non-Markovian diffusion*. Physical review. E, 100(5-1):052217, 2019. DOI: 10.1103/PhysRevE.100.052217
- [5] Weigang Liu, U. Täuber. *Aging phenomena in the two-dimensional complex Ginzburg-Landau equation*. Europhysics Letters, 128, 2019. DOI: 10.1209/0295-5075/128/40005
- [6] A. Achab, H. Rezazadeh, D. Baleanu, Temesgen Desta Leta, Shumaila Javeed, K. Alimgeer. *Ginzburg Landau equation’s Innovative Solution (GLEIS)*. Physica Scripta, 96, 2020. DOI: 10.1088/1402-4896/abc976
- [7] Logan Bishop-Van Horn. *pyTDGL: Time-dependent Ginzburg-Landau in Python*. Comput. Phys. Commun., 291:108799, 2023. DOI: 10.1016/j.cpc.2023.108799
- [8] Mariano De Leo, J. P. Borgna, Diego García Ovalle. *On the existence of nematic-superconducting states in the Ginzburg-Landau regime*. Chaos, Solitons & Fractals, 2024. DOI: 10.1016/j.chaos.2023.114364
- [9] X. Li, X. Zhong, H. Gao, J. Kou, Accelerating implicit integration factor methods for stiff reaction-diffusion equations via physics-informed neural operator, arXiv preprint arXiv:2505.18511 (2025).
- [10] C. Aguirre, Q. Martins, J. Barba-Ortega. *Brief numerical analysis of (3+1) Ginzburg-Landau equations*. Journal of Physics: Conference Series, 1671, 2020. DOI: 10.1088/1742-6596/1671/1/012007
- [11] L. Yang, R. Du, Z. Zhang, Analysis of linearized L2-scheme for time-dependent Ginzburg-Landau equations in 2D and 3D, *AIMS Mathematics*, 8 (2) (2023) 2795–2813. doi: 10.3934/math.2023124.
- [12] E. Salete, A. M. Vargas, A. García, M. Negreanu, J. J. Benito, F. Ureña. *Complex Ginzburg-Landau Equation with Generalized Finite Differences*. Mathematics, 2020. DOI: 10.3390/math8122248

- [13] M. Li, D. Shi, Junjun Wang. *Unconditional superconvergence analysis of a linearized Crank-Nicolson Galerkin FEM for generalized Ginzburg-Landau equation*. Comput. Math. Appl., 79:2411–2425, 2018. DOI: 10.1016/j.camwa.2019.11.008
- [14] Buyang Li, Zhimin Zhang. *Mathematical and numerical analysis of the time-dependent Ginzburg-Landau equations in nonconvex polygons based on Hodge decomposition*. Math. Comput., 86:1579–1608, 2014. DOI: 10.1090/mcom/3177
- [15] Xiaoyu Li, Yu-Lan Wang, Zhi-yuan Li. *Numerical simulation for the fractional-in-space Ginzburg-Landau equation using Fourier spectral method*. AIMS Mathematics, 2022. DOI: 10.3934/math.2023047
- [16] M. A. Zaky, A. Hendy, R. H. De Staelen. *Alikhanov Legendre—Galerkin Spectral Method for the Coupled Nonlinear Time-Space Fractional Ginzburg–Landau Complex System*. Mathematics, 2021. DOI: 10.3390/math9192465
- [17] A. Seçer, Yasemin Bakır, Chebyshev wavelet collocation method for Ginzburg-Landau equation, *Thermal Science*, 23 (Suppl. 4) (2019) S1167–S1176. doi: 10.2298/TSCI181126054S.
- [18] E. Asante-Asamani, A. Kleefeld, B. A. Wade. *A second-order exponential time differencing scheme for non-linear reaction-diffusion systems with dimensional splitting*. ArXiv, abs/2001.11220, 2020. DOI: 10.48550/arXiv.2001.11220
- [19] M. Caliarì, F. Cassini. *Efficient simulation of complex Ginzburg-Landau equations using high-order exponential-type methods*. ArXiv, abs/2403.02816, 2024. DOI: 10.48550/arXiv.2403.02816
- [20] Yong-Liang Zhao, A. Ostermann, Xianming Gu. *A low-rank Lie-Trotter splitting approach for nonlinear fractional complex Ginzburg-Landau equations*. ArXiv, abs/2010.05249, 2020. DOI: 10.48550/arXiv.2010.05249
- [21] Burhaneddin Izgi, Coskun Çetin. *Milstein-type semi-implicit split-step numerical methods for nonlinear stochastic differential equations with locally Lipschitz drift terms*. Thermal Science, 2019. DOI: 10.2298/TSCI181029054I
- [22] C. Aguirre, J. Otálora, A. S. Mosquera Polo, J. Barba-Ortega. *Matricial methods applied to the solution of the Ginzburg-Landau equations*. Journal of Physics: Conference Series, 2516, 2023. DOI: 10.1088/1742-6596/2516/1/012002
- [23] Yian Chen, J. Hoskins, Y. Khoo, M. Lindsey. *Committor functions via tensor networks*. ArXiv, abs/2106.12515, 2021. DOI: 10.48550/arXiv.2106.12515
- [24] Derek R. Handwerk, G. Dangelmayr, I. Oprea, Patrick D. Shipman. *Phase-Diffusion Equations for the Anisotropic Complex Ginzburg–Landau Equation*. International Journal of Bifurcation and Chaos, 2020. DOI: 10.1142/S0218127420501758
- [25] Elham Kiyani, K. Shukla, Jorge F. Urbán, Jérôme Darbon, G. Karniadakis. *Optimizing the optimizer for physics-informed neural networks and Kolmogorov-Arnold networks*. Computer Methods in Applied Mechanics and Engineering, 2025. DOI: 10.1016/j.cma.2024.117607
- [26] Haoya Li, Y. Khoo, Yinuo Ren, Lexing Ying. *Solving for high dimensional committor functions using neural network with online approximation to derivatives*. ArXiv, abs/2012.06727, 2020. DOI: 10.48550/arXiv.2012.06727
- [27] R. Matthey, Susanta Ghosh. *Gradient Flow Based Phase-Field Modeling Using Separable Neural Networks*. ArXiv, abs/2405.06119, 2024. DOI: 10.48550/arXiv.2405.06119
- [28] Iman Peivaste, A. Makradi, S. Belouettar. *Teaching Artificial Intelligence to Perform Rapid, Resolution-Invariant Grain Growth Modeling via Fourier Neural Operator*. ArXiv, abs/2503.14568, 2025. DOI: 10.48550/arXiv.2503.14568
- [29] S. Sargsyan, S. Brunton, J. Kutz. *Nonlinear model reduction for dynamical systems using sparse sensor locations from learned libraries*. Physical review. E, Statistical, nonlinear, and soft matter physics, 92(3):033304, 2015. DOI: 10.1103/PhysRevE.92.033304
- [30] S. Sargsyan, S. Brunton, J. Kutz. *Online Interpolation Point Refinement for Reduced-Order Models using a Genetic Algorithm*. ArXiv, abs/1607.07702, 2016. DOI: 10.48550/arXiv.1607.07702
- [31] E. Simonnet. *Computing non-equilibrium trajectories by a deep learning approach*. J. Comput. Phys., 491:112349, 2022. DOI: 10.1016/j.jcp.2023.112349
- [32] Xun Tang, Lexing Ying. *Solving high-dimensional Fokker-Planck equation with functional hierarchical tensor*. J. Comput. Phys., 511:113110, 2023. DOI: 10.1016/j.jcp.2024.113110
- [33] Yongyi Yu, Qingmei Zhao. *Controllability and observability for some forward-stochastic complex degenerate/singular Ginzburg-Landau equations*. ESAIM: Control, Optimisation and Calculus of Variations, 2023. DOI: 10.1051/cocv/2023014

- [34] Xiangyuan Zhang, Weichao Mao, Saviz Mowlavi, M. Benosman, Tamer Başar. *Controlgym: Large-scale control environments for benchmarking reinforcement learning algorithms*. Conference on Learning for Dynamics & Control, 2023. Available at: <https://api.semanticscholar.org/CorpusID:265506677>