
SSLfmm: An R Package for Semi-Supervised Learning with a Mixed-Missingness Mechanism in Finite Mixture Models

Geoffrey J. McLachlan 

School Of Mathematics and Physics
The University of Queensland
St Lucia 4072, Australia
g.mclachlan@uq.edu.au

Jinran Wu 

School Of Mathematics and Physics
The University of Queensland
St Lucia 4072, Australia
jinran.wu@uq.edu.au

December 4, 2025

ABSTRACT

Semi-supervised learning (SSL) constructs classifiers from datasets in which only a subset of observations is labelled, a situation that naturally arises because obtaining labels often requires expert judgement or costly manual effort. This motivates methods that integrate labelled and unlabelled data within a learning framework. Most SSL approaches assume that label absence is harmless, typically treated as missing completely at random or ignored, but in practice, the missingness process can be informative, as the chances of an observation being unlabelled may depend on the ambiguity of its feature vector. In such cases, the missingness indicators themselves provide additional information that, if properly modelled, may improve estimation efficiency. The **SSLfmm** package for R is designed to capture this behaviour by estimating the Bayes' classifier under a finite mixture model in which each component corresponding to a class follows a multivariate normal distribution. It incorporates a mixed-missingness mechanism that combines a missing completely at random (MCR) component with a (non-ignorable) missing at random (MAR) component, the latter modelling the probability of label missingness as a logistic function of the entropy based on the features. Parameters are estimated via an Expectation–Conditional Maximisation algorithm. In the two-class Gaussian setting with arbitrary covariance matrices, the resulting classifier trained on partially labelled data may, in some cases, achieve a lower misclassification rate than the supervised version in the case where all the labels are known. The package includes a practical tool for modelling and illustrates its performance through simulated examples.

Keywords semi-supervised learning · mixture modelling · mixed-missingness · classification · expectation–conditional maximisation

1 Introduction

In classification problems, the construction of classifiers typically assumes access to fully labelled training data. In many real-world settings, however, complete annotation is difficult to obtain: expert labelling may be costly, time-consuming, or reliant on diagnostic procedures that cannot be applied in every instance. Consequently, datasets frequently contain feature vectors for which the corresponding class labels are missing. Such omissions may result from routine factors, limited time, incomplete documentation, or technical interruptions during data collection, but may also arise from more systematic reasons. In areas such as medicine or defence, for example, ambiguous or borderline cases are often left unlabelled when the available evidence does not support a confident decision, or when further diagnostic procedures are constrained by ethical or logistical considerations. As noted by Mealli and Rubin [2015], the mechanisms that lead to missing labels can be subtle. In practice, they typically combine incidental omissions with deliberate, feature-dependent decisions, making the development of classifiers substantially more challenging.

Semi-supervised learning (SSL) provides a principled framework for combining labelled and unlabelled data, making it well suited to applications where complete annotation is difficult to obtain [McLachlan, 1975, O'Neill, 1978, Chapelle

et al., 2006]. A wide range of SSL methodologies has been developed, including generative approaches [Kingma et al., 2014, Paige et al., 2017], graph-based algorithms [Camps-Valls et al., 2007, Song et al., 2022], and semi-supervised extensions of support vector machines [Bennett and Demiriz, 1998, Chapelle et al., 2008]. Within this landscape, finite mixture models (FMMs) offer a probabilistic representation for partially labelled data, which can be fitted by the expectation–maximisation (EM) framework [Dempster et al., 1977, McLachlan and Krishnan, 2008, Grün and Leisch, 2008]; see McLachlan and Peel [2000] and McLachlan et al. [2019]. FMM-based SSL methods are widely used [Huang and Hasegawa-Johnson, 2010, Szummer and Jaakkola, 2001], but they typically adopt the assumption that unlabelled observations arise for reasons unrelated to the data-generating process. When the missingness depends on the observed features or latent class structure, this assumption is violated, potentially leading to biased inference. Recent work has reframed unlabelled observations explicitly as a missing-data problem, showing that accounting for the missing-label mechanism can yield gains in statistical efficiency. For example, Ahfock and McLachlan [2020] showed that partially labelled data can outperform completely labelled data in two-component normal models, with related extensions in Ahfock and McLachlan [2023]. These developments suggest that a careful treatment of the missing-label mechanism can broaden the scope and effectiveness of SSL methods.

A range of software tools now support SSL within both discriminative and generative modelling frameworks. On the discriminant side, packages such as RSSL [Krijthe, 2016], S2Net [Culp, 2013], LSX [Watanabe, 2021], LFDA [Tang and Li, 2019], and SAMGEP [Ahuja et al., 2022] extend established classification and representation-learning methods by allowing unlabelled data to contribute through regularisation, graph-based constraints, or surrogate modelling. Methods such as SMMAL [Hou et al., 2025] apply similar ideas in causal inference, using unlabelled data to stabilise outcome and propensity estimation. Generative approaches, implemented in toolkits including mclust [Fraley and Raftery, 2007], flexmix, mixtools [Benaglia et al., 2010], Rmixmod [Lebrete et al., 2015], and more recently batchmix [Coleman et al., 2022], make use of partially labelled data through likelihood-based or Bayesian mixture-model estimation, where unlabelled observations help refine component densities and classification boundaries. Although these packages differ in purpose and modelling strategy, most of them adopt the assumption that unlabelled observations arise for reasons unrelated to the features or underlying class structure. In applications where labels are withheld for systematic or case-specific reasons, this assumption is unlikely to hold. Hence, it would appear that existing software incorporates unlabelled data without addressing the mechanism by which labels become unavailable, leaving room for methods that explicitly account for the missing-label process within the SSL framework.

In this work, we introduce an open-source R package **SSLfmm** (semi-supervised learning under a mixed-missingness mechanism in finite mixture models), now available at <https://github.com/wujrtudou/SSLfmm.git>. The package implements a likelihood framework that jointly models class membership and the label-missingness process, explicitly accommodating both MCAR and entropy-based MAR mechanisms. Estimation is carried out via an Expectation—Conditional Maximisation (ECM) algorithm, which alternates between computing soft label assignments and missingness indicators, updating logistic regression parameters through standard glm routines, and refining mixture parameters using the nlminb optimiser. The package allows arbitrary covariance parameterisations, offers a robust initialisation strategy, and provides diagnostic tools for monitoring convergence and model fit. With built-in functions for simulation and visualisation, **SSLfmm** provides a unified and practical solution for semi-supervised mixture modelling in domains where a mixed-missingness mechanism is present.

The remainder of this paper is organised as follows. Section 2 introduces the FMM framework and formalises a mixed-missingness mechanism, combining MCAR and entropy-based MAR. Section 3 details the estimation procedure. Section 4 describes the core functions implemented in the **SSLfmm** package, covering data simulation, parameter initialisation, iterative estimation, prediction, and error-rate evaluation. Section 5 provides illustrative examples through simulation studies, highlighting both prediction under a mixed-missingness mechanism and theoretical error-rate comparisons with complete-data models. Section 6 concludes with a summary of contributions, practical implications, and avenues for future development.

2 FMM under a mixed-missingness mechanism

2.1 FMM

Let \mathbf{Y} be a p -dimensional random feature vector on an entity belonging to one of g predefined classes C_1, \dots, C_g , which occur in proportions π_1, \dots, π_g satisfying $\sum_{i=1}^g \pi_i = 1$. Conditional on membership to class C_i , the random vector \mathbf{Y} corresponding to \mathbf{y} has probability density function,

$$f_i(\mathbf{y}; \boldsymbol{\omega}_i) = \phi(\mathbf{y}; \boldsymbol{\mu}_i, \boldsymbol{\Sigma}_i)$$

with mean $\boldsymbol{\mu}_i$ and covariance matrix $\boldsymbol{\Sigma}_i$. The class-specific parameter vector is $\boldsymbol{\omega}_i$ containing the elements of $\boldsymbol{\mu}_i$ and the distinct elements of $\boldsymbol{\Sigma}_i$, ($i = 1, \dots, g$). The full parameter vector is $\boldsymbol{\theta} = (\pi_1, \dots, \pi_{g-1}, \boldsymbol{\omega}_1^\top, \dots, \boldsymbol{\omega}_g^\top)^\top$. We define

the complete observation vector as $\mathbf{x}_j = (\mathbf{y}_j^\top, \mathbf{z}_j^\top)^\top$, where the class-indicator vector $\mathbf{z}_j = (z_{1j}, \dots, z_{gj})^\top$ is given by

$$z_{ij} = \begin{cases} 1, & \text{if } \mathbf{y}_j \in C_i, \\ 0, & \text{otherwise,} \end{cases} \quad i = 1, \dots, g; \quad j = 1, \dots, n.$$

In semi-supervised learning, some labels \mathbf{z}_j are missing. Define

$$m_j = \begin{cases} 1, & \text{if } \mathbf{z}_j \text{ is missing,} \\ 0, & \text{if } \mathbf{z}_j \text{ is observed.} \end{cases} \quad j = 1, \dots, n.$$

For observations with missing labels, the contribution of the feature vector \mathbf{y}_j to the likelihood function is,

$$f(\mathbf{y}_j; \boldsymbol{\theta}) = \sum_{i=1}^g \pi_i \phi(\mathbf{y}_j; \boldsymbol{\mu}_i, \boldsymbol{\Sigma}_i) \quad (i = 1, \dots, g).$$

The posterior probability that an entity with feature vector \mathbf{y} belongs to the i th class is given by,

$$\tau_i(\mathbf{y}; \boldsymbol{\theta}) = \frac{\pi_i f_i(\mathbf{y}; \boldsymbol{\omega}_i)}{\sum_{h=1}^g \pi_h f_h(\mathbf{y}; \boldsymbol{\omega}_h)} \quad (i = 1, \dots, g).$$

The Bayes' classifier assigns an entity with feature vector \mathbf{y} to the class to which it has the highest posterior probability of belonging.

The log likelihood $\log L_C(\boldsymbol{\theta})$ based on the labelled features is given by

$$\log L_C(\boldsymbol{\theta}) = \sum_{j=1}^n (1 - m_j) \sum_{i=1}^g z_{ij} \log\{\pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i)\}, \quad (\text{a})$$

while the log likelihood $\log L_{UC}(\boldsymbol{\theta})$ based on the unlabelled features is

$$\log L_{UC}(\boldsymbol{\theta}) = \sum_{j=1}^n m_j \log\left\{ \sum_{i=1}^g \pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i) \right\}. \quad (\text{b})$$

From (a) and (b), under the assumption of ignorable missingness, the log likelihood for a partially classified data set is

$$\log L_{PC}^{(\text{ig})}(\boldsymbol{\theta}) = \log L_C(\boldsymbol{\theta}) + \log L_{UC}(\boldsymbol{\theta}). \quad (1)$$

If all the labels are observed ($m_j = 0$ for all j), then this reduces to

$$\log L_{CC}(\boldsymbol{\theta}) = \sum_{j=1}^n \sum_{i=1}^g z_{ij} \log\{\pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i)\}.$$

2.2 A mixed-missingness mechanism for class labels

The missing mechanism can be ignored in likelihood-based inference if the missing labels satisfy the MCAR assumption, for which missingness does not depend on the feature vector or its class label. More generally, feature-truncated missingness, where labels are absent whenever a predictor falls below a threshold, belongs to the ignorable MAR case, and so can be ignored when forming the likelihood [McLachlan and Gordon, 1989]. By contrast, in the entropy-based MAR setting considered here, the probability of missingness depends on the class entropy, which itself involves the distribution parameters. Because the parameter-distinctness condition is violated, this mechanism is non-ignorable and needs to be explicitly modelled. Accounting for it can also improve classification performance. Ahfock and McLachlan [2020] further noted that in practice, unlabelled samples (i.e., observations with missing class labels) often lie in ambiguous regions of the feature space, where class overlap is substantial. Such samples provide valuable information that can enhance the efficiency of parameter estimation for $\boldsymbol{\theta}$. The uncertainty in class membership for a feature vector \mathbf{y}_j in these regions can be quantified using Shannon entropy,

$$e(\mathbf{y}_j; \boldsymbol{\theta}) = - \sum_{i=1}^g \tau_i(\mathbf{y}_j; \boldsymbol{\theta}) \log \tau_i(\mathbf{y}_j; \boldsymbol{\theta}),$$

where $\tau_i(\mathbf{y}_j; \boldsymbol{\theta})$ is the posterior probability that an entity with feature vector \mathbf{y}_j belongs to class C_i , ($i = 1, \dots, g$).

Building on this idea, we extend the framework of Ahfock and McLachlan [2020] to allow for a mixed-missingness mechanism that accommodates MCAR and entropy-based MAR. Specifically, we introduce binary indicators m_{1j} and m_{2j} . For observation \mathbf{y}_j , we set $m_{1j} = 1$ if its label is missing due to MCAR, and $m_{2j} = 1$ if the missingness arises from entropy-based MAR. When the label is observed, both indicators take the value zero, that is, $m_{1j} = m_{2j} = 0$, implying $m_j = 0$. The MCAR mechanism is modelled as

$$\Pr\{M_{1j} = 1 \mid \mathbf{y}_j, \mathbf{z}_j\} = \Pr\{M_{1j} = 1 \mid \mathbf{y}_j\} = \alpha,$$

where α is the probability that a label is MCAR. Next, for the MAR element, we model the probability of entropy-based missingness as

$$\Pr\{M_{2j} = 1 \mid \mathbf{y}_j, \mathbf{z}_j\} = \Pr\{M_{2j} = 1 \mid \mathbf{y}_j\} = (1 - \alpha)q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi}),$$

where $\boldsymbol{\xi} = (\xi_0, \xi_1^T)^T$ parameterises the entropy-based MAR mechanism and is distinct from the model parameters $\boldsymbol{\theta}$. The function $q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi})$ is defined as a logistic function of the log-entropy

$$q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi}) = \frac{\exp\{\xi_0 + \xi_1 \log e(\mathbf{y}_j; \boldsymbol{\theta})\}}{1 + \exp\{\xi_0 + \xi_1 \log e(\mathbf{y}_j; \boldsymbol{\theta})\}}.$$

In the special case of $g = 2$ normal components with equal covariance matrices, the log entropy can be replaced by the negative of the square of the discriminant function [Ahfock and McLachlan, 2020].

Let $\boldsymbol{\Psi} = (\boldsymbol{\theta}^T, \boldsymbol{\xi}^T)^T$. Define $\mathbf{m}_1 = (m_{11}, \dots, m_{1n})^T$, and $\mathbf{m}_2 = (m_{21}, \dots, m_{2n})^T$, and let f denote a generic density or probability function. To construct the full likelihood function $L_{\text{PC}}^{(\text{full})}(\boldsymbol{\Psi})$ for the partially classified dataset, we require the following components

$$f(\mathbf{y}_j, \mathbf{z}_j, m_j = 0), \quad f(\mathbf{y}_j, m_{1j} = 1), \quad f(\mathbf{y}_j, m_{2j} = 1),$$

which correspond to the contributions from classified, MCAR-unclassified, and MAR-unclassified observations, respectively.

Therefore, for a classified feature vector \mathbf{y}_j , the contribution is

$$\begin{aligned} f(\mathbf{y}_j, \mathbf{z}_j, M_j = 0) &= f(\mathbf{z}_j)f(\mathbf{y}_j \mid \mathbf{z}_j)\Pr\{M_j = 0 \mid \mathbf{y}_j, \mathbf{z}_j\} \\ &= \prod_{i=1}^g \{\pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i)\}^{z_{ij}} \{(1 - \alpha)(1 - q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi}))\}. \end{aligned}$$

For an unclassified MCAR feature \mathbf{y}_j

$$f(\mathbf{y}_j, m_{1j} = 1) = f(\mathbf{y}_j)\Pr\{m_{1j} = 1 \mid \mathbf{y}_j\} = \sum_{i=1}^g \pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i) \alpha.$$

For an unclassified MAR feature \mathbf{y}_j

$$f(\mathbf{y}_j, m_{2j} = 1) = f(\mathbf{y}_j)\Pr\{m_{2j} = 1 \mid \mathbf{y}_j\} = \sum_{i=1}^g \pi_i f_i(\mathbf{y}_j; \boldsymbol{\omega}_i)(1 - \alpha)q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi}).$$

Let \mathcal{C} denote the set of classified observations, that is, those with observed labels (i.e., $m_j = 0$). Let $\mathcal{U}_{\text{MCAR}}$ represent the set of unclassified observations whose labels are missing due to an MCAR mechanism (i.e., $m_{1j} = 1$). Finally, let \mathcal{U}_{MAR} denote the set of unclassified observations with label missingness arising from an entropy-based MAR mechanism (i.e., $m_{2j} = 1$). The full likelihood function is

$$L_{\text{PC}}^{(\text{full})}(\boldsymbol{\Psi}) = \prod_{j \in \mathcal{C}} f(\mathbf{y}_j, \mathbf{z}_j, m_j = 0) \times \prod_{j \in \mathcal{U}_{\text{MCAR}}} f(\mathbf{y}_j, m_{1j} = 1) \times \prod_{j \in \mathcal{U}_{\text{MAR}}} f(\mathbf{y}_j, m_{2j} = 1). \quad (2)$$

Taking the logarithm, the full log likelihood can thus be decomposed as:

$$\log L_{\text{PC}}^{(\text{full})}(\boldsymbol{\Psi}) = \log L_{\text{PC}}^{(\text{ig})}(\boldsymbol{\theta}) + \log L_{\text{PC}}^{(\text{miss})}(\boldsymbol{\Psi}),$$

where $\log L_{\text{PC}}^{(\text{ig})}(\boldsymbol{\theta})$ is the log likelihood based on partially classified data, which is defined by (1) of Section 2.1, and

$$\begin{aligned} \log L_{\text{PC}}^{(\text{miss})}(\boldsymbol{\Psi}) &= \sum_{j=1}^n \left[m_{1j} \log \alpha + (1 - m_{1j}) \log(1 - \alpha) \right. \\ &\quad \left. + m_{2j} \log q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi}) + (1 - m_{2j}) \log(1 - q(\mathbf{y}_j; \boldsymbol{\theta}, \boldsymbol{\xi})) \right]. \end{aligned} \quad (3)$$

3 Estimation via an ECM Algorithm

This section outlines the estimation of the parameters in the finite mixture model with a mixed-missingness mechanism. Two levels of incompleteness are present: (i) missing class labels for a subset of observations, and (ii) latent indicators specifying whether each missing label arises from MCAR or entropy-based MAR. The overall parameter vector is

$$\Psi = (\boldsymbol{\theta}^\top, \boldsymbol{\xi}^\top, \alpha)^\top.$$

The ECM algorithm alternates between two expectation steps and two conditional maximisation steps.

E-step 1: Posterior probability of class membership Given current estimates $\boldsymbol{\theta}^{(k)}$, the posterior probability that observation j belongs to class C_i is

$$\tau_{ij}^{(k)} = \frac{\pi_i^{(k)} \phi(\mathbf{y}_j; \boldsymbol{\mu}_i^{(k)}, \boldsymbol{\Sigma}_i^{(k)})}{\sum_{\ell=1}^g \pi_\ell^{(k)} \phi(\mathbf{y}_j; \boldsymbol{\mu}_\ell^{(k)}, \boldsymbol{\Sigma}_\ell^{(k)})}.$$

The estimate of the entropy after the $(k+1)$ th iteration of the ECM algorithm,

$$e_j^{(k+1)} = - \sum_{i=1}^g \tau_{ij}^{(k)} \log \tau_{ij}^{(k)}, \quad d_j^{(k)} = \log e_j^{(k)},$$

is then obtained for use in modelling entropy-based missingness.

E-step 2: Missingness indicator estimation For labelled observations ($m_j = 0$), the missingness indicators satisfy $m_{1j} = m_{2j} = 0$. For unlabelled observations ($m_j = 1$), the probability that a missing label arises from MCAR is

$$m_{1j}^{(k)} = \frac{\alpha^{(k)}}{\alpha^{(k)} + (1 - \alpha^{(k)})q_j^{(k)}},$$

and the probability that it arises from entropy-based missingness is

$$m_{2j}^{(k)} = \frac{(1 - \alpha^{(k)})q_j^{(k)}}{\alpha^{(k)} + (1 - \alpha^{(k)})q_j^{(k)}},$$

where

$$q_j^{(k)} = \text{logit}^{-1}(\xi_0^{(k)} + \xi_1^{(k)} d_j^{(k)}).$$

These provide the soft assignment of each missing label to the MCAR or MAR mechanism.

CM-step 1: Update of α and $\boldsymbol{\xi}$ The updated MCAR proportion is updated by averaging the soft MCAR assignments to give

$$\alpha^{(k+1)} = \frac{1}{n} \sum_{j=1}^n m_{1j}^{(k)}.$$

The entropy-based missingness parameters are updated by maximising the weighted logistic likelihood,

$$\boldsymbol{\xi}^{(k+1)} = \arg \max_{\boldsymbol{\xi}} \sum_{j=1}^n \left[m_{2j}^{(k)} \log q_j(\boldsymbol{\xi}^{(k)}) + (1 - m_{2j}^{(k)}) \log(1 - q_j(\boldsymbol{\xi}^{(k)})) \right],$$

where $q_j(\boldsymbol{\xi}^{(k)}) = \text{logit}^{-1}(\xi_0^{(k)} + \xi_1^{(k)} d_j^{(k)})$. This corresponds to a weighted logistic regression of m_j on $d_j^{(k)}$.

CM-step 2: Update of the mixture model parameter $\boldsymbol{\theta}$ Given the current missingness parameters $(\alpha^{(k)}, \boldsymbol{\xi}^{(k)})$ and the posterior class probabilities $\{\tau_{ij}^{(k)}\}$ from E-step 1, the mixture model parameter vector $\boldsymbol{\theta}$ is updated by maximising the expected complete-data log likelihood with respect to $\boldsymbol{\theta}$. Because the MCAR component of the missingness likelihood does not depend on $\boldsymbol{\theta}$, it is constant in this step and is therefore omitted. The resulting Q -function for updating $\boldsymbol{\theta}$ is

$$\begin{aligned} Q_{\boldsymbol{\theta}}^{(k)}(\boldsymbol{\theta}) = & \sum_{j=1}^n \sum_{i=1}^g \left[(1 - m_j) z_{ij} + m_j \tau_{ij}^{(k)} \right] \left[\log \pi_i + \log \phi(\mathbf{y}_j | \boldsymbol{\mu}_i, \boldsymbol{\Sigma}_i) \right] \\ & + \sum_{j=1}^n \left[m_{2j}^{(k)} \log q_j(\boldsymbol{\theta}, \boldsymbol{\xi}^{(k)}) + (1 - m_{2j}^{(k)}) \log(1 - q_j(\boldsymbol{\theta}, \boldsymbol{\xi}^{(k)})) \right]. \end{aligned}$$

Maximisation of $Q_{\boldsymbol{\theta}}^{(k)}(\boldsymbol{\theta})$ is computed numerically (e.g., via `nlminb`) under the specified covariance structure.

Remark Initial mixture parameters are obtained from the labelled subset. Posterior probabilities and entropies are computed in E-step 1, followed by a weighted logistic fit for the missingness mechanism in CM-step 1. Upon convergence, the algorithm outputs $\hat{\theta}^{(k+1)}$ and $\hat{\xi}^{(k+1)}$.

4 Main functions

The **SSLfmm** package provides a set of functions for simulating data, initialising parameters, performing semi-supervised ECM estimation, making predictions, and computing theoretical error rates under a mixed-missingness mechanism that combines MCAR and entropy-based MAR processes. This package is designed for the Gaussian mixture setting ($g = 2$), where partial class labels and structured missingness must be jointly modelled to improve classification performance. The workflow begins with `simulate_mixed_missingness()` to generate synthetic datasets, proceeds to `EM_FMM_SemiSupervised_Complete_Initial()` for robust parameter initialisation, and then applies `EM_FMM_SemiSupervised()` for iterative estimation of both mixture and missingness parameters. The package also includes `bayesclassifier()` for Bayes-optimal classification and `error_beta_classification()` for computing the theoretical Bayes' error rate in equal-covariance cases, allowing for both simulation studies and methodological evaluation within a consistent framework.

4.1 Data simulation

The function `simulate_mixed_missingness()` generates artificial datasets from a two-component FMM under a mixed-missingness process that combines MCAR and MAR mechanisms. The model is specified with $g = 2$ mixture components having mixing proportions $\pi = (\pi_1, \pi_2)$, a component mean matrix μ of dimension $p \times 2$, and a component covariance array Σ of dimension $p \times p \times 2$. Complete observations are first simulated using the `rmix()` function. For each simulated observation, entropy is calculated via `get_entropy()`, and a logistic regression model with intercept ξ_0 and slope ξ_1 is applied to the logarithm of this entropy to yield MAR probabilities. Observations are first subjected to MCAR missingness by randomly selecting an α proportion of samples from the entire dataset and treating their labels as missing. Among the remaining complete observations, we then impose entropy-based MAR missingness by drawing Bernoulli indicators from the corresponding logistic probabilities.

The function accepts as inputs the sample size n , the mixing proportions (π_1, π_2) , a $p \times 2$ matrix of component means, and a $p \times p \times 2$ array of component covariance matrices. The entropy-based MAR mechanism is governed by the logistic parameters ξ_0 (intercept) and ξ_1 (slope), while the parameter $\alpha \in [0, 1]$ specifies the proportion of MCAR cases introduced across the full dataset. A random seed can also be supplied for reproducibility. The output is a `data.frame` containing the simulated feature vectors y_1, \dots, y_p , the entropy values, a missingness indicator taking values 0 (observed), 1 (MCAR), and 2 (MAR), the observed label, and the true underlying class label.

4.2 Parameter initialisation

The function `EM_FMM_SemiSupervised_Complete_Initial()` provides a unified initialisation routine for semi-supervised Gaussian mixture modelling with a mixed-missingness mechanism (MCAR + MAR). It constructs stable, data-informed starting values for both the mixture parameters and the missingness mechanism by leveraging both labelled and unlabelled observations. The procedure operates in two stages: (i) mixture-parameter estimation from the labelled subset, yielding initial π , μ , and Σ under either a shared (equal) or class-specific (unequal) covariance structure as specified by `ncov`; and (ii) a short heuristic warm-up/calibration step that incorporates unlabelled data via soft responsibilities, evaluates entropy-based classification uncertainty, and calibrates the missingness parameters by updating the MCAR proportion α and fitting a logistic model for the MAR component.

The function takes as input a data frame whose first p columns contain numeric feature variables, followed by two required columns: `missing`, indicating whether an observation is labelled (0) or unlabelled (nonzero), and `obs`, storing the observed class labels $1:g$ for the labelled rows. The value of p is inferred as `ncol(data) - 2` under this structure. Users may specify the number of mixture components g (default 2) and the covariance structure via `ncov`, where 1 assumes a shared covariance matrix and 2 allows class-specific covariance matrices (default 1). Additional tuning parameters include an initial MCAR proportion `alpha_init` in $(0, 1)$ for the warm-up calibration step (default 0.01), the number of warm-up EM iterations `warm_up_iter` (default 20), and a convergence tolerance `tol` (default $1e-6$). The function outputs a list containing the initialised mixture model parameters: the mixing proportions π ; the component mean vectors $\{\mu_i\}$; the covariance matrices, returned either as a single shared $p \times p$ matrix or as class-specific matrices depending on `ncov`; the calibrated MCAR proportion `alpha`; and the logistic MAR parameters $\xi = (\xi_0, \xi_1)$.

4.3 Estimation routine

The function `EM_FMM_SemiSupervised()` carries out the full semi-supervised ECM estimation for the FMM with the mixed-missingness mechanism (MCAR + entropy-based MAR) described in the preceding subsection. It takes stable, data-informed starting values from `EM_FMM_SemiSupervised_Complete_Initial()` and iteratively refines both the mixture parameters and the missingness mechanism parameters until convergence.

At each iteration, the algorithm begins with an E-step that computes component responsibilities τ_{ij} for all observations, setting $\tau_{ij} = \mathbb{I}(z_{ij} = i)$ for labelled cases. From these responsibilities, it calculates the entropy-based uncertainty measure e_j and its log-transform $d_j = \log(e_j)$ for each observation. Using the current missingness coefficients $\xi = (\xi_0, \xi_1)$, the MAR link is evaluated as $q_j = \text{logit}^{-1}(\xi_0 + \xi_1 d_j)$. For unlabelled observations, the posterior channel weights for the MCAR and MAR components are then computed as $m_{1j} = \alpha / \{\alpha + (1 - \alpha)q_j\}$ and $m_{2j} = (1 - \alpha)q_j / \{\alpha + (1 - \alpha)q_j\}$, respectively, while both weights are set to zero for labelled cases. In the M-step for the missingness mechanism, the MCAR proportion α is updated as the mean of m_{1j} across the whole dataset, and the MAR coefficients ξ are updated by fitting a weighted logistic regression of m_{2j} on d_j , using weights of one for all cases. The subsequent M-step for the mixture parameters re-estimates θ by maximising the mixture log likelihood, treating τ_{ij} for labelled cases as fixed and for unlabelled cases as the current responsibilities. This maximisation is performed numerically using `nlmnb` applied to a packed parameter vector from `pack_theta()`, which contains $(g - 1)$ logits for π (with the last component as baseline), all component means in column-major order, and the lower-triangular elements (including diagonal) of the covariance matrix or matrices. The covariance structure is determined by the `ncov` argument: when `ncov = 1`, a single $p \times p$ shared covariance matrix is estimated and replicated internally; when `ncov = 2`, g distinct covariance matrices are estimated separately.

The function takes as input a data frame in which the first p columns contain the numeric feature variables, followed by the columns `missing` (coded 0 for labelled and nonzero for unlabelled observations) and `obs` (recording the observed class labels $1:g$ for the labelled cases). Users may specify the number of mixture components g (default 2), provide initial parameter values through the list `init_res` (containing `pi`, `mu`, `Sigma`, `alpha`, and `xi`), and control the ECM optimisation through the maximum number of iterations `max_iter` (default 5) and the convergence tolerance `tol` (default $1e-6$). The covariance structure is governed by the flag `ncov`, where 1 specifies a shared covariance matrix and 2 allows component-specific covariances (default 1). The function outputs a list containing the estimated mixing proportions, the component mean vectors, the covariance matrix or matrices (depending on `ncov`), the estimated MCAR proportion α , the MAR logistic coefficients ξ , and the maximised total log likelihood.

4.4 Prediction

The function `bayesclassifier()` implements a Bayes' classifier for a two-component Gaussian mixture model. Given θ , and Σ , the function assigns each observation to the component that maximises its posterior log-probability

$$\hat{z}_{ij} = \begin{cases} 1, & \text{if } i = \arg \max_h \{\log \pi_h + \log \phi(\mathbf{y}_j; \boldsymbol{\mu}_h, \boldsymbol{\Sigma}_h)\}, \\ 0, & \text{otherwise,} \end{cases} \quad h = 1, 2.$$

The classifier supports both shared covariance matrices ($p \times p$) and component-specific covariance arrays ($p \times p \times 2$), and it can handle either a single observation vector or an $n \times p$ data matrix.

The function accepts as input a numeric data object `dat`, provided either as an $n \times p$ matrix or a length- p vector, together with the dimension p , the mixing proportions $\pi = (\pi_1, \pi_2)$ satisfying $\pi_1 + \pi_2 = 1$, a $p \times 2$ matrix of component means, and either a shared $p \times p$ covariance matrix or a $p \times p \times 2$ array of component-specific covariance matrices. Optionally, a list `paralist` containing `pi`, `mu`, and `sigma` may be supplied, in which case these entries override the corresponding individual arguments. The function returns an integer vector of length n containing the predicted class labels in $\{1, 2\}$.

4.5 Error rate computation

The function `error_beta_classification()` computes the theoretical Bayes classification error rate for a two-component GMM under the assumption of a common (equal) covariance structure across components. It requires the estimated mixture parameters: the component means $\boldsymbol{\mu}$, the shared covariance matrix $\boldsymbol{\Sigma}$, and the mixing proportions $\pi = (\pi_1, \pi_2)$. The function accepts $\boldsymbol{\mu}$ either as a $p \times 2$ numeric matrix, where each column is a component mean vector, or as a list of two numeric mean vectors, which is internally converted to matrix form.

The classification rule is derived from the linear discriminant function

$$z_h = 1 \quad \text{if } h = \arg \max_h \{\log \pi_h + \log \phi(\mathbf{y}; \boldsymbol{\mu}_h, \boldsymbol{\Sigma})\}, \quad \text{else } 0, \quad (h = 1, 2)$$

where $\phi(\cdot; \boldsymbol{\mu}_h, \boldsymbol{\Sigma})$ denotes the p -variate Normal density with the same covariance matrix $\boldsymbol{\Sigma}$ for both components. The discriminant coefficients are given by

$$\boldsymbol{\beta}_1 = \boldsymbol{\Sigma}^{-1}(\boldsymbol{\mu}_1 - \boldsymbol{\mu}_2), \quad \beta_0 = -\frac{1}{2}(\boldsymbol{\mu}_1 + \boldsymbol{\mu}_2)^\top \boldsymbol{\Sigma}^{-1}(\boldsymbol{\mu}_1 - \boldsymbol{\mu}_2) + \log\left(\frac{\pi_1}{\pi_2}\right),$$

and the Bayes' error rate is computed as

$$\text{Err} = \sum_{i=1}^2 \pi_i \Phi\left(\frac{(-1)^i(\beta_0 + \boldsymbol{\beta}_1^\top \boldsymbol{\mu}_i)}{\|\boldsymbol{\beta}_1\|}\right),$$

where $\Phi(\cdot)$ is the standard normal cumulative distribution function and $\|\cdot\|$ denotes the Euclidean norm.

The function takes as input the estimated component means, provided either as a $p \times 2$ numeric matrix or as a list of two p -dimensional vectors; a shared $p \times p$ covariance matrix $\boldsymbol{\Sigma}_{\text{hat}}$, which must be identical for both mixture components; and the estimated mixing proportions $\boldsymbol{\pi}_{\text{hat}} = (\pi_1, \pi_2)$ satisfying $\pi_1 + \pi_2 = 1$. Given these quantities, the function returns a single numeric value corresponding to the theoretical Bayes classification error rate.

5 Illustrations

5.1 Simulation study I: Prediction under a mixed-missingness mechanism

We illustrate our approach with a two-component GMM for a bivariate covariate vector $\mathbf{y} \in \mathbb{R}^2$ associated with a class label $z \in 1, 2$ and mixing proportions $\boldsymbol{\pi} = (\pi_1, 1 - \pi_1)$. For this illustration, we set $\boldsymbol{\pi} = (0.5, 0.5)$ and position the two component means symmetrically along the first coordinate, separated by a contrast δ , that is, $\boldsymbol{\mu}_1 = (\delta/2, 0)^\top$ and $\boldsymbol{\mu}_2 = (-\delta/2, 0)^\top$. The component covariance matrices are specified as

$$\boldsymbol{\Sigma}_1 = \begin{bmatrix} 1 & 0.6 \\ 0.6 & 1 \end{bmatrix}, \quad \boldsymbol{\Sigma}_2 = \begin{bmatrix} 1 & 0.3 \\ 0.3 & 1 \end{bmatrix}.$$

To incorporate hybrid labelling and missingness, each observation is assigned an indicator $m \in 0, 1, 2$, where $m = 0$ corresponds to labelled cases, $m = 1$ to MCAR, and $m = 2$ to MAR. The MCAR rate is controlled by $\alpha = 0.1$, while the MAR mechanism depends on entropy $e(\mathbf{y})$ through the logistic model $\Pr(m = 2 \mid e(\mathbf{y})) = \text{logit}^{-1}(\xi_0 + \xi_1 \log(e(\mathbf{y})))$, with intercept $\xi_0 = 1$ and slope $\xi_1 = 3$. The simulated dataset is generated using the function `simulate_mixed_missingness()`, with random seed setting `random_seed=2025`, as shown below.

```

1 R> n <- 1000; pi <- c(0.5,0.5); delta <- 2; p <- 2; K <- 2
2 R> mu <- matrix(0, nrow = p, ncol = 2)
3 R> mu[1, ] <- c(delta/2, -delta/2)
4 R> sigma <- array(0, dim = c(p, p, K))
5 R> sigma[, ,1] <- matrix(c(1, 0.6, 0.6, 1), nrow = p, byrow = TRUE)
6 R> sigma[, ,2] <- matrix(c(1, 0.3, 0.3, 1), nrow = p, byrow = TRUE)
7 R> data <- simulate_mixed_missingness(n=1000, pi, mu, sigma, xi0=1, xi1=3,
8 + alpha = 0.1, seed_id = 2025)

```

The first few rows of the simulated dataset are displayed below:

```

1 R> head(data)

```

	y1	y2	en	missing	label	truth
1	0.032624598	-0.37023705	0.6672926	1	NA	1
2	0.009774211	-0.76452297	0.6193036	0	1	1
3	-1.030505708	-0.57992823	0.3602273	0	2	2
4	1.146958771	-0.42799891	0.2057740	0	1	1
5	1.323361132	-0.17179004	0.1735304	0	1	1
6	-0.072443169	-0.07785968	0.6903744	0	1	1

To further explore the data patterns, we provide boxplots of entropy stratified by the missingness indicator (labelled, MCAR, MAR), alongside a two-dimensional scatter plot that visualises the underlying cluster structure.


```

1 R> ## ---- Combined subfigures: Boxplot (left) + 2D scatter (right) ----
2 R> counts <- table(data$missing)
3 R> cols_box <- c("skyblue", "lightgreen", "pink")
4 R> group_names <- c(paste0("labelled (n=", counts["0"], ")"),
5 +                 paste0("MCAR (n=", counts["1"], ")"),
6 +                 paste0("MAR (n=", counts["2"], ")"))
7 R> cols_truth <- ifelse(data$truth == 1, "red", "blue")
8 R> cols_truth <- grDevices::adjustcolor(cols_truth, alpha.f = 0.7)
9 R> shapes <- ifelse(data$missing == 0, 20, ifelse(data$missing == 1, 17, 8))
10 R> op <- par(no.readonly = TRUE)
11 R> layout(matrix(1:2, 1, 2), widths = c(1, 1.25))
12 R> par(mar = c(4, 4, 3, 1) + 0.1)
13 R> boxplot(en ~ missing, data = data, main = "Entropy by Missing Indicator",
14 +       xlab = "Group", ylab = "Entropy (en)", col = cols_box,
15 +       names = group_names)
16 R> par(mar = c(4, 4, 3, 1) + 0.1)
17 R> plot(data$y1, data$y2, col = cols_truth, pch = shapes, cex = 0.8,
18 +     xlab = "y1", ylab = "y2", main = "2D Visualisation of Data",
19 +     asp = 1)
20 R> legend(xx = 2.7, y = 4, legend = c("Cluster 1", "Cluster 2"),
21 +     col = c("red", "blue"), pch = 16, pt.cex = 1, bty = "n")
22 R> legend(x = 2.7, y = -2.5, legend = c("Labelled", "MCAR", "MAR"),
23 +     pch = c(20, 17, 8), pt.cex = 1, bty = "n")
24 R> par(op)

```

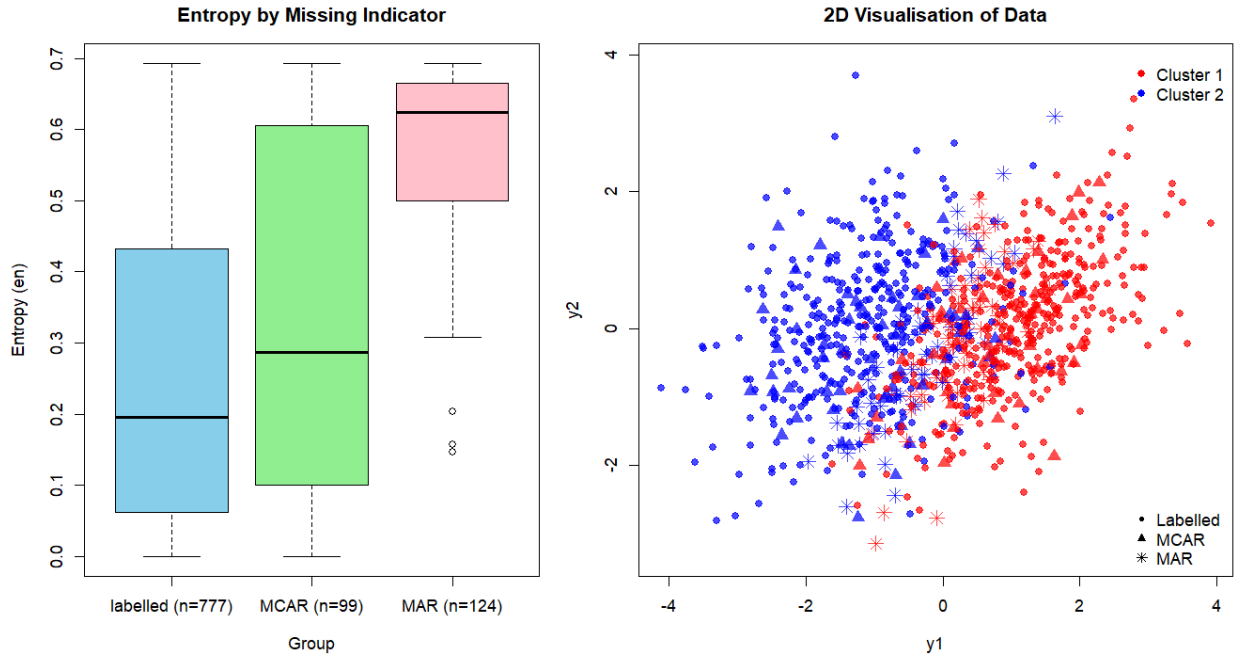


Figure 1: Visualisation of simulated data

Figure 1 provides a joint illustration of entropy patterns and spatial distribution under the mixed-missingness mechanism. The left panel shows boxplots of entropy across the three categories, with labelled cases spanning a broad range of values, MCAR cases overlapping closely with the labelled distribution as expected under randomness, and MAR cases skewed toward higher entropy values, consistent with their selection through the entropy-based logistic model. The right panel presents a two-dimensional scatterplot of the simulated data, where the two clusters are separated along the y_1 axis. Here, labelled points are well distributed across both clusters, MCAR points appear randomly scattered, and MAR points are concentrated near the overlapping boundary between clusters, where classification uncertainty is greatest. Taken together, the plots confirm that the simulation design is working as intended: the labelled and MCAR

sets provide broad coverage of the clusters, while the MAR mechanism selectively removes ambiguous observations with higher entropy.

For the initialisation stage, we first assemble the inputs required by the semi-supervised ECM routine by column-binding the two covariates and then appending the missingness indicator and the (partially observed) class labels. This creates a data frame in the format expected by the estimator, with columns $\{y_1, y_2, \text{missing}, z\}$.

```
1 R> ## Assemble input for initialisation
2 R> dat <- cbind(data[, c(1, 2)])
3 R> dat$missing <- data$missing
4 R> dat$z <- data$label
```

We then employ `EM_FMM_SemiSupervised_Complete_Initial()` with two mixture components ($g = 2$) and heterogeneous covariance structure ($\text{ncov} = 2$) to allow a distinct covariance matrix per component. To stabilise early iterations, we set a small initialisation weight $\alpha_{\text{init}} = 0.01$ and include a warm-up phase of 20 iterations; numerical convergence is monitored via a stringent tolerance of 10^{-6} . This configuration yields robust starting values for the subsequent EM optimisation and mitigates sensitivity to random or ill-posed initial parameters.

```
1 R> ## Initialization of semi-supervised EM (g=2, distinct covariances)
2 R> fit_init <- EM_FMM_SemiSupervised_Complete_Initial(data = dat, g = 2,
3 +                                     ncov = 2, alpha_init = 0.01, warm_up_iter = 20,
4 +                                     tol = 1e-6)
5 R> fit_init
```

```
Iter 1:  alpha=0.0099 | xi0=-0.1634 | xi1=0.8082 | sum(m2j_k)=213 / 223
Iter 2:  alpha=0.0125 | xi0=-0.0683 | xi1=0.9245 | sum(m2j_k)=211 / 223
...
Iter 20: alpha=0.0912 | xi0=0.6446 | xi1=2.6497 | sum(m2j_k)=132 / 223
```

```
$pi
[1] 0.5115244 0.4884756

$mu
$mu[[1]]
      y1      y2
0.94711296 0.01936498

$mu[[2]]
      y1      y2
-1.03928504 -0.03381975

$Sigma
$Sigma[[1]]
      y1      y2
[1,] 0.9501111 0.5539266
[2,] 0.5539266 0.9919709

$Sigma[[2]]
      y1      y2
[1,] 0.9858761 0.3105419
[2,] 0.3105419 1.1227010

$alpha
[1] 0.09118555

$xi
(Intercept) log_entropy
 0.6445696   2.6496517
```

Subsequently, these initial values (`fit_init`) are passed into the main `EM_FMM_SemiSupervised()` function to perform the full semi-supervised ECM optimisation.

```

1 R> ## Run the main EM using fit_init as starting values
2 R> model0 <- EM_FMM_SemiSupervised(data=dat, g=2, init_res=fit_init,
3 +   max_iter=50, tol= 1e-6, ncov= 2)

```

```

Iter 1: full_nll=-3888.398621 | alpha=0.0935 | xi0=0.6733 | xi1=2.7334 | ncov=2
Iter 2: full_nll=-3888.582416 | alpha=0.0956 | xi0=0.6997 | xi1=2.8109 | ncov=2
...
Iter 50: full_nll=-3889.313186 | alpha=0.1115 | xi0=0.9373 | xi1=3.5197 | ncov=2

```

Then, we output the estimation results.

```

1 R> model0

$pi
[1] 0.5115244 0.4884756

$mu
$mu$'1'
[1] 0.94711296 0.01936498

$mu$'2'
[1] -1.03928504 -0.03381975

$$Sigma
$$Sigma[[1]]
      [,1]      [,2]
[1,] 0.9501111 0.5539266
[2,] 0.5539266 0.9919709

$$Sigma[[2]]
      [,1]      [,2]
[1,] 0.9858761 0.3105419
[2,] 0.3105419 1.1227010

$xi
(Intercept)      slope
    0.9373195    3.5197437

$alpha
[1] 0.111518

$loglik
[1] -3889.313

```

The ECM algorithm exhibits a gradual but consistent reduction in the negative log likelihood, reaching convergence within only a few iterations. The final parameter estimates are stable: the mixture proportions are balanced at roughly 0.50 and 0.50, the component means are clearly separated around +1 and -1, and the covariance matrices are distinct, indicating heteroscedasticity. The logistic regression parameters $\xi_0 \approx 0.94$ and $\xi_1 \approx 3.5$ remain nearly unchanged across iterations, suggesting that the missingness mechanism is well identified. The estimated missingness proportion parameter $\alpha \approx 0.11$ indicates that about 11% of missingness is explained by the MCAR part, with the remainder driven by entropy-based MAR. Taken together, these results show that the warm-start initialisation yields estimates that align closely with those from the full ECM optimisation, underscoring both the stability and reliability of the procedure.

In order to evaluate the predictive performance of the fitted model, we generated an independent test dataset of 5,000 observations using the function `simulate_mixed_missingness()` with a seed value set to 2026. The test set was constructed under the same mixture parameters but with $\alpha = 0$, ensuring that the evaluation is not affected by additional missingness mechanisms. The observed covariates were extracted into `test_y`, while the true class memberships were stored in `test_z`. We then constructed a parameter list `paras` containing the estimated mixture proportions, means,

and covariance matrices from the fitted model (model0), and applied the bayesclassifier() function to assign class labels:

```

1 R> ## Generate independent test data (n=5000), with no missingness (alpha=0)
2 R> test_data <- simulate_mixed_missingness(n=5000,pi,mu,sigma,xi0,xi1,
3 +                                     alpha=0,seed_id = 2026)
4 R> test_y <- test_data[, c(1, 2)] # observed covariates
5 R> test_z <- test_data$truth      # true cluster labels
6 R> ## Collect fitted parameters from EM into a list
7 R> paras <- list(pi = model0$pi, mu = model0$mu, sigma = model0$Sigma)
8 R> ## Apply Bayes' classifier using fitted parameters
9 R> preds <- bayesclassifier(dat = test_y, p = 2, g = 2, paralist = paras)
10 R> ## Compute test accuracy
11 R> mean(preds == test_z)

```

[1] 0.8692

The Bayes' classifier achieved a prediction accuracy of approximately 86.92% on the simulated test set, demonstrating reliable classification under the specified FMM.

5.2 Simulation study II: Error-rate evaluation

In this subsection, we illustrate how to use the error_beta_classification() function to assess classification performance. We compare our proposed semi-supervised model with a complete-data model that assumes full access to ground-truth labels. Throughout this study, we impose equal covariance matrices across components and fix the MCAR proportion at $\alpha = 0$. We consider a two-component Gaussian mixture for a bivariate covariate vector $\mathbf{y} \in \mathbb{R}^2$ associated with a class label $z \in \{1, 2\}$ and mixing proportions $\boldsymbol{\pi} = (\pi_1, 1 - \pi_1)$. The generative model is $\Pr(z = i) = \pi_i$, and $\mathbf{y} \mid (z = i) \sim \mathcal{N}(\boldsymbol{\mu}_i, \boldsymbol{\Sigma}_i)$, $i = 1, 2$. For this study, we set $\boldsymbol{\pi} = (0.6, 0.4)$ and position the component means symmetrically along the first axis with separation $\delta = 2$: $\boldsymbol{\mu}_1 = (\delta/2, 0)^\top$, and $\boldsymbol{\mu}_2 = (-\delta/2, 0)^\top$. Both components share the same covariance matrix,

$$\boldsymbol{\Sigma}_1 = \boldsymbol{\Sigma}_2 = \begin{bmatrix} 1 & 0.3 \\ 0.3 & 1 \end{bmatrix}.$$

Each dataset is simulated using simulate_mixed_missingness() with $n = 500$ observations and seed values $\{2024, \dots, 2123\}$. For each replicate, the proposed approach is initialised by EM_FMM_SemiSupervised_Complete_Initial() and fitted via EM_FMM_SemiSupervised(). The plug-in classification error rate is then evaluated with error_beta_classification(). In parallel, a complete-data model is fitted with the true labels via initialvalue1(), and its classification error rate is computed in the same way. Averaging across 100 replicates yields overall error-rate summaries for both methods, which can be compared with the true Bayes' error rate under the specified mixture.

We begin by defining the mixture parameters, including sample size, mixing proportions, mean locations, and covariance matrices:

```

1 R> # Mixture setup
2 R> n <- 500; pi <- c(0.6,0.4); delta <- 2; p <- 2; K <- 2
3 R> xi0 <- 2; xi1 <- 2
4 R> mu <- matrix(0, nrow = p, ncol = 2)
5 R> mu[1, ] <- c(delta/2, -delta/2)
6 R> sigma <- array(0, dim = c(p, p, K))
7 R> sigma[, ,1] <- matrix(c(1, 0.3, 0.3, 1),
8 +                       nrow = p, byrow = TRUE)
9 R> sigma[, ,2] <- sigma[, ,1]

```

Next, we specify the number of replicates, initialise storage for the error-rate values, and loop over 100 seeds to generate datasets, initialise models, and compute error rates for both the proposed and complete-data approaches:

```

1 R> # Seeds and loop
2 R> n_seeds <- 100; seeds <- 2024 + seq_len(n_seeds)
3 R> res_mat <- matrix(NA, nrow = n_seeds, ncol = 2)
4 R> colnames(res_mat) <- c("Error_proposed", "Error_complete")
5 R> set.seed(12345)

```

```

6 R> for (i in seq_len(n_seeds)) {
7 +   t <- seeds[i]; set.seed(t)
8 +   data <- simulate_mixed_missingness(
9 +     n, pi, mu, sigma, xi0, xi1, alpha = 0, seed_id = t)
10 +   dat <- as.data.frame(data[, 1:p])
11 +   dat$missing <- data$missing; dat$z <- data$label
12 +   ints <- EM_FMM_SemiSupervised_Complete_Initial(
13 +     data = dat, g = 2, ncov = 1,
14 +     alpha_init = 0.01, warm_up_iter = 20, tol = 1e-6)
15 +   modell <- EM_FMM_SemiSupervised(
16 +     data = dat, g = 2, init_res = ints,
17 +     max_iter = 50, tol = 1e-6, ncov = 1)
18 +   err_prop <- error_beta_classification(
19 +     mu_hat = modell$mu, Sigma_hat = modell$Sigma, pi_hat = modell$pi)
20 +   model_f <- initialvalue1(
21 +     dat = data[, 1:p], zm = data$truth, g = 2, ncov = 1)
22 +   err_comp <- error_beta_classification(
23 +     mu_hat = model_f$mu, Sigma_hat = model_f$sigma, pi_hat = model_f$pi)
24 +   res_mat[i, ] <- c(err_prop, err_comp)
25 +   if (i %% 10 == 0)
26 +     message(sprintf("Finished %d / %d", i, n_seeds))
27 + }

```

Finally, we summarise the average error rate across replicates, compare both models with the theoretical Bayes' error rate, and compute the asymptotic relative efficiency (ARE) of the complete-data model *relative to* the proposed method, defined in terms of their deviations from the true Bayes' error rate:

```

1 R> # Overall results
2 R> Overall_Prop <- mean(res_mat[, "Error_proposed"], na.rm = TRUE)
3 R> Overall_Comp <- mean(res_mat[, "Error_complete"], na.rm = TRUE)
4 R> True_Error <- error_beta_classification(
5 +   mu_hat = mu, Sigma_hat = sigma[, ,1], pi_hat = pi)
6 R> ARE <- (Overall_Comp - True_Error) /
7 +   (Overall_Prop - True_Error)
8 R> print(ARE)

```

```
[1] 1.491459
```

In this parametrisation, $ARE > 1$ indicates that the complete-data estimator is less efficient, because it deviates more from the true Bayes' error rate than the proposed semi-supervised estimator. In our simulation, the ARE of the complete-data model relative to the proposed model was estimated at 1.49, implying that the bias of the complete-data estimator (measured by its deviation from the true Bayes' error rate) is about 1.5 times that of the semi-supervised estimator. Equivalently, the proposed model attains substantially higher classification efficiency, highlighting the practical benefits of explicitly modelling the mixed-missingness mechanism when labels are incomplete.

6 Summary and discussion

This work introduces **SSLfmm**, an R package for semi-supervised finite mixture modelling under a mixed-missingness mechanism. Unlike conventional approaches that assume MCAR labels, **SSLfmm** jointly models both MCAR and entropy-based MAR mechanisms within a unified likelihood. Estimation is carried out via an ECM algorithm, complemented by robust initialisation routines for numerical stability. The package provides an end-to-end workflow that includes data simulation, parameter estimation, classification, and theoretical error rate computation. Simulation studies confirm that explicitly accounting for a mixed-missingness mechanism improves classification accuracy over benchmarks that are completely supervised. Several directions remain open for future development. The current implementation is limited to binary mixtures, with potential scalability challenges in high-dimensional or large-sample settings. Extensions to multiclass mixtures, integration of regularisation methods, and incorporation of alternative missingness mechanisms beyond entropy-based MAR would broaden applicability. Despite these limitations, **SSLfmm** delivers both methodological novelty and practical utility. It unifies MCAR and entropy-based MAR processes into a coherent semi-supervised framework and operationalises this advance in a reproducible software package, offering a principled tool for analysing partially labelled data in realistic settings where a mixed-missingness mechanism is prevalent.

Acknowledgments

This work was supported by the Australian Research Council [DP230101671] and ARC Training Centre on Innovation in Biomedical Imaging Technology [IC170100035].

References

- Fabrizia Mealli and Donald B Rubin. Clarifying missing at random and related definitions, and implications when coupled with exchangeability. *Biometrika*, 102(4):995–1000, 2015.
- Geoffrey J McLachlan. Iterative reclassification procedure for constructing an asymptotically optimal rule of allocation in discriminant analysis. *Journal of the American Statistical Association*, 70(350):365–369, 1975.
- Terence J O’Neill. Normal discrimination with unclassified observations. *Journal of the American Statistical Association*, 73(364):821–826, 1978.
- Olivier Chapelle, Bernhard Schölkopf, and Alexander Zien, editors. *Semi-Supervised Learning*. Adaptive Computation and Machine Learning. The MIT Press, Cambridge, MA, 2006.
- Diederik P Kingma, Danilo J Rezende, Shakir Mohamed, et al. Semi-supervised learning with deep generative models. *Advances in Neural Information Processing Systems*, 27, 2014.
- Brooks Paige, Jan-Willem Van De Meent, et al. Learning disentangled representations with semi-supervised deep generative models. *Advances in Neural Information Processing Systems*, 30, 2017.
- Gustavo Camps-Valls, Tatyana V Bandos Marsheva, and Dengyong Zhou. Semi-supervised graph-based hyperspectral image classification. *IEEE Transactions on Geoscience and Remote Sensing*, 45(10):3044–3054, 2007.
- Zixing Song, Xiangli Yang, Zenglin Xu, et al. Graph-based semi-supervised learning: A comprehensive review. *IEEE Transactions on Neural Networks and Learning Systems*, 34(11):8174–8194, 2022.
- Kristin Bennett and Ayhan Demiriz. Semi-supervised support vector machines. *Advances in Neural Information Processing Systems*, 11, 1998.
- Olivier Chapelle, Vikas Sindhwani, and Sathya S Keerthi. Optimization techniques for semi-supervised support vector machines. *Journal of Machine Learning Research*, 9(2), 2008.
- Arthur P Dempster, Nan M Laird, and Donald B Rubin. Maximum likelihood from incomplete data via the EM algorithm. *Journal of the Royal Statistical Society: Series B (Methodological)*, 39(1):1–22, 1977.
- Geoffrey J McLachlan and Thiriyambakam Krishnan. *The EM algorithm and extensions*. John Wiley & Sons, 2008.
- Bettina Grün and Friedrich Leisch. Flexmix version 2: Finite mixtures with concomitant variables and varying and constant parameters. *Journal of Statistical Software*, 28(1):1–35, 2008.
- Geoffrey J McLachlan and David Peel. *Finite Mixture Models*, volume 299. Wiley, 2000.
- Geoffrey J McLachlan, Sharon X Lee, and Suren I Rathnayake. Finite mixture models. *Annual Review of Statistics and its Application*, 6(1):355–378, 2019.
- Jui Ting Huang and Mark Hasegawa-Johnson. Semi-supervised training of gaussian mixture models by conditional entropy minimization. In *Proceedings of the 11th Annual Conference of the International Speech Communication Association, Interspeech 2010*, pages 1353–1356. International Speech Communication Association, 2010.
- Martin Szummer and Tommi Jaakkola. Partially labeled classification with markov random walks. *Advances in Neural Information Processing Systems*, 14, 2001.
- Daniel Ahfock and Geoffrey J McLachlan. An apparent paradox: A classifier based on a partially classified sample may have smaller expected error rate than that if the sample were completely classified. *Statistics and Computing*, 30(6):1779–1790, 2020.
- Daniel Ahfock and Geoffrey J McLachlan. Semi-supervised learning of classifiers from a statistical perspective: A brief review. *Econometrics and Statistics*, 26:124–138, 2023.
- Jesse H Krijthe. RSSL: Semi-supervised learning in R. In *International Workshop on Reproducible Research in Pattern Recognition*, pages 104–115. Springer, 2016.
- Mark Culp. On the semisupervised joint trained elastic net. *Journal of Computational and Graphical Statistics*, 22(2):300–318, 2013.
- Kohei Watanabe. Latent semantic scaling: A semisupervised text analysis technique for new domains and languages. *Communication Methods and Measures*, 15(2):81–102, 2021.

- Yuan Tang and Wenxuan Li. Ifda: Local Fisher discriminant analysis in R. *Journal of Open Source Software*, 4(39): 1572, 2019.
- Yuri Ahuja, Jun Wen, Chuan Hong, et al. A semi-supervised adaptive Markov Gaussian embedding process (SAMGEP) for prediction of phenotype event times using the electronic health record. *Scientific Reports*, 12(1):17737, 2022.
- Jue Hou, Rajarshi Mukherjee, and Tianxi Cai. Efficient and robust semi-supervised estimation of average treatment effect with partially annotated treatment and response. *Journal of Machine Learning Research*, 26(40):1–77, 2025.
- Chris Fraley and Adrian Raftery. Model-based methods of classification: Using the mclust software in chemometrics. *Journal of Statistical Software*, 18:1–13, 2007.
- Tatiana Benaglia, Didier Chauveau, David R Hunter, et al. mixtools: An R package for analyzing mixture models. *Journal of Statistical Software*, 32:1–29, 2010.
- Rémi Lebrete, Serge Iovleff, Florent Langrognet, et al. Rmixmod: The R package of the model-based unsupervised, supervised, and semi-supervised classification Mixmod library. *Journal of Statistical Software*, 67:1–29, 2015.
- Stephen Coleman, Kath Nicholls, Xaquín Castro Dopico, et al. A semi-supervised Bayesian mixture modelling approach for joint batch correction and classification. *bioRxiv*, pages 2022–01, 2022.
- Geoffrey J McLachlan and RD Gordon. Mixture models for partially unclassified data: A case study of renal venous renin in hypertension. *Statistics in Medicine*, 8(10):1291–1300, 1989.