

# Open Set Face Forgery Detection via Dual-Level Evidence Collection

Zhongyi Cai<sup>1</sup> Bryce Gernon<sup>2</sup> Wentao Bao<sup>1</sup> Yifan Li<sup>1</sup> Matthew Wright<sup>2</sup> Yu Kong<sup>1</sup>  
<sup>1</sup> Michigan State University <sup>2</sup> Rochester Institute of Technology

## Abstract

*The proliferation of face forgeries has increasingly undermined confidence in the authenticity of online content. Given the rapid development of face forgery generation algorithms, new fake categories are likely to keep appearing, posing a major challenge to existing face forgery detection methods. Despite recent advances in face forgery detection, existing methods are typically limited to binary Real-vs-Fake classification or the identification of known fake categories, and are incapable of detecting the emergence of novel types of forgeries. In this work, we study the Open Set Face Forgery Detection (OSFFD) problem, which demands that the detection model recognize novel fake categories. We reformulate the OSFFD problem and address it through uncertainty estimation, enhancing its applicability to real-world scenarios. Specifically, we propose the Dual-Level Evidential face forgery Detection (DLED) approach, which collects and fuses category-specific evidence on the spatial and frequency levels to estimate prediction uncertainty. Extensive evaluations conducted across diverse experimental settings demonstrate that the proposed DLED method achieves state-of-the-art performance, outperforming various baseline models by an average of 20% in detecting forgeries from novel fake categories. Moreover, on the traditional Real-versus-Fake face forgery detection task, our DLED method concurrently exhibits competitive performance.*

## 1. Introduction

Deepfakes, which use deep learning techniques to generate or modify faces and voices, continue to rapidly increase in both sophistication and accessibility. The diversity of deepfake forgeries [22, 26, 46, 49] causes different visual artifacts to appear in the generated deepfakes, making deepfake detection increasingly difficult. According to a survey by Mirsky et al. [33], existing face deepfake forgeries can generally be organized into four categories: Face Swapping (FS), Face Reenactment (FR), Entire Face Synthesis (EFS), and Face Editing (FE). As new generation methods continue to emerge, it is likely that novel categories of facial deep-

fakes will be developed.

Despite progress in deepfake detection under closed set scenarios [9, 35, 39, 63], where both training and testing data contain the same known fake forgeries<sup>1</sup>, these methods have yet to fully address the challenge of generalizing to unseen fake forgeries. Some studies [2, 34, 51, 58, 77] have proposed mechanisms to improve generalization to unseen forgeries. However, their overall performance remains sub-optimal, and they fail to detect the emergence of novel fake categories.

In this paper, we study the Open Set Face Forgery Detection (OSFFD) problem to address this issue. OSFFD was proposed in [4, 76], but it remains an under-explored problem. Traditional deepfake detection and attribution tasks either distinguish between real and fake images or assign forgeries to predefined categories. In contrast, OSFFD determines whether a given face belongs to a novel fake category, while simultaneously performing multiclass classification among real and known fake categories. The difference among these settings is shown in Fig. 1. The aforementioned studies approached the OSFFD problem by training models on labeled data for seen classes (real and known fake categories), and unlabeled data for novel fake categories. This setup has practical limitations as data from a novel fake category would not be integrated into datasets immediately after its proliferation. In this paper, we reformulate the OSFFD problem by restricting model training to only real and known fake categories, which enhances the real-world applicability of OSFFD.

To address the OSFFD problem, we formulate it as an uncertainty estimation issue that assesses the confidence of model predictions based on the evidence collected from the data. During training, the model is exposed to known fake categories and learns to assign low uncertainty to these samples. At test time, samples from unknown categories are expected to yield high uncertainty scores, facilitating their detection.

In this paper, we propose a novel *Dual-Level Evidential face forgery Detection* approach, DLED, that simultane-

<sup>1</sup>In this paper, we define “fake forgeries” as specific deepfake methodologies, and “fake categories” as the broader groups to which these methodologies belong; e.g., FSGAN [36] is the fake forgery and Face Swapping is its according fake category.

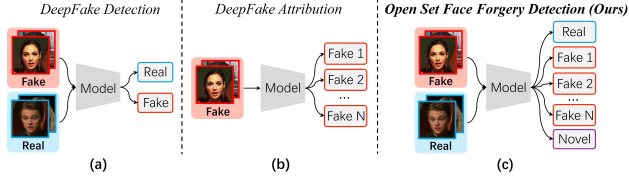


Figure 1. **Comparison with existing settings.** Different from DeepFake Detection (a) and Attribution (b), Open Set Face Forgery Detection (c) aims to identify whether a forgery originates from a novel fake category or not while simultaneously performing multiclass classification among real and known fake categories.

ously identifies emerging, unknown fake categories and performs multiclass classification among real and known fake categories. To enable novel category recognition, DLED leverages Evidential Deep Learning (EDL) [43, 44, 47] for classification and uncertainty estimation. However, unlike conventional open set classification, OSFFD operates on structured facial imagery whose spatial semantic patterns alone are insufficiently discriminative [58]. Accordingly, DLED augments these cues with complementary low-level frequency artifacts, yielding a more effective application of EDL. Because both sources are informative, detection decisions should reflect their joint support. To this end, we introduce an uncertainty-guided evidence fusion mechanism grounded in Dempster’s combination rule [45], enabling DLED to integrate evidence on both the spatial and frequency levels into a unified, comprehensive uncertainty estimate. Furthermore, we propose an improved uncertainty estimation approach to enhance the model’s capability to detect novel fake, as the original EDL formulation can be affected by evidence from irrelevant classes, resulting in suboptimal uncertainty quantification.

Compared with existing face forgery detection methods, a key advantage of our DLED model lies in its ability to promptly detect newly emerging fake categories and avoid misclassification, without relying on any prior knowledge of these categories. While existing deepfake detection algorithms can be adapted to be feasible in the OSFFD problem, e.g., one-class detectors [23, 28, 48] can combine with a separate multiclass classifier, they often struggle to balance between accurate novel category detection and effective multiclass classification. In addition, our methodology is grounded in principled reasoning, offering clear interpretability for the OSFFD results.

In summary, our contribution is three-fold:

- We reformulate the Open Set Face Forgery Detection (OSFFD) problem, eliminating the reliance on unlabeled data from novel fake categories during model training, making it more applicable in real life.
- We propose leveraging EDL to treat the OSFFD as an uncertainty estimation problem, enabling the model to deter-

mine whether a face image originates from a novel fake category.

- We propose the DLED approach, which aggregates and fuses evidence on both the spatial and frequency levels to estimate prediction uncertainty. Extensive empirical results validate its effectiveness and demonstrate its superiority over various baseline models.

## 2. Related Work

### 2.1. Deepfake Detection

A wide range of deepfake detection approaches have been studied in the literature [18]. Most existing methods [2, 35, 50, 77] leverage spatial patterns to detect manipulation artifacts, while others [9, 32, 71] exploit discrepancies in the frequency domain to reveal forgery traces. Some studies also [10, 52, 60] integrated features from complementary modalities, such as noise patterns, to further distinguish fake faces. One-class anomaly detection methods [23, 28, 48] treat real faces as the positive class and all other data as anomalous outliers, training the model exclusively on the positive class to distinguish between real and fake faces. Recent works [24, 37] find that the pretrained CLIP [40] model performs well on unseen forgeries. Based on this finding, several recent works [29, 31, 68] designed diverse adaptations for CLIP to enhance its detection capabilities. However, these approaches are limited by their exclusive focus on Real-vs-Fake classification, which overlooks the differences among different fake categories.

### 2.2. Deepfake Attribution

The deepfake attribution task aims to identify the source of fake faces so that models can provide persuasive explanations for the results of deepfake detection. However, most of these methods [20, 61, 67, 74] are limited to the closed set scenario. Few methods have utilized the “open world” setting to track unseen forgeries. The open-world GAN [8] method is designed to detect images generated by previously unseen GANs, but its framework does not extend to other manipulations such as face editing. Another work, CPL [51], introduced a benchmark which encompasses a broader array of unseen forgeries derived from multiple known categories. However, this setting relies on access to unlabeled data from such forgeries during training and does not determine whether a given forgery originates from a novel category, thereby limiting its practical applicability. Although recent works [55, 56] introduced open set classification for forgeries, their settings do not differentiate between unseen forgeries originating from known categories and those from entirely novel categories, nor can they determine whether a face is real or fake.



Figure 2. **Illustration for Fake Categories in OSFFD.** Real faces and fake faces from the seen categories are used to train the model. Subsequently, the model is evaluated on test data that includes both seen classes and previously unseen categories. In the figure, the labels EFS, FR, and FS denote seen categories, whereas FE represents an unseen category.

### 2.3. Open Set Recognition

Open Set Recognition is a well-defined task that recognizes known classes and differentiates the unknown. The pioneering work [42] formalized the definition and introduced a “one-vs-set” machine based on binary SVM. Prototype learning and metric learning methods [3, 66, 70] have been applied to identify the unknown by keeping unknown samples at large distances to prototypes of known class data. Recently, uncertainty estimation methods [1, 6, 7, 59] using Evidential Deep Learning (EDL) have shown promising results on open set recognition problems. EDL [43, 44, 47] works well to quantify model confidence and prediction uncertainty, exhibiting high efficacy in handling unseen data types, and it has been further broadened to encompass multi-view classification [12, 19]. To the best of our knowledge, this paper is the first to integrate EDL into the OSFFD problem.

### 3. Open Set Face Forgery Detection

**Definition.** As depicted in Fig. 2, Open Set Face Forgery Detection (OSFFD) addresses a practical problem: leveraging knowledge from seen classes (i.e., real faces and faces from known fake categories) to classify a given face as either belonging to a seen class or to the newly emerging, unseen fake category. In the training phase, the model is exposed exclusively to images from seen classes, while images from novel fake categories are reserved for testing purposes.

**Motivation.** OSFFD requires a model to simultaneously discover novel fake categories and perform multiclass classification. Among these two objectives, novel fake category discovery is the core challenge. However, most existing detectors [37, 64] emphasize out-of-distribution (OOD) generalization, which target binary real-vs-fake discrimination on unseen testing samples. As a result, they neither sup-

port multiclass classification nor distinguish novel fake categories, rendering them unsuitable for OSFFD. One alternative is a two-stage pipeline that first partitions samples into seen versus unseen class via OOD detection [23, 48] and then applies a face-forgery classifier to seen classes; but this decoupled design optimizes different training objectives across stages and offers limited theoretical interpretability. Additionally, existing open set recognition (OSR) methods [27, 72] could hardly perform well when directly applied to OSFFD as the data in OSFFD consist of highly structured facial imagery that requires additional mechanisms to extract discriminative representations. Therefore, novel algorithms need to be developed to address the OSFFD problem.

**Formulation.** Given a labeled training set  $D_S = \{(x_i, y_i)\}_{i=1}^M$  consisting of  $M$  labeled samples from  $K$  seen classes comprising the Real class and  $N$  known fake categories (i.e.,  $K = N + 1$ ,  $y_i \in \{1, \dots, K\}$ ) and a test set  $D_T$  containing samples from the face class set  $\{R, F_1, \dots, F_N, F_{N+1}, \dots, F_{N+U}\}$ , where  $U$  is the number of unknown fake categories, we denote the embedding space of class  $k \in [1, K]$  as  $P_k$ , and its corresponding open space as  $O_k$ . The open space is further divided into two subspaces: the positive open space from other known classes  $O_k^{\text{pos}}$  and the negative open space  $O_k^{\text{neg}}$  that represents the remaining infinite unknown region.

For a single class  $k$ , the samples  $D_S^k \in P_k$ ,  $D_S^{\neq k} \in O_k^{\text{pos}}$ , and  $D_V \in O_k^{\text{neg}}$  are positive training data, negative training data and potential unknown data respectively. Then, we could use a simple binary classification model  $\Psi_k(x) \rightarrow \{0, 1\}$  to detect unseen classes [3] and optimize the model by minimizing the expected risk  $R^k$ :

$$\arg \min_{\Psi_k} R^k = R_c(\Psi_k, P_k \cup O_k^{\text{pos}}) + \alpha \cdot R_o(\Psi_k, O_k^{\text{neg}}), \quad (1)$$

where  $\alpha$  is a positive constant,  $R_c$  is the empirical classification risk on the known data, and  $R_o$  is the open space risk [42].  $R_o$  measures the likelihood of labeling unknown samples as either known or unknown classes, expressed as a nonzero integral function over the space  $O_k^{\text{neg}}$ :

$$R_o(\Psi_k, O_k^{\text{neg}}) = \frac{\int_{O_k^{\text{neg}}} \Psi_k(x) dx}{\int_{P_k \cup O_k} \Psi_k(x) dx}. \quad (2)$$

The more frequently the negative open space  $O_k^{\text{neg}}$  is labeled as positive, the higher the associated open space risk.

We extend single-class detection to the multiclass OSFFD setting by integrating multiple binary classification models  $\Psi_k$  using a one-vs-rest strategy. With Eq. 1, the overall expected risk is computed as the sum over all seen classes:  $\sum_{k=1}^K R^k$ . This is equivalent to training a multiclass classification model  $\mathcal{F} = \odot(\Psi_1, \dots, \Psi_K)$  for  $K$ -class classification, where  $\odot(\cdot)$  denotes the integration operation.

The overall training optimization objective is formulated as:

$$\arg \min \{R_c(\mathcal{F}, D_S) + \alpha \cdot \sum_{k=1}^K R_o(\mathcal{F}, D_V)\}, \quad (3)$$

which demands the model to minimize the combination of the classification risk on seen classes and the open space risk on unseen classes. Therefore, our goal is to train a multiclass classification model  $\mathcal{F}(\cdot)$ , parameterized by  $\theta$ , on  $K$  seen classes to accurately classify faces as either real or belonging to one of the known fake categories, while simultaneously detecting novel fake categories as a distinct  $(K + 1)^{\text{th}}$  class. We further formulate OSFFD as an uncertainty estimation problem: the model  $\mathcal{F} : \mathcal{X} \rightarrow (\tilde{y}, \tilde{u})$  outputs a predicted category label  $\tilde{y} \in \{1, \dots, K\}$  and its associated predictive uncertainty  $\tilde{u}$ . If the predictive uncertainty exceeds the class-specific threshold  $\tau_{\tilde{y}}$ , i.e.,  $\tilde{u} > \tau_{\tilde{y}}$ , the predicted label is deemed unreliable and the instance is assigned to the novel fake category.

## 4. Methodology

To solve the formulated uncertainty estimation problem, we utilize established techniques such as MaxLogit and Evidential Deep Learning.

**Plug-in OSR Techniques.** Maximum Softmax Probability [16] and MaxLogit [54] detectors are two widely used plug-in OSR techniques, which utilize the maximum Softmax probabilities and the maximum logits as the model prediction confidence with no extra computational costs.

**Evidential Deep Learning.** Evidential Deep Learning (EDL) is an effective technique that performs multiclass classification and uncertainty modeling by introducing the framework of Dempster-Shafer Theory [45] and subjective logic [21]. For a  $K$ -class classification problem, given a sample  $x$  and a model  $\mathcal{F}$  parameterized by  $\theta$ , the predicted evidence is given by  $e = h(\mathcal{F}(x; \theta)) \in R^K$ , where  $h$  is an evidence function. With total strength  $S = \sum_{k=1}^K \alpha_k$ , where  $\alpha_k = e_k + 1$ , the predicted probability for class  $k$  is  $p_k = \alpha_k / S$  and the prediction uncertainty  $u$  is calculated as  $u = K / S$ . EDL has been useful to detect data from unknown classes in prior literature [1, 38, 57, 69, 73]. These literature motivates us to develop a EDL-based algorithm to detect novel deepfake categories. Compared with plug-in OSR techniques, EDL provides a more principled uncertainty estimation.

**Challenges in applying EDL.** In our approach, we employ EDL to collect evidence for face forgery detection. However, leveraging EDL to address the OSFFD problem meets the following challenges:

1) How to collect sufficient evidence in the OSFFD problem? Unlike conventional open set image classification, face forgery detection involves highly structured facial imagery. As a result, off-the-shelf EDL do not directly carry

over to OSFFD with satisfactory performance. To bridge this gap, we extract evidential cues at two complementary levels: high-level semantic signals in the spatial domain and low-level artifacts in the frequency domain.

2) How can we achieve a comprehensive integration of collected complementary evidential cues? As both sources carry informative evidence, detection decisions should account for their joint contribution. The key challenge, therefore, is integrating the two independent uncertainty estimates into one well-calibrated and comprehensive metric. We address this issue by proposing a novel uncertainty-guided evidence fusion mechanism.

## 5. Dual Level Evidence Collection

**Overview.** To address the OSFFD problem, we propose the Dual-Level Evidential face forgery Detection (DLED) approach, which is exhibited in Fig. 3. DLED exploits EDL through a dual-level evidential architecture that captures category characteristics of facial imagery across spatial and frequency domains, yielding sufficiently discriminative evidence. It addresses the evidence aggregation challenge with an uncertainty-guided fusion mechanism and further incorporates an uncertainty-improvement procedure to enhance the reliability of the resulting estimates. Together, these components enable DLED to detect novel fake categories by quantifying classification uncertainty across complementary levels and determining whether an existing prediction should be reassigned to the novel category.

**Spatial and Frequency Evidence.** Our DLED model addresses the evidence collection problem by extracting cues at two complementary levels: high-level spatial semantic signals and low-level frequency artifacts. Face forgeries generally fall into several common categories (FS, FR, EFS, and FE) based on their characteristics in the context of human visuals [33]. We refer to these characteristics as deepfake category semantics, which is neglected by most existing works. Exploiting these semantics, the model can discern subtle differences among fake categories. To leverage both contextual and visual deepfake semantics, we employ the CLIP [40] architecture, a vision-language model designed to align image and text representations in a shared semantic space. Given an input image and the class textual descriptions, we then calculate the logit mass  $m_i$  for class  $i$ . In contrast to standard open set classification, relying solely on visual semantics fails to capture the structure of forgery images. We thus leverage low-level artifacts in the frequency domain as a complementary source of evidence. Specifically, for each input image, we obtain its frequency map by applying the Fast Fourier Transform and shifting the resulting spectrum to center the low-frequency components, thereby making them more prominent. To extract evidence from these complementary domains, we employ two parallel CLIP pipelines, each with a dedicated im-

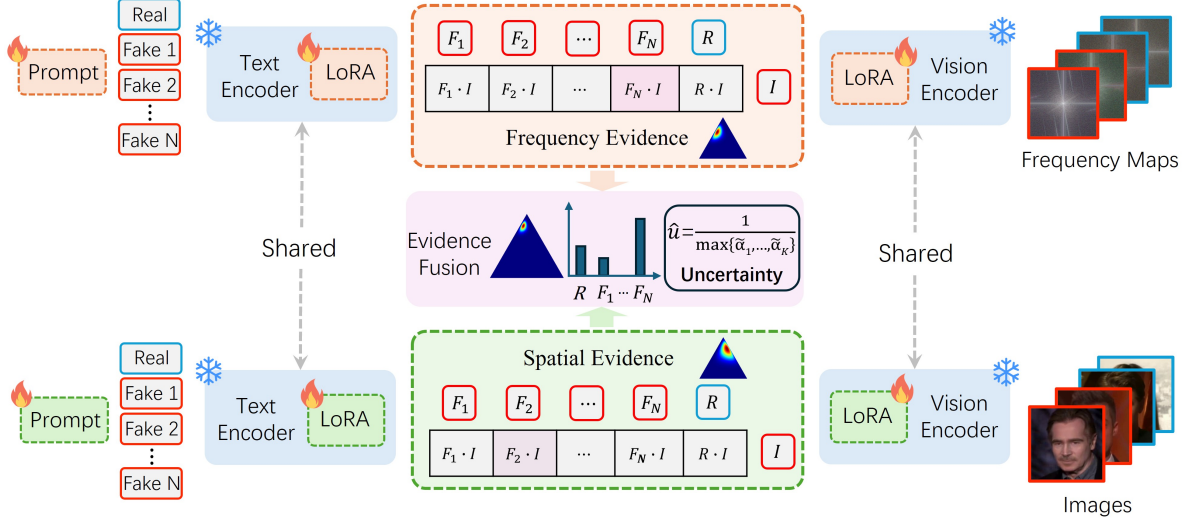


Figure 3. **Overview of DLED.** DLED collects and fuses evidence from both the spatial and frequency domains to estimate prediction uncertainty. Our improved uncertainty estimation  $\hat{u}$  is applied to achieve better detection performance.  $F_N$  represents the  $N$ -th fake category and  $K$  is the total known class number. If the uncertainty for the given sample is larger than the computed threshold, its label will be reassigned to the novel fake category. In the evidence illustration, we present a demonstration of a three-class classification scenario ( $K = 3$ ).

age encoder and text encoder. Since CLIP is not explicitly trained to capture forgery image patterns, particularly in the frequency domain, we adapt it by fine-tuning the encoders along with the text prompts while freezing all other pre-trained parameters. For text prompts, we employ Context Optimization [75], which augments class tokens with learnable prompt vectors to yield stronger context embeddings. For image and text encoders, we integrate LoRA [17] layers into them, which enhance the model’s understanding of deepfakes while not adding any additional parameters during testing. Although we have two parallel branches for spatial and frequency level representations, we reduce memory consumption by sharing their pretrained parameters.

**Evidential Uncertainty Estimation.** Our DLED model detects novel fake categories through evidential uncertainty estimation using Evidential Deep Learning (EDL) [43] in an end-to-end manner grounded in solid theoretical principles. EDL employs deep neural networks to output the parameters of a Dirichlet distribution over class probabilities, which is then used for both class prediction and uncertainty estimation. This process can be regarded as an evidence collection process. By leveraging EDL, our method quantifies the uncertainty associated with each prediction to assess its reliability. If the uncertainty is high, the model will re-classify the input as belonging to the novel class, thereby enabling the identification of faces from previously unseen fake categories.

Specifically, for each of the spatial and frequency branches with classification logits mass  $m$ , our approach

calculates the corresponding evidence  $e = h(m)$  using an evidence function  $h(\cdot)$  that guarantees  $e$  to be non-negative. During the training phase, to facilitate evidence collection, we independently apply the following EDL loss to each branch:

$$\mathcal{L}_{EDL}(e, y) = \sum_{k=1}^K y_k (\log S - \log(e_k + 1)), \quad (4)$$

where  $S = \sum_k \alpha_k$  and  $\alpha_k = e_k + 1$ , denoting the total strength of the Dirichlet distribution governed by  $\{\alpha_1, \dots, \alpha_K\}$ , and  $y$  is the one-hot  $K$ -class label. We also apply AvU regularization [1, 11] to each branch for uncertainty calibration. The EDL loss and AvU regularization minimize  $R_c$  and  $R_o$  in Eq. 3 separately.

**Test-time Evidence Fusion.** To address the integration problem, we design a uncertainty-guided test-time evidence fusion mechanism. During model inference, according to EDL [43], the probabilities of different classes (belief masses) and the overall uncertainty mass can be calculated by  $b_k = e_k/S$  and  $u = K/S$ . The  $K$  belief mass values and the uncertainty  $u$  are all non-negative and follow the sum-to-one rule:  $\sum_{k=1}^K b_k + u = 1$ . With this approach, we can get the belief and uncertainty for each branch.

Our DLED model collects two independent sets of probability mass  $M^s = \{\{b_k^s\}_{k=1}^K, u^s\}$  and  $M^f = \{\{b_k^f\}_{k=1}^K, u^f\}$  from the spatial and frequency domains. Inspired by previous works [12, 13], we apply the Dempster’s combination rule [45] to get the joint detection probability mass set  $\hat{M}$  in the following manner:  $\hat{M} = M^s \oplus M^f$ . The

Table 1. Comparisons of model performance with diverse baseline methods implemented by ourselves for the OSFFD problem. We use different data configurations for the seen and unseen fake categories. For “FS”, “FR”, and “EFS”, we let each fake category be the unseen category and let the left two be seen categories. For “FE & SM”, we take FS, FR and EFS as seen categories and let FE and SM be the unseen categories. The best results are highlighted in **bold**.

Methods		FS		FR		EFS		FE & SM		Avg	
		Acc	DR	Acc	DR	Acc	DR	Acc	DR	Acc	DR
Two-stage	OC-FakeDect [23]	58.16	14.68	60.69	11.43	56.14	9.01	56.74	11.67	57.93	11.70
	SBI [48]	65.15	1.07	64.19	3.00	61.24	0.91	62.27	0.66	63.21	1.41
CNN-based + OSR	Xception [41]	64.60	23.90	53.51	29.06	57.62	22.70	55.28	29.04	57.75	26.17
	SPSL [30]	65.07	16.71	54.10	18.93	59.67	18.12	60.02	25.98	59.71	19.93
	SIA [50]	62.09	13.59	54.62	13.36	56.85	10.99	56.29	22.53	57.46	15.12
	UCF [62]	65.08	0.30	50.98	0.20	52.95	1.28	52.69	1.80	55.42	0.89
	NPR [52]	<b>75.37</b>	17.37	64.63	6.75	70.43	4.36	71.45	29.20	70.47	14.42
CLIP-based + OSR	CLIP Closed Set Finetuning	67.24	\	65.19	\	64.53	\	66.24	\	65.80	\
	CLIP Zero-Shot [40]	52.30	0.81	50.36	0.26	46.01	0.38	47.62	0.25	49.07	0.43
	UnivFD [37]	68.81	3.88	64.00	2.48	63.21	0.73	66.34	8.22	65.59	3.83
	CLIPing [24]	66.44	14.38	62.41	6.09	61.29	4.92	66.26	19.27	64.10	11.16
	$D^3$ [68]	70.46	8.14	64.71	8.90	61.65	1.17	66.33	8.26	65.79	6.62
<b>Ours</b>		71.37	<b>33.61</b>	<b>66.83</b>	<b>34.92</b>	<b>75.52</b>	<b>34.71</b>	<b>74.48</b>	<b>82.18</b>	<b>72.05</b>	<b>46.35</b>

specific calculation rules for belief mass and uncertainty mass are formulated as

$$\tilde{b}_k = \gamma(b_k^s b_k^f + b_k^s u^f + b_k^f u^s), \quad \tilde{u} = \gamma u^s u^f, \quad (5)$$

where  $\gamma = 1/(1 - \sum_{i \neq j} b_i^s b_j^f)$  is the scaling factor, normalizing the mass fusion to mitigate the effects of conflicting information between the spatial mass and frequency mass. With this newly obtained joint detection mass  $\tilde{M}$ , the joint evidence and the parameters of the Dirichlet distribution are calculated as follows:

$$\tilde{S} = \frac{K}{\tilde{u}}, \quad \tilde{e}_k = \tilde{b}_k \times \tilde{S}, \quad \text{and} \quad \tilde{\alpha}_k = \tilde{e}_k + 1. \quad (6)$$

For a test sample  $x^i$ , the model prediction  $\hat{p}_k^i$  for class  $k$  is computed as  $\hat{p}_k^i = \tilde{\alpha}_k^i / \tilde{S}^i$ .

**Improved Uncertainty Estimation.** Considering  $\tilde{u} = K/\tilde{S}$  and  $\tilde{S} = \sum_{k=1}^K (\tilde{e}_k + 1)$ , after dividing numerator and denominator by  $K$ , the uncertainty can be expressed as

$$\tilde{u} = \frac{1}{1 + \frac{1}{K} \sum_{k=1}^K \{\tilde{e}_{1,...,K}\}}, \quad (7)$$

which indicates that the uncertainty is assessed using the average evidence across all  $K$  classes. Therefore, when the input data shows high evidence from irrelevant classes, the estimated uncertainty will be overestimated resulting in a sub-optimal estimation. To solve this problem, we propose an improved uncertainty estimation by replacing the *average* evidence with *maximum* evidence:

$$\hat{u} = \frac{1}{1 + \max\{\tilde{e}_{1,...,K}\}} = \frac{1}{\max\{\tilde{\alpha}_{1,...,K}\}} \quad (8)$$

where  $\{\tilde{e}_{1,...,K}\}$  represents the set of  $K$  fused evidences. Our improved uncertainty measure offers the advantage of being less affected by low-evidence classes while retaining

a normalized range between 0 and 1 for better human understanding. Moreover, it directly reflects the model’s confidence in the predicted class. We recalculate the uncertainty  $\hat{u}$  with Eq. 8 after the evidence fusion to get better detection performance.

To determine if a face image belongs to an unseen fake category, our model compares its uncertainty  $\hat{u}$  with the uncertainty threshold for its predicted class. If the uncertainty falls above the threshold, the model reassigns the label to the novel category. We provide a detailed description of the inference procedure for our DLED model. We denote the spatial and frequency branches as  $\mathcal{F}^s$  and  $\mathcal{F}^f$ , respectively, such that  $\mathcal{F} = \{\mathcal{F}^s, \mathcal{F}^f\}$ . Given the retrieved uncertainty thresholds  $\{\tau_k\}_{k=1}^K$  for each known class  $k$ , the DLED inference procedure for an input face image  $x$  is described in Algorithm 1, where  $h(\cdot)$  denotes the evidence function and  $\text{FFT}(\cdot)$  represents the Fast Fourier Transform.

## 6. Experiments

### 6.1. Experimental Setup

**Datasets.** To evaluate model performance on the OSFFD problem, we conducted experiments using the comprehensive dataset DF40 [65]. DF40 collects fake faces from four distinct categories (“Face Swapping”, “Face Reenactment”, “Entire Face Synthesis”, and “Face Editing”) and includes a total of 40 diverse forgeries. Additionally, we introduced data from two “Stacked Manipulation” (SM) forgeries [15], in which techniques from multiple fake categories are applied within a single image. We treat these SM forgeries as an auxiliary fake category.

**Evaluation Protocols.** In OSFFD problem, the training set comprises real faces and fake faces from multiple known fake categories, while the test set additionally includes samples from unknown fake categories. To evaluate the model’s performance, we first adopted the leave-one-out strategy in which one fake category from FS, FR, or EFS was with-

---

**Algorithm 1** DLED Inference Procedure

---

**Require:** Input image  $x$ ; uncertainty thresholds  $\{\tau_k\}_{k=1}^K$  for each known class.

- 1: Obtain the frequency map:  $x^f = \text{FFT}(x)$
  - 2: Extract dual-level evidence:  $e^s = h(\mathcal{F}^s(x))$ ,  $e^f = h(\mathcal{F}^f(x^f))$
  - 3: Calculate belief and uncertainty for each branch:  
 $b_k = e_k/S$ ,  $u = K/S$ ,  $S = \sum_{k=1}^K (e_k + 1)$
  - 4: Fuse belief and uncertainty:  
 $\tilde{b}_k = \gamma(b_k^s b_k^f + b_k^s u^f + b_k^f u^s)$ ,  
 $\tilde{u} = \gamma u^s u^f$ ,  $\gamma = 1 / (1 - \sum_{i \neq j} b_i^s b_j^f)$  [Eq. 5]
  - 5: Calculate fused evidence and parameters:  
 $\tilde{S} = K/\tilde{u}$ ,  $\tilde{e}_k = \tilde{b}_k \times \tilde{S}$ ,  $\tilde{\alpha}_k = \tilde{e}_k + 1$  [Eq. 6]
  - 6: Calculate predictive distribution and predicted label:  
 $\tilde{p}_k = \tilde{\alpha}_k/\tilde{S}$ ,  $\tilde{y} = \arg \max_k \tilde{p}_k$
  - 7: Improve uncertainty estimation:  
 $\hat{u} = 1 / (\max\{\tilde{\alpha}_1, \dots, \tilde{\alpha}_K\})$  [Eq. 8]
  - 8: Novel category detection and final prediction:  
 $\hat{y} = \begin{cases} \tilde{y}, & \text{if } \hat{u} \leq \tau_{\tilde{y}} \\ K+1, & \text{if } \hat{u} > \tau_{\tilde{y}} \end{cases}$
  - 9: **return**  $\hat{y}$  and  $\hat{u}$
- 

held during training and treated as an unseen category during testing. Subsequently, all three fake categories (FS, FR, and EFS) were included as seen classes, and the model was evaluated on a test set containing additional forgeries from FE and SM, representing novel fake categories. As for the evaluation metric, we employed the multiclass classification Accuracy (**Acc**) and the Detection Rate (**DR**), where DR refers to the recall of the unseen fake categories.

We compared the DLED method with the following baselines. 1) Two-stage baselines: We introduced a second training stage for one-class out-of-distribution (OOD) detection methods: OC-FakeDetect [23] and SBI [48], in which an additional closed set multiclass model is independently trained to further classify the seen classes. For fair comparison, we used CLIP as the multiclass model’s backbone and finetuned it in the closed set manner with the cross-entropy loss; 2) CNN-based baselines: Xception [41], SPSL [30], SIA [50], UCF [62], and NPR [52]; 3) CLIP-based baselines: Zero-shot CLIP [40] and three established methods UnivFD [37], CLIPing [24] and  $D^3$  [68].

For the two-stage baselines, images recognized by the one-class model as seen classes are passed to the multiclass model to obtain their concrete labels during testing. For the CNN-based and CLIP-based baselines, we replaced their binary classifier with a multi-class classifier trained end-to-end, and adopted the MaxLogit [72] technique during testing, due to its strong performance in detecting unknown samples. For all algorithms that need a threshold to detect novel categories, we computed it from the training data such

Table 2. Comparisons of prediction accuracy with diverse baselines implemented by ourselves for the Real-vs-Fake detection task. Data configurations are the same as those in OSFFD. All baseline models are implemented following their original algorithms.

Methods	FS	FR	EFS	FE & SM	Avg
OC-FakeDetect [23]	48.09	48.45	48.18	47.16	47.97
SBI [48]	50.13	50.36	50.07	49.96	50.13
Xception [41]	71.73	67.98	67.19	67.49	68.60
SPSL [30]	72.29	65.87	70.34	69.57	69.52
SIA [50]	69.45	64.13	66.91	64.64	66.28
UCF [62]	71.10	64.78	65.18	67.98	67.26
NPR [52]	80.76	75.73	77.67	77.21	77.84
CLIP Zero-Shot[40]	52.96	53.20	53.12	56.62	53.97
UnivFD [37]	77.64	76.83	79.33	81.31	78.78
CLIPing [24]	78.46	77.15	79.58	81.09	79.07
$D^3$ [68]	78.56	77.00	79.67	79.81	78.76
<b>Ours</b>	<b>87.22</b>	<b>85.93</b>	<b>83.52</b>	<b>84.97</b>	<b>85.41</b>

that 95% of the samples in each class are marked as known, which is the widely used setup in open set problems.

**Network Modules.** Our DLED method employs CLIP [40] as the backbone for both the spatial and frequency branches, using the ViT-B/16 [5] encoder with half-precision (fp16) data type. The same CLIP configuration is also used for all CLIP-based baseline methods to ensure fair comparisons. For the CLIP Zero-Shot baseline, we used the text prompt “a [CLASS] photo.” as the input, where “[CLASS]” is replaced with the predefined class names corresponding to the seen classes. For CNN-based baseline methods and one-class detectors in Two-stage baselines, all backbones utilize the official implementations provided by the respective authors. These baseline models are trained from scratch for the OSFFD experiments. Specifically, SPSL [30] and UCF [62] utilized the Xception backbone [41], while SBI [48] and SIA [50] are based on EfficientNet-B4 [53]. NPR [52] is a modified version of ResNet [14], and OC-FakeDetect [23] incorporates a Variational Autoencoder. [25]. Xception [41] is used directly without modification.

**Implementation Details.** In our experiments, the batch size was set to 32 for training and 100 for testing across all models. Our DLED model employed the softplus function as its confidence function  $h(\cdot)$ . Both DLED and CLIP-based baseline models are optimized using SGD with a learning rate of 0.002, while the remaining baseline methods use the Adam optimizer with a learning rate of  $1e^{-4}$ . All models, except for the CLIP Zero-Shot baseline, are trained for 50 epochs. We randomly selected a seed and evaluated the model’s performance at the final epoch in a single run. All methods are implemented in PyTorch, and experiments are conducted on an RTX 6000 Ada GPU.

## 6.2. Evaluation of Detection Performance

**Open Set Face Forgery Detection.** Since the two-stage baselines rely on the closed set finetuned CLIP model as their multiclass classifier, we also report the performance

Table 3. Ablation Study of DLED. The table presents DR results under the same data configuration as used in the main OSFFD experiments.

Models		FS	FR	EFS	FE & SM	Avg
Spatial Branch	Zero-Shot with MaxLogit	0.81	0.26	0.38	0.25	0.42
	Zero-Shot with EDL	1.58	0.58	0.68	0.63	0.87
	Finetuning with EDL	13.02	30.94	8.33	50.59	25.71
Frequency Branch	Zero-Shot with MaxLogit	3.85	2.35	6.98	0.53	3.43
	Zero-Shot with EDL	4.71	2.51	6.06	0.55	3.46
	Finetuning with EDL	14.34	8.49	7.69	<b>90.36</b>	30.22
Two Branches	Evidence Fusion	32.42	<b>36.16</b>	32.56	79.74	45.22
	Full DLED	<b>33.61</b>	34.92	<b>34.71</b>	82.18	<b>46.36</b>

of this model independently. As shown in Table 1, most baseline models struggle to achieve high performance on both Accuracy (Acc) and Detection Rate (DR) simultaneously. Methods with higher Acc typically exhibit lower DR, and vice versa. It could also be observed that two-stage methods yield lower Acc than their base forgery classifier, indicating that OOD detectors and forgery classifiers are difficult to integrate in OSFFD with satisfactory performance. Besides, directly applying OSR techniques with an Xception backbone attains notably low Acc, underscoring that off-the-shelf OSR approaches are insufficient to solve the OSFFD problem. With more sophisticated designs tailored to face forgery detection, the baselines achieve higher Acc in most cases, confirming that efficient mechanisms for exploring forgery-specific representations are necessary to address OSFFD. In comparison, our DLED model consistently achieves the highest DR across all scenarios and demonstrates superior average Acc, outperforming baseline methods in the majority of cases. These results highlight the effectiveness of DLED in discovering novel fake categories while maintaining strong recognition performance on real images and known fake categories.

**Real-vs-Fake Detection.** We also evaluate the proposed DLED model on the traditional Real-vs-Fake detection task, using the same data configuration as in the OSFFD problem. In this task, all baseline methods are implemented according to their original designs without modification. For our DLED model, any face predicted to belong to a fake category is classified as a fake sample. The results are shown in Table 2. It can be observed that DLED significantly outperforms these face forgery detection algorithms across all evaluation cases. These empirical results demonstrate that, in addition to its strong performance on the OSFFD problem, the proposed DLED model also achieves competitive results on the traditional binary Real-vs-Fake deepfake detection task.

### 6.3. Ablation Study

In this section, we conducted an ablation study on DLED. These experiments follow the same setup as described for OSFFD, and the results are summarized in Table 3. Our results indicate that: 1) Compared to MaxLogit, EDL enhances model performance across both the spatial and fre-

quency branches, indicating its superior capability in uncertainty estimation and, consequently, improved discovery of novel categories. 2) Although equipped with EDL, the pretrained CLIP model cannot be directly applied to the OSFFD problem in either the spatial or frequency domain, as indicated by its extremely poor performance (see the 2nd and 5th rows). Fine-tuning the prompts and integrating LoRA layers substantially improves the performance of both branches, highlighting the effectiveness of task-specific representation adaptation. 3) Without frequency information, the finetuned spatial branch with EDL exhibits an average performance drop of about 20% relative to the fused model (see the 3rd and 7th rows). This highlights the necessity of extracting complementary evidential cues across spatial and frequency domains to fully exploit forgery-specific signals and make more effective use of EDL, as well as the benefits of evidence integration. 4) By incorporating the improved uncertainty estimation, the full DLED model achieves the highest average Detection Rate, surpassing simple evidence fusion in most cases and thereby validating its effectiveness.

### 6.4. Analysis of Visual Attention and Evidence



Figure 4. **Visualization of Attention Map.** Attention maps generated by the DLED model for the novel fake categories FS and FE are shown in subfigures (a) and (b), respectively.

To provide a clearer understanding of DLED’s behavior in OSFFD, we present visualizations of attention map in Fig. 4 and evidence distribution in Fig. 5 and Fig. 6. In this analysis, FR and EFS are treated as known fake categories, while FS and FE represent novel categories.

Fig. 4 illustrates the evidence collected by the DLED model. It can be observed that DLED attends to category-specific semantic cues. For example, in the case of FS, the model highlights edge regions indicative of face transplantation, whereas for FE, it focuses on manipulated areas such as sunglasses, hairbands, and hair.

Fig. 5 illustrates how uncertainty estimation facilitates the detection of novel fake categories among test samples. Each subfigure visualizes the Dirichlet distribution produced by DLED for the corresponding fake category. These visualizations demonstrate that the DLED model exhibits higher confidence when making predictions on seen classes, while showing greater prediction uncertainty for novel fake categories. This behavior enables DLED to effectively rec-

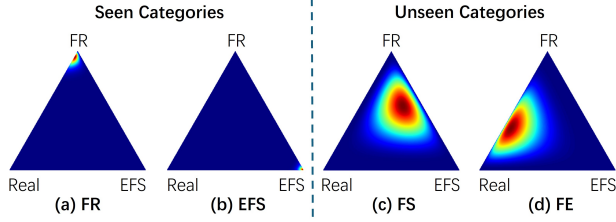


Figure 5. **Visualization of Evidence Distribution.** The evidence for seen fake categories FR and EFS is condensed in their corresponding corner with low uncertainty, while the evidence for novel fake categories FS and FE is sparse with higher uncertainty.

ognize newly emerging fake categories while simultaneously maintaining strong performance on known classes. Furthermore, we illustrate how DLED distinguishes between unseen real and unseen fake faces. We sample unseen real and fake images from the novel subdatasets FS and FE, respectively, and visualize their individual evidential distributions in Fig. 6. These visualizations show that the DLED model can produce low uncertainties for real images, even though they are from the unseen FS and FE subdatasets, and produce high uncertainties for fake images since they are novel fakes.

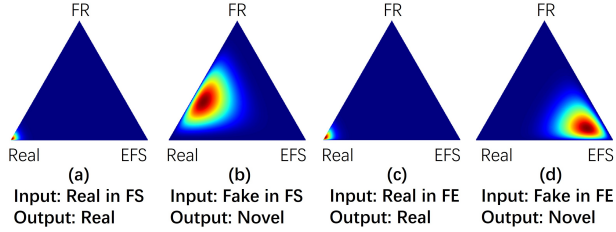


Figure 6. **Visualization of Evidence Distribution for novel real and fake face images.** We visualize the Evidence Distribution of novel real and fake faces and present the corresponding predictions made by our DLED model. The prediction confidence for new real faces remains high, whereas novel fake faces exhibit low confidence accompanied by high prediction uncertainty.

### 6.5. Influence of Uncertainty Threshold

Uncertainty threshold is calculated from the training data such that a certain ratio of the samples in each class are marked as known. A higher threshold indicates that more training samples are regarded as reliable, thereby imposing a stricter criterion for novel fake discovery. To further investigate the impact of the uncertainty threshold on the OSFFD problem, we conducted a series of experiments using various threshold values [0.85, 0.90, 0.95, 0.97, 0.99] on DLED, as well as three CLIP-based baseline methods: UnivFD [37], CLIPing [24], and  $D^3$  [68].

In this experiment, FS and FR are treated as seen fake

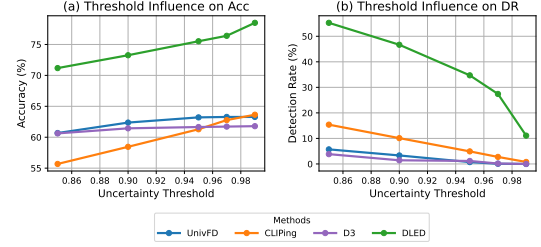


Figure 7. Accuracy and Detection Rate across different uncertainty thresholds for UnivFD, CLIPing, and DLED.

categories, while EFS is designated as the only novel fake category. The results are presented in Fig. 7. It can be observed that as the uncertainty threshold increases, classification accuracy improves, whereas the novel fake discovery rate declines. This indicates that a stricter threshold reduces the detection of novel samples but also decreases the misclassification of known samples. These findings highlight the critical role of the uncertainty threshold in balancing known class classification and novel fake discovery. Moreover, across all threshold settings, our DLED method consistently achieves higher Acc and DR compared to the two CLIP-based baselines, demonstrating its robustness and superior performance.

## 7. Conclusion

In this work, we reformulate the Open Set Face Forgery Detection (OSFFD) problem by removing the need for unlabeled novel data during model training, thereby enhancing its practicality for real-world applications. By treating the OSFFD as an uncertainty estimation problem, we proposed a novel algorithm, DLED, which effectively identifies unseen fake categories as novel while simultaneously classifying real and known fake categories. DLED leverages EDL to collect and fuse evidence from both spatial and frequency domains, exploiting category-specific semantics to estimate prediction uncertainty. Additionally, we propose an improved uncertainty formulation that enhances the model’s ability to detect novel fake categories. Extensive experiments under various testing configurations demonstrate that DLED substantially outperforms diverse baseline methods in addressing the OSFFD problem. Future work will focus on improving the efficiency of the proposed method and enabling rapid adaptation to the detected novel fake categories.

## Acknowledgements

This material is based upon work supported in part by the National Science Foundation under Awards Nos. 2429836, 2429835.

## References

- [1] Wentao Bao, Qi Yu, and Yu Kong. Evidential deep learning for open set action recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 13349–13358, 2021. 3, 4, 5
- [2] Junyi Cao, Chao Ma, Taiping Yao, Shen Chen, Shouhong Ding, and Xiaokang Yang. End-to-end reconstruction-classification learning for face forgery detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4113–4122, 2022. 1, 2
- [3] Guangyao Chen, Peixi Peng, Xiangqian Wang, and Yonghong Tian. Adversarial reciprocal points learning for open set recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(11):8065–8081, 2021. 3
- [4] Michael Macedo Diniz and Anderson Rocha. Open-set deepfake detection to fight the unknown. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 13091–13095. IEEE, 2024. 1
- [5] Alexey Dosovitskiy. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020. 7
- [6] Lei Fan, Bo Liu, Haoxiang Li, Ying Wu, and Gang Hua. Flexible visual recognition by evidential modeling of confusion and ignorance. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 1338–1347, 2023. 3
- [7] Lei Fan, Mingfu Liang, Yunxuan Li, Gang Hua, and Ying Wu. Evidential active recognition: Intelligent and prudent open-world embodied perception. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16351–16361, 2024. 3
- [8] Sharath Girish, Saksham Suri, Saketh Rambhatla, and Abhinav Shrivastava. Towards discovery and attribution of open-world gan generated images. *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 14074–14083, 2021. 2
- [9] Qiqi Gu, Shen Chen, Taiping Yao, Yang Chen, Shouhong Ding, and Ran Yi. Exploiting fine-grained face forgery clues via progressive enhancement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 735–743, 2022. 1, 2
- [10] Fabrizio Guillaro, Davide Cozzolino, Avneesh Sud, Nicholas Dufour, and Luisa Verdoliva. Trufor: Leveraging all-round clues for trustworthy image forgery detection and localization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20606–20615, 2023. 2
- [11] Ahmed Hammam, Frank Bonarens, Seyed Eghbal Ghobadi, and Christoph Stiller. Predictive uncertainty quantification of deep neural networks using dirichlet distributions. In *Proceedings of the 6th ACM Computer Science in Cars Symposium*, pages 1–10, 2022. 5
- [12] Zongbo Han, Changqing Zhang, Huazhu Fu, and Joey Tianyi Zhou. Trusted multi-view classification. In *International Conference on Learning Representations*, 2020. 3, 5
- [13] Zongbo Han, Changqing Zhang, Huazhu Fu, and Joey Tianyi Zhou. Trusted multi-view classification with dynamic evidential fusion. *IEEE transactions on pattern analysis and machine intelligence*, 45(2):2551–2566, 2022. 5
- [14] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016. 7
- [15] Yinan He, Bei Gan, Siyu Chen, Yichun Zhou, Guojun Yin, Luchuan Song, Lu Sheng, Jing Shao, and Ziwei Liu. Forgerynet: A versatile benchmark for comprehensive forgery analysis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4360–4369, 2021. 6
- [16] Dan Hendrycks, Steven Basart, Mantas Mazeika, Andy Zou, Joe Kwon, Mohammadreza Mostajabi, Jacob Steinhardt, and Dawn Song. Scaling out-of-distribution detection for real-world settings. *arXiv preprint arXiv:1911.11132*, 2019. 4
- [17] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, et al. Lora: Low-rank adaptation of large language models. *ICLR*, 1(2):3, 2022. 5
- [18] He Huang, Nan Sun, Xufeng Lin, and Nour Moustafa. Towards generalized deepfake detection with continual learning on limited new data. In *2022 International Conference on Digital Image Computing: Techniques and Applications (DICTA)*, pages 1–7. IEEE, 2022. 2
- [19] Haojian Huang, Xiaozhenhn Qiao, Zhuo Chen, Haodong Chen, Bingyu Li, Zhe Sun, Mulin Chen, and Xuelong Li. Crest: Cross-modal resonance through evidential deep learning for enhanced zero-shot learning. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 5181–5190, 2024. 3
- [20] Ziheng Huang, Boheng Li, Yan Cai, Run Wang, Shangwei Guo, Liming Fang, Jing Chen, and Lina Wang. What can discriminator do? towards box-free ownership verification of generative adversarial networks. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 5009–5019, 2023. 2
- [21] Audun Jøsang. *Subjective logic*. Springer, 2016. 4
- [22] Tero Karras. Progressive growing of gans for improved quality, stability, and variation. *arXiv preprint arXiv:1710.10196*, 2017. 1
- [23] Hasam Khalid and Simon S Woo. Oc-fakedect: Classifying deepfakes using one-class variational autoencoder. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition workshops*, pages 656–657, 2020. 2, 3, 6, 7
- [24] Sohail Ahmed Khan and Duc-Tien Dang-Nguyen. Clipping the deception: Adapting vision-language models for universal deepfake detection. In *Proceedings of the 2024 International Conference on Multimedia Retrieval*, pages 1006–1015, 2024. 2, 6, 7, 9
- [25] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*, 2013. 7
- [26] Iryna Korshunova, Wenzhe Shi, Joni Dambre, and Lucas Theis. Fast face-swap using convolutional neural networks.

- In *Proceedings of the IEEE international conference on computer vision*, pages 3677–3685, 2017. 1
- [27] Nico Lang, Vésteinn Snæbjarnarson, Elijah Cole, Oisín Mac Aodha, Christian Igel, and Serge Belongie. From coarse to fine-grained open-set recognition. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 17804–17814, 2024. 3
- [28] Nicolas Larue, Ngoc-Son Vu, Vitomir Struc, Peter Peer, and Vassilis Christophides. Seeable: Soft discrepancies and bounded contrastive learning for exposing deepfakes. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21011–21021, 2023. 2
- [29] Ajian Liu, Shuai Xue, Jianwen Gan, Jun Wan, Yanyan Liang, Jiankang Deng, Sergio Escalera, and Zhen Lei. Cfpl-fas: Class free prompt learning for generalizable face anti-spoofing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 222–232, 2024. 2
- [30] Honggu Liu, Xiaodan Li, Wenbo Zhou, Yuefeng Chen, Yuan He, Hui Xue, Weiming Zhang, and Nenghai Yu. Spatial-phase shallow learning: rethinking face forgery detection in frequency domain. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 772–781, 2021. 6, 7
- [31] Huan Liu, Zichang Tan, Chuangchuang Tan, Yunchao Wei, Jingdong Wang, and Yao Zhao. Forgery-aware adaptive transformer for generalizable synthetic image detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10770–10780, 2024. 2
- [32] Yuchen Luo, Yong Zhang, Junchi Yan, and Wei Liu. Generalizing face forgery detection with high-frequency features. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16317–16326, 2021. 2
- [33] Yisroel Mirsky and Wenke Lee. The creation and detection of deepfakes: A survey. *ACM computing surveys (CSUR)*, 54(1):1–41, 2021. 1, 4
- [34] Aakash Varma Nadimpalli and Ajita Rattani. On improving cross-dataset generalization of deepfake detectors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, pages 91–99, 2022. 1
- [35] Yunsheng Ni, Depu Meng, Changqian Yu, Chengbin Quan, Dongchun Ren, and Youjian Zhao. Core: Consistent representation learning for face forgery detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12–21, 2022. 1, 2
- [36] Yuval Nirkin, Yosi Keller, and Tal Hassner. Fsgan: Subject agnostic face swapping and reenactment. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 7184–7193, 2019. 1
- [37] Utkarsh Ojha, Yuheng Li, and Yong Jae Lee. Towards universal fake image detectors that generalize across generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 24480–24489, 2023. 2, 3, 6, 7, 9
- [38] Kunyu Peng, Di Wen, Kailun Yang, Ao Luo, Yufan Chen, Jia Fu, M Saquib Sarfraz, Alina Roitberg, and Rainer Stiefelhagen. Advancing open-set domain generalization using evidential bi-level hardest domain scheduler. *Advances in Neural Information Processing Systems*, 37:85412–85440, 2025. 4
- [39] Yuyang Qian, Guojun Yin, Lu Sheng, Zixuan Chen, and Jing Shao. Thinking in frequency: Face forgery detection by mining frequency-aware clues. In *European conference on computer vision*, pages 86–103. Springer, 2020. 1
- [40] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 2, 4, 6, 7
- [41] Andreas Rossler, Davide Cozzolino, Luisa Verdoliva, Christian Riess, Justus Thies, and Matthias Nießner. Faceforensics++: Learning to detect manipulated facial images. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 1–11, 2019. 6, 7
- [42] Walter J Scheirer, Anderson de Rezende Rocha, Archana Sapkota, and Terrance E Boult. Toward open set recognition. *IEEE transactions on pattern analysis and machine intelligence*, 35(7):1757–1772, 2012. 3
- [43] Murat Sensoy, Lance Kaplan, and Melih Kandemir. Evidential deep learning to quantify classification uncertainty. *Advances in neural information processing systems*, 31, 2018. 2, 3, 5
- [44] Murat Sensoy, Lance Kaplan, Federico Cerutti, and Maryam Saleki. Uncertainty-aware deep classifiers using generative models. In *Proceedings of the AAAI conference on artificial intelligence*, pages 5620–5627, 2020. 2, 3
- [45] Kari Sentz and Scott Ferson. Combination of evidence in dempster-shafer theory. 2002. 2, 4, 5
- [46] Wei Shen and Rujie Liu. Learning residual images for face attribute manipulation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4030–4038, 2017. 1
- [47] Weishi Shi, Xujiang Zhao, Feng Chen, and Qi Yu. Multifaceted uncertainty estimation for label-efficient deep learning. *Advances in neural information processing systems*, 33: 17247–17257, 2020. 2, 3
- [48] Kaede Shiohara and Toshihiko Yamasaki. Detecting deepfakes with self-blended images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18720–18729, 2022. 2, 3, 6, 7
- [49] Aliaksandr Siarohin, Stéphane Lathuilière, Sergey Tulyakov, Elisa Ricci, and Nicu Sebe. First order motion model for image animation. *Advances in neural information processing systems*, 32, 2019. 1
- [50] Ke Sun, Hong Liu, Taiping Yao, Xiaoshuai Sun, Shen Chen, Shouhong Ding, and Rongrong Ji. An information theoretic approach for attention-driven face forgery detection. In *European Conference on Computer Vision*, pages 111–127. Springer, 2022. 2, 6, 7
- [51] Zhimin Sun, Shen Chen, Taiping Yao, Bangjie Yin, Ran Yi, Shouhong Ding, and Lizhuang Ma. Contrastive pseudo learning for open-world deepfake attribution. In *Proceedings*

- of the *IEEE/CVF International Conference on Computer Vision*, pages 20882–20892, 2023. 1, 2
- [52] Chuangchuang Tan, Yao Zhao, Shikui Wei, Guanghua Gu, Ping Liu, and Yunchao Wei. Rethinking the up-sampling operations in cnn-based generative network for generalizable deepfake detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 28130–28139, 2024. 2, 6, 7
- [53] Mingxing Tan and Quoc Le. Efficientnet: Rethinking model scaling for convolutional neural networks. In *International conference on machine learning*, pages 6105–6114. PMLR, 2019. 7
- [54] Haoqi Wang, Zhizhong Li, Litong Feng, and Wayne Zhang. Vim: Out-of-distribution with virtual-logit matching. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4921–4930, 2022. 4
- [55] Jun Wang, Omran Alamyreh, Benedetta Tondi, and Mauro Barni. Open set classification of gan-based image manipulations via a vit-based hybrid architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 953–962, 2023. 2
- [56] Jun Wang, Benedetta Tondi, and Mauro Barni. Bosc: A backdoor-based framework for open set synthetic image attribution. *arXiv preprint arXiv:2405.11491*, 2024. 2
- [57] Ruofan Wang, Rui-Wei Zhao, Xiaobo Zhang, and Rui Feng. Towards evidential and class separable open set object detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 5572–5580, 2024. 4
- [58] Sheng-Yu Wang, Oliver Wang, Richard Zhang, Andrew Owens, and Alexei A Efros. Cnn-generated images are surprisingly easy to spot... for now. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8695–8704, 2020. 1, 2
- [59] Yezhen Wang, Bo Li, Tong Che, Kaiyang Zhou, Ziwei Liu, and Dongsheng Li. Energy-based open-world uncertainty modeling for confidence calibration. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9302–9311, 2021. 3
- [60] Zhendong Wang, Jianmin Bao, Wengang Zhou, Weilun Wang, Hezhen Hu, Hong Chen, and Houqiang Li. Dire for diffusion-generated image detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22445–22455, 2023. 2
- [61] Mengjie Wu, Jingui Ma, Run Wang, Sidan Zhang, Ziyao Liang, Boheng Li, Chenhao Lin, Liming Fang, and Lina Wang. Traceevader: Making deepfakes more untraceable via evading the forgery model attribution. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 19965–19973, 2024. 2
- [62] Zhiyuan Yan, Yong Zhang, Yanbo Fan, and Baoyuan Wu. Ucf: Uncovering common features for generalizable deepfake detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22412–22423, 2023. 6, 7
- [63] Zhiyuan Yan, Yong Zhang, Xinhang Yuan, Siwei Lyu, and Baoyuan Wu. Deepfakebench: A comprehensive benchmark of deepfake detection. *arXiv preprint arXiv:2307.01426*, 2023. 1
- [64] Zhiyuan Yan, Yuhao Luo, Siwei Lyu, Qingshan Liu, and Baoyuan Wu. Transcending forgery specificity with latent space augmentation for generalizable deepfake detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8984–8994, 2024. 3
- [65] Zhiyuan Yan, Taiping Yao, Shen Chen, Yandan Zhao, Xinghe Fu, Junwei Zhu, Donghao Luo, Chengjie Wang, Shouhong Ding, Yunsheng Wu, et al. Df40: Toward next-generation deepfake detection. *arXiv preprint arXiv:2406.13495*, 2024. 6
- [66] Hong-Ming Yang, Xu-Yao Zhang, Fei Yin, Qing Yang, and Cheng-Lin Liu. Convolutional prototype network for open set recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(5):2358–2370, 2020. 3
- [67] Tianyun Yang, Ziyao Huang, Juan Cao, Lei Li, and Xirong Li. Deepfake network architecture attribution. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 4662–4670, 2022. 2
- [68] Yongqi Yang, Zhihao Qian, Ye Zhu, Olga Russakovsky, and Yu Wu. D<sup>3</sup>: Scaling up deepfake detection by learning from discrepancy. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 23850–23859, 2025. 2, 6, 7, 9
- [69] Yang Yu, Danruo Deng, Furui Liu, Qi Dou, Yueming Jin, Guangyong Chen, and Pheng Ann Heng. Anedl: adaptive negative evidential deep learning for open-set semi-supervised learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 16587–16595, 2024. 4
- [70] Hui Zhang and Henghui Ding. Prototypical matching and open set rejection for zero-shot semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 6974–6983, 2021. 3
- [71] Xu Zhang, Svebor Karaman, and Shih-Fu Chang. Detecting and simulating artifacts in gan fake images. In *2019 IEEE international workshop on information forensics and security (WIFS)*, pages 1–6. IEEE, 2019. 2
- [72] Zihan Zhang and Xiang Xiang. Decoupling maxlogit for out-of-distribution detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3388–3397, 2023. 3, 7
- [73] Chen Zhao, Dawei Du, Anthony Hoogs, and Christopher Funk. Open set action recognition via multi-label evidential learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 22982–22991, 2023. 4
- [74] Haonan Zhong, Jiamin Chang, Ziyue Yang, Tingmin Wu, Pathum Chamikara Mahawaga Arachchige, Chehara Pathmabandu, and Minhui Xue. Copyright protection and accountability of generative ai: Attack, watermarking and attribution. In *Companion Proceedings of the ACM Web Conference 2023*, pages 94–98, 2023. 2
- [75] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Learning to prompt for vision-language models. *International Journal of Computer Vision*, 130(9):2337–2348, 2022. 5
- [76] Xinye Zhou, Hu Han, Shiguang Shan, and Xilin Chen. Fine-grained open-set deepfake detection via unsupervised do-

main adaptation. *IEEE Transactions on Information Forensics and Security*, 2024. [1](#)

- [77] Wanyi Zhuang, Qi Chu, Zhentao Tan, Qiankun Liu, Haojie Yuan, Changtao Miao, Zixiang Luo, and Nenghai Yu. Uia-vit: Unsupervised inconsistency-aware method based on vision transformer for face forgery detection. In *European conference on computer vision*, pages 391–407. Springer, 2022. [1](#), [2](#)