

SAM3-I: Segment Anything with Instructions

Jingjing Li^{1†}, Yue Feng^{2†}, Yuchen Guo^{3†}, Jincai Huang^{4†}, Yongri Piao⁵, Qi Bi⁶, Miao Zhang⁵,
Xiaoqi Zhao⁷, Qiang Chen⁸, Shihao Zou^{9✉}, Wei Ji^{7✉}, Huchuan Lu⁵, Li Cheng¹

¹University of Alberta ²NUAA ³Northwestern University ⁴SUSTech ⁵Dalian University of Technology

⁶Utrecht University ⁷Yale University ⁸Independent Researcher ⁹SIAT, Chinese Academy of Sciences

jingjin1@ualberta.ca, sh.zou@siat.ac.cn, wei.ji@yale.edu

[†]Equal contribution, [✉]Corresponding author



Figure 1. **Evolution of promptable segmentation within the SAM family.** (a) Promptable Visual Segmentation (PVS) in SAM1/2 [9, 19] requires users’ interactive prompts, with each prompt segmenting only one object. (b) Promptable Concept Segmentation (PCS) in SAM3 [3] supports short noun-phrase prompts (e.g., “soccer player”) to segment all instances that match the given concept. (c) To process more complex natural-language instructions, SAM3 relies on external multi-modal agents to convert long instructions into short NPs, which remains overly coarse to capture fine-grained conditions (red icon). (d) Promptable Instruction Segmentation (PIS) in our SAM3-I directly interprets complex instructions (e.g., attributes, relations, actions and other reasoning cues) and effectively grounds the intended target instance (green icon). SAM3-I firstly unifies concept-level understanding and instruction-level reasoning within the SAM family.

Abstract

Segment Anything Model 3 (SAM3) has advanced open-vocabulary segmentation through promptable concept segmentation, allowing users to segment all instances corresponding to a given concept, typically specified with short noun-phrase (NP) prompts. While this marks the first integration of language-level concepts within the SAM family, real-world usage typically requires far richer expressions that include attributes, spatial relations, functionalities, actions, states, and even implicit reasoning over instances. Currently, SAM3 relies on external multi-modal agents to convert complex instructions into NPs and then conduct iterative mask filtering. However, these NP-level concepts remain overly coarse, often failing to precisely represent a specific instance. In this work, we present **SAM3-I**, an enhanced framework that unifies concept-level understanding and instruction-level reasoning within the SAM family. SAM3-I introduces an instruction-aware cascaded adaptation mechanism that progressively aligns expressive instruc-

tion semantics with SAM3’s existing vision–language representations, enabling direct instruction-following segmentation without sacrificing its original concept-driven capabilities. Furthermore, we design a structured instruction taxonomy spanning concept, simple, and complex levels, and develop a scalable data engine to construct a dataset with diverse instruction–mask pairs. Experiments show that SAM3-I delivers appealing performance, demonstrating that SAM3 can be effectively extended to follow natural-language instructions while preserving its strong concept grounding. We open-source SAM3-I and provide practical fine-tuning workflows, enabling researchers to adapt it to domain-specific applications. The source code is available [here](#).

1. Introduction

Semantic segmentation [7, 9, 21] is a fundamental task in visual understanding. Traditional methods [8, 14] have pri-

Preliminary version; work in progress.

marily targeted explicit instance segmentation, where each pixel is assigned to one of a fixed set of predefined categories. However, such closed vocabularies remain considerably narrower than the diverse range of instances present in real-world scenarios. To this end, SAM3 [3] represents an important step forward by introducing PCS, a concept-driven paradigm that enables users to segment all related instances using short NP prompts. This formulation naturally aligns with open-vocabulary segmentation. As an example in Fig. 1 b, a concept prompt such as “soccer player” can be used to segment all associated instances in an image.

However, real-world interactions are typically not conveyed through short NPs alone; users often describe instances using far richer expressions that may incorporate attributes, spatial relations, functions, actions, states, or even implicit reasoning over instances. Such descriptions often specify a concept together with multiple conditions, *e.g.*, “the soccer player on the far right, wearing a blue jersey, is sliding on the grass to tackle the ball”, as shown in Fig. 1 c. Handling such inputs requires the model to parse structured semantics and accurately ground them in the scene. This capability is essential for many open-world applications, including home robotics [12, 17], autonomous driving [5], and augmented reality [10, 20], where systems must follow complex instructions to guide segmentation and decision-making.

This leads to a natural question: *Can we retain SAM3’s strong concept recall ability gained from large-scale training while enabling it to interpret more complex instructions and ground the corresponding instances?* To approximate this capability, SAM3 currently relies on external multi-modal agents, *e.g.*, Qwen3-VL [1], to convert long instructions into short NPs and then perform multiple rounds of mask filtering process. Although workable, this agent-driven pipeline separates linguistic reasoning from visual segmentation, adds notable computational overhead, and limits the model’s ability to directly align complex instructions with visual concepts. More importantly, the PCS formulation constrains the agent’s final output to short NPs. These NP-level concepts are overly coarse and often insufficient for precisely grounding specific instances described by detailed instructions, as shown in Fig. 1 c and d.

To overcome these limitations, we present **SAM3-I**, an enhanced framework that unifies concept-level understanding and instruction-level reasoning within the SAM family. SAM3-I directly interprets complex natural-language instructions and grounds the corresponding instances that satisfy the specified conditions, while retaining SAM3’s strong concept recall ability. At its core, SAM3-I introduces an instruction-aware cascaded adaptation mechanism that progressively aligns expressive instruction semantics with SAM3’s existing vision–language representations, enabling instruction-following segmentation without sacrific-

ing its original concept-driven capabilities.

To enable scalable instruction alignment, we further develop a data construction pipeline that converts existing open-vocabulary segmentation datasets into a large instruction-centric corpus. The pipeline is guided by a structured instruction taxonomy, covering concept, simple, and complex levels of instruction, and synthesizes diverse descriptions accordingly. Each generated instruction is then validated through a three-stage annotation–inspection–correction procedure to guarantee faithful grounding to its corresponding image. This process yields a high-quality dataset that more accurately reflects the richness and diversity of natural-language expressions encountered in real-world applications.

Empirical experiments show that SAM3-I achieves appealing performance on both referring and reasoning segmentation, bringing robust instruction-following capability to the SAM family. We release SAM3-I together with lightweight fine-tuning workflows to support future research on instruction-based segmentation. Finally, we highlight several promising directions for further exploration.

2. Preliminary: SAM Family

SAM represents a major milestone in segmentation foundation models, showcasing strong cross-domain generalization with compelling performance in diverse downstream applications, such as medical imaging and industrial inspection [16, 21]. Central to this success is the promptable segmentation paradigm introduced by the SAM1 and SAM2 series [9, 19], where a user supplies points, boxes, or masks to guide the model in segmenting a single target per prompt, a setting known as Promptable Visual Segmentation (PVS), as illustrated in Fig. 1 a. When combined with the large-scale, high-quality SA-1B and SA-V datasets that provide rich supervision signals, this paradigm forms the foundation of the SAM family’s remarkable segmentation capability.

SAM3 extends this paradigm from single-object prompting to Promptable Concept Segmentation (PCS), allowing the model to segment all instances of a given concept within an image or video, as illustrated in Fig. 2 a. SAM3 advances open-vocabulary segmentation by supporting short noun-phrase (NP) such as “soccer player” or “yellow bus”. However, SAM3 is fundamentally designed around atomic concept prompts, restricting text inputs to simple NPs rather than long referring expressions or multi-condition instructions. When presented with complex instructions, SAM3 must rely on the agentic pipeline shown in Fig. 2 b, where a multi-modal large language model (MLLM) converts long instructions into short NPs and then conducts iterative mask filtering to produce the final output. This multi-step process depends heavily on external reasoning and often collapses rich natural-language descriptions into over-simplified NP

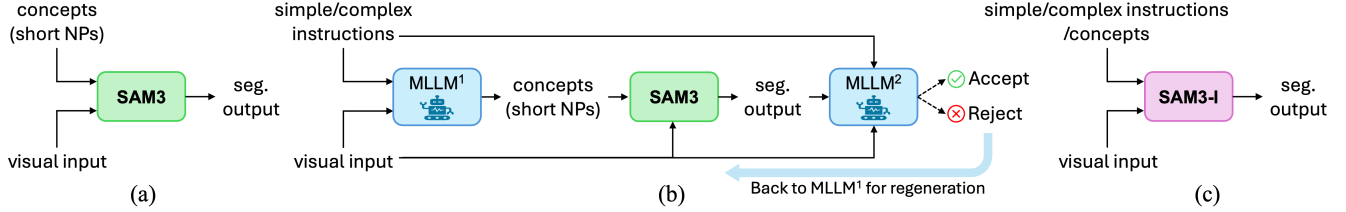


Figure 2. **Comparison of SAM3-series pipelines.** (a) SAM3 takes an image and a short NP concept as input and directly produces segmentation outputs. (b) SAM3 + Agent handles longer instructions by prompting an MLLM¹ to rewrite them into NPs and using an MLLM² to validate and refine SAM3’s predictions, often through multiple rounds of mask filtering. (MLLM¹ and MLLM² denote two separate calls to the same MLLM.) Although this enables SAM3 to process long instructions, it introduces additional system complexity, computational overhead, and may collapse detailed instructions into over-simplified NPs. (c) SAM3-I removes the agent loop entirely and directly supports both concepts and instructions in a single pass. For clarity, the mask/point/box prompting branch is omitted.

prompts. As a result, the PCS interface inherently limits SAM3’s ability to segment specific instances that satisfy detailed natural-language conditions.

Real-world usage, however, involves expressions that go well beyond simple NPs. This motivates us to extend SAM3 with the ability to follow rich, complex instructions while preserving its strong concept-level grounding capability.

3. Promptable Instruction Segmentation

We extend the PCS paradigm to a more expressive instruction-following setting, which we term Promptable Instruction Segmentation (PIS). We formulate the instructions into three progressively finer hierarchical levels:

- *i) Concept instruction* represents the most atomic form, expressed as short noun phrases (NPs) consistent with SAM3.
- *ii) Simple instruction* retains explicit NP mentions but augments them with additional referring conditions such as attributes, spatial cues, or local context.
- *iii) Complex instruction* removes explicit NP references and instead requires the model to identify targets by interpreting functions, actions, affordance, or broader contextual semantics.

Together, these three levels establish a unified hierarchy that enables SAM-I to unify concept-level understanding and instruction-level reasoning within the SAM family.

4. SAM3-I Model

Overview. As shown in Fig. 3, SAM3-I builds upon the SAM3 architecture and extends it to the PIS task, while remaining fully compatible with PCS and PVS. Briefly, SAM3 comprises a dual vision–language encoder and a detector-based segmentation head, along with a tracker and a memory module for video segmentation. Both the detector and tracker operate on representations produced by the Perception Encoder (PE [2]), which jointly embeds visual and text inputs.

To equip SAM3 with the ability to interpret and execute natural language instructions, from simple referring expressions to complex reasoning instructions, we introduce a lightweight, instruction-aware adaptation mechanism while keeping the entire SAM3 backbone frozen. This design preserves SAM3’s original capabilities, prevents catastrophic forgetting, and injects new instruction-following abilities in a parameter-efficient manner.

Instruction-Aware Cascaded Adapter. A key challenge in instruction understanding is the wide variability in linguistic expressions. Simple referring expressions typically hinge on recognizing the target concept and integrating perceptual attributes, positional cues, or local relations, which requires the model to detect explicit linguistic anchors and align them with visual evidence. Complex reasoning instructions demand substantially richer linguistic competence: the model must interpret functional descriptions, resolve implicit references, or perform multi-step reasoning to link abstract semantics to concrete visual instances. Mastering this spectrum of linguistic complexity is essential for achieving robust and accurate instruction-following segmentation. To this end, we introduce an instruction-aware cascaded adapter, a hierarchical module inserted into each layer of SAM3’s text encoder. The design contains two adapters:

- *i) S-Adapter* learns attribute, position, and relation semantics, enabling effective grounding for simple referring expression where the target instance’s NP remains explicitly available.
- *ii) C-Adapter* builds upon S-Adapter and is responsible for handling complex instructions that lack explicit target NP mentions, requiring multi-hop or contextual reasoning.

Both adapters employ a lightweight bottleneck structure (down-projection, ReLU activation, and up-projection) to enhance alignment with visual features, and a multi-head self attention (MHSA) layer is incorporated to capture long-range textural dependencies. During training, S-Adapter is

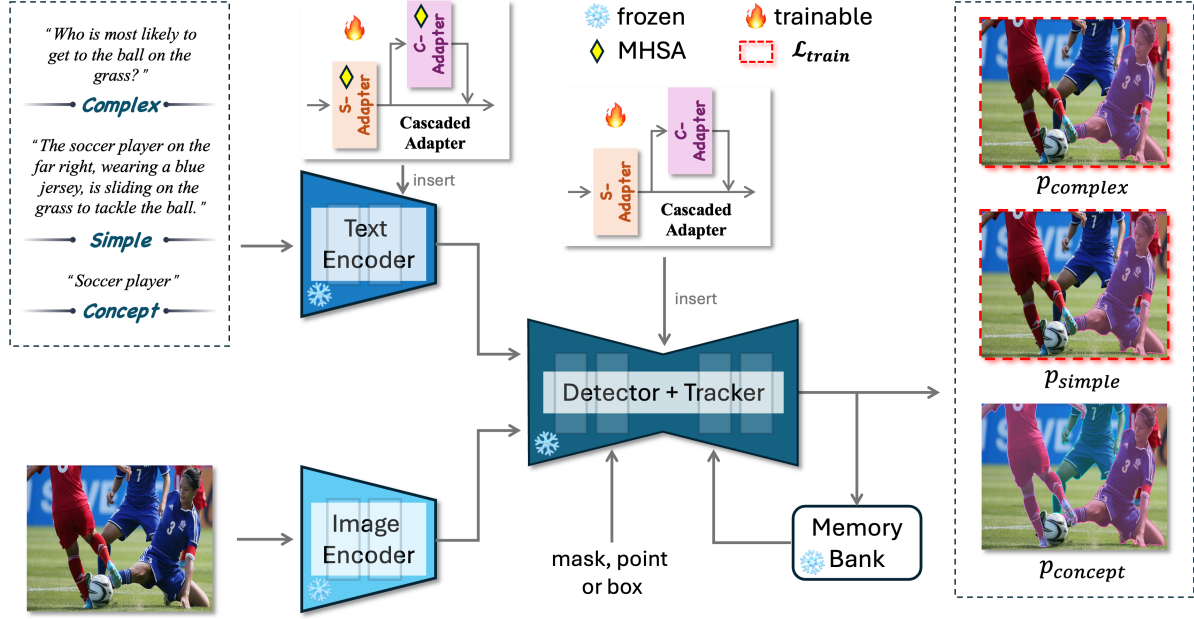


Figure 3. Overview of the proposed SAM3-I framework. (Sec. 4)

used exclusively for simple instructions, whereas complex instructions activate the full cascade so that C-Adapter can refine and enrich the representation produced by S-Adapter. This progressive cascaded learning mechanism mirrors the natural hierarchy of linguistic difficulty, stabilizes optimization, mitigates catastrophic interference, and yields more structured and expressive linguistic embeddings that generalize well to both simple and complex instruction forms.

To propagate instruction understanding into the segmentation stage, we further integrate the cascaded adapter into SAM3’s detector. The detector receives the adapted instructional features and visual features, and produces instruction-conditioned mask predictions for both simple and complex branches, denoted as p_{simple} and p_{complex} , respectively.

Instruct-Mask Distribution Alignment Loss. Allowing the two branches to decode instructions independently risks *semantic drift* between them. To maintain coherent and stable grounding across different levels of instruction, we introduce a pair of alignment losses that regularize their predictions beyond the segmentation loss \mathcal{L}_{seg} used in SAM3, enforcing consistency in both instruction semantics and mask distributions:

- *i) Distribution Alignment.* To ensure that the simple- and complex-instruction branches produce compatible predictions for the same target, we align their mask distributions using a Kullback-Leibler (KL) divergence loss:

$$\mathcal{L}_{\text{align}} = \text{KL}(p_{\text{simple}} \parallel p_{\text{complex}}).$$

This encourages the two branches to share a consistent

semantic space and stabilizes optimization by anchoring them to SAM3’s original concept-level detector.

- *ii) Uncertainty-Aware Hard-Region Supervision.* Discrepancies between the two branches often arise in semantically difficult regions, *e.g.*, occlusions, relational cues, or context-dependent areas. To emphasize learning on these challenging pixels, we compute an uncertainty map $w_{\text{uncertainty}}$ based on the disagreement between the simple- and complex-instruction predictions, measured using the Jensen–Shannon Divergence [13]. This uncertainty score is then used as an adaptive weight in an auxiliary cross-entropy (CE) loss:

$$\mathcal{L}_{\text{hard}} = w_{\text{uncertainty}} \cdot \text{CE}(p_{\text{simple}}, p_{\text{complex}}).$$

By guiding the model to focus on ambiguous or reasoning-intensive regions, this mechanism enhances robustness to complex linguistic instructions.

Multi-Stage Training. SAM3-I is trained through a three-stage curriculum designed to ensure stable convergence and progressively acquire increasingly complex instruction-following capabilities:

- *i) Stage 1: Simple-instruction learning.* The SAM3 backbone is frozen. The S-Adapter is trained on simple instructional data to establish category-, attribute-, and relation-level grounding ability.
- *ii) Stage 2: Complex-instruction reasoning.* The S-Adapter is kept fine-tuned. The C-Adapter is inherited from it and trained using complex instructions to

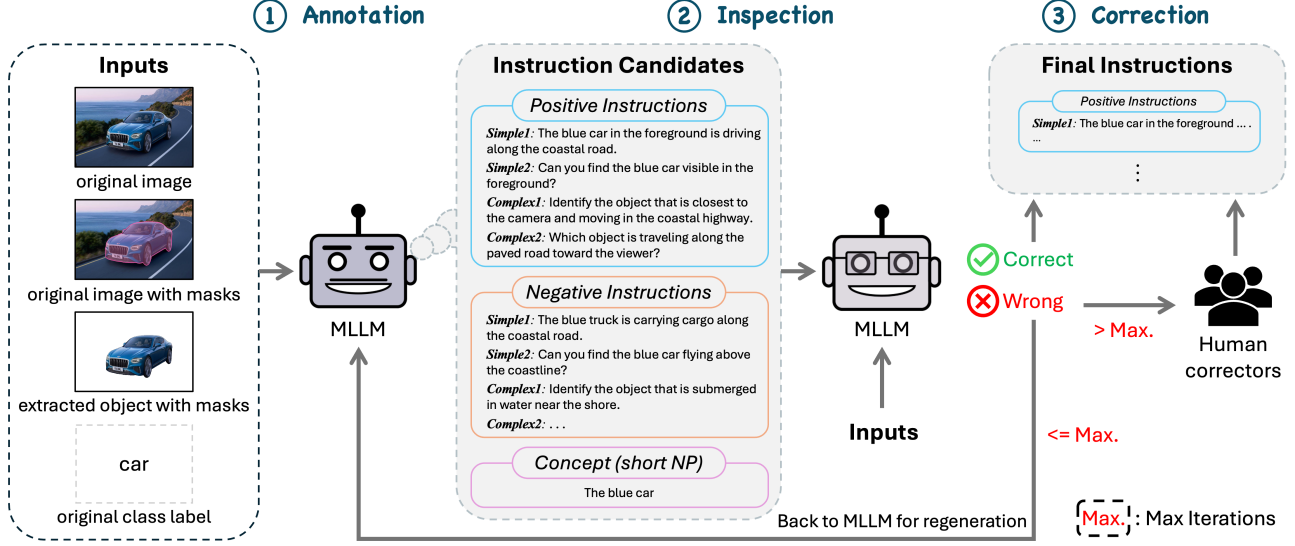


Figure 4. Overview of the scalable instructional data construction pipeline. (Sec. 5)

enable the model with functional, and reasoning-level grounding ability.

- *iii) Stage 3: Joint alignment refinement.* All adapters are activated and jointly fine-tuned using the alignment objectives, harmonizing the two branches and ensuring consistent instruction-conditioned predictions.

This progressive curriculum reflects the inherent hierarchy of linguistic complexity and allows SAM3-I to integrate new instruction-following capabilities without disrupting SAM3’s original concept-driven strengths. The overall training objective is $\mathcal{L}_{\text{train}} = \mathcal{L}_{\text{seg}} + \mathcal{L}_{\text{align}} + \mathcal{L}_{\text{hard}}$.

5. Scalable Instructional Data Construction

To enable PIS at scale, SAM3-I requires a large and diverse collection of high-quality instruction–mask pairs. To achieve this, we develop a semi-automatic data construction pipeline that enriches existing open-vocabulary segmentation datasets with rich, compositional natural-language instructions. The pipeline operates in three stages: i) MLLM-assisted automatic instruction annotation, ii) agentic quality inspection using a second MLLM, and iii) human-assisted correction to resolve challenging or ambiguous cases. An overview of the full workflow is shown in Fig. 4.

Instruction Taxonomy. For each target instance, we generate multiple levels of instructions to reflect the diversity of natural-language grounding:

- *Positive instructions* include two levels. *i) Simple instructions* explicitly include the target’s NP and correspond to referring-style descriptions that focus on the target’s perceptual attributes, *e.g.*, color, shape, states,

and spatial relationships alongside the target’s NP. *ii) Complex instructions* exclude the NP and instead rely on cognitive reasoning to identify the target, *e.g.*, action, functions, and affordance, forcing the model to interpret the underlying intent and deduce the correct object to segment. Both instruction types are produced in declarative and question formats, aiming to enrich linguistic diversity.

- *Negative instructions* are synthesized by modifying or contradicting the visual semantics while preserving natural-language fluency. They act as contrastive distractors, enabling the inspector MLLM to reliably distinguish correct instructions from incorrect ones during quality filtering.
- *Concept NPs* are generated for open-vocabulary datasets that provide only raw class labels, ensuring compatibility with SAM3’s PCS-style inputs, which expect short concept NPs rather than long class labels.

Through this process, our pipeline yields four positive instructions, four negative instructions, and one short concept NP for each target instance, all paired with the original class label. The detailed pipeline is described below.

Stage 1: Automatic Instruction Annotation. Given an image, its ground-truth masks, and the corresponding class labels, we first construct a rich visual prompt that includes the original image, an overlaid image with masks, and cropped object region with masks. Combined with a carefully designed system prompt and a set of few-shot examples, this visual input is fed into an MLLM to produce instruction candidates. For each instance, the annotator MLLM outputs: i) four positive instructions, covering both

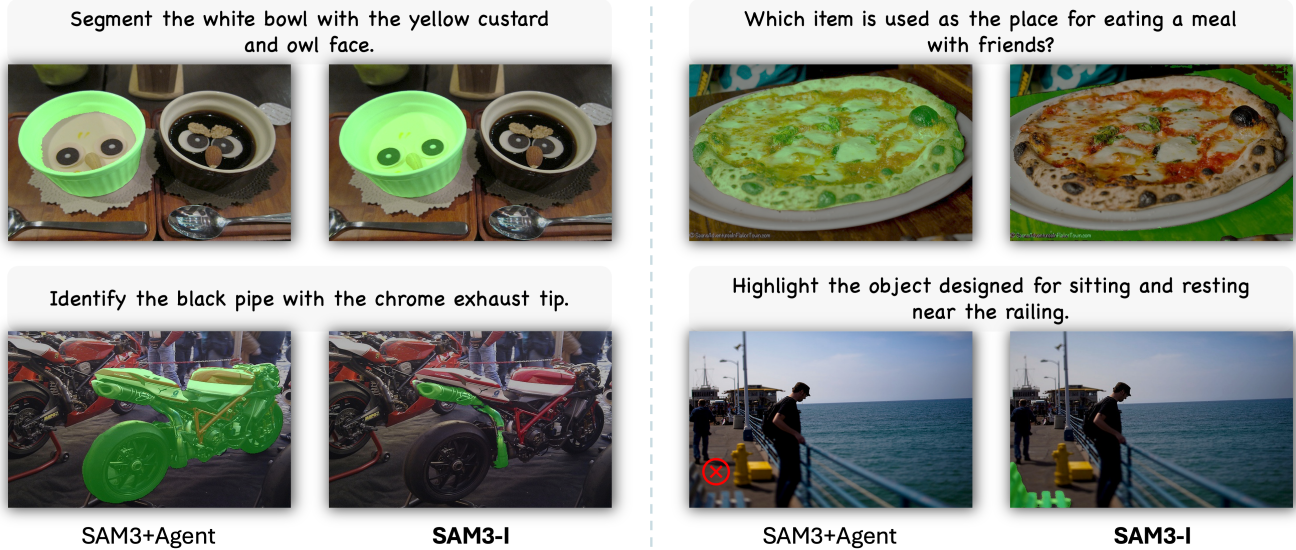


Figure 5. **Qualitative comparison between SAM3-I and SAM3 with an MLLM agent.** The left column shows examples with simple referring instructions, while the right column presents complex instructions that require contextual or functional reasoning. In all cases, we use Qwen3-VL-8B as the external agent for SAM3+Agent. Across both simple and complex settings, SAM3-I more reliably grounds the intended target without relying on external MLLM processing. In the final example, SAM3+Agent fails to produce a valid segmentation, whereas SAM3-I correctly identifies the instructed object.

simple and complex instructions in declarative and question formats, ii) four negative instructions with intentionally contradicted semantics, and iii) one short concept NP compatible with SAM3’s PCS-style prompting.

Stage 2: Agentic Quality Inspection. All generated positive and negative instructions are then evaluated by a second MLLM through a multiple-choice verification task. The inspector must correctly identify all instructions that align with the visual content, *i.e.*, image with target mask, while rejecting those that do not. An instruction set is accepted only when the inspector achieves 100% accuracy across all candidates. If any misalignment is detected, the entire set is rejected and returned to Stage 1 for regeneration. This annotation–inspection loop is repeated for up to ten rounds, ensuring both broad coverage and high semantic precision.

Stage 3: Human-in-the-Loop Correction. Samples that repeatedly fail automatic verification are forwarded to human annotators for final review. Three annotators collaboratively revise or rewrite problematic instructions to ensure correctness, clarity, and precise grounding; extremely ambiguous or impractical cases are discarded. This stage resolves long-tail failures that automated agents struggle to correct.

Through these three stages, our pipeline produces a scalable, high-quality instructional dataset as the foundation for training SAM3-I’s instruction-following capabilities.

6. Experiments

We conduct empirical experiments¹ to evaluate SAM3-I from two complementary perspectives: i) its instruction-following capability on our newly constructed *PACO-LVIS-Instruct* benchmark; and ii) ablation studies that assess the contribution of key components in our design. Unless otherwise noted, all results are obtained using single-pass inference without assistance from any external agents.

Datasets and Metrics. To train and evaluate PIS models, we extend the PACO-LVIS [18] benchmark with rich natural-language instructions, resulting in *PACO-LVIS-Instruct*. The dataset includes 45,308 images, 210,876 object-level masks, and 843,504 positive instructions, with an average instruction length of 15.3 words. The train/val/test splits follow those of the original PACO-LVIS benchmark, and all instruction–mask pairs are produced using the pipeline introduced in Sec. 5. For evaluation, we adopt the $gIoU$ and $P@50$ metrics. Here $gIoU$ [11] is defined by the average of all per-image Intersection-over-Union (IoU). Precision@0.5 ($P@50$ [6]) measures the percentage of test samples whose predicted segmentation mask achieves an Intersection-over-Union (IoU) of at least 0.5 with the corresponding ground-truth mask. The percent symbol is omitted for readability.

Implementation Details. For data engine construction, we use two separate Qwen3-VL-8B (Instruct) models [1] to perform the annotation–inspection loop described in Sec. 5.

¹Preliminary results. Comprehensive evaluation is ongoing.

Model	Parameter	Inference	<i>Concept-level</i>		<i>Simple Instruct.</i>		<i>Complex Instruct.</i>	
			gIoU	P@50	gIoU	P@50	gIoU	P@50
SAM3 [3]	0.8B	single	48.9	54.1	–	–	–	–
SAM3 [3] + Agent (Qwen3-VL-2B [1])	2.8B	multi	–	–	40.6	43.6	30.5	32.7
SAM3 [3] + Agent (Qwen3-VL-8B [1])	8.8B	multi	–	–	41.6	45.6	48.2	52.3
SAM3-I	1.1B	single	48.9*	54.1*	54.0	59.6	51.0	56.4
					+12.4	+14.0	+2.8	+4.1

Table 1. **Comparison of SAM3-I with SAM3 and SAM3+Agent baselines.** SAM3-I improves simple and complex instruction-following performance while preserving SAM3’s original concept-level understanding. Unlike agent-based variants, SAM3-I operates in a single-stage inference pipeline with fewer parameters and requires no external MLLM reasoning. * indicates that we retain naive SAM3’s concept-level scores, and “–” denotes settings not applicable to the corresponding method.

Ablated Settings	<i>Simple Instruct.</i>		<i>Complex Instruct.</i>	
	gIoU	P@50	gIoU	P@50
Our SAM3-I	54.0	59.6	51.0	56.4
<i>w/o. stages 1 & 2 training</i>	42.9	47.6	42.6	47.4
<i>w/o. stage 2 training</i>	52.1	57.7	43.9	48.9
<i>w/o. mask distribution alignment</i>	52.4	57.8	50.4	55.7
<i>w/o. uncertainty-aware hard-region supervision</i>	51.9	57.3	49.7	55.0

Table 2. **Ablation study of SAM3-I showing the impact of each design choice.** We report performance after removing individual components from the full model. Discarding curriculum stages, distribution alignment, or uncertainty-aware supervision each degrades performance, validating the contribution of every module. “w/o” denotes the SAM3-I model with the corresponding component removed.

The entire process is executed on 32 H100 GPUs to support large-scale instruction generation and verification. The afterwards model training are carried out with a batch size of 32 on 16 H100 GPUs. During training, we use only the PACO-LVIS-Instruct train split and update the simple- and complex-instruction branches, while keeping the original concept branch frozen to preserve SAM3’s original concept segmentation capability. For hyper-parameters, we follow the original SAM3 settings without modification. For the SAM3 plus multimodal-agent, we set the maximum number of iterative checking rounds to 3.

Results for Instruction-Following Capability. We first assess whether SAM3-I can effectively follow natural-language instructions and segment the target instances specified by concept, simple, and complex instruction prompts. We compare it against two baselines:

- **SAM3 [3]:** the original SAM3 model, which accepts only short concept prompts (NP-only) and therefore cannot handle simple or complex instructions.
- **SAM3 [3] + Agent [1]:** an agentic pipeline where an MLLM (Qwen3-VL) converts long instructions into short NPs and then conducts iterative mask filtering.
- **SAM3-I (Ours):** our unified framework, which supports all instruction types with single-pass inference while requiring fewer parameters and computation than using an external MLLM agent.

As shown in Table 1, SAM3-I maintains SAM3’s concept-level performance (48.9 gIoU / 54.1 P@50) as well as enables the instruction-following ability. It achieves 54.0 gIoU / 59.6 P@50 on simple instructions and 51.0 gIoU / 56.4 P@50 on complex ones, demonstrating reliable interpretation of diverse instruction types in a single-pass pipeline with fewer parameters than agent-based alternatives. The visual comparison is presented in Fig. 5. These results show that SAM3-I unifies concept grounding and instruction-driven reasoning within an efficient extension of the SAM family. We note that the current version should be regarded as an initial feasibility study, intended to demonstrate that SAM3 can be meaningfully extended to follow natural-language instructions. Achieving state-of-the-art performance is beyond the scope of this work, as doing so would require scaling to substantially larger instructional corpora to fully realize a PIS foundation model. *This direction is planned for the next stage of our work.*

Results for Ablation Studies. We perform ablation studies on the PACO-LVIS-Instruct test set to analyze the contribution of each major design choice in SAM3-I. Table 2 reports results when removing individual components from the full model. As observed, removing the first two training stages (“w/o stages 1 & 2 training”) leads to the most significant drop across both simple and complex instructions (e.g., simple: 54.0 \rightarrow 42.9 gIoU, complex: 51.0 \rightarrow 42.6 gIoU). This suggests that without progressive curriculum learning, the model is forced to acquire attribute, relation,

and reasoning capabilities simultaneously, which destabilizes optimization and prevents the cascaded adapters from forming well-structured linguistic representations. Removing only Stage 2 (“w/o stage 2 training”) also causes noticeable degradation on complex instructions (51.0 \rightarrow 43.9 gIoU , 56.4 \rightarrow 43.9 P@50). This verifies that complex-instruction reasoning is hard to be learned implicitly and requires explicit training with NP-free, reasoning-dependent instructions. The ablation trends confirm our design rationale: simple and complex instructions require distinct levels of linguistic understanding, and a hierarchical cascaded adapter design is crucial for capturing this spectrum.

Furthermore, removing the distribution alignment loss (“w/o mask distribution alignment”) causes simple- and complex-instruction branches to diverge semantically. Performance drops from 54.0 \rightarrow 52.4 gIoU on simple instructions and from 51.0 \rightarrow 50.4 gIoU on complex ones, showing that aligning mask distributions helps maintain consistent grounding across both branches. Removing the hard-region supervision (“w/o uncertainty-aware hard-region supervision”) also leads to degraded performance (simple: 54.0 \rightarrow 51.9 gIoU , complex: 51.0 \rightarrow 49.7 gIoU). This highlights the importance of focusing training on semantically difficult regions to strengthen robustness on linguistic instructions.

The full SAM3-I model achieves the best results across both simple (54.0 gIoU , 59.6 P@50) and complex instructions (51.0 gIoU , 56.4 P@50). These results confirm that: 1) multi-stage training provides a stable path for progressively acquiring linguistic complexity; 2) the cascaded adapter structure is essential for layered instruction understanding; and 3) the alignment losses play complementary roles in enforcing semantic consistency and improving robustness.

7. Discussion and Outlook

While SAM3-I demonstrates the feasibility of extending the SAM family toward instruction-following segmentation, several limitations and opportunities for further improvement remain:

i) Scaling training data for richer instruction knowledge. Our current data engine offers an effective prototype for generating rich instructional corpus, yet scaling to larger and more diverse instruction-mask datasets would further strengthen the model’s ability to understand and reason over natural-language instructions. Similar to how SA-1B, SA-V, and SA-Co [3, 9, 19] enabled the evolution of the SAM family, expanding the scale and diversity of PIS training data across both object- and part-level annotations is a crucial step toward building a more comprehensive instruction-grounded segmentation foundation model.

ii) Potential bias of instruction-instance pairs. SAM3-I is primarily trained on settings where multiple instructions correspond to a single instance, and all instances are associ-

ated with a single concept under original SAM3’s PCS formulation, *i.e.*, *N-to-1 instance segmentation*. However, real-world scenarios often require interpreting instructions that refer to multiple instances simultaneously, *i.e.*, group reasoning or *1-to-N instance segmentation*. Overcoming this limitation calls for greater data diversity and explicit mitigation of dataset bias, enabling SAM3-I to generalize more effectively to multi-instance and group-level grounding.

iii) More flexible and scalable architecture. The current design employs separate branches or adapters for concepts, simple, and complex instructions. A promising direction for scaling SAM3-I is to move beyond heuristic branch switching and adopt adaptive routing mechanisms. For example, consolidating the instruction-guided branches or introducing a Mixture-of-Experts (MoE) [4, 15] router could dynamically choose the appropriate reasoning path while preserving SAM3’s original concept-level capabilities.

iv) Broader evaluations. A natural next step is to fine-tune SAM3-I on task-specific instruction datasets, such as training on ReasonSeg [11] and evaluating its instruction-level generalization under domain-specific conditions. In addition, as larger-scale instructional data becomes available, we expect SAM3-I to progressively evolve toward a more foundational PIS model. To this end, we will also conduct broader zero-shot generalization studies, enabling a more comprehensive assessment of SAM3-I’s adaptability and robustness across different tasks and linguistic distributions.

8. Conclusion

In this work, we introduced SAM3-I, an enhanced framework that unifies concept-level understanding and instruction-level reasoning within the SAM family. Enabled by a scalable instructional data construction pipeline, SAM3-I provides a preliminary demonstration that SAM3 can be effectively extended to follow natural-language instructions while preserving its strong concept grounding. We further analyzed the current limitations of SAM3-I and outlined several directions for future improvement. Moving forward, we aim to scale the instruction corpus, explore finer-grained part-aware segmentation, and develop more flexible and adaptive architectures that better accommodate diverse real-world scenarios. We hope that SAM3-I represents an early step toward more capable instruction-driven segmentation foundation models.

9. Acknowledgment

This work is partly supported by NSERC Discovery, CFI-JELF, NSERC Alliance, Alberta Innovates, and PrairiesCan grants. The views and conclusions contained in this paper are those of the authors and should not be interpreted as representing any funding agency.

References

- [1] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, Wenbin Ge, Zhifang Guo, Qidong Huang, Jie Huang, Fei Huang, Binyuan Hui, Shutong Jiang, Zhaohai Li, Mingsheng Li, Mei Li, Kaixin Li, Zicheng Lin, Junyang Lin, Xuejing Liu, Jiawei Liu, Chenglong Liu, Yang Liu, Dayiheng Liu, Shixuan Liu, Dunjie Lu, Ruilin Luo, Chenxu Lv, Rui Men, Lingchen Meng, Xuancheng Ren, Xingzhang Ren, Sibao Song, Yuchong Sun, Jun Tang, Jianhong Tu, Jianqiang Wan, Peng Wang, Pengfei Wang, Qiuyue Wang, Yuxuan Wang, Tianbao Xie, Yiheng Xu, Haiyang Xu, Jin Xu, Zhibo Yang, Mingkun Yang, Jianxin Yang, An Yang, Bowen Yu, Fei Zhang, Hang Zhang, Xi Zhang, Bo Zheng, Humen Zhong, Jingren Zhou, Fan Zhou, Jing Zhou, Yuanzhi Zhu, and Ke Zhu. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025. **2, 6, 7**
- [2] Daniel Bolya, Po-Yao Huang, Peize Sun, Jang Hyun Cho, Andrea Madotto, Chen Wei, Tengyu Ma, Jiale Zhi, Jathushan Rajasegaran, Hanoona Rasheed, et al. Perception encoder: The best visual embeddings are not at the output of the network. *Neural Information Processing Systems*, 2025. **3**
- [3] Nicolas Carion, Laura Gustafson, Yuan-Ting Hu, Shoubhik Debnath, Ronghang Hu, Didac Suris, Chaitanya Ryali, Kalyan Vasudev Alwala, Haitham Khedr, Andrew Huang, Jie Lei, Tengyu Ma, Baishan Guo, Arpit Kalla, Markus Marks, Joseph Greer, Meng Wang, Peize Sun, Roman Rädle, Triantafyllos Afouras, Effrosyni Mavroudi, Katherine Xu, Tsung-Han Wu, Yu Zhou, Liliane Momeni, Rishi Hazra, Shuangrui Ding, Sagar Vaze, Francois Porcher, Feng Li, Siyuan Li, Aishwarya Kamath, Ho Kei Cheng, Piotr Dollár, Nikhila Ravi, Kate Saenko, Pengchuan Zhang, and Christoph Feichtenhofer. Sam 3: Segment anything with concepts. *arXiv preprint arXiv:2511.16719*, 2025. **1, 2, 7, 8**
- [4] Tianlong Chen, Xuxi Chen, Xianzhi Du, Abdullah Rashwan, Fan Yang, Huizhong Chen, Zhangyang Wang, and Yeqing Li. Adamv-moe: Adaptive multi-task vision mixture-of-experts. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 17346–17357, 2023. **8**
- [5] Di Feng, Christian Haase-Schütz, Lars Rosenbaum, Heinz Hertlein, Claudius Glaeser, Fabian Timm, Werner Wiesbeck, and Klaus Dietmayer. Deep multi-modal object detection and semantic segmentation for autonomous driving: datasets, methods, and challenges. *IEEE Transactions on Intelligent Transportation Systems*, 22:1341–1360, 2020. **2**
- [6] Ronghang Hu, Marcus Rohrbach, and Trevor Darrell. Segmentation from natural language expressions. In *European Conference on Computer Vision*, pages 108–124, 2016. **6**
- [7] Wei Ji, Jingjing Li, Qi Bi, Tingwei Liu, Wenbo Li, and Li Cheng. Segment anything is not always perfect: An investigation of sam on different real-world applications. *Machine Intelligence Research*, 21(4):617–630, 2024. **1**
- [8] Wei Ji, Jingjing Li, Cheng Bian, Zhicheng Zhang, and Li Cheng. Semantict: A large-scale dataset and method for robust semantic segmentation in multispectral images. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 3307–3316, 2023. **1**
- [9] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023. **1, 2, 8**
- [10] Tae-young Ko and Seung-ho Lee. Novel method of semantic segmentation applicable to augmented reality. *Sensors*, 20(6):1737, 2020. **2**
- [11] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9579–9589, 2024. **6, 8**
- [12] Yong Li, Zhiqiang Guo, Feng Shuang, Man Zhang, and Xiuhua Li. Key technologies of machine vision for weeding robots: A review and benchmark. *Computers and Electronics in Agriculture*, 196:106880, 2022. **2**
- [13] Jianhua Lin. Divergence measures based on the shannon entropy. *IEEE Transactions on Information Theory*, 37(1):145–151, 1991. **4**
- [14] Jonathan Long, Evan Shelhamer, and Trevor Darrell. Fully convolutional networks for semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3431–3440, 2015. **1**
- [15] Saeed Masoudnia and Reza Ebrahimpour. Mixture of experts: a literature survey. *Artificial Intelligence Review*, 42(2):275–293, 2014. **8**
- [16] Yun Peng, Xiao Lin, Nachuan Ma, Jiayuan Du, Chuangwei Liu, Chengju Liu, and Qijun Chen. Sam-lad: Segment anything model meets zero-shot logic anomaly detection. *Knowledge-Based Systems*, 314:113176, 2025. **2**
- [17] Benedict Quartey, Eric Rosen, Stefanie Tellex, and George Konidaris. Verifiably following complex robot instructions with foundation models. In *IEEE International Conference on Robotics and Automation*, pages 1–8. IEEE, 2025. **2**
- [18] Vignesh Ramanathan, Anmol Kalia, Vladan Petrovic, Yi Wen, Baixue Zheng, Baishan Guo, Rui Wang, Aaron Marquez, Rama Kovvuri, Abhishek Kadian, et al. Paco: Parts and attributes of common objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7141–7151, 2023. **6**
- [19] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. Sam 2: Segment anything in images and videos. *International Conference on Learning Representations*, 2025. **1, 2, 8**
- [20] Azhar Wahid, Miftachul Huda, Moh Abdul Rohim, Abdul Halim Ali, Khairul Ghufuran Kaspin, Maskanatul Fiqiyah, and Muhammad Talhah Ajmain Jima'ain. Augmented reality model in supporting instruction process: a critical review. In *International Congress on Information and Communication Technology*, pages 69–83. Springer, 2024. **2**
- [21] Junde Wu, Ziyue Wang, Mingxuan Hong, Wei Ji, Huazhu Fu, Yanwu Xu, Min Xu, and Yueming Jin. Medical sam adapter: Adapting segment anything model for medical image segmentation. *Medical Image Analysis*, 102:103547, 2025. **1, 2**