

TRIPLEC LEARNING AND LIGHTWEIGHT SPEECH ENHANCEMENT FOR MULTI-CONDITION TARGET SPEECH EXTRACTION

Ziling Huang^{1,2†}, Junnan Wu², Lichun Fan², Zhenbo Luo², Jian Luan², Haixin Guan³, Yanhua Long^{1,3*}

¹Shanghai Normal University, Shanghai, China

²MiLM Plus, Xiaomi Inc., Beijing, China

³Unisound AI Technology Co., Ltd. Beijing, China

ABSTRACT

In our recent work, we proposed Lightweight Speech Enhancement Guided Target Speech Extraction (LGTSE) and demonstrated its effectiveness in multi-speaker-plus-noise scenarios. However, real-world applications often involve more diverse and complex conditions, such as one-speaker-plus-noise or two-speaker-without-noise. To address this challenge, we extend LGTSE with a Cross-Condition Consistency learning strategy, termed TripleC Learning. This strategy is first validated under multi-speaker-plus-noise condition and then evaluated for its generalization across diverse scenarios. Moreover, building upon the lightweight front-end denoiser in LGTSE can flexibly process both noisy and clean mixtures and show strong generalization to unseen conditions, we integrate TripleC learning with a further proposed parallel universal training scheme that organizes batches containing multiple scenarios for the same target speaker. By enforcing consistent extraction across different conditions, easier cases can assist harder ones, thereby fully exploiting diverse training data and fostering a robust universal model. Experimental results on the Libri2Mix three-condition tasks demonstrate that the proposed LGTSE with TripleC learning achieves superior performance over condition-specific models, highlighting its strong potential for universal deployment in real-world speech applications.

Index Terms— Target Speech Extraction, Lightweight Speech Enhancement, TripleC Learning, Universal TSE

1. INTRODUCTION

Target speech extraction (TSE) aims to extract the speech of a desired speaker from mixtures of interferers and background noise using an enrollment utterance, with applications in automatic speech recognition, hearing aids and speech communication. However, most existing approaches are designed and evaluated under a single condition, such as two-speaker mixtures or one-speaker-plus-noise, which limits their practicality. However, real-world applications often involve diverse and complex conditions, including one-speaker-plus-noise, two-speaker-without-noise and noisy multi-speaker scenarios. This discrepancy highlights the need for a universal TSE that can robustly generalize across multi-diverse conditions.

Recent studies on enrollment-guided TSE can be grouped into three categories: 1) speaker embedding/encoder-based approaches [1–4], 2) embedding/encoder-free methods [5–9], and 3) hybrid techniques that combine the two [10]. However, research

on universal TSE that generalizes across diverse conditions remains limited, especially for embedding-free models. For example, [11] proposed USEF-TSE, showing that embedding-free frameworks can integrate with different separation backbones. [12] introduced UPN, which unifies personalized and non-personalized TSE within a single model but relies on speaker embeddings. Similarly, [13] developed USEF-PNet, enabling both personalized and non-personalized TSE, while being an embedding-free framework. AnyEnhance [14], UniAudio [15] and Metis [16] also offer unified frameworks supporting TSE and other speech tasks. However, most of these studies only provide single-condition TSE performance, and they have not been evaluated under multiple interfering conditions, leaving their robustness unverified and highlighting the need for systematic studies on multi-condition TSE.

To the best of our knowledge, multi-condition TSE was first brought to significant attention in the community during the ICASSP 2021 DNS Challenge [17], called personalized speech enhancement (PSE), and further explored in ICASSP 2022 [18] and 2023 [19]. In these challenges, models were typically trained on data from all three conditions, but evaluation used mainly overall metrics, without analyzing each system across individual conditions. For example, top-ranking systems [20, 21] were evaluated using overall performance without examining condition-specific performance. Later studies [22, 23] conducted condition-wise evaluations, showing that training on all conditions and adding innovations slightly improved overall performance, simpler scenarios were already well-handled, while the main limitation came from the challenging two-speaker-plus-noise condition, which still needs targeted improvement. Notably, most of these efforts focused on embedding/encoder-based models; in contrast, embedding/encoder-free TSE has seen few attempts to build a universal model handling multi-diverse conditions.

Building upon these observations, this work makes the following contributions: 1) We extend our recently proposed LGTSE [24] by introducing a cross-condition consistency learning strategy, termed TripleC Learning, which is initially validated on multi-speaker-plus-noise mixtures and then generalized to multi-condition TSE tasks, showing consistent improvements in extraction performance; 2) We build a universal embedding-free TSE model for multiple conditions: a lightweight GTCRN-based [25] denoiser in LGTSE flexibly handles both noisy and clean mixtures, and a parallel universal training strategy is proposed that organizes multiple conditions for the same target speaker within each batch, enabling effective integration with TripleC Learning; 3) Experimental results on the Libri2Mix three-condition dataset demonstrate that the proposed universal model consistently outperforms condition-specific baselines, highlighting its robustness and practical potential for real-world deployment.

*Yanhua Long is the corresponding author. This work was sponsored by Natural Science Foundation of Shanghai (Grant No.25ZR1401277).

† Work done during internship at MiLM Plus, Xiaomi Inc.

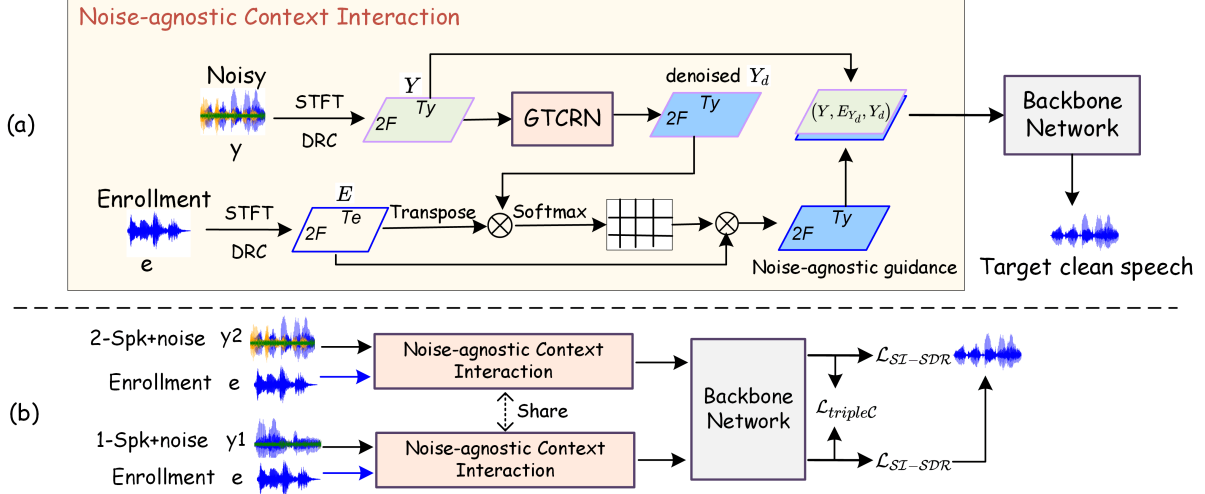


Fig. 1: Illustration of the proposed framework: (a) LGTSE architecture. (b) TripleC training scheme.

2. PROPOSED METHODS

2.1. Revisit LGTSE

Fig.1(a) shows our recently proposed LGTSE [24], which is a lightweight speech enhancement-guided target speech extraction model. It consists of a front-end Noise-agnostic Context Interaction module and a back-end backbone. The model takes two inputs: noisy mixtures and enrollment speech, and outputs the extracted target clean speech. Both inputs are first transformed into complex time-frequency representations via short-time Fourier transform, with the enrollment $\mathbf{E} \in \mathbb{R}^{2F \times T_e}$ and the noisy speech $\mathbf{Y} \in \mathbb{R}^{2F \times T_y}$, where $2F$ denotes the concatenated real and imaginary parts along the frequency axis, and T_e and T_y represent the number of frames of the enrollment and noisy speech, respectively. Dynamic range compression [26] with compression factor $\beta = 0.5$ is applied to the magnitude spectrum:

$$\mathbf{E} = |\mathbf{E}|^\beta e^{j\theta_E}, \quad \mathbf{Y} = |\mathbf{Y}|^\beta e^{j\theta_Y}. \quad (1)$$

The noisy input \mathbf{Y} is then denoised by the GTCRN [25] front-end to obtain \mathbf{Y}_d , which is used for noise-agnostic context interaction:

$$\begin{aligned} \mathbf{Y}_d &= \text{GTCRN}(\mathbf{Y}), \\ \mathbf{E}_{Y_d} &= \mathbf{E} \times \text{softmax}(\mathbf{E}^T \times \mathbf{Y}_d). \end{aligned} \quad (2)$$

The motivation is that directly using the noisy input would produce guidance contaminated by noise, which can degrade the target speech extraction performance. In [24], LGTSE showed competitive performance in multi-speaker noisy scenarios. Here, we further enhance the model and extend its generalization to diverse conditions.

2.2. Cross-condition Consistency (TripleC) Learning

Fig. 1(b) illustrates the training scheme of our proposed Cross-condition Consistency (TripleC) Learning. To improve performance in multi-speaker-plus-noise conditions, we leverage the fact that single-speaker-plus-noise mixtures are easier for the model to extract, thus providing more reliable guidance. We therefore enforce consistency between outputs of the same target speaker with different conditional interfering and noise.

Specifically, let y_1 denote a single-speaker-plus-noise mixture and y_2 a two-speaker-plus-noise mixture, both paired with the same

enrollment speech e , and let s be the clean target speech. During training, the two input pairs (y_1, e) and (y_2, e) are fed in parallel. Each pair is processed by the noise-agnostic context interaction module and then passed into the backbone network. For brevity, we denote this end-to-end LGTSE mapping as $f(\cdot)$, and the corresponding extracted signals are

$$\hat{s}_i = f(y_i, e), \quad i \in \{1, 2\}, \quad (3)$$

where \hat{s}_1 and \hat{s}_2 are the estimated target speech signals from the two conditions, both aiming to approximate s . Thus, the overall training objective combines consistency and supervision losses is defined as:

$$\mathcal{L}_{\text{TripleC}} = w \cdot \frac{1}{T} \sum_{t=1}^T |\hat{s}_1[t] - \hat{s}_2[t]|, \quad (4)$$

$$\mathcal{L}_{\text{SI-SDR}} = - \sum_{i=1}^2 \text{SI-SDR}(\hat{s}_i, s), \quad (5)$$

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{SI-SDR}} + \mathcal{L}_{\text{TripleC}}, \quad (6)$$

where T is the number of sampling points and $w = 50$. Here, $\mathcal{L}_{\text{TripleC}}$ enforces consistency between outputs under different conditions, while $\mathcal{L}_{\text{SI-SDR}}$ ensures both estimates match the clean target s . This joint optimization allows the model to exploit easier single-speaker mixtures to guide extraction in harder multi-speaker-plus-noise conditions, improving robustness and consistency.

2.3. TripleC-parallel Universal Training

To extend TripleC Learning into a universal framework, we propose a parallel universal training scheme where each batch contains three types of mixtures sharing the same target speech and enrollment speech e : single-speaker-plus-noise, two-speaker-plus-noise, and two-speaker. These inputs are processed in parallel by the model, with each condition producing its own extracted output.

The training objective combines two components. First, all outputs are supervised by their clean target speech using SI-SDR loss, ensuring accurate extraction across conditions. Second, the TripleC loss is applied only to the noisy conditions (single-speaker-plus-noise and two-speaker-plus-noise), aligning their outputs to let the easier case guide the harder one.

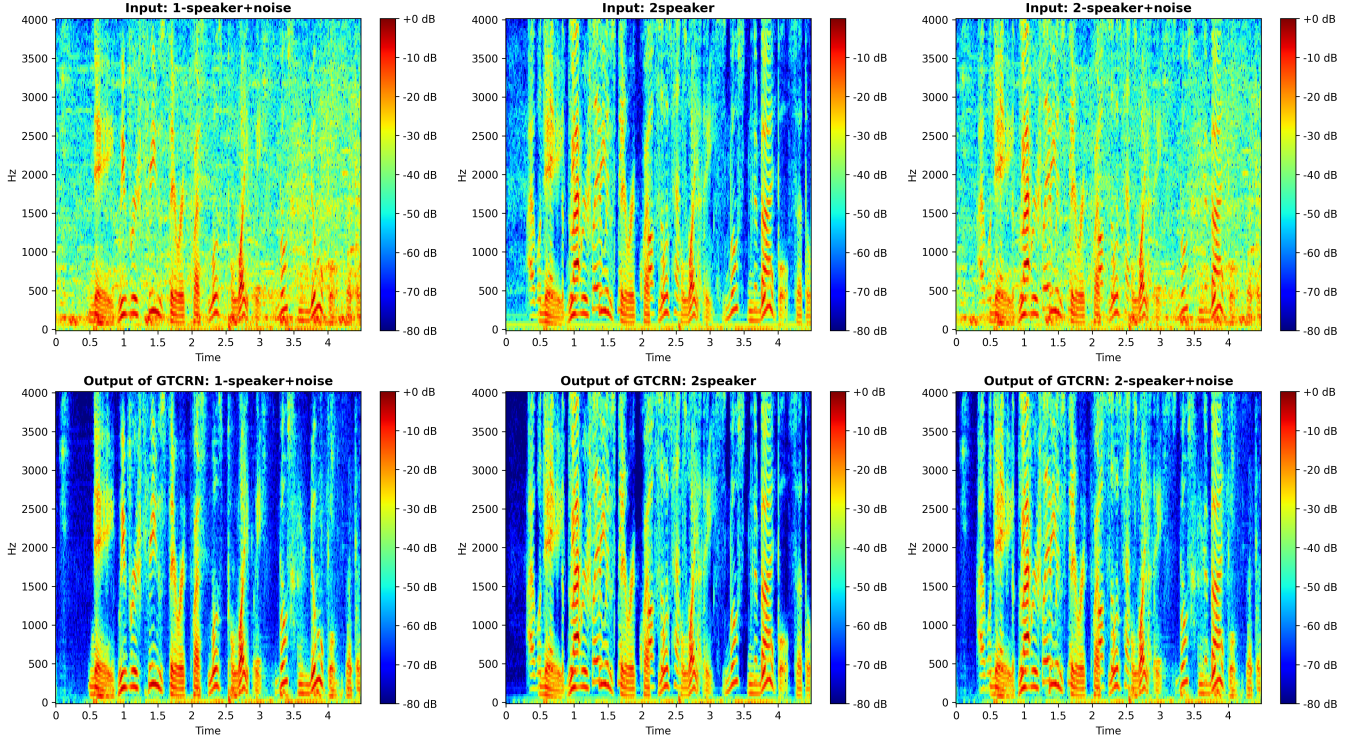


Fig. 2: Illustration of GTCRN denoising performance. Top row: input mixtures under three conditions (single-speaker+noise, two-speaker clean, two-speaker+noise); bottom row: corresponding enhanced outputs.

This parallel setup allows the model to see all conditions simultaneously and to learn a shared representation that generalizes across them. The GTCRN front-end plays a crucial role: it naturally performs effective denoising when noise is present, while behaving almost as an identity mapping on clean mixtures (see Fig. 2). This property enables seamless universal training without any additional adjustment, laying a solid foundation for robust performance in diverse real-world scenarios.

3. EXPERIMENTS AND RESULTS

3.1. Datasets

All our experiments are conducted on the publicly available Libri2Mix dataset [27], which covers three PSE conditions: 1) 1-speaker+noise (*mix_single*): a mixture containing only the target speaker and background noise; 2) 2-speaker (*mix_clean*): a mixture with a target speaker and one interfering speaker without additional noise; 3) 2-speaker+noise (*mix_both*): a mixture with a target speaker, one interfering speaker, and background noise. For clarity, we adopt the terms ‘1-speaker+noise’, ‘2-speaker’, and ‘2-speaker+noise’ instead of the original *mix_** names in Libri2Mix. In each condition, the training set contains 13,900 utterances from 251 speakers, while the development and test sets each contain 3,000 utterances from 40 speakers. All mixtures are simulated in the ‘min’ mode. Note that only the first speaker is taken as the target speaker, and all mixtures are resampled to 8 kHz, unless otherwise specified.

3.2. Models

GTCRN [25], which has achieved state-of-the-art performance on speech enhancement tasks, has only 50K parameters and 0.03G MACs. **SEF-PNet** [6], used as one competitive embedding-free TSE

baseline, has 6.08M parameters and 8.50G MACs. **LGTSE** [24], which combines GTCRN and SEF-PNet, has 6.13M parameters and 8.53G MACs. As proposed in [24], the LGTSE baseline is trained using a *pre-training+finetuning* two-stage training strategy: first, both the GTCRN front-end and backbone networks are pre-trained individually, then the whole LGTSE is fine-tuned to joint optimize the final system. In all the enhanced LGTSE+* experiments, the proposed TripleC and parallel universal training are all performed on both the pre-training and finetuning stages. Full architecture details are provided in [24].

3.3. Configurations

We perform STFT using a 32 ms Hanning window with an 8 ms shift. The model is trained with Adam (initial LR = 0.0005), decayed by 0.98 every two epochs for the first 100 epochs and by 0.9 for the last 20 epochs. Gradient clipping is applied to limit the maximum L2-norm to 1. For evaluation, we report SI-SDR (dB) [30], PESQ [31], and STOI (%) [32].

3.4. Results

3.4.1. Overall Results

Table 1 presents the overall results of condition-wise and multi-condition scenarios (E0-E3). Condition-wise results refer to training and evaluating each condition separately. Compared with SEF-PNet (E0), LGTSE (E1) achieves similar results in the 1-speaker+noise case but shows clear gains under speaker interference. In the 2-speaker task, LGTSE improves SI-SDR and STOI, and in the more challenging 2-speaker+noise scenario, the gains are larger across all metrics. This confirms that the proposed noise-agnostic enrollment guidance in LGTSE provides more accurate cues in robust

Table 1: Performance comparison between our methods (E0–E4) and existing approaches (G0–G2). All metrics are the higher the better.

ID	Training Data	Method	1-speaker+noise			2-speaker			2-speaker+noise		
			SI-SDR	PESQ	STOI	SI-SDR	PESQ	STOI	SI-SDR	PESQ	STOI
-	-	unprocessed	3.27	1.75	79.51	-0.03	1.60	71.38	-2.03	1.43	64.65
E0	Condition-wise	SEF-PNet [6]	14.50	3.05	92.47	13.00	3.05	89.71	7.43	2.14	80.31
E1	Condition-wise	LGTSE [24]	14.50	3.07	92.48	13.18	3.06	90.02	7.88	2.21	81.27
E2	2-spkr+noise + 1-spkr+noise	LGTSE+tripleC	14.25	3.03	92.03	11.87	2.81	88.44	8.41	2.32	82.41
E3	2-spkr+noise + 1-spkr+noise + 2-spkr	LGTSE+tripleC-parallel	14.28	3.03	92.15	13.33	3.07	90.19	8.58	2.33	82.61
G0 [‡]		LGTSE+shuffled	14.42	2.28	92.91	15.01	2.57	92.53	9.70	1.72	85.52
G1 [‡]		LGTSE+tripleC-parallel	14.51	2.30	93.10	15.23	2.64	92.95	10.12	1.77	85.96
G2 [‡]	Condition-wise	DB-BSRNN [28]	-	-	-	13.84	2.53	-	-	1.77	-
G3 [*]	Condition-wise	NCSN++ [29]	-	-	-	13.80	2.24	-	9.70	1.55	-

[‡]/^{*} Results at 16 kHz on Libri2Mix-100 ([‡]) and Libri2Mix-360 (^{*}), with two speakers alternating as the target speaker.

multi-condition TSE.

In E2, applying TripleC boosts the 2-speaker+noise performance over E1 significantly. The 1-speaker+noise condition shows a slight decrease, likely because the model sacrifices some performance on easier conditions to better align outputs for more challenging multi-speaker+noise mixtures, achieving overall improvement. In contrast, the 2-speaker condition shows a noticeable performance drop, as the model has not seen clean speech without noise during training.

Extending TripleC to all conditions in E3 yields slight gains across scenarios. Parallel universal training encourages the model to process single-speaker+noise, multi-speaker clean, and multi-speaker+noise in the same feature space. This shared learning enhances the model’s ability to discriminate the target speaker, leading to minor improvements even for the multi-speaker clean condition, which is not directly constrained by TripleC. Comparing E3 with E0 and E1, *an embedding-free single model achieves universal performance across conditions, and parallel training with TripleC is generalizable*. Except for a slight drop in 1-speaker+noise, all other conditions outperform models trained condition-wise independently, demonstrating the effectiveness of the unified training scheme.

3.4.2. Comparison with Existing Approaches

System G0–G3 in Table 1 presents the performance comparison with recent existing methods. For a fair comparison, all our models are trained on Libri2Mix-100 at 16kHz, with two speakers alternating as the target. G0 is taken as a standard baseline, where training data from the three conditions are randomly shuffled and fed into the model for training. G1 corresponds to our proposed model. It can be seen that applying the TripleC plus parallel universal learning strategy leads to consistent improvements across all conditions, demonstrating the effectiveness of our approach.

Comparing G1 with other condition-wise trained state-of-the-art models (G2 and G3), LGTSE+TripleC-parallel achieves the highest performance. Specifically, under the 2-speaker condition, it achieves SI-SDR/PESQ/STOI = 15.23/2.64/92.95, and under the 2-

speaker+noise condition, SI-SDR/PESQ/STOI = 10.12/1.77/85.96, surpassing the DB-BSRNN model. Moreover, our model even outperforms NCSN++, which is trained on Libri2Mix-360 with more than twice the amount of data. These results verify the effectiveness of a universal, multi-condition, embedding-free TSE model and highlight its potential for practical deployment in diverse acoustic scenarios.

3.4.3. Effects of GTCRN in Multi-condition Tasks

Fig. 2 illustrates the denoising capability of our pre-trained LGTSE front-end, GTCRN. Although trained only on multi-speaker noisy mixtures, it generalizes well to unseen single-speaker noisy and multi-speaker clean conditions. The first row shows the input mixtures: single-speaker+noise, two-speaker clean, and two-speaker+noise. The second row shows the corresponding GTCRN outputs. GTCRN effectively denoises single-speaker noisy inputs and preserves two-speaker clean inputs, removing any slight underlying noise. Performance on two-speaker noisy mixtures is also strong. These results demonstrate that GTCRN provides a robust foundation for a universal TSE model capable of handling both noisy and clean scenarios, enabling an embedding-free TSE system suitable for real-world multi-condition applications.

4. CONCLUSION

In this work, we built upon our previous LGTSE model and proposed TripleC Learning, a cross-condition consistency strategy to improve performance on multi-speaker-plus-noise mixtures. We first validated its effectiveness, and further, by adopting a parallel model training scheme, we developed a universal embedding-free TSE model capable of handling multiple conditions. The effectiveness of our extraction method was verified on the Libri2Mix three-condition datasets. Future work includes more generalization experiments, optimizing the model for low-latency, real-time deployment in practical applications.

5. REFERENCES

- [1] J. Yu, H. Chen, Y. Luo, R. Gu, and C. Weng, “High fidelity speech enhancement with band-split RNN,” in *Proc. Interspeech*, 2023, pp. 2483–2487.
- [2] K. Liu, Z. Du, X. Wan, and H. Zhou, “X-SEPFORMER: End-to-end speaker extraction network with explicit optimization on speaker confusion,” in *Proc. ICASSP*, 2023, pp. 1–5.
- [3] J. Han, Y. Long, et al., “DPCCN: Densely-connected pyramid complex convolutional network for robust speech separation and extraction,” in *Proc. ICASSP*, 2022, pp. 7292–7296.
- [4] Z. You, Z. Zhou, L. Li, and D. Wang, “An investigation on speaker augmentation for end-to-end speaker extraction,” *arXiv preprint arXiv:2505.21805*, 2025.
- [5] B. Zeng, H. Suo, Y. Wan, and M. Li, “SEF-Net: Speaker embedding free target speaker extraction network,” in *Proc. Interspeech*, 2023, pp. 3452–3456.
- [6] Z. Huang, H. Guan, H. Wei, and Y. Long, “SEF-PNet: Speaker encoder-free personalized speech enhancement with local and global contexts aggregation,” in *Proc. ICASSP*, 2025, pp. 1–5.
- [7] X. Yang, C. Bao, J. Zhou, and X. Chen, “Target speaker extraction by directly exploiting contextual information in the time-frequency domain,” in *Proc. Interspeech*, 2024, pp. 10476–10480.
- [8] Y. Hu, H. Xu, Z. Guo, H. Huang, and L. He, “SMMA-Net: An audio clue-based target speaker extraction network with spectrogram matching and mutual attention,” in *Proc. ICASSP*, 2024, pp. 1496–1500.
- [9] T. Pärnamäa and A. Saabas, “Personalized speech enhancement without a separate speaker embedding model,” in *Proc. Interspeech*, 2024, pp. 4863–4867.
- [10] K. Zhang, J. Li, S. Wang, Y. Wei, Y. Wang, Y. Wang, and H. Li, “Multi-level speaker representation for target speaker extraction,” in *Proc. ICASSP*, 2025, pp. 1–5.
- [11] B. Zeng and M. Li, “USEF-TSE: Universal speaker embedding free target speaker extraction,” *IEEE Transactions on Audio, Speech, and Language Processing*, 2025.
- [12] Z. Wang, R. Giri, D. Shah, J.-M. Valin, M. M. Goodwin, and P. Smaragdis, “A framework for unified real-time personalized and non-personalized speech enhancement,” in *Proc. ICASSP*. IEEE, 2023, pp. 1–5.
- [13] Z. Huang, H. Guan, and Y. Long, “Unified architecture and unsupervised speech disentanglement for speaker embedding-free enrollment in personalized speech enhancement,” *arXiv preprint arXiv:2505.12288*, 2025.
- [14] J. Zhang, J. Yang, Z. Fang, Y. Wang, Z. Zhang, Z. Wang, F. Fan, and Z. Wu, “AnyEnhance: A unified generative model with prompt-guidance and self-critic for voice enhancement,” *arXiv preprint arXiv:2501.15417*, 2025.
- [15] D. Yang, J. Tian, X. Tan, R. Huang, S. Liu, H. Guo, X. Chang, J. Shi, J. Bian, Z. Zhao, et al., “UniAudio: Towards universal audio generation with large language models,” in *Proc. ICML*, 2024.
- [16] Y. Wang, J. Zheng, J. Zhang, X. Zhang, H. Liao, and Z. Wu, “Metis: A foundation speech generation model with masked generative pre-training,” *arXiv preprint arXiv:2502.03128*, 2025.
- [17] C. K. A. Reddy, H. Dubey, V. Gopal, R. Cutler, S. Braun, H. Gamper, R. Aichner, and S. Srinivasan, “ICASSP 2021 deep noise suppression challenge,” in *Proc. ICASSP*, 2021, pp. 6623–6627.
- [18] H. Dubey et al., “ICASSP 2022 deep noise suppression challenge,” in *Proc. ICASSP*. IEEE, 2022, pp. 9271–9275.
- [19] H. Dubey, A. Aazami, V. Gopal, B. Naderi, S. Braun, R. Cutler, A. Ju, M. Zohourian, M. Tang, M. Golestaneh, et al., “ICASSP 2023 deep noise suppression challenge,” *IEEE Open Journal of Signal Processing*, vol. 5, pp. 725–737, 2024.
- [20] Y. Ju, W. Rao, X. Yan, Y. Fu, et al., “TEA-PSE: Tencenteethereal-audio-lab personalized speech enhancement system for ICASSP 2022 DNS challenge,” in *Proc. ICASSP*, 2022, pp. 9291–9295.
- [21] X. Yan, Y. Yang, Z. Guo, L. Peng, and L. Xie, “The NPU-Elevoc personalized speech enhancement system for ICASSP 2023 DNS Challenge,” in *Proc. ICASSP*, 2023, pp. 1–2.
- [22] Y. Ju, S. Zhang, W. Rao, et al., “TEA-PSE 2.0: Sub-band network for real-time personalized speech enhancement,” in *Proc. SLT*, 2023, pp. 472–479.
- [23] X. Ge, J. Han, H. Guan, and Y. Long, “Dynamic acoustic compensation and adaptive focal training for personalized speech enhancement,” *Applied Acoustics*, vol. 216, pp. 109803, 2024.
- [24] Z. Huang, J. Wu, L. Fan, Z. Luo, J. Luan, H. Guan, and Y. Long, “Lightweight speech enhancement guided target speech extraction in noisy multi-speaker scenarios,” *arXiv preprint arXiv:2508.19583*, 2025.
- [25] X. Rong, T. Sun, X. Zhang, Y. Hu, C. Zhu, and J. Lu, “GTCRN: A speech enhancement model requiring ultralow computational resources,” in *Proc. ICASSP*, 2024, pp. 971–975.
- [26] A. Li, C. Zheng, R. Peng, and X. Li, “On the importance of power compression and phase estimation in monaural speech dereverberation,” *JASA Express Letters*, p. 014802, 2021.
- [27] J. Cosentino, M. Pariente, S. Cornell, A. Deleforge, and E. Vincent, “LibriMix: An open-source dataset for generalizable speech separation,” *arXiv preprint arXiv:2005.11262*, 2020.
- [28] J. Wang, S. Wang, J. Li, K. Zhang, Y. Qian, and H. Li, “Enhancing speaker extraction through rectifying target confusion,” in *Proc. SLT*, 2024, pp. 349–356.
- [29] L. Zhang, Y. Qian, L. Yu, H. Wang, H. Yang, S. Liu, L. Zhou, and Y. Qian, “DDTSE: Discriminative diffusion model for target speech extraction,” in *Proc. SLT*, 2024, pp. 294–301.
- [30] J. Le Roux, S. Wisdom, H. Erdogan, and J. R. Hershey, “SDR-half-baked or well done?,” in *Proc. ICASSP*, 2019, pp. 626–630.
- [31] M. Wang, C. Boeddeker, R. Dantas, A. Seelan, et al., “PESQ (perceptual evaluation of speech quality) wrapper for python users,” Zenodo, 2022.
- [32] C. H. Taal, R. C. Hendriks, J. Heusdens, and R. Jensen, “A short-time objective intelligibility measure for time-frequency weighted noisy speech,” in *Proc. ICASSP*, 2010, pp. 4214–4217.