

# CORRECTION OF DECOUPLED WEIGHT DECAY

**Jason Chuan-Chih Chou**  
Cohere Labs Community  
Toronto, ON, Canada  
chuanchih@gmail.com

## ABSTRACT

Decoupled weight decay, solely responsible for the performance advantage of AdamW over Adam, has long been set to proportional to learning rate  $\gamma$  without questioning. Some researchers have recently challenged such assumption and argued that decoupled weight decay should be set  $\propto \gamma^2$  instead based on orthogonality arguments at steady state. To the contrary, we find that eliminating the contribution of the perpendicular component of the update to the weight norm leads to little change to the training dynamics. Instead, we derive that decoupled weight decay  $\propto \gamma^2$  results in stable weight norm based on the simple assumption that updates become independent of the weights at steady state, regardless of the nature of the optimizer. Based on the same assumption, we derive and empirically verify that the Total Update Contribution (TUC) of a minibatch under the Scion optimizer is better characterized by the momentum-dependent effective learning rate whose optimal value transfers and we show that decoupled weight decay  $\propto \gamma^2$  leads to stable weight and gradient norms and allows us to better control the training dynamics and improve the model performance.

## 1 INTRODUCTION

$L_2$  regularization, a common technique for controlling model weight growth and preventing overfitting, is equivalent to weight decay for unmodified SGD. For adaptive gradient methods such as SGD with momentum (Sutskever et al., 2013) and Adam (Kingma & Ba, 2015), weight decay is no longer equivalent to  $L_2$  regularization, and empirical observations have led to the development of the decoupled weight decay of AdamW (Loshchilov & Hutter, 2019) that outperforms the original Adam with the following update rules:

$$\begin{aligned} \mathbf{g}_t &\leftarrow \nabla_{\theta} f_t(\boldsymbol{\theta}_{t-1}) \\ \mathbf{m}_t &\leftarrow \beta_1 \mathbf{m}_{t-1} + (1 - \beta_1) \mathbf{g}_t \\ \mathbf{v}_t &\leftarrow \beta_2 \mathbf{v}_{t-1} + (1 - \beta_2) \mathbf{g}_t^2 \\ \mathbf{u}_t &\leftarrow \frac{\mathbf{m}_t / (1 - \beta_1^t)}{\sqrt{\mathbf{v}_t / (1 - \beta_2^t)}} \\ \boldsymbol{\theta}_t &\leftarrow \boldsymbol{\theta}_{t-1} - \gamma (\lambda \boldsymbol{\theta}_{t-1} + \mathbf{u}_t) \end{aligned}$$

where squaring and division are understood to be element-wise,  $\theta_t$  and  $f_t$  are the model weights and loss function,  $\mathbf{m}_t$  and  $\mathbf{v}_t$  are the first and second moments of the loss gradient  $\mathbf{g}_t$ ,  $\mathbf{u}_t$  is the parameter update, and learning rate  $\gamma$ , weight decay coefficient  $\lambda$ , betas  $(\beta_1, \beta_2)$  and epsilon  $\epsilon$  are the hyperparameters. Accordingly, we get the following expression for the expected value of the  $l^2$ -norm squared of the layer weight vectors:

$$\begin{aligned} \mathbb{E}[||\boldsymbol{\theta}_t||^2] &= \mathbb{E}[|(1 - \gamma\lambda)\boldsymbol{\theta}_{t-1} - \gamma\mathbf{u}_t|^2] \\ &= \mathbb{E}[(1 - \gamma\lambda)^2 ||\boldsymbol{\theta}_{t-1}||^2 + \gamma^2 ||\mathbf{u}_t||^2 - 2\gamma(1 - \gamma\lambda) \langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle] \end{aligned} \quad (1)$$

Kosson et al. (2024) argues that the changes of model weights can be modeled as random walk and at steady state. If we assume that as  $t \rightarrow \infty$ ,  $\mathbb{E}[||\mathbf{u}_t||^2]$  becomes a time-independent constant  $C$  and  $\mathbb{E}[\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle] = 0$  since  $\boldsymbol{\theta}_{t-1}$  and  $\mathbf{u}_t$  are independent, then

$$\mathbb{E}[||\boldsymbol{\theta}_t||^2] = \mathbb{E}[(1 - \gamma\lambda)^2 ||\boldsymbol{\theta}_{t-1}||^2 + \gamma^2 C]$$

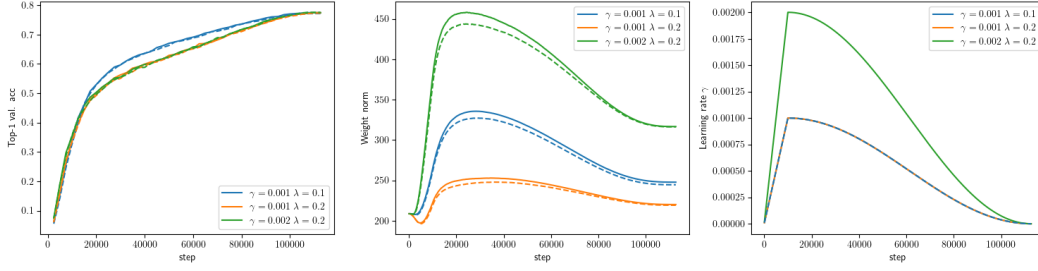


Figure 1: Training a ViT-S/16 with “Renormalized” AdamW results in negligible differences in top-1 val. accuracy (77.15 vs. 77.45 for the  $\gamma = 0.001$ ,  $\lambda = 0.1$  AdamW baseline), weight norm, and gradient norm throughout the training process. Notice the suppression of weight norm and surge of gradient norm towards the end of the cosine learning rate decay, characteristic of AdamW. Except using the PyTorch Inception crop with crop scale lower bound  $a_{min} = 0.2$ , the setup is identical to Beyer et al. (2022).

At steady state  $\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] = \mathbb{E}[\|\boldsymbol{\theta}_{t-1}\|^2]$ , we can solve for  $\mathbb{E}[\|\boldsymbol{\theta}_t\|^2]$ :

$$\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] = \frac{\gamma C}{\lambda(2 - \gamma\lambda)} \approx \frac{\gamma C}{2\lambda} \quad (2)$$

Kosson et al. (2024) largely follows the derivation above but further decomposes the update norm into the scalar projection  $u_{t\parallel} = \frac{\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle}{\|\boldsymbol{\theta}_{t-1}\|}$  onto the weights and the corresponding scalar rejection  $u_{t\perp} = \sqrt{u_t^2 - u_{t\parallel}^2}$ . It then argues that since  $\mathbb{E}[u_{t\parallel}] = 0$  due to randomness or scale-invariance resulting from normalization,  $u_{t\perp}$  drives balanced rotation across all layers at steady state. Defazio (2025) takes a more prudent approach and limits its theory to layers immediately followed by normalization that guarantees  $\langle \boldsymbol{\theta}_{t-1}, \mathbf{g}_t \rangle = 0$  but comes to a similar conclusion and proposes AdamC, a variant of AdamW that sets  $\lambda_t \propto \gamma_t$ , the scheduled time-dependent learning rate, for layers followed by normalization to keep the steady-state weight norm constant. Nevertheless, Defazio (2025) presents experiments on Llama 3 architecture (Grattafiori et al., 2024) in which most layers are not immediately followed by normalization. It states that “we consider every linear layer as normalized, excluding the output layer of the network” for the purpose of applying such corrected weight decay, and AdamC results in more stable weight and gradient norms than the AdamW baseline regardless.

In the following sections, we first present experiments showing that  $u_{t\perp}$  makes insignificant contributions to the weight norm for pre-norm transformers like Llama 3. We then further generalize the above derivation to constrained Scion (Pethick et al., 2025) and present numerical simulation results as supporting evidence. Finally, we present our experiments showing that ScionC, with  $\lambda_t \propto \gamma_t$  analogous to AdamC, exhibits similarly stable weight and gradient norms and improved model performance.

### 1.1 PERPENDICULAR COMPONENT OF THE UPDATE MAKES NEGLIGIBLE CONTRIBUTION TO THE WEIGHT NORM

Consider the “Renormalized” AdamW optimizer above (Algorithm 1) which eliminates the contribution of  $u_{t\perp}$  to the weight norm by renormalizing the weights of the layers  $l = 0 \dots L$  by a factor of  $\frac{\|\boldsymbol{\theta}_{t-1,l}\| - \gamma_t u_{t\parallel,l}}{\|\boldsymbol{\theta}_{t,l}\| + \epsilon}$  after update. If the scalar projection  $u_{t\parallel}$  is small or zero and the subsequent balanced rotation (Kosson et al., 2024) or gradient-to-weight ratios (Defazio, 2025) are important to the training dynamics, we expect this change to be significant. We train a variant of ViT-S/16 based on the setup described in Beyer et al. (2022) on the ImageNet-1k dataset (Russakovsky et al., 2015) for 90 epochs and instead observe almost no differences in relevant metrics (Fig. 1). Although we cannot exclude the possibility that the balancing effects of AdamW are important for training other classes of models, this contradicting evidence and the fact that AdamW excels at transformer optimization (Zhang et al., 2024) cast doubt on their importance in general.

**Algorithm 1** “Renormalized” AdamW

---

```

1: Input: Initial values  $\theta_{0,l}$  for all layers  $l$ ,
2: Input: scheduled learning rate  $\gamma_t$ , weight-decay coefficient  $\lambda, (\beta_1, \beta_2), \epsilon$ 
3:  $v_{0,l} = m_{0,l} = 0$ 
4: for  $t = 1$  to  $T$  do
5:   for layer  $l = 0$  to  $L$  do
6:      $g_{t,l} = \nabla_{\theta_l} f_t(\theta_{t-1,l}, \zeta_t)$  ▷ Minibatch gradient
7:      $m_{t,l} = \beta_1 m_{t-1,l} + (1 - \beta_1) g_{t,l}$ 
8:      $v_{t,l} = \beta_2 v_{t-1,l} + (1 - \beta_2) g_{t,l}^2$ 
9:      $u_{t,l} = \frac{m_{t,l}/(1-\beta_1^t)}{\sqrt{v_{t,l}/(1-\beta_2^t)}}$ 
10:     $\theta_{t-1,l} = \theta_{t-1,l} - \gamma_t \lambda \theta_{t-1,l}$ 
11:     $\theta_{t,l} = \theta_{t-1,l} - \gamma_t u_{t,l}$  ▷ Standard Adam update
12:    if  $\|\theta_{t-1,l}\| \geq \epsilon$  then
13:       $u_{t,l} = \frac{\langle \theta_{t-1,l}, u_{t,l} \rangle}{\|\theta_{t-1,l}\|}$ 
14:       $\theta_{t,l} = \frac{\|\theta_{t-1,l}\| - \gamma_t u_{t,l}}{\|\theta_{t,l}\| + \epsilon} \theta_{t,l}$  ▷ Only keep the contribution of  $u_{t,l}$  to the norm
15:    end if
16:  end for
17: end for

```

---

## 1.2 EXPECTED WEIGHT NORM WITH INDEPENDENT WEIGHT UPDATE AT STEADY STATE

With evidence against the geometry argument for the steady-state weight norm, let us re-examine the derivation of the steady-state weight norm in Eq. 2. Note that we only assume the existence of a steady state of the weight norm as  $t \rightarrow \infty$  and that the weight update  $u_t$  becomes independent of the model weight  $\mathbb{E}[\langle \theta_{t-1}, u_t \rangle] = 0$  at steady state. We make no references to how the optimizer computes the weight update  $u_t$  based on the minibatch gradient (Appx. A). We therefore expect the derived steady-state weight norm  $\mathbb{E}[\|\theta_t\|^2] \propto \frac{\gamma C}{2\lambda}$  to be applicable to all optimizers with decoupled weight decay, including SGD with momentum (SGDM) shown in Defazio (2025) and Lion (Chen et al., 2023) discussed in Kosson et al. (2024), as long as they do not violate the stated assumptions. For the remainder of the paper, we further generalize the result to constrained Scion (Pethick et al., 2025) and present Scion with corrected weight decay (ScionC).

## 2 SCION WITH CORRECTED WEIGHT DECAY

## 2.1 CONSTRAINED SCION

As formulated in Pethick et al. (2025), the constrained variant of Scion can be considered a collection of optimizers with the following unified update rules. Given layer  $l$  and layer weight  $\theta_{t,l}$  at time  $t - 1$ , the choice of linear minimization oracle  $\text{lmo}_l$ , momentum  $\alpha$ , learning rate  $\gamma$ , and radius  $\rho_l$ :

$$\begin{aligned}
g_{t,l} &\leftarrow \nabla_{\theta_l} f_t(\theta_{t-1,l}, \zeta_t) \\
m_{t,l} &\leftarrow (1 - \alpha) m_{t-1,l} + \alpha g_{t,l} \\
\theta_{t,l} &\leftarrow (1 - \gamma) \theta_{t-1,l} + \gamma \rho_l \text{lmo}_l(m_{t,l})
\end{aligned}$$

Table 1 lists the lmos and the norms from which they are derived that we use in our experiments. Conceptually, we choose the norms of the layers based on the shape of the weight and their functions in the model, and lmos are the updates with unit norms in the direction of the steepest descent.

Although equivalent up to reparameterization, the original formulation of Scion deviates significantly from the conventional terminology and makes it difficult to reason about the role of decoupled weight decay in its update rules. We therefore reformulate constrained Scion in terms of independent weight decay coefficient  $\eta = \gamma$ , layer-wise learning rate  $\gamma_l = \gamma \rho_l$ , and layer-wise weight decay

Table 1: Norms and the associated lmos as normalized in our experiments. Sign and Spectral assume matrix weight  $\theta_l = \mathbf{A} \in \mathbb{R}^{d_{\text{out}} \times d_{\text{in}}}$  while Bias assumes vector weight  $\theta_l = \mathbf{b}_\ell \in \mathbb{R}^{d_{\text{out}}}$ .  $\mathbf{U}\mathbf{V}^\top$  refers to the reduced SVD of the input matrix with unitary matrices  $\mathbf{U}$  and  $\mathbf{V}^\top$  from the full SVD  $\mathbf{A} = \mathbf{U}\text{diag}(\boldsymbol{\sigma})\mathbf{V}^\top$  while  $\|\mathbf{A}\|_{\mathcal{S}_\infty} = \max(\boldsymbol{\sigma})$  is the spectral norm of the matrix.

	Sign	Spectral	Bias
<b>Norm</b>	$d_{\text{in}} \max_{i,j}  A_{i,j} $	$\sqrt{\frac{d_{\text{in}}}{d_{\text{out}}}} \ \mathbf{A}\ _{\mathcal{S}_\infty}$	RMS
<b>LMO</b>	$\mathbf{A} \mapsto -\frac{\text{sign}(\mathbf{A})}{d_{\text{in}}}$	$\mathbf{A} \mapsto -\sqrt{\frac{d_{\text{out}}}{d_{\text{in}}}} \mathbf{U}\mathbf{V}^\top$	$\mathbf{b}_\ell \mapsto -\frac{\mathbf{b}_\ell}{\ \mathbf{b}_\ell\ _{\text{RMS}}}$

coefficient  $\lambda_l = \frac{1}{\rho_l}$ . The update rules then become

$$\begin{aligned}
\mathbf{g}_{t,l} &\leftarrow \nabla_{\theta_l} f_t(\boldsymbol{\theta}_{t-1,l}, \zeta_t) \\
\mathbf{m}_{t,l} &\leftarrow (1 - \alpha)\mathbf{m}_{t-1,l} + \alpha\mathbf{g}_{t,l} \\
\boldsymbol{\theta}_{t,l} &\leftarrow (1 - \eta)\boldsymbol{\theta}_{t-1,l} + \gamma_l \text{lmo}_l(\mathbf{m}_{t,l}) \\
&= \boldsymbol{\theta}_{t-1,l} + \gamma_l (-\lambda_l \boldsymbol{\theta}_{t-1,l} + \text{lmo}_l(\mathbf{m}_{t,l}))
\end{aligned}$$

## 2.2 MOMENTUM WITH NORMALIZED UPDATE

So far we have assumed steady-state  $\mathbb{E}[\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle] = 0$  which implies  $\mathbb{E}[\langle \mathbf{u}_{t-1}, \mathbf{u}_t \rangle] = 0$  for simplicity, even though the use of momentum clearly violates this assumption. Qualitatively, the relationship  $\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] \propto \frac{\gamma C}{2\lambda}$  holds regardless since as  $\mathbf{m}_{t-k,l}$  component of  $\mathbf{m}_{t,l}$  decays, the update of the far past eventually becomes independent of the current update:

$$\lim_{k \rightarrow \infty} \mathbb{E}[\langle \mathbf{u}_{t-k}, \mathbf{u}_t \rangle] = 0$$

if the minibatch gradients based on which the momentum is updated become independent at the steady state. In the end, we just have a larger constant  $C'$  due to the decaying correlation. In fact, if the minibatch gradients  $\mathbf{g}_t$  become independent with time-independent expected norm at steady state, the second momentum  $\mathbf{v}_t$  of AdamW stays approximately constant, so the Total Update Contribution (TUC) of the minibatch gradients also remains constant regardless of  $\beta_1$  as postulated in Kosson et al. (2024) (Appx. B).

The lmos of Scion normalize the updates so the same reasoning no longer applies and we need to derive  $\mathbb{E}[\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle]$ . Assume that the minibatch gradients become independent with time-independent expected  $L_2$  norm  $C'$  at steady state,  $\mathbb{E}[\langle \mathbf{g}_{t'}, \mathbf{g}_t \rangle] = C'^2 \delta_{t't}$ , where  $\delta_{ij}$  is the Kronecker delta function. Then

$$\begin{aligned}
\mathbf{m}_t &= (1 - \alpha)^k \mathbf{m}_{t-k} + \alpha \sum_{i=0}^{k-1} (1 - \alpha)^i \mathbf{g}_{t-i}, \quad k \geq 1 \\
\mathbb{E}[\langle \mathbf{m}_{t-k}, \mathbf{m}_t \rangle] &= C'^2 (1 - \alpha)^k
\end{aligned}$$

In particular  $\mathbb{E}[\|\mathbf{m}_t\|^2] = C'^2$  so  $\mathbb{E}[\|\mathbf{m}_t\|_2] = C'$  as expected. Consider the Bias  $\text{lmo}_{b_\ell}$  in Table 1 that normalizes the update  $\mathbf{u}_t = -\text{lmo}_{b_\ell}(\mathbf{m}_t) = -\frac{\mathbf{m}_t}{\|\mathbf{m}_t\|_{\text{RMS}}}$ . Then

$$\mathbb{E}[\langle \mathbf{u}_{t-k}, \mathbf{u}_t \rangle] = \mathbb{E}\left[\frac{\langle \mathbf{m}_{t-k}, \mathbf{m}_t \rangle}{\|\mathbf{m}_{t-k}\|_{\text{RMS}} \|\mathbf{m}_t\|_{\text{RMS}}}\right]$$

Assume that at steady state  $\|\mathbf{m}_t\| \approx \mathbb{E}[\|\mathbf{m}_t\|_2] = C'$ . Then

$$\mathbb{E}[\langle \mathbf{u}_{t-k}, \mathbf{u}_t \rangle] \approx d_{\text{out}} \mathbb{E}[\langle \mathbf{m}_{t-k}, \mathbf{m}_t \rangle] = d_{\text{out}} (1 - \alpha)^k$$

For consistency and brevity, we again denote the  $L_2$  norm of the update as  $\|\mathbf{u}_t\|_2 = \sqrt{d_{\text{out}}} = C$ . We have  $\mathbb{E}[\langle \mathbf{u}_{t-k}, \mathbf{u}_t \rangle] \approx C^2(1-\alpha)^k$ . We have

$$\begin{aligned}
\boldsymbol{\theta}_t &= (1-\eta)\boldsymbol{\theta}_{t-1} - \gamma\mathbf{u}_t \\
&= -\gamma \sum_{i=0}^{\infty} (1-\eta)^i \mathbf{u}_{t-i} \\
\boldsymbol{\theta}_{t-1} &= -\gamma \sum_{i=0}^{\infty} (1-\eta)^i \mathbf{u}_{t-1-i} \\
\mathbb{E}[\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle] &= -\gamma \sum_{i=0}^{\infty} (1-\eta)^i \mathbb{E}[\langle \mathbf{u}_{t-1-i}, \mathbf{u}_t \rangle] \\
&= -\gamma C^2 \sum_{i=0}^{\infty} (1-\eta)^i (1-\alpha)^{i+1} \\
&= -\gamma C^2 (1-\alpha) \sum_{i=0}^{\infty} (1-\eta)^i (1-\alpha)^i \\
&= -\frac{\gamma C^2 (1-\alpha)}{1 - (1-\eta)(1-\alpha)} = -\frac{\gamma C^2 (1-\alpha)}{\eta + \alpha - \alpha\eta}
\end{aligned}$$

Recall Eq. 1 with the independent weight decay coefficient  $\eta = \gamma\lambda$ :

$$\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] = \mathbb{E}[(1-\eta)^2 \|\boldsymbol{\theta}_{t-1}\|^2 + \gamma^2 \|\mathbf{u}_t\|^2 - 2\gamma(1-\eta)\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle]$$

With  $\|\mathbf{u}_t\|^2 = C^2$  and the expression above, at steady state  $\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] = \mathbb{E}[\|\boldsymbol{\theta}_{t-1}\|^2]$ :

$$\begin{aligned}
(2\eta - \eta^2)\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] &= \gamma^2 C^2 (1 + 2\frac{(1-\eta)(1-\alpha)}{\eta + \alpha - \alpha\eta}) \\
\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] &= \frac{\gamma^2 C^2}{2\eta - \eta^2} \frac{(2 - \eta - \alpha + \alpha\eta)}{\eta + \alpha - \alpha\eta}
\end{aligned}$$

Typically  $\eta \ll \alpha \leq 1$ . Ignore  $O(\eta^2)$  and  $O(\eta^3)$  terms of the denominator and  $O(\eta)$  terms of the numerator, we get

$$\mathbb{E}[\|\boldsymbol{\theta}_t\|^2] \approx \gamma^2 C^2 \frac{2 - \alpha}{2\alpha\eta} = \frac{\gamma_{\text{eff}}^2 C^2}{2\eta} \quad (3)$$

$$= \gamma C^2 \frac{2 - \alpha}{2\alpha\lambda} \quad (4)$$

Eq. 3 again suggests that weight decay should be set  $\propto \gamma^2$  and TUC of the minibatch is better characterized by the effective learning rate  $\gamma_{\text{eff}} := \gamma\sqrt{\frac{2-\alpha}{\alpha}}$  instead of the raw learning rate  $\gamma$  at steady state. Indeed, the optimal effective learning rate  $\gamma_{\text{eff}}$  transfers better across different momentum values than the optimal learning rate  $\gamma$  (Fig. 2). We can even replace cosine learning rate decay with momentum scheduling for the equivalent  $\gamma_{\text{eff}}$  decay throughout most of the training process (Fig. 3, Appx. C). Switching back to the weight decay coefficient  $\lambda = \frac{\eta}{\gamma}$ , Eq. 4 states that it should be set  $\propto \gamma$  for stable weight norm at steady state.

The above derivation applies equally to other  $L_2$ -norm-based lmos, including ColNorm and RowNorm in Pethick et al. (2025). The Sign lmo( $\mathbf{A}$ ) =  $-\frac{\text{sign}(\mathbf{A})}{d_{\text{in}}}$  is applied element-wise and  $-\frac{\text{sign}(A_{i,j})}{d_{\text{in}}} \propto \|A_{i,j}\|_{\infty} = \|A_{i,j}\|_2$ . It is much more difficult to analyze the dynamics of  $\mathbf{u}_t$  with the Spectral lmo( $\mathbf{A}$ ) =  $-\sqrt{\frac{d_{\text{out}}}{d_{\text{in}}}}\mathbf{U}\mathbf{V}^{\top}$  but we observe that  $\mathbf{U}\mathbf{V}^{\top}$  is a semi-orthogonal matrix with Frobenius norm  $\|\mathbf{U}\mathbf{V}^{\top}\|_F = \sqrt{\min(d_{\text{in}}, d_{\text{out}})}$ . We postulate that the dynamics of  $\mathbf{u}_t = -\text{lmo}(\mathbf{A}) = \sqrt{\frac{d_{\text{out}}}{d_{\text{in}}}}\mathbf{U}\mathbf{V}^{\top}$  would be similar to the hypothetical  $\mathbf{u}'_t = -\text{lmo}'(\mathbf{A}) = \sqrt{\frac{d_{\text{out}}}{d_{\text{in}}}} \min(d_{\text{in}}, d_{\text{out}}) \frac{\mathbf{A}}{\|\mathbf{A}\|_F}$  so Eq. 4 still applies. We therefore propose Scion with corrected weight decay (ScionC, Algorithm 2).

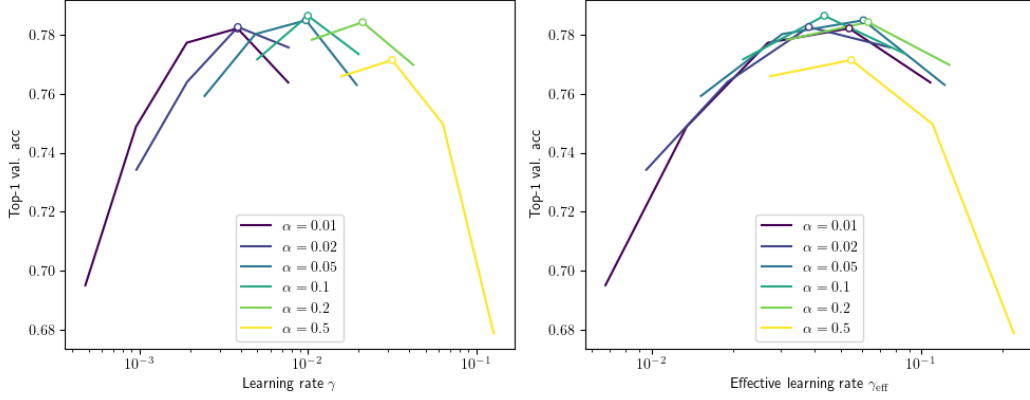


Figure 2: ImageNet-1k top-1 val. accuracy of simple ViT-S/16 trained for 90 epochs with momentum  $\alpha \in [0.01, 0.5]$  plotted along the maximum learning rate  $\gamma$  (left) vs. maximum steady-state effective learning rate  $\gamma_{\text{eff}}$  (right) for the non-Sign parameters at the start of cosine decay. The optimal learning rate  $\gamma$  increases with momentum  $\alpha$  while the optimal effective momentum  $\gamma_{\text{eff}}$  is within a factor of 2 across the momentum values and well within the granularity of the sweep. Weight and gradient norms are kept stable and comparable with ScionC (Algorithm 2 with maximum learning rate  $\gamma_L = 0.2$ , momentum  $\alpha = 0.1$ , weight decay coefficient  $\lambda_L = 0.004$  for the Sign layer and  $C_l^2 = 1.1875$  for other parameters) for these experiments.

---

**Algorithm 2** Scion with corrected weight decay (ScionC)

---

```

1: Input: Initial values  $\theta_{0,l}$ , layer-wise learning rate schedule  $\gamma_{t,l}$ , choice of  $\text{lmo}_l$  for all layers  $l$ 
2: Input: Momentum schedule  $\alpha_t$ , steady-state norm squared schedule  $C_{t,l}^2$  or weight decay coefficient  $\lambda_l$  for all layers  $l$ 
3: for layer  $l = 0$  to  $L$  do
4:    $\mathbf{m}_{0,l} = 0$ 
5: end for
6: for  $t = 1$  to  $T$  do
7:   for layer  $l = 0$  to  $L$  do
8:      $\mathbf{g}_{t,l} = \nabla_{\theta_l} f_t(\theta_{t-1,l}, \zeta_t)$  ▷ Minibatch gradient
9:      $\mathbf{m}_{t,l} = (1 - \alpha_t)\mathbf{m}_{t-1,l} + \alpha_t \mathbf{g}_{t,l}$ 
10:    if  $\lim_{t \rightarrow \infty} \mathbb{E}[\langle \theta_{t-1,l}, \mathbf{u}_{t,l} \rangle] = 0$  then
11:       $\lambda_{t,l} = \frac{2 - \alpha_t}{2\alpha_t C_{t,l}^2} \gamma_{t,l}$ 
12:    else
13:       $\lambda_{t,l} = \lambda_l$ 
14:    end if
15:     $\theta_{t,l} = \theta_{t-1,l} + \gamma_{t,l} (-\lambda_{t,l} \theta_{t-1,l} + \text{lmo}_l(\mathbf{m}_{t,l}))$ 
16:  end for
17: end for

```

---

### 3 EXPERIMENTS

Our main experiments consist of training a 124M Modded-NanoGPT on FineWeb-Edu-100B (Penedo et al., 2024) with {Scion, ScionC}, PyTorch 2.8 and training the ViT-S/16 described in (Beyer et al. (2022), sometimes called “Simple ViT”) on the ImageNet-1k dataset (Russakovsky et al., 2015) with {AdamW, AdamC, Scion, ScionC}, PyTorch 2.5.1 with various training budgets. We use the standard `torch.optim.AdamW` for the AdamW baseline and externally scheduled `weight_decay` of the corresponding parameter groups for our AdamC implementation. Our Scion baseline is mostly unmodified from the official implementation of Pethick et al. (2025) except for

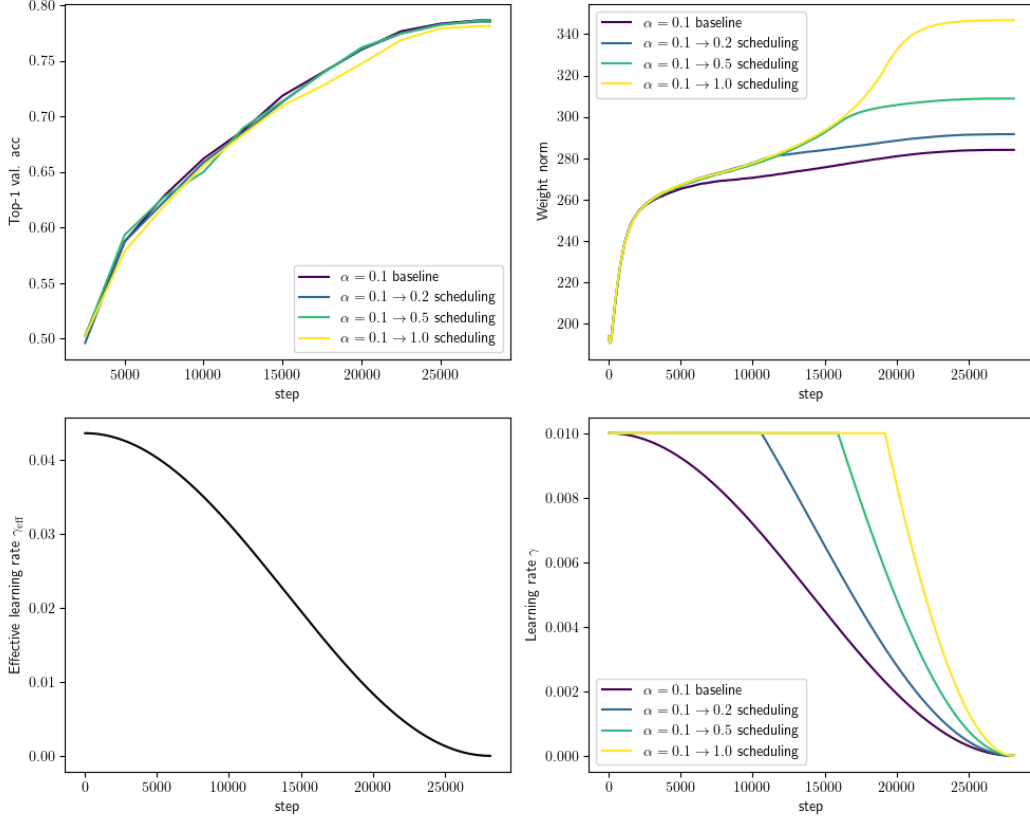


Figure 3: Simple ViT-S/16 trained on ImageNet-1k for 90 epochs with ScionC (Algorithm 2 with maximum learning rate  $\gamma_L = 0.2$ , momentum  $\alpha = 0.1$ , weight decay coefficient  $\lambda_L = 0.004$  for the Sign layer and maximum learning rate  $\gamma = 0.01$ ,  $C_l^2 = 1.1875$  for other parameters) and baseline cosine learning rate decay vs. the equivalent momentum scheduling. For the momentum scheduling experiments  $\alpha$  increases from 0.1 to  $\alpha_{\text{max}} = \{0.2, 0.5, 1.0\}$  s.t. the effective learning rate  $\gamma_{\text{eff}}$  matches that of the cosine learning rate baseline until  $\alpha_{\text{max}}$  is reached. The models converge to the same top-1 val. accuracy up till  $\alpha_{\text{max}} = 0.5$  where the weight norm approximation starts to break down.

1. The reparameterization described in Sec. 2.1
2. Improvement in efficiency through sharding the state variables and parameter updates on multi-GPU nodes in the spirit of Rajbhandari et al. (2020)
3. Improved reduced SVD accuracy with PolarExpress (Amsel et al., 2025).

We then further modify the multi-GPU Scion to implement ScionC. For the purpose of our experiments, we believe  $\lim_{t \rightarrow \infty} \mathbb{E}[\langle \theta_{t-1,l}, \mathbf{u}_{t,l} \rangle] = 0$  except the output layer (Appx. D). We do not further explore the parameter space of momentum scheduling and instead keep the momentum constant  $\alpha = 0.1$  for the main experiments.

### 3.1 MODDED-NANO GPT

For the 124M Modded-NanoGPT experiment, we keep the maximum learning rates from Pethick et al. (2025),  $\gamma_L = \gamma \rho_L = 2^{-12} \times 3000$  for the first and last Sign layer (weight-tied),  $\gamma_l = \gamma \rho_l = 2^{-12} \times 50$  for the Spectral layers,  $\lambda_L = \frac{1}{3000}$  for the Sign layer and  $C_l^2 = 5.798$  for the rest for ScionC to keep the initial weight decay the same as the Scion counterpart. We stretch the learning rate schedule with cosine learning rate decay to train the model on the 100B subset of FineWeb-Edu (Penedo et al., 2024). We find that the original batch size  $512 \times 1024$  (seqlen) does not fit in the

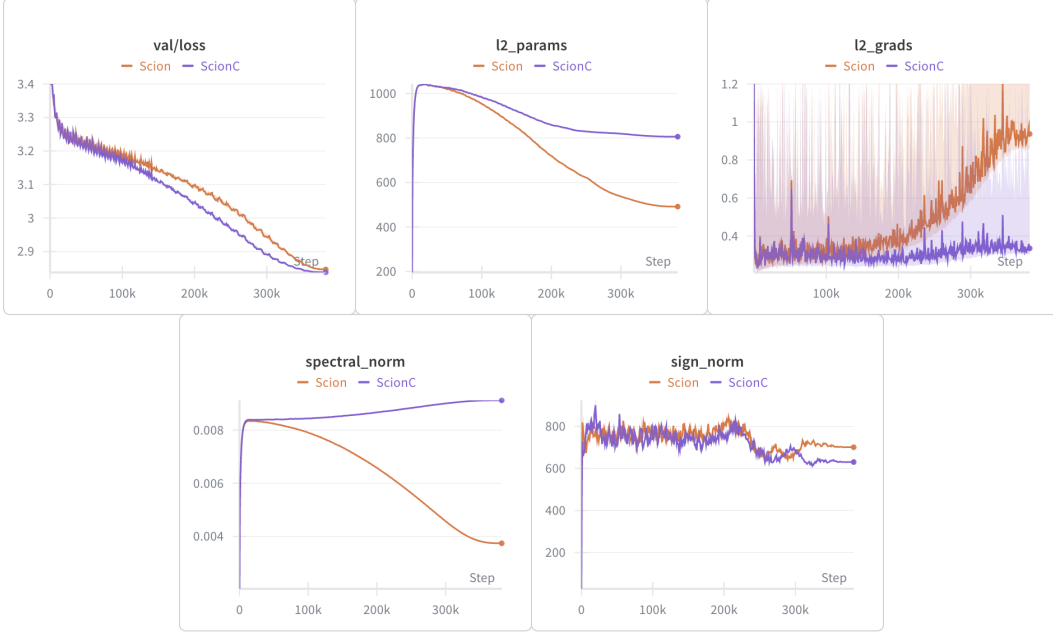


Figure 4: Training 124M Modded-NanoGPT on FineWeb-Edu-100B, Scion vs. ScionC.  $\lambda \propto \gamma$  scaling of ScionC results in more stable weight norm, gradient norm, and Spectral norms. The final validation loss is 2.846 for Scion and 2.838 for ScionC.

VRAM of a  $8 \times \text{H100}$  80GB instance and opt to halve the batch size instead of running gradient accumulation. In addition to the typical metrics, we keep track of the Sign norm and the geometric mean of the Spectral norms. We run power iteration (Mises & Pollaczek-Geiringer, 1929) once per step and persist the dominant singular vectors to evaluate the Spectral norms efficiently. We find that ScionC results in lower validation loss (2.838 vs. 2.846) and more stable weight norm, gradient norm, and Spectral norms than the baseline Scion (Fig. 4). The Sign norm is stable in both experiments, in support of the hypothesis that  $\lim_{t \rightarrow \infty} \mathbb{E}[\langle \theta_{t-1,l}, \mathbf{u}_{t,l} \rangle] \neq 0$  for the output layer.

### 3.2 SIMPLE ViT-S/16

For training ViT-S/16 on the ImageNet-1k dataset, we use the model architecture and setup of Beyer et al. (2022) for the {AdamW, AdamC} experiments including sincos2d positional encoding, batch size 1024, global average pooling (GAP), and augmentations including RandAugment (Cubuk et al., 2020) and Mixup (Zhang et al., 2018). The only exception is Inception crop (Szegedy et al., 2015), for which we use the PyTorch implementation with crop scale lower bound  $a_{min} = 0.05$ . for {AdamW, AdamC, Scion, ScionC}, we train a model for {30, 60, 90, 150, 300} epochs. In addition, we follow the architecture changes made by Pethick et al. (2025) for DeiT (Touvron et al., 2020):

1. Scale the GELU activation function as  $\sqrt{2}\text{GELU}$  to preserve variance
2. Replace LayerNorm with RMSNorm.

We also keep its maximum learning rates  $\gamma_L = \gamma \rho_L = 0.0004 \times 500 = 0.2$  for the last Sign layer and  $\gamma_l = \gamma \rho_l = 0.0004 \times 25 = 0.01$  for the rest. Overall we find that corrected weight decay requires higher maximum weight decay than the uncorrected counterpart after testing  $\lambda \in \{0.1, 0.2\}$  for {AdamW, AdamC} and fully sweeping  $\lambda \in \{4 \times 10^{-4}, 8 \times 10^{-4}, 1.2 \times 10^{-3}, 1.6 \times 10^{-3}\}$  for Scion and  $C_l^2 \in \{1.1875, \mathbf{0.79167}, 0.59375, 0.475\}$  ( $\lambda_L = 0.004$  for the Sign layer) for ScionC (constant). For each setting we repeat the experiment for  $N = 3$  random seeds and report the ImageNet-1k top-1 val. accuracy as (mean)  $\pm$  (sample standard deviation).

We find this setup of shorter durations in terms of training dynamics than the Modded-NanoGPT experiment. In fact, the model trained with AdamC does not seem to be in steady state even after



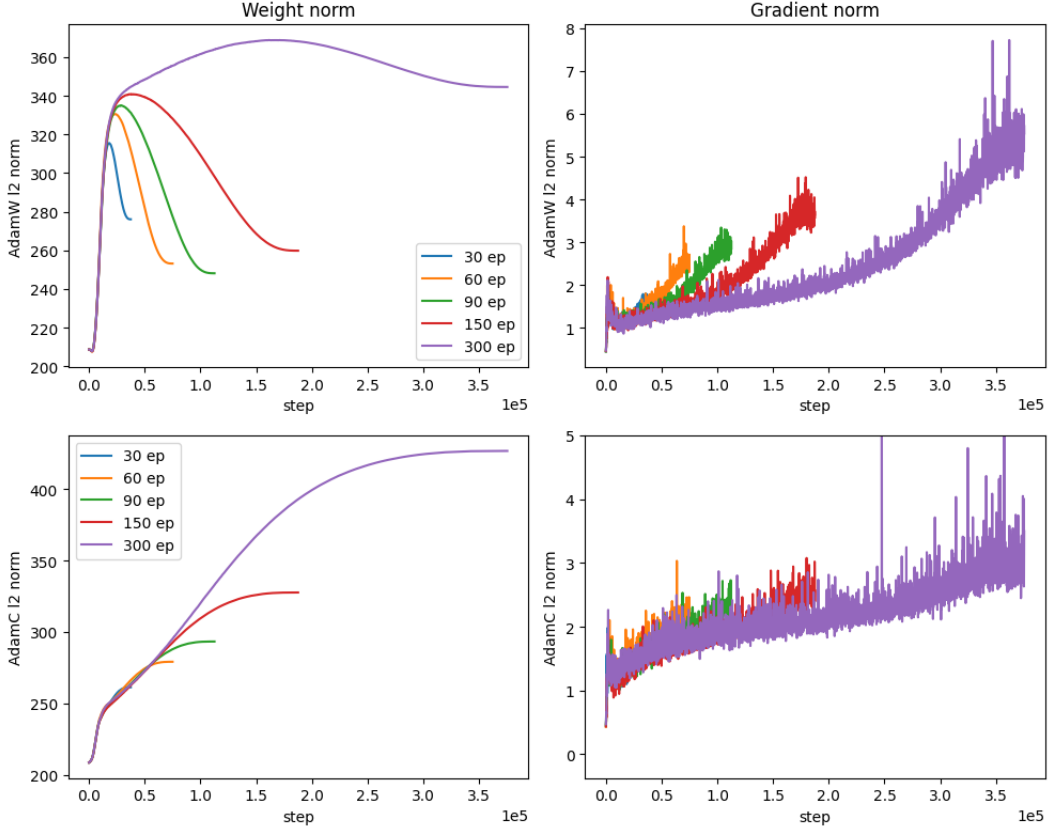


Figure 5: Training ViT-S/16 on ImageNet-1k, AdamW (upper) vs. AdamC (lower).  $\lambda \propto \gamma$  scaling of AdamC results in more stable weight and gradient norms. Note that the model does not seem to be in steady state even after 300 epochs.

	AdamW	AdamC	Scion	ScionC (constant)	ScionC (cosine)
30ep	67.35 $\pm$ 0.33	67.53 $\pm$ 0.27	<b>73.31</b> $\pm$ 0.09	73.10 $\pm$ 0.18	73.10 $\pm$ 0.15
60ep	74.77 $\pm$ 0.08	74.59 $\pm$ 0.18	<b>77.44</b> $\pm$ 0.09	77.20 $\pm$ 0.08	77.43 $\pm$ 0.11
90ep	76.92 $\pm$ 0.13	76.98 $\pm$ 0.10	78.68 $\pm$ 0.09	78.53 $\pm$ 0.10	<b>78.74</b> $\pm$ 0.09
150ep	78.64 $\pm$ 0.18	78.69 $\pm$ 0.03	<b>79.65</b> $\pm$ 0.07	79.58 $\pm$ 0.04	79.62 $\pm$ 0.12
300ep	79.73 $\pm$ 0.12	79.70 $\pm$ 0.08	<b>80.10</b> $\pm$ 0.14	79.94 $\pm$ 0.08	80.06 $\pm$ 0.03

Table 2: ImageNet-1k top-1 val. accuracy (original label) of simple ViT-S/16 trained with {AdamW, AdamC, Scion, ScionC} and various training budgets. ScionC models perform as well as the Scion counterparts with more stable weight and gradient norms.

300 epochs (Fig. 5). In contrast, the model trained with ScionC reaches steady state where the model is more likely to benefit. Interestingly, Scion holds a slight edge over ScionC (constant), a result that drives us to start scheduling steady-state norm squared  $C_{t,l}^2$  to discern at which stage and to what extent it is beneficial to induce weight norm decrease. We test cosine decay of  $C_{t,l}^2$  from  $C_{0,l}^2 = 1.1875$  to  $C_{T,l}^2 = \{\frac{C_{0,l}^2}{2}, \frac{C_{0,l}^2}{4}, \frac{C_{0,l}^2}{8}\}$  for ScionC (cosine). ScionC (cosine) matches the performance of Scion (Table 2, Appx. E), suggesting that the model’s performance is indifferent to the detailed schedule of weight norm decrease and the model does not benefit from the terminal weight norm suppression of uncorrected weight decay as  $\gamma \rightarrow 0$  (Fig. 6), a result that may explain the design choice of non-zero terminal learning rate seen in some literature.

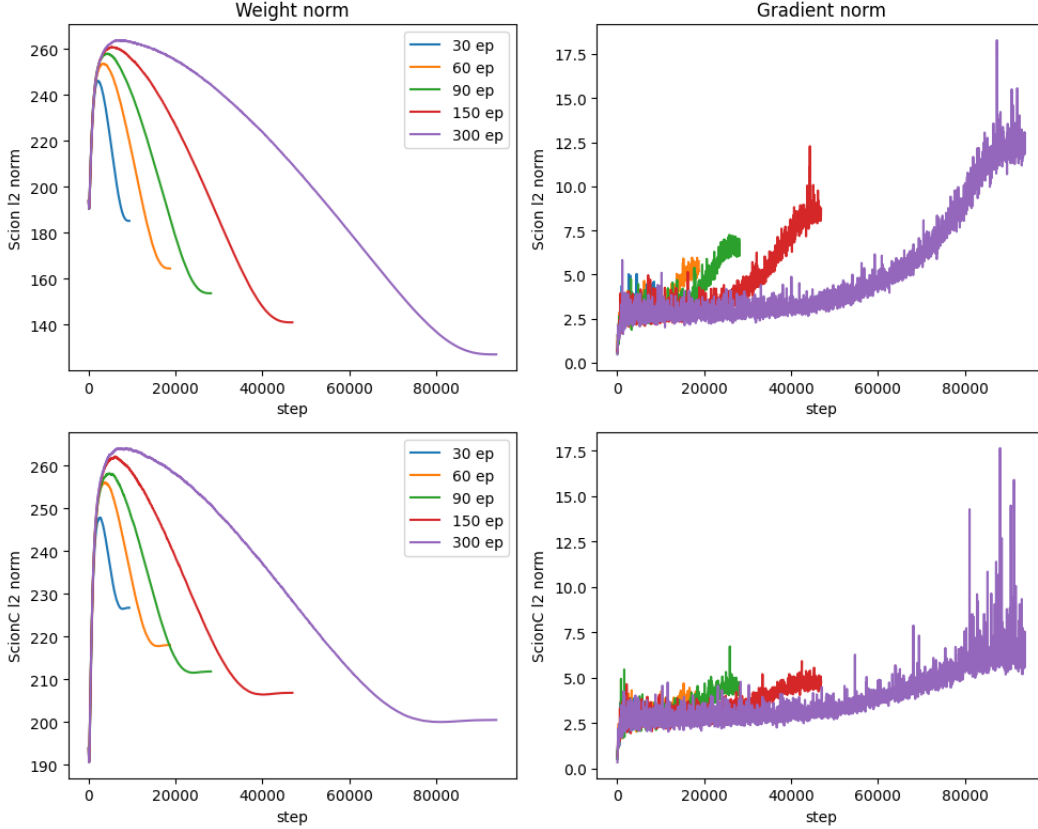


Figure 6: Training ViT-S/16 on ImageNet-1k, Scion (upper) vs. ScionC (cosine, lower).  $\lambda \propto \gamma$  scaling of ScionC results in more stable weight and gradient norms.

## 4 RELATED WORK AND CONCLUSION

Due to its importance, the role and effect of weight decay have received much scrutiny (Zhang et al., 2019; D’Angelo et al., 2024; Sun et al., 2025; Kobayashi et al., 2024; Galanti et al., 2025) along with its interactions with the learning rate (Schaipp, 2023) and the sizes of the model and the dataset (Wang & Aitchison, 2025). Paradoxically, its most direct effects on the weight and gradient norms seem to have received less attention (Defazio, 2025; Xie et al., 2023). Furthermore, most of the focus has been on SGD and Adam variants. The Muon optimizer (Jordan et al., 2024b) that can be considered the Spectral-norm subset of unconstrained Scion was in fact proposed without weight decay, likely due to its root in NanoGPT speedrunning (Jordan et al., 2024a). Our result of the dependence of weight decay’s effect on momentum (Sec. 2.2) for optimizers with momentum and normalized updates can be considered a major step in resolving their interactions, and we hope that the general random walk model of weight update and decay (Eq. 2) can be further extended to elucidate its role in weight and gradient evolution and model optimization.

### LLM DISCLOSURE

We brainstormed the derivation and approximation of the steady-state weight norm in the case of momentum with normalized update (Sec. 2.2) with DeepSeek R1 (Guo et al., 2025).

### REFERENCES

Noah Amsel, David Persson, Christopher Musco, and Robert M. Gower. The polar express: Optimal matrix sign methods and their application to the muon algorithm, 2025. URL <https://arxiv.org/abs/2505.18881>.

[//arxiv.org/abs/2505.16932](https://arxiv.org/abs/2505.16932).

Lucas Beyer, Xiaohua Zhai, and Alexander Kolesnikov. Better plain vit baselines for imagenet-1k, 2022. URL <https://arxiv.org/abs/2205.01580>.

Xiangning Chen, Chen Liang, Da Huang, Esteban Real, Kaiyuan Wang, Hieu Pham, Xuanyi Dong, Thang Luong, Cho-Jui Hsieh, Yifeng Lu, and Quoc V Le. Symbolic discovery of optimization algorithms. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=ne6zeqLFCZ>.

Ekin Dogus Cubuk, Barret Zoph, Jon Shlens, and Quoc Le. Randaugment: Practical automated data augmentation with a reduced search space. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 18613–18624. Curran Associates, Inc., 2020. URL [https://proceedings.neurips.cc/paper\\_files/paper/2020/file/d85b63ef0ccb114d0a3bb7b7d808028f-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2020/file/d85b63ef0ccb114d0a3bb7b7d808028f-Paper.pdf).

Francesco D’Angelo, Maksym Andriushchenko, Aditya Vardhan Varre, and Nicolas Flammarion. Why do we need weight decay in modern deep learning? *Advances in Neural Information Processing Systems*, 37:23191–23223, 2024.

Aaron Defazio. Why gradients rapidly increase near the end of training, 2025. URL <https://arxiv.org/abs/2506.02285>.

Tomer Galanti, Zachary S Siegel, Aparna Gupte, and Tomaso A Poggio. SGD with weight decay secretly minimizes the ranks of your neural networks. In *The Second Conference on Parsimony and Learning (Proceedings Track)*, 2025. URL <https://openreview.net/forum?id=0LzE9ARowD>.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhotia, Lauren Rantala-Yeary, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Raparthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer

Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vitor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuewei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkan Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippas Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Russ Howes, Rutu Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojian Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao,

- Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shirong Ma, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Hanwei Xu, Honghui Ding, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jingchang Chen, Jingyang Yuan, Jinhao Tu, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaichao You, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingxu Zhou, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shutong Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature*, 645(8081):633–638, 2025. doi: 10.1038/s41586-025-09422-z. URL <https://doi.org/10.1038/s41586-025-09422-z>.
- Keller Jordan, Jeremy Bernstein, Brendan Rappazzo, @fernbear.bsky.social, Boza Vlado, You Jiacheng, Franz Cesista, Braden Koszarsky, and @Grad62304977. modded-nanogpt: Speedrunning the nanogpt baseline, 2024a. URL <https://github.com/KellerJordan/modded-nanogpt>.
- Keller Jordan, Yuchen Jin, Vlado Boza, Jiacheng You, Franz Cesista, Laker Newhouse, and Jeremy Bernstein. Muon: An optimizer for hidden layers in neural networks, 2024b. URL <https://kellerjordan.github.io/posts/muon/>.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In Yoshua Bengio and Yann LeCun (eds.), *ICLR (Poster)*, 2015. URL <http://dblp.uni-trier.de/db/conf/iclr/iclr2015.html#KingmaB14>.
- Seijin Kobayashi, Yassir Akram, and Johannes von Oswald. Weight decay induces low-rank attention layers. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 4481–4510. Curran Associates, Inc., 2024. URL [https://proceedings.neurips.cc/paper\\_files/paper/2024/file/084a67fb91826028f555e288f3adc9a4-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2024/file/084a67fb91826028f555e288f3adc9a4-Paper-Conference.pdf).
- Atli Kosson, Bettina Messmer, and Martin Jaggi. Rotational equilibrium: how weight decay balances learning across neural networks. In *Proceedings of the 41st International Conference on Machine Learning*, ICML’24. JMLR.org, 2024.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.

- R. V. Mises and H. Pollaczek-Geiringer. Praktische verfahren der gleichungsauflösung . *ZAMM - Journal of Applied Mathematics and Mechanics / Zeitschrift für Angewandte Mathematik und Mechanik*, 9(1):58–77, 1929. doi: <https://doi.org/10.1002/zamm.19290090105>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1002/zamm.19290090105>.
- Antonio Orvieto and Robert Gower. In search of adam’s secret sauce, 2025. URL <https://arxiv.org/abs/2505.21829>.
- Guilherme Penedo, Hynek Kydlíček, Loubna Ben allal, Anton Lozhkov, Margaret Mitchell, Colin Raffel, Leandro Von Werra, and Thomas Wolf. The fineweb datasets: Decanting the web for the finest text data at scale. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=n6SCkn2QaG>.
- Thomas Pethick, Wanyun Xie, Kimon Antonakopoulos, Zhenyu Zhu, Antonio Silveti-Falls, and Volkan Cevher. Training deep learning models with norm-constrained LMOs. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=2Oqm2IzTy9>.
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. Zero: memory optimizations toward training trillion parameter models. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, SC ’20. IEEE Press, 2020. ISBN 9781728199986.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115:211–252, 2015.
- Fabian Schaipp. Decay no more. In *ICLR Blogposts 2023*, 2023. URL <https://iclr-blogposts.github.io/2023/blog/2023/adamw/>. <https://iclr-blogposts.github.io/2023/blog/2023/adamw/>.
- Tao Sun, Yuhao Huang, Li Shen, Kele Xu, and Bao Wang. Investigating the role of weight decay in enhancing nonconvex sgd. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 15287–15296, June 2025.
- Ilya Sutskever, James Martens, George Dahl, and Geoffrey Hinton. On the importance of initialization and momentum in deep learning. In Sanjoy Dasgupta and David McAllester (eds.), *Proceedings of the 30th International Conference on Machine Learning*, volume 28 of *Proceedings of Machine Learning Research*, pp. 1139–1147, Atlanta, Georgia, USA, 17–19 Jun 2013. PMLR. URL <https://proceedings.mlr.press/v28/sutskever13.html>.
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1–9, Los Alamitos, CA, USA, June 2015. IEEE Computer Society. doi: 10.1109/CVPR.2015.7298594. URL <https://doi.ieeecomputersociety.org/10.1109/CVPR.2015.7298594>.
- Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. *CoRR*, abs/2012.12877, 2020. URL <https://arxiv.org/abs/2012.12877>.
- Xi Wang and Laurence Aitchison. How to set adamw’s weight decay as you scale model and dataset size. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=IszVnczhfz>.
- Zeke Xie, zhiqiang xu, Jingzhao Zhang, Issei Sato, and Masashi Sugiyama. On the overlooked pitfalls of weight decay and how to mitigate them: A gradient-norm perspective. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=vnGcubtzRl>.
- Guodong Zhang, Chaoqi Wang, Bowen Xu, and Roger Grosse. Three mechanisms of weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bl1z-3Rct7>.

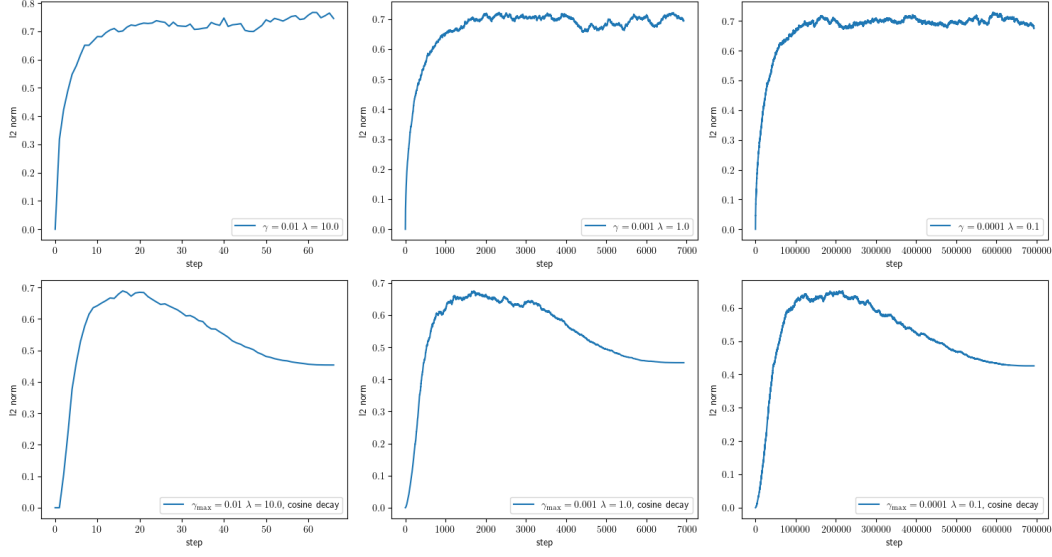


Figure 7: Numerical simulations of the system described by Eq. 5 where  $\theta$  is a vector of length  $10^3$ .  $\mathbb{E}[\theta_t^2] = \frac{\gamma C}{2\lambda} = \frac{1}{2000}$  for each element, so the expected  $L_2$  norm of the vector is  $\approx 0.71$  if we keep the learning rate constant (upper) as expected. If we apply cosine learning rate decay (lower), weight norm decreases towards the end. Here we consistently simulate the system for 10 half-lives  $t_{1/2} = -\frac{\log 2}{\log(1-\gamma\lambda)}$ , with  $0.5 t_{1/2}$  of linear-warmup and  $9.5 t_{1/2}$  of cosine learning rate decay, so the behavior of the systems looks identical despite 4 orders of magnitude of difference in scale.

Hongyi Zhang, Moustapha Cisse, Yann N. Dauphin, and David Lopez-Paz. mixup: Beyond empirical risk minimization. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=r1Ddp1-Rb>.

Yushun Zhang, Congliang Chen, Tian Ding, Ziniu Li, Ruoyu Sun, and Zhi-Quan Luo. Why transformers need adam: A hessian perspective. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=X6rqEbnj3>.

## A NUMERICAL SIMULATIONS

Consider the following system where  $\theta$  is initialized as  $\theta_0 = 0$ :

$$\theta_t \leftarrow \theta_{t-1} - \gamma(\lambda\theta_{t-1} + \mathcal{N}(0, 1)) \quad (5)$$

It turns out that this simple system is sufficient to replicate the weight norm behavior towards the end of the cosine learning rate decay, suggesting that the nature of the optimizer is not fundamental to such phenomena (Fig. 7).

## B BETAS' EFFECT ON THE WEIGHT DECAY AND STEADY-STATE NORM FOR ADAMC

We train a ViT-S/16 on the ImageNet-1k dataset (Russakovsky et al., 2015) for 90 epochs with AdamC and  $\beta_1 = \beta_2 = 0.99$  instead of  $(\beta_1, \beta_2) = (0.9, 0.999)$  of the main experiment, partially motivated by Orvieto & Gower (2025) (Fig. 8). As predicted, changing betas has no effect on the weight decay and steady-state norm.

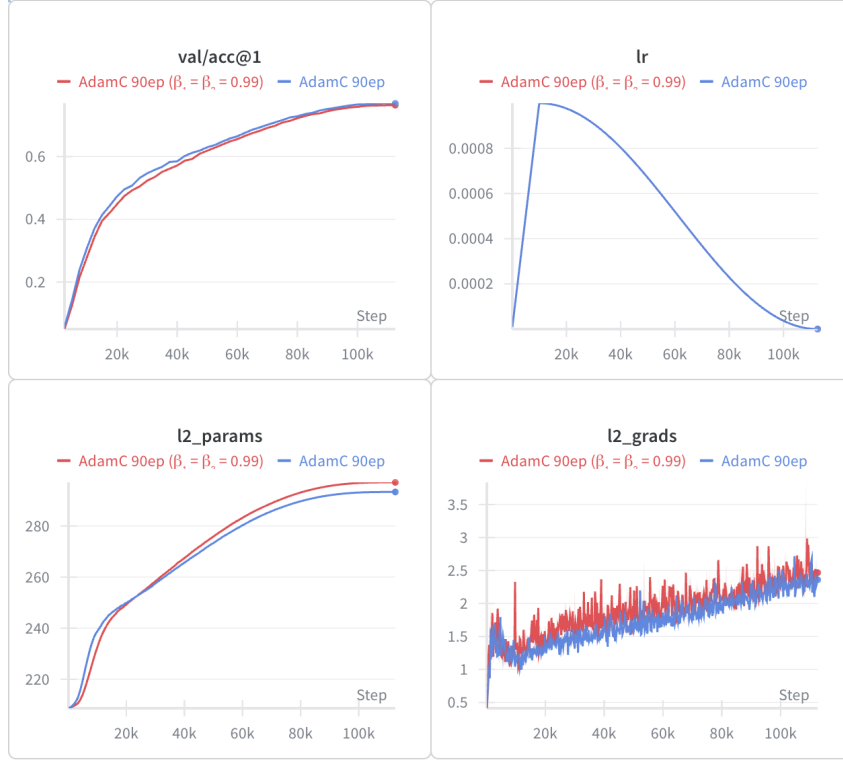


Figure 8: Training a ViT-S/16 on ImageNet-1k for 90 epochs, AdamC with  $\beta_1 = \beta_2 = 0.99$  vs. AdamC with  $(\beta_1, \beta_2) = (0.9, 0.999)$ . Changing the beta values has almost no effects on the weight norm.

## C ADDITIONAL SCIONC MOMENTUM SCHEDULING EXPERIMENTS

We have run more exploratory experiments to verify Eqs. 3 & 4 by training a ViT-S/16 on the ImageNet-1k dataset (Russakovsky et al., 2015) for 90 epochs with momentum scheduling. Most of the experiments can be explained by comparing their effective learning rate schedule to the cosine learning rate decay baseline.

### C.1 SMALL DEVIATION FROM COSINE LEARNING RATE DECAY

These experiments train the same Simple ViT-S/16 on ImageNet-1k for 90 epochs with ScionC (Algorithm 2) and the same hyperparameters (maximum learning rate  $\gamma_L = 0.2$ , momentum  $\alpha = 0.1$ , weight decay coefficient  $\lambda_L = 0.004$  for the Sign layer and maximum learning rate  $\gamma = 0.01$ ,  $C_l^2 = 1.1875$  for other parameters) as the ones in Fig. 3 but we match  $\gamma'_{\text{eff}} = \gamma \frac{2-\alpha}{\alpha}$  of the cosine learning rate baseline with momentum scheduling instead (Fig. 9). Clearly  $\gamma'_{\text{eff}}$  is not the correct effective learning rate and it is apparent that the resulting small deviation from the cosine schedule affects the top-1 val. accuracy curves when we consider the correct  $\gamma_{\text{eff}}$  of these experiments.

### C.2 MOMENTUM 0.02, SMALL DEVIATION FROM COSINE LEARNING RATE DECAY

These experiments are run with the same setup as those in the previous section but with starting momentum  $\alpha = 0.02$  (Fig. 10). Since we erroneously match  $\alpha = 0.1, \gamma = 0.01, \gamma'_{\text{eff}} = \gamma \frac{2-\alpha}{\alpha}$  with  $\alpha = 0.02$ , the correct effective learning rate is too low and the models underperform.

### C.3 LINEAR MOMENTUM SCHEDULING

For this set of experiments, we compare training the same Simple ViT-S/16 on ImageNet-1k for 90 epochs with the following:



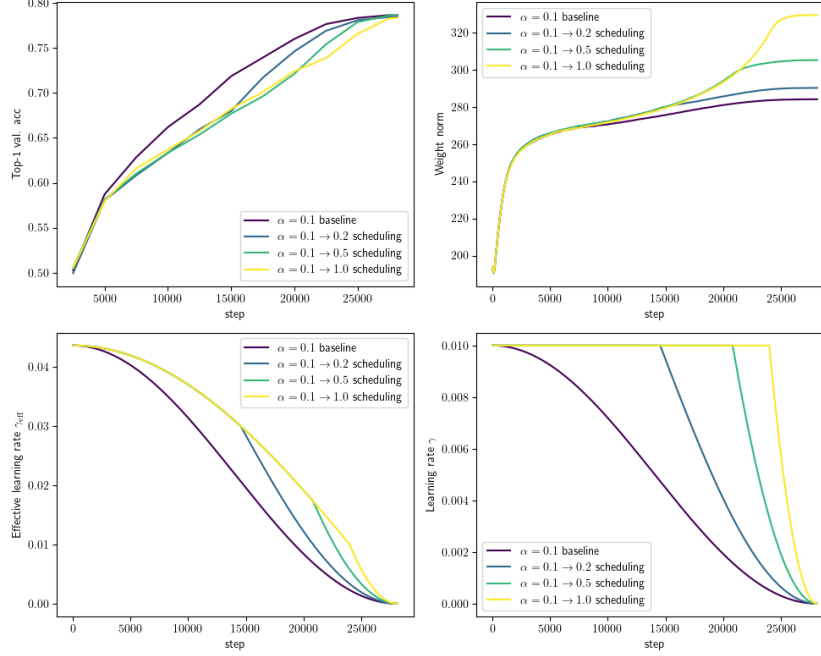


Figure 9: Training a ViT-S/16 with momentum scheduling that erroneously matches  $\gamma'_{\text{eff}} = \gamma \frac{2-\alpha}{\alpha}$  of the cosine learning rate baseline. Delayed decay of the correct effective learning rate  $\gamma_{\text{eff}} = \gamma \sqrt{\frac{2-\alpha}{\alpha}}$  results in lower top-1 val. accuracy until the very end.

1. The baseline ScionC with  $\gamma = 0.01, \alpha = 0.1, \eta = 4 \times 10^{-4}$ , therefore  $\lambda = 0.04$  and  $C_l^2 = 2.375$ .
2. The  $\alpha = 0.01 \rightarrow 1.0$  ScionC linear scheduling experiment that linearly increases the momentum in addition to cosine learning rate decay with the same maximum learning rate  $\gamma = 0.01$ .
3. The  $\alpha = 0.01 \rightarrow 1.0$  linear scheduling experiment that linearly increases the momentum in addition to cosine learning rate decay but only scales  $\lambda \propto \gamma$ , ignoring the momentum schedule.

The results are mostly expected if we consider the effective learning rate  $\gamma_{\text{eff}}$  over time (Fig. 11).  $\gamma_{\text{eff}}$  decays early at the beginning of the  $\alpha = 0.01 \rightarrow 1.0$  ScionC experiment, so the top-1 val. accuracy rises early at the beginning but soon plateaus while the weight and gradient norms are kept stable with ScionC.  $\gamma$  scheduling alone is insufficient to keep weight and gradient norms stable, so they end up swinging drastically for Experiment 3. Interestingly, it eventually converges to higher accuracy, possibly due to its lower weight norm compensating for the vanishing  $\gamma_{\text{eff}}$ .

## D OUTPUT LAYER STEADY STATE

In agreement with Defazio (2025), we also come to the conclusion that the learning rate scaling  $\lambda \propto \gamma$  should not be applied to the output layer if we are training the model with cross-entropy loss. However, we believe that the reason is not the lack of a subsequent normalization layer but that  $\mathbb{E}[(\theta_{t-1}, u_t)] \neq 0$  at steady state for the output layer. Say, we have  $v = Ax + b$  as the output logits and the model makes the correct prediction for this sample

$$\operatorname{argmax}_i v_i = c$$

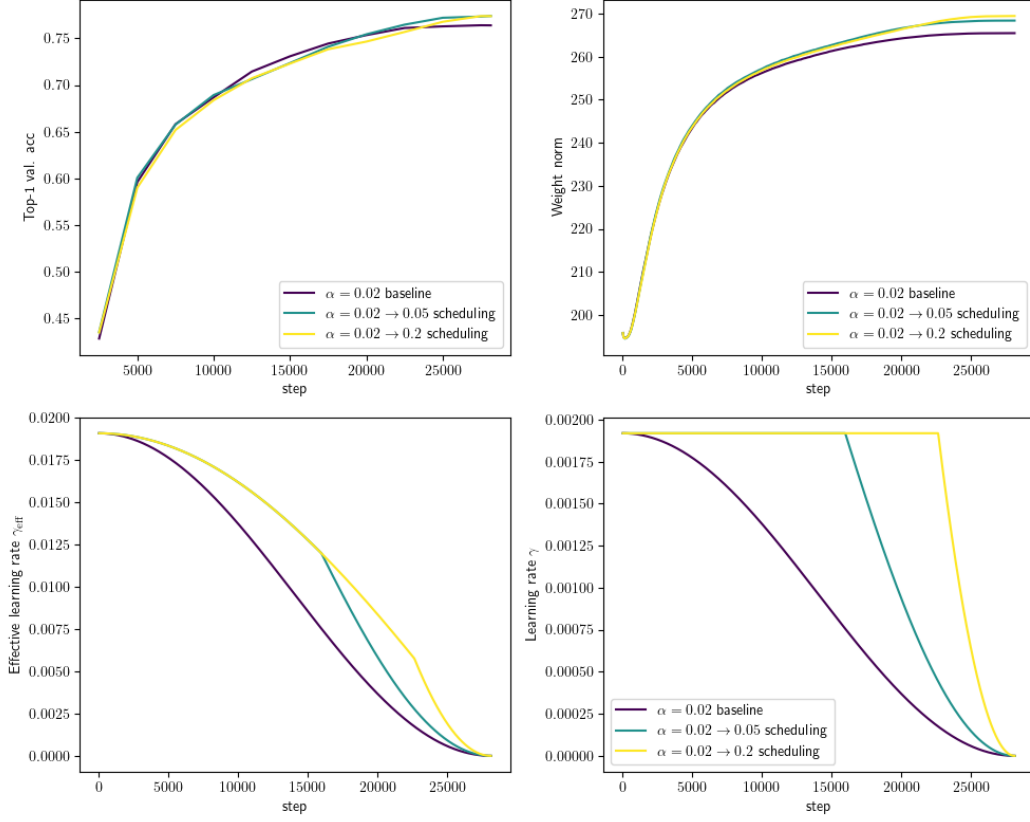


Figure 10: Training a ViT-S/16 with momentum scheduling that erroneously matches  $\gamma'_{\text{eff}} = \gamma \frac{2-\alpha}{\alpha}$  of the cosine learning rate baseline and starting momentum  $\alpha = 0.02$ . The correct effective learning rate is too low for these experiments and delayed decay ends up beneficial.

Then the cross-entropy loss becomes

$$L_{CE,v} = -\log\left(\frac{e^{v_c}}{\sum_i e^{v_i}}\right) = -\log\left(\frac{1}{\sum_i e^{(v_i-v_c)}}\right)$$

Since  $\arg\max_i v_i = c, \forall_{i \neq c} (v_i - v_c) < 0$ . So if we increase  $v$  by a small fraction  $v' = (1+\epsilon)v$ ,  $0 < \epsilon \ll 1$ :

$$L_{CE,v'} = -\log\left(\frac{1}{\sum_i e^{(v'_i-v'_c)}}\right) = -\log\left(\frac{1}{\sum_i e^{(v_i-v_c)} e^{\epsilon(v_i-v_c)}}\right) < L_{CE,v}$$

By linearity,  $\mathbf{v}' = \mathbf{A}'\mathbf{x} + \mathbf{b}'$  where  $\mathbf{A}' = (1+\epsilon)\mathbf{A}$ ,  $\mathbf{b}' = (1+\epsilon)\mathbf{b}$ . So, as the model makes more and more correct predictions, the steepest descent increasingly aligns with the weights.<sup>1</sup>  $\mathbb{E}[\langle \boldsymbol{\theta}_{t-1}, \mathbf{u}_t \rangle]$  is likely to continue to increase, especially if  $\mathbf{u}_t$  is normalized (Fig. 12).

<sup>1</sup>This reasoning suggests that we should also remove the  $\lambda \propto \gamma$  dependence of the weight decay of the output layer bias even though we did not for our experiments. We do not expect the difference to be significant.

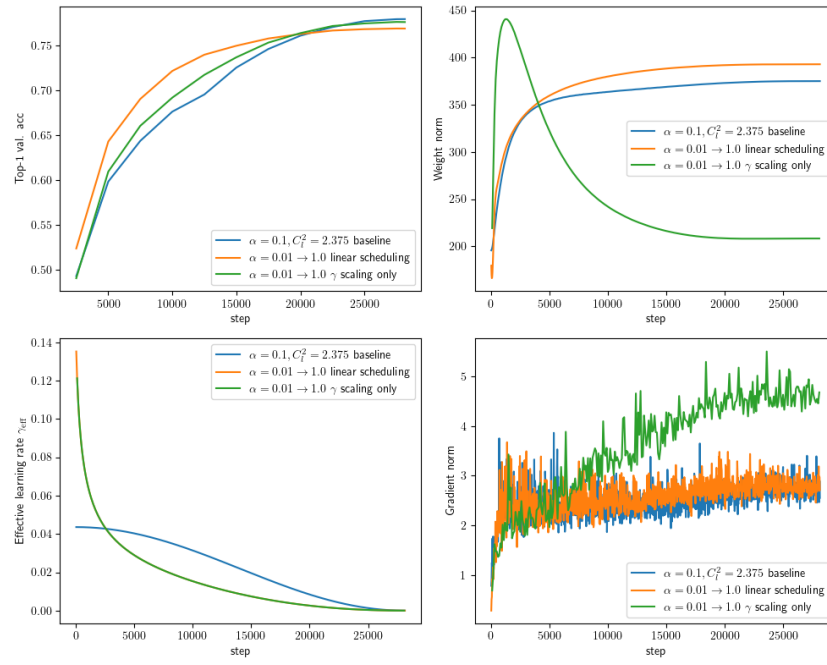


Figure 11: Stress testing ScionC by training a ViT-S/16 with momentum scheduling. Properly scaled and adaptive weight decay results in stable weight and gradient norms, while the learning rate scaling  $\lambda \propto \gamma$  alone turns out to be insufficient.

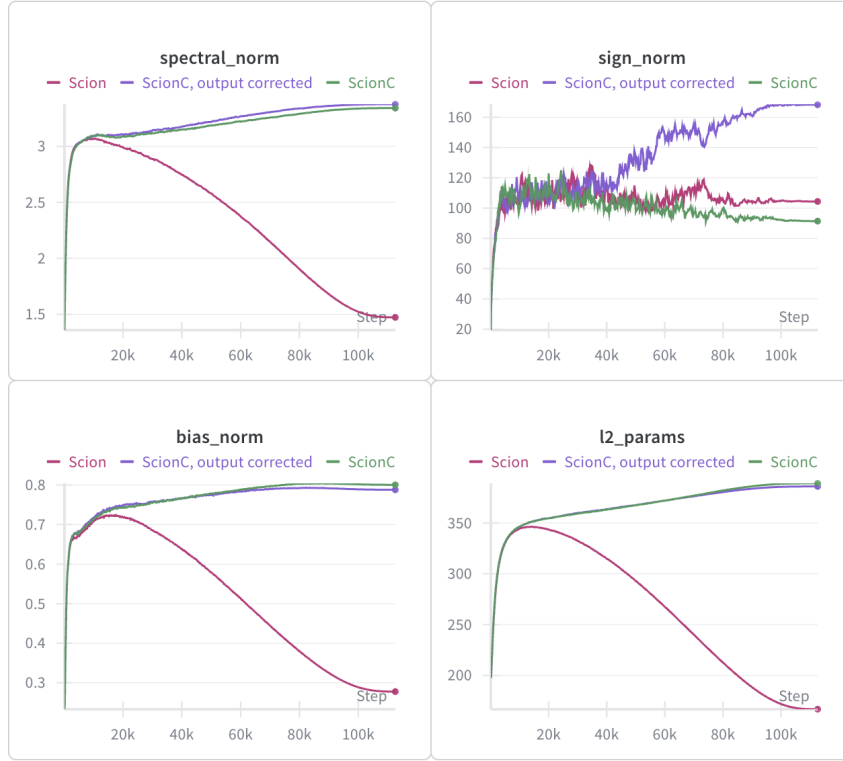


Figure 12: Comparing Scion, ScionC, and ScionC that scales  $\lambda \propto \gamma$  for model weights including the output layer while training a ViT-S/16 on the ImageNet-1k dataset (Russakovsky et al., 2015) for 90 epochs. In addition of  $L_2$  norm of the model weight, we keep track of the geometric mean of the Spectral norms, arithmetic mean of the Bias norms, and the Sign norm as defined in Table 1 for these experiments. The behavior of the Sign norm is qualitatively different from the others: It continues to increase towards the end of the cosine learning rate decay if we apply the  $\lambda \propto \gamma$  correction but remains stable if not corrected.

## E SIMPLE ViT-S/16 WEIGHT DECAY SWEEP

Here we report the ImageNet-1k top-1 val. accuracy of simple ViT-S/16 for the {Scion, ScionC (constant), ScionC (cosine)} weight decay sweep (Tables 3 to 5), in addition to sample weight and gradient norms of the ScionC (constant) experiments compared to that of regular Scion (Fig. 13).

$\lambda$	0.0004	0.0008	0.0012	0.0016
30ep	72.08 $\pm$ 0.19	<b>73.31</b> $\pm$ 0.09	73.24 $\pm$ 0.21	72.50 $\pm$ 0.22
60ep	76.98 $\pm$ 0.09	<b>77.44</b> $\pm$ 0.09	76.88 $\pm$ 0.14	76.07 $\pm$ 0.16
90ep	78.42 $\pm$ 0.19	<b>78.68</b> $\pm$ 0.09	78.32 $\pm$ 0.04	77.31 $\pm$ 0.12
150ep	79.27 $\pm$ 0.08	<b>79.65</b> $\pm$ 0.07	79.05 $\pm$ 0.15	78.31 $\pm$ 0.07
300ep	79.67 $\pm$ 0.06	<b>80.10</b> $\pm$ 0.14	79.98 $\pm$ 0.10	78.64 $\pm$ 0.32

Table 3: ImageNet-1k top-1 val. accuracy (original label) of simple ViT-S/16 trained with Scion and various training budget, weight decay coefficient  $\lambda$  sweep.

$C_l^2$	1.1875	0.7916	0.59375	0.475
30ep	72.87 $\pm$ 0.09	<b>73.10</b> $\pm$ 0.18	73.03 $\pm$ 0.29	72.54 $\pm$ 0.41
60ep	77.19 $\pm$ 0.08	<b>77.20</b> $\pm$ 0.08	76.76 $\pm$ 0.27	76.47 $\pm$ 0.03
90ep	78.42 $\pm$ 0.19	<b>78.53</b> $\pm$ 0.10	78.33 $\pm$ 0.13	77.87 $\pm$ 0.13
150ep	79.39 $\pm$ 0.15	<b>79.58</b> $\pm$ 0.04	79.31 $\pm$ 0.17	78.41 $\pm$ 0.08
300ep	79.78 $\pm$ 0.12	<b>79.94</b> $\pm$ 0.08	79.52 $\pm$ 0.38	78.35 $\pm$ 0.20

Table 4: ImageNet-1k top-1 val. accuracy (original label) of simple ViT-S/16 trained with ScionC (constant) and various training budget, steady-state norm squared  $C_l^2$  sweep.

$C_{T,l}^2$	0.59375	0.296875	0.1484375
30ep	72.98 $\pm$ 0.11	73.10 $\pm$ 0.15	<b>73.37</b> $\pm$ 0.29
60ep	<b>77.44</b> $\pm$ 0.05	77.43 $\pm$ 0.11	77.41 $\pm$ 0.04
90ep	78.65 $\pm$ 0.17	<b>78.74</b> $\pm$ 0.09	78.64 $\pm$ 0.05
150ep	79.47 $\pm$ 0.19	79.62 $\pm$ 0.12	<b>79.62</b> $\pm$ 0.03
300ep	79.99 $\pm$ 0.11	80.06 $\pm$ 0.03	<b>80.08</b> $\pm$ 0.10

Table 5: ImageNet-1k top-1 val. accuracy (original label) of simple ViT-S/16 trained with ScionC (constant) and various training budget, terminal steady-state norm squared  $C_{T,l}^2$  sweep. Initial steady-state norm squared  $C_{0,l}^2 = 1.1875$  for these experiments.

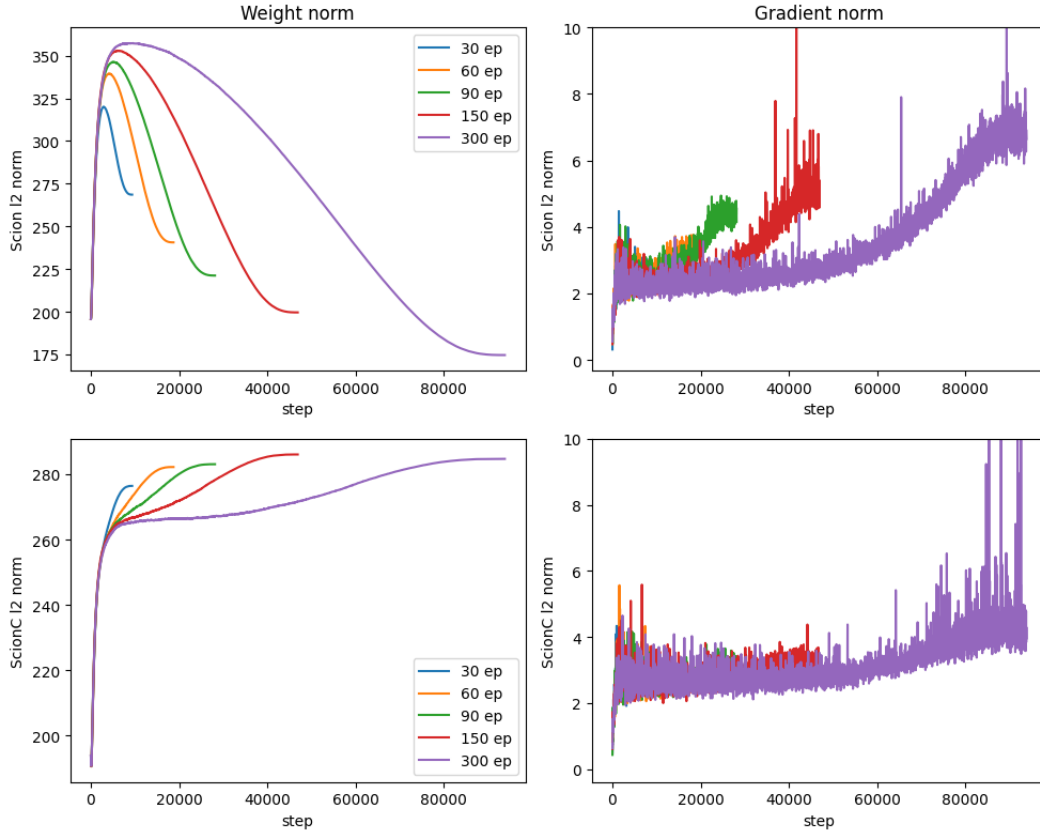


Figure 13: Training ViT-S/16 on ImageNet-1k, Scion ( $\lambda = 0.0004$ , upper) vs. ScionC (constant  $C_l^2 = 1.1875$ , lower).  $\lambda \propto \gamma$  scaling of ScionC results in more stable weight and gradient norms.