

# See-Control: A Multimodal Agent Framework for Smartphone Interaction with a Robotic Arm

Haoyu Zhao  
University College London  
London, United Kingdom  
haoyu.zhao.25@ucl.ac.uk

Weizhong Ding  
Imperial College London  
London, United Kingdom  
dingweizhong1@gmail.com

Yuhao Yang  
Huawei Noah's Ark Lab  
London, United Kingdom  
yang.yuhao@huawei.com

Zheng Tian\*  
ShanghaiTech University  
Shanghai, China  
tianzheng@shanghaitech.edu.cn

Linyi Yang  
Southern University of Science and  
Technology  
Shenzhen, China  
yangly6@sustech.edu.cn

Kun Shao  
Huawei Noah's Ark Lab  
London, United Kingdom  
shaokun2@huawei.com

Jun Wang\*  
University College London  
London, United Kingdom  
jun.wang@cs.ucl.ac.uk

## Abstract

Recent advances in Multimodal Large Language Models (MLLMs) have enabled their use as intelligent agents for smartphone operation. However, existing methods depend on the Android Debug Bridge (ADB) for data transmission and action execution, limiting their applicability to Android devices. In this work, we introduce the novel Embodied Smartphone Operation (ESO) task and present See-Control, a framework that enables smartphone operation via direct physical interaction with a low-DoF robotic arm, offering a platform-agnostic solution. See-Control comprises three key components: (1) an ESO benchmark with 155 tasks and corresponding evaluation metrics; (2) an MLLM-based embodied agent that generates robotic control commands without requiring ADB or system back-end access; and (3) a richly annotated dataset of operation episodes, offering valuable resources for future research. By bridging the gap between digital agents and the physical world, See-Control provides a concrete step toward enabling home robots to perform smartphone-dependent tasks in realistic environments.

## Keywords

Multimodal, Smartphone Operation, Large Language Model

## 1 Introduction


State-of-the-art Multimodal Large Language Models (MLLMs), such as OpenAI o3 and GPT-4o [6], have catalyzed a wave of task-oriented smartphone agents that automate mobile interfaces on behalf of users. However, most contemporary systems depend on Android Debug Bridge (ADB) for perception and control, tying solutions to a single OS, requiring developer modes and wired/debug privileges, and raising practical and privacy concerns outside lab settings. At the same time, embodied AI is rapidly moving from simulation to home environment [7, 29], where robots must complete

daily tasks that routinely depend on mobile apps, such as approving two-factor prompts, scanning QR codes, navigating vendor-specific IoT controls, or coordinating deliveries. These converging trends open a timely Human-Computer Interaction (HCI) question: how can we enable reliable, privacy-preserving, *cross-platform* smartphone operation that integrates naturally with the physical workflows of domestic robots?

We argue that smartphone operation is not merely another Graphical User Interface (GUI) automation problem but a core capability for future home robots. Households already rely on smartphones as the control plane for services and devices; human users fluidly mix physical actions (moving the phone, aligning the camera, tapping) with digital steps (interpreting novel layouts, acknowledging pop-ups). A home robot that cannot act on a phone will frequently stall at the last mile of assistance. Giving robots a robust way to *See and Control* on smartphones therefore expands the space of assistive scenarios, including accessibility support for users with motor impairments and privacy-sensitive tasks where on-device data should never be tunneled through debugging channels.

Prior smartphone agents make progress on reasoning [1, 30], planning [17, 20, 32], and multimodal perception [21, 23, 28], but their reliance on ADB remains a brittle abstraction boundary: it is platform-locked (Android-only), privileges a development configuration (debug mode, tethering), and routes sensitive content through software bridges that are ill-suited to everyday domestic use. Emulators and OS toolkits sidestep some friction but fail to capture the physical constraints of real phones (screen glare, touch friction, alignment errors), which matter for embodied execution and user trust. In this paper, we introduce the Embodied Smartphone Operation (ESO) task and *See-Control*, a framework that enables MLLM-based embodied agents to operate smartphones physically via a low-DoF robotic arm, which can tap, swipe, and type directly on the screen without ADB or privileged access. Our approach is platform-agnostic by design: it treats the phone as a visual-tactile object in the world, processes only screen imagery, and outputs continuous control to the end-effector. This reframes

\*denotes corresponding author

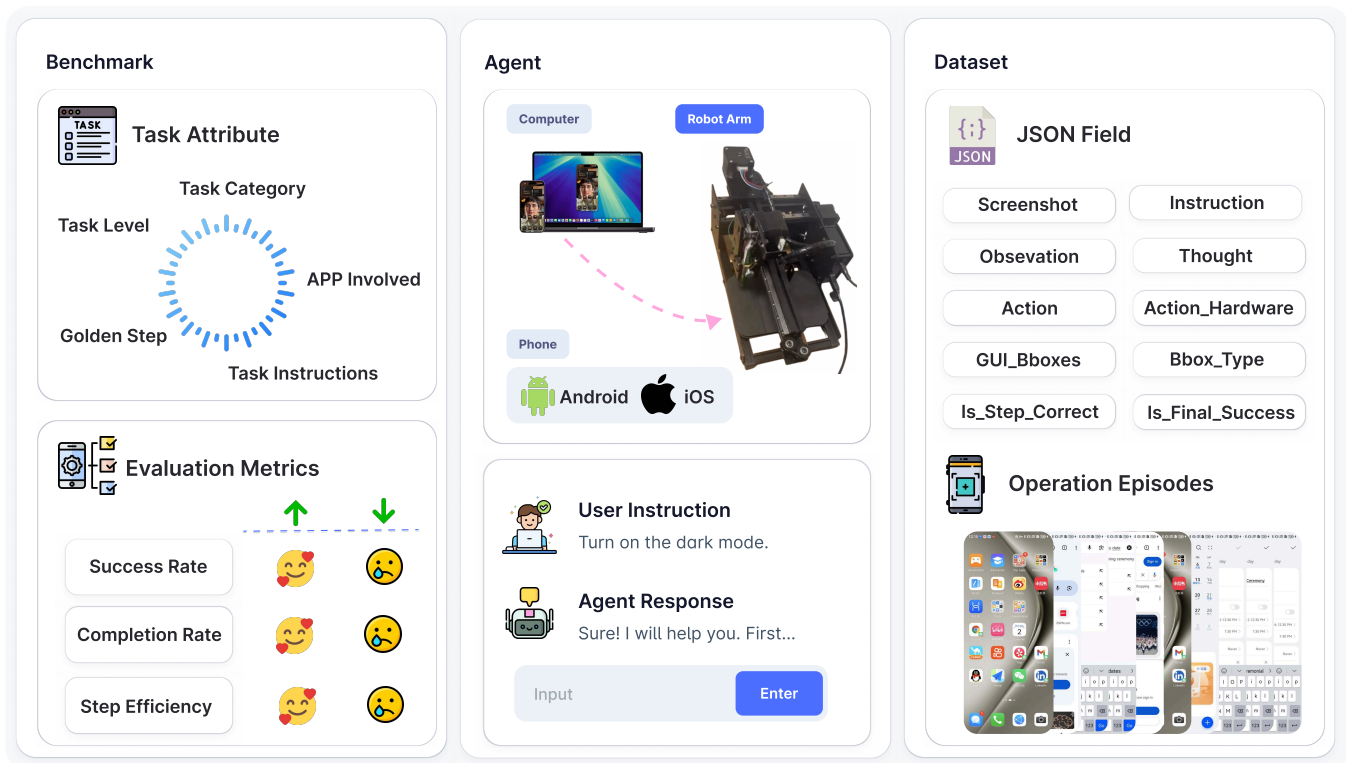

**Figure 1: Overview of the See-Control Framework.** The framework consists of three main components: a benchmark, an MLLM-based embodied agent, and a richly labeled dataset of smartphone operation episodes. See-Control reframes mobile HCI automation from a software-bridge problem into an embodied perception-and-action challenge, aligning with the way people naturally interact with phones. It not only overcomes the platform limitations present in existing research but also provides a more secure solution.

mobile HCI automation from a software-bridge problem into an embodied perception-and-action problem, aligning with how people themselves operate phones.

Concretely, See-Control comprises three components (see Fig. 1). First, we establish an ESO benchmark of 155 manually annotated tasks with task-level metrics tailored to single-contact, three-axis robotic arms. Second, we build an MLLM-based embodied agent that takes only screen captures as input and generates control for a robotic arm, fully decoupled from ADB. Third, we release a richly annotated dataset of smartphone operation episodes, including intermediate agent states to facilitate future development of Vision-Language-Action (VLA) models.

Our contributions are as follows:

- A problem formulation and benchmark for *Embodied Smartphone Operation* (ESO), targeting the realities of physical smartphone operation with low-DoF arms.
- *See-Control*, a platform-agnostic, privacy-preserving system that performs direct physical interaction with smartphones—no wired connections, device-specific code, or privileged modes.
- An open, richly labeled dataset of operation episodes and an empirical evaluation across diverse apps demonstrating the feasibility and robustness of embodied, ADB-free smartphone control.

Together, these results suggest a complementary path for smartphone agents that better matches real-world domestic contexts: rather than contorting phones into developer configurations, let robots interact with them as people do—seeing the screen, deciding what to do, and touching it. This shift broadens deployment beyond a single OS, reduces privacy exposure, and integrates naturally with embodied assistance in the home.

## 2 Related Work

### 2.1 Smartphone Operation Agents

The goal of smartphone operation agents is to develop AI assistants capable of performing user-specified tasks within smartphone-oriented environments, with a strong focus on enhancing human-computer interaction to improve user experience and task efficiency. Early approaches [4, 9, 16, 33] focused mainly on programming by demonstration (PbD) systems, which allow users to automate tasks by simply performing them once or multiple times. However, these PbD systems are often constrained by their limited generalization ability and lack of autonomy.

Recently, state-of-the-art Multimodal Large Language Models (MLLMs), such as OpenAI o3, GPT-4o [6], and the QwenVL series [2, 18, 22], have demonstrated promising progress in multi-turn

dialogue and tool use. Leveraging these capabilities, agents built upon MLLMs have emerged as the dominant solution in the modern development of smartphone operation agents, where the MLLM serves as the central reasoning and decision-making component. By drawing on the vast knowledge acquired during pre-training, such agents can generate responses that are adaptive to a wide range of tasks and environments.

A key factor of smartphone operation agents is the ability to accurately map language instructions to specific Graphical User Interface (GUI) elements. The methods for grounding these GUI elements can be broadly categorized into two approaches. The first category primarily focuses on GUI-related text analysis, leveraging textual files as auxiliary input to facilitate accurate understanding of the GUI. This approach involves utilizing existing GUI meta-data (e.g., XML), with notable representative research like AppAgent [30] and AppAgent v2 [10], or using GUI parsing modules to convert images into textual HTML files for further processing, as demonstrated in AutoDroid [25, 26]. The second category leverages computer vision tools, directly analyzing input images through a visual perception module, such as Grounding DINO [12] and CLIP [8], to analyze screen information for determining the coordinates of interactive elements. This approach is exemplified by methods such as Mobile-Agent [21], and Mobile-Agent-E [24]. Despite the variety of methods for GUI navigation, they all share a fundamental dependency on the Android Debug Bridge (ADB). This reliance not only introduces inherent security risks but also restricts agents’ applicability to Android platforms, thereby limiting their cross-platform versatility.

## 2.2 Smartphone Operation Benchmarks

The evaluation of agent performance in smartphone operation tasks is crucial for understanding their effectiveness, reliability, and adaptability in real-world scenarios. However, most existing agent frameworks are evaluated on a limited set of relatively simple tasks. To address this evaluation challenge, various benchmarks have been established, such as Spa-Bench [3], Android World [15], Mobile Env [31], Android Env [19], and Mobile-Bench [5]. Spa-Bench stands out as an outstanding example, offering a diverse set of tasks that cover both system and third-party apps in English and Chinese, thus bridging the gap in unified benchmarks by increasing task number and complexity. However, for the specific domain of Embodied Smartphone Operation (ESO), there remains a critical need for a benchmark that accounts for the unique characteristics of embodied interaction systems. Our work directly addresses this gap by introducing the first ESO benchmark.

## 3 Benchmark

In this section, we provide a comprehensive introduction to the See-Control benchmark. As the first evaluation framework specifically designed for the Embodied Smartphone Operation (ESO) task, the See-Control benchmark addresses the distinct challenges posed by using robotic arms with a single contact point to interact with smartphones.

### 3.1 Task Construction

In contrast to existing methods based on Android Debug Bridge (ADB), the ESO task presents a greater challenge for the agent, as the agent cannot invoke system commands via ADB and must accommodate cross-platform compatibility. Although most actions can be achieved through pixel coordinate mapping, three main actions present significant challenges that require additional adaptations, including navigating back, exiting applications, and typing. These actions can be completed easily with a single ADB command, but in the absence of ADB, they become substantially more complex. The See-Control benchmark is specifically designed to evaluate the performance of ESO agents in addressing these challenges, with tasks grounded in real user scenarios such as shopping, social interaction, and information management, ensuring that the benchmark is built upon common user needs. A list of the apps involved and their corresponding tasks can be found in Appendix A.

Specifically, we begin by compiling tasks from established smartphone operation frameworks and benchmarks, such as SPA-Bench [3], and manually augment these tasks. In addition to augmenting existing tasks, we also manually design new tasks that specifically require the use of the three main challenging actions associated with the ESO task, thereby further enriching our evaluation task set. All tasks are then filtered to include only those that can be executed by robotic arms with a single contact point. Subsequently, we classified all tasks into two categories based on the number of applications required to complete each task: single-app tasks and cross-app tasks. Within the single-app tasks, these are further divided into two distinct groups. The first group includes tasks that only involve pixel-level coordinate mapping, which we refer to as the Standard Task Set. The second group consists of tasks that incorporate the aforementioned challenging actions, categorized under the Challenging Task Set. Given that cross-app tasks generally involve challenging actions, we do not differentiate among these tasks further. The benchmark comprises a total of 155 tasks, which are categorized into 140 single-app tasks and 15 cross-app tasks. Within the single-app tasks, 37 belong to the Standard Task Set, whereas the remaining 103 are part of the Challenging Task Set.

Furthermore, we categorize the tasks into 8 distinct categories according to their application domain, such as SystemApps, Comm & Social, and others. Additionally, the benchmark emphasizes cross-platform generality, excluding tasks that are restricted to a single platform, such as Google Play, which is limited to the Android system. We further classify the single-app tasks into three levels of difficulty: easy, medium, and hard, with the majority of higher-difficulty tasks built upon their lower-level counterparts. For each task, we include a human-executed trajectory to identify the optimal execution path and determine the number of steps required, referred to as golden steps. For single-app golden step annotation, the calculation begins from the app’s home screen. In contrast, for cross-app golden steps, which involve interactions across multiple applications, the calculation starts from the phone’s home screen. Overall, our benchmark is designed to be cross-platform and fully customized for ESO tasks, enabling the systematic evaluation of home robots’ ability to perform smartphone operations. These distinctive features set our benchmark apart from existing ones.

### 3.2 Evaluation Metrics

To comprehensively evaluate the performance of ESO agents on our benchmark, we define three evaluation metrics that capture different aspects of task execution: (1) Success Rate (SR), (2) Completion Rate (CR), and (3) Step Efficiency (SE).

- **Success Rate (SR):** A task is considered successfully executed when all components of the user’s instruction are fully completed. Let  $S_n$  denote the total number of successfully executed tasks and  $N$  the total number of tasks, then the success rate is defined as:

$$SR = \frac{S_n}{N} \quad (1)$$

- **Completion Rate (CR):** Although some instructions may not be fully executed, the successful actions performed by the agent still hold substantial importance. For a given task  $T_i$ , let  $HStep_i$  represent the number of human steps required to complete the task, and  $AStep_i$  the number of steps successfully completed by the agent. The Completion Rate for task  $T_i$ , denoted as  $CR_{Ti}$ , is then defined as:

$$CR_{Ti} = \frac{AStep_i}{HStep_i} \quad (2)$$

For a task set  $S_i$  consisting of  $n$  task, the overall Completion Rate  $CR_{Si}$  is given by the average:

$$CR_{Si} = \frac{1}{n} \sum_{i=1}^n CR_{Ti} \quad (3)$$

- **Step Efficiency (SE):** Assessing the efficiency of tasks successfully completed by the agent is another critical aspect. Evidently, a process that achieves the task goal with fewer steps reflects a more optimal solution. The Step Efficiency for task  $T_i$ , denoted as  $SE_{Ti}$ , is then defined as:

$$SE_{Ti} = \frac{HStep_i}{AStep_i} \quad (4)$$

For a task set  $S_i$  consisting of  $n$  task, the overall Step Efficiency  $SE_{Si}$  is given by the average:

$$SE_{Si} = \frac{1}{n} \sum_{i=1}^n SE_{Ti} \quad (5)$$

## 4 Agent

Designing an embodied smartphone operation agent presents a significant challenge due to several key factors. First, achieving cross-platform compatibility requires the system to avoid relying on system commands. For instance, actions like Text, Back, and Exit can be executed with a single command in ADB-based frameworks. However, without ADB, these operations require custom design and implementation strategies, making it challenging to achieve the same level of accuracy. The performance of these fundamental actions directly influences the overall accuracy of the embodied agent. Second, the robotic arm, with its single contact point, can only simulate single-finger operations. This hardware limitation necessitates the meticulous and specific design of every action’s execution. Third, in the absence of ADB, the agent is inherently isolated from the smartphone’s internal storage, making it impossible to utilize internal GUI description files. Consequently, a fully

vision-based approach is required to interpret and interact with the interface. In this work, we establish the simplest baseline for the Embodied Smartphone Operation (ESO) task, leaving the development of more efficient ESO agents as an open challenge for future research. An overview of our agent is shown in Fig. 2, and Fig. 3 illustrates an example of the Execution Pathway of the See-Control agent during task completion.

### 4.1 Framework

**Hardware Setup.** Our hardware setup includes a PC, a three-axis robotic arm, and a smartphone, compatible with any operating system and screen resolution. The robotic arm is connected to the PC to receive hardware actions generated by the agent. The agent employs a fully vision-based approach, relying solely on real-time screenshots captured via screen mirroring. This system fully simulates the logic of human smartphone interaction, eliminating the need for cable connections to the smartphone or access to system files, such as XML, through software bridges.


**Action Space.** To reduce operational complexity, we define a fully discretized action space that closely mirrors typical human interactions with smartphones. This ensures that the set of actions is both minimal and sufficient to achieve the desired tasks. From the broad range of possible human actions, we select those that can be executed by home robots equipped with robotic arms featuring a single contact point. Each action and its corresponding function are represented in JSON format, with each action type corresponding to specific movements of the robotic arm. Below is a detailed description of the action space:

- **Tap ( $x, y$ ).** Perform a single tap at a specific pixel coordinate ( $x, y$ ).
- **Swipe ( $x, y, direction, distance$ ).** Swipe from the starting point at ( $x, y$ ) in the given direction (*up, down, left, right*) over a specified distance (*short, medium, long*). The distances are defined as 1/4, 1/3, and 1/2 of the screen’s width or height, respectively.
- **Text (*text*).** Input specific text into an on-screen text field.
- **Back.** Navigate to the previous screen.
- **Exit.** Close the current application or activity and return to the home screen.

**Agent Formulation.** Following Agent Q [13], we model the smartphone operation task as a Partially Observable Markov Decision Process (POMDP), given the limited observability of information beyond screenshots. Specifically, the agent lacks prior ground truth regarding interactive GUI elements on smartphones, thereby necessitating more precise localization of the interaction objectives. Furthermore, the smartphone screen represents a constantly evolving and highly dynamic environment, posing significant challenges for the agent in determining the exact state after the execution of an action.

We consider a generalized yet simplified POMDP setup, with an example of the thinking and decision-making process in the See-Control agent shown in Fig. 4. In this framework, the agent’s observations, denoted as  $\mathbf{o}_t \in \mathcal{O}$ , encompass information provided by both the user and the smartphone. Specifically, the initial observation  $\mathbf{o}_1$  includes the user’s instruction and the current screenshot of the smartphone interface. The agent actions  $\mathbf{a}_t \in \mathcal{A}$  are



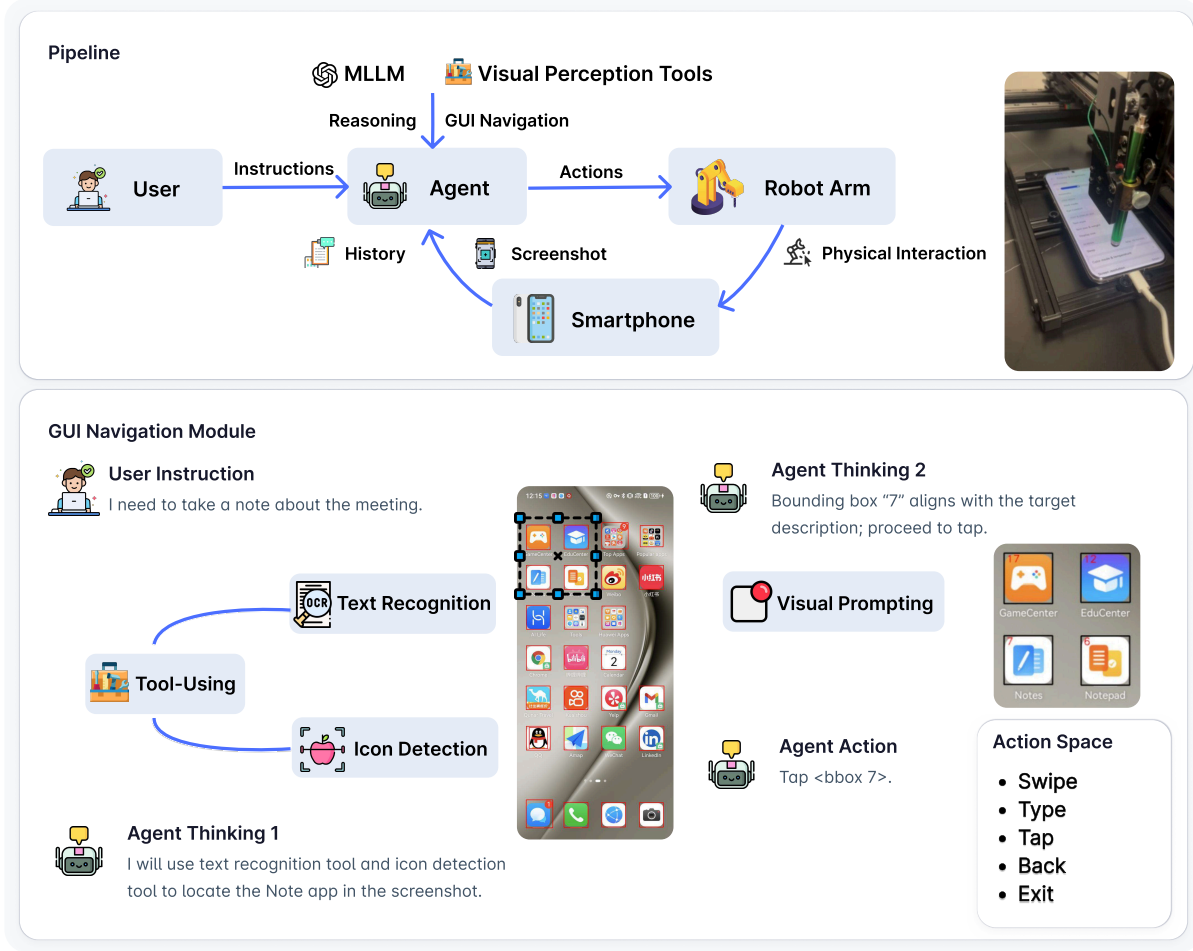

**Figure 2: Pipeline of the See-Control Agent and its Visual Perception Module.** The top panel shows how the agent processes user instructions and screen images to generate actions. The bottom panel provides a specific example of how the agent’s reasoning leverages specialized visual grounding tools and visual prompting to accurately locate and interact with an UI element, demonstrating its ability to bridge user instructions with physical control.


composite, based on the agent’s memory component history,  $\mathbf{h}_t$ , where  $\mathbf{h}_t = (\mathbf{a}_1, \dots, \mathbf{a}_{t-1}, \mathbf{o}_t)$ . For the first action following the initial observation  $\mathbf{o}_1$ , we leverage the planning capabilities of the MLLM to prompt the agent to generate a thought action  $\mathbf{a}_t^{\text{tht}} \sim \pi(\mathbf{a}_t^{\text{tht}} | \mathbf{h}_t)$ , which encapsulates the reasoning logic underlying the subsequent action. Subsequently, we generate the mobile interaction command  $\mathbf{a}_t^{\text{env}} \sim \pi(\mathbf{a}_t^{\text{env}} | \mathbf{h}_t, \mathbf{a}_t^{\text{tht}})$ , which corresponds to a tangible action such as "Tap", "Swipe", or "Text". We define the step action  $\mathbf{a}_t$  as a tuple comprising observations, thought actions, and environment actions for all steps. During model optimization, we consider the joint likelihood to guide the decision-making process:

$$\log \pi(\mathbf{a}_t | \mathbf{h}_t) = \log \pi(\mathbf{a}_t^{\text{env}} | \mathbf{h}_t, \mathbf{a}_t^{\text{tht}}) + \log \pi(\mathbf{a}_t^{\text{tht}} | \mathbf{h}_t) \quad (6)$$

This formulation enables the agent to reason effectively about its actions while interacting with the highly dynamic smartphone environment. Building on this foundation, our agent is equipped with the capabilities of self-planning and self-reflection. Upon receiving

a user task, the agent autonomously performs reasoning and planning to determine the subsequent action. Furthermore, it is capable of independently assessing whether the task has been completed and halting its output accordingly. In addition, the introduction of  $\mathbf{h}_t$  enables the agent to perform self-reflection. Specifically, when the agent identifies that a particular action has resulted in an error, such as navigating to an incorrect page, it can revert to the previous step, modify the relevant action parameters, or generate alternative actions to autonomously correct its behavior.

**Gui Navigation.** In the See-Control agent, GUI elements are categorized into two distinct types: icons and text. Correspondingly, we have developed a dedicated visual perception module that allows agents to invoke grounding mechanisms tailored to each category. Additionally, we employ a visual prompting approach to enable the agent to perform more effective reasoning based on the visual marks provided. By analyzing the coordinates obtained from the

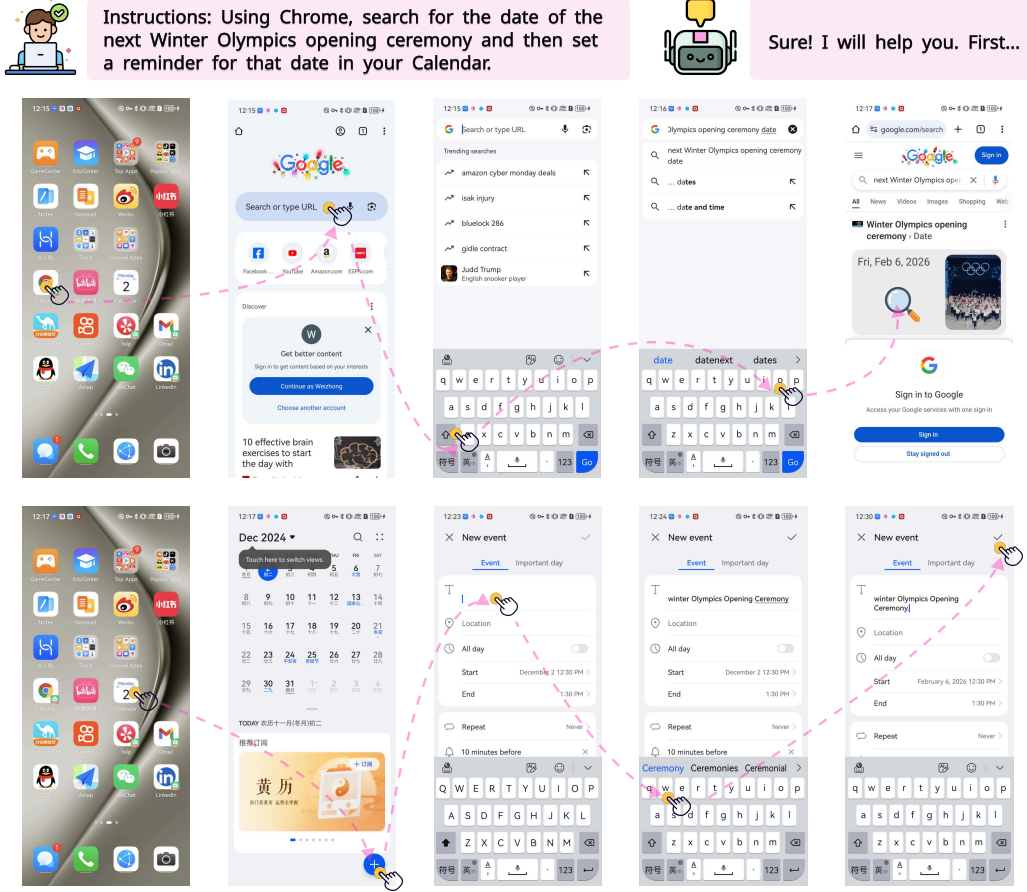

**Figure 3: An example of the execution pathway of the See-Control agent during task completion, highlighting its comprehensive capabilities in task planning, reasoning, and visual perception.**

GUI navigation process, we can accurately determine the actual execution trajectory of the robotic arm.


For text grounding, consistent with most existing research, such as MobileAgent [21] and AppAgent v2 [11], when the agent identifies the need to interact with text, it invokes an OCR model for detection, which returns the corresponding bounding boxes (bboxes). The center pixel of the bbox is then used as the contact point for the robotic arm to execute the desired action.

For icon grounding, inspired by LLM-Optic [34] and SoM [27], we first employ a leading open-vocabulary object detector, Grounding DINO [12], to detect all potential icon elements and return their corresponding bboxes. Subsequently, each candidate bbox is annotated with an index mark (See Fig. 2), which serves as a visual prompt to enable the agent to perform more effective reasoning. The annotated image is then fed into the agent, which determines the specific icon index corresponding to the next action required for the task. This approach avoids over-reliance on basic computer vision models such as CLIP [14], whose limited language understanding capabilities often lead to weak results in icon recognition. Instead, we leverage the outputs of the visual perception module

in combination with the cross-modal semantic understanding capability of MLLMs to empower the agent to synthesize all available information and make direct decisions.

**Action Execution.** As mentioned in Sec. 3, compared to existing agents that rely on system commands for smartphone operation, home robots equipped with single-contact-point robotic arms face three main challenges due to their independence from the smartphone system: navigating back, exiting applications, and texting. In addition to these actions, which require special design, we also implement tap and swipe actions by mapping virtual coordinates to mechanical coordinates based on the pixel coordinates returned by the visual perception module. For the tap action, this involves clicking on the center of the bounding box, while for the swipe action, it entails dragging in a specified direction over a certain distance (as detailed in Sec. 4.1).

**Back and Exit.** For the back and exit actions, we primarily employ smartphone gestures as the main method, supplemented by GUI navigation-based approaches. In most scenarios, gestures can effectively serve as substitutes for the majority of system commands. For instance, swiping from the bottom to the top initiates the exit action, while swiping from left to right executes the back action.

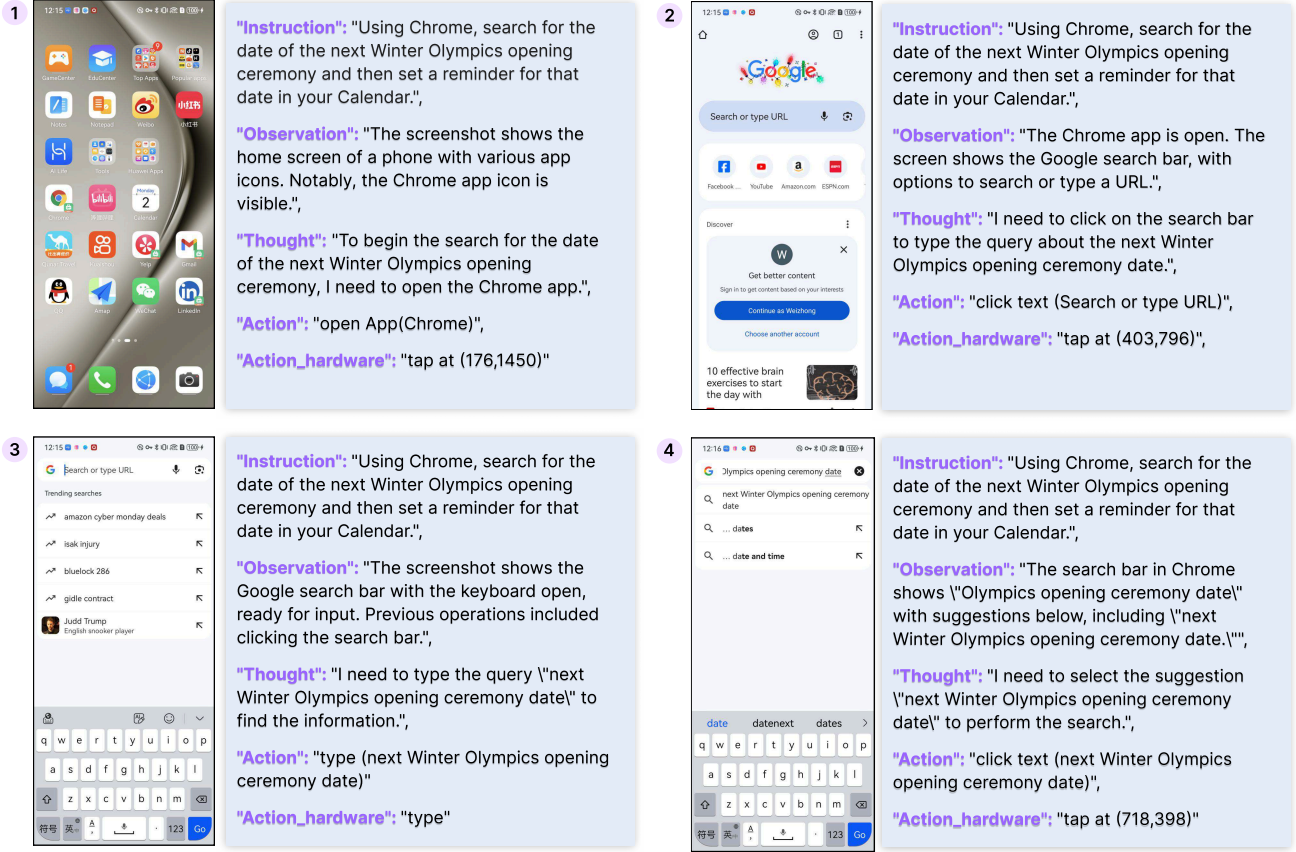

**Figure 4: An example of the See-Control agent’s thinking and decision-making process, in which the agent interacts with the environment to gather observations for each state, performs reasoning, and converts its decisions into precise actions for the robotic arm. Due to space constraints, only the first four steps of the task are presented.**

These gestures are particularly well-suited for a single-contact-point robotic arm, as they only require the implementation of a swipe motion from one coordinate to another. In the rare instances where gestures cannot successfully perform these actions, we adopt the same methodology utilized in GUI navigation. Specifically, we attempt to interact with the back button or relevant text elements to execute the desired actions.

*Text.* In the ESO task, text input actions present non-trivial challenges. While ADB-based methods enable text input via system commands, achieving this without ADB requires additional design. In our agent, we address this challenge by implementing a keyboard key localization approach. By employing the standard international keyboard layout as an example, we systematically identify and store the pixel coordinates of each key. This localization procedure is performed only once for each device.

To achieve more precise localization, we first employ the icon grounding approach to identify the region where the keyboard is located. Following this, a cropping operation is applied to the corresponding section of the screenshot, isolating the relevant area for subsequent analysis. To reduce the computational complexity associated with localization, we do not localize every individual

key. Instead, we utilize specific anchor points as references for positioning. Taking the first row of the keyboard as an example, we begin by identifying the positions of the first and second characters. By calculating the horizontal distance between these two anchor points, we can determine the positions of all characters in the first row. This is achieved by maintaining a constant vertical coordinate while incrementally adjusting the horizontal coordinate based on the calculated offset values. The same principle is then extended to determine the positions of keys in subsequent rows, ensuring accurate localization across the entire keyboard.

## 4.2 Experiments

We use GPT-4o [6] as the MLLM backbone for the See-Control agent and evaluate its performance using our carefully designed benchmark. The results are presented in Table 1 to Table 4. All experiments are conducted in a unified environment, fully automated without human intervention. To ensure reliability, we save screenshots and actions at each step and perform secondary human verification to assess both the accuracy of each step and whether the task is successfully completed when the agent stops. This process ensures alignment with the intended human objectives.

**Table 1: Overall Evaluation Results. SR = Success Rate, CR = Completion Rate, SE = Step Efficiency.**

Benchmark Subset	Simple			Medium			Hard		
	SR ↑	CR ↑	SE ↑	SR ↑	CR ↑	SE ↑	SR ↑	CR ↑	SE ↑
Single-App Task Instructions (Standard Task Set)	11/13	0.333	0.921	5/13	0.318	0.892	1/11	0.178	0.456
Single-App Task Instructions (Challenging Task Set)	23/32	0.365	0.803	18/35	0.274	0.840	3/36	0.301	0.849
Cross-App Task Instructions	Overall Results								
	SR: 2/15			CR: 0.333			SE: 0.649		

From the results, we observe that the agent demonstrates proficiency in successfully completing most tasks within the simple instructions subset. However, as task complexity increases, the agent’s Success Rate (SR) declines stepwise, with SR for cross-app tasks significantly lower than for single-app scenarios. This trend is also evident in the Completion Rate (CR) and Step Efficiency (SE). As task difficulty increases, the agent often requires more steps for trial and error, leading to a reduction in SE. At the same time, more complex tasks are often built upon simpler tasks, inherently requiring more steps. However, the agent often fails to recover from earlier mistakes, leading to a further drop in CR.

The performance disparity between simple and complex tasks can be further attributed to two primary factors. First, our benchmark includes more complex tasks with a significantly higher average number of steps, which increases overall complexity and challenge. Longer task sequences require more GUI localization and interaction, inevitably reducing task execution accuracy. Second, unlike ADB-based methods, ESO settings present additional challenges. Simple tasks involve fewer ESO-specific actions, which reduces the likelihood of error accumulation.

**Table 2: Results for Single-App Task Instructions (Standard Task Set). " - " indicates Not Applicable, meaning that all tasks in the corresponding task category were either fully correct or fully incorrect. This convention also applies to the following table.**

Task Category	Simple			Medium			Hard		
	SR	CR	SE	SR	CR	SE	SR	CR	SE
Comm&Social	2/2	-	0.833	0/2	0.500	-	0/2	0.182	-
Lifestyle	1/1	-	1.000	1/1	-	0.833	0/1	0.300	-
News&Reading	2/2	-	1.000	0/2	0.214	-	0/2	0.136	-
Prod&Tools	1/1	-	1.000	-	-	-	-	-	-
SystemApps	4/4	-	0.867	4/5	0.167	0.906	1/3	0.256	0.455
Travel&Nav	1/3	0.333	1.000	0/3	0.317	-	0/3	0.111	-

Upon analyzing the execution trajectories, we identify the primary cause of task failures. Consistent with existing research, the main challenge stems from the inherent limitations of the visual perception module and the insufficient UI comprehension capabilities of MLLMs. Due to the diversity of UI designs, current models often struggle to interpret interfaces accurately. For instance, a "settings" button may appear in very different forms across applications, and in some cases, the correct action requires clicking on the user’s avatar. While such variations are trivial for users,

**Table 3: Results for Single-App Task Instructions (Challenging Task Set).**

Task Category	Simple			Medium			Hard		
	SR	CR	SE	SR	CR	SE	SR	CR	SE
Comm&Social	7/10	0.267	0.716	3/10	0.378	0.953	2/10	0.232	0.774
Lifestyle	3/3	-	0.722	4/4	-	0.721	1/5	0.304	1.000
Media&Entmt	4/5	0.667	0.838	3/5	0.238	1.000	0/5	0.248	-
News&Reading	3/4	0.667	0.833	1/4	0.185	1.000	0/4	0.199	-
Prod&Tools	2/2	-	0.667	1/3	0.293	0.700	0/3	0.371	-
Shop&Fin	2/3	0.667	0.700	2/3	0.143	0.586	0/3	0.524	-
SystemApps	0/2	0.001	-	1/2	0.000	1.000	0/2	0.179	-
Travel&Nav	2/3	0.286	1.000	3/4	0.250	0.831	0/4	0.448	-

**Table 4: Results for Cross-App Task Instructions.**

Task Category	SR	CR	SE
General Tool	1/2	0.333	0.571
Information Management	1/3	0.215	0.727
Media Entertainment	0/1	0.545	-
Multi-Apps	0/3	0.204	-
Social Sharing	0/3	0.252	-
Web Shopping	0/3	0.553	-

they remain highly challenging for grounding models and MLLMs. These findings underscore the need for more robust visual perception mechanisms and the development of MLLMs with stronger autonomous reasoning abilities.

### 4.3 User Study

To further investigate users’ acceptance, preferences, and concerns regarding smartphone operation agents, we conducted an exploratory user study with participants spanning a wide age range and diverse educational backgrounds. Each participant completed a questionnaire using a 5-point Likert scale, which focused on three key aspects: (1) attitudes toward existing smartphone operation agents, (2) concerns regarding privacy, security, and platform-specific limitations, and (3) expectations and preferences for future robotic smartphone automation, including perceived convenience. The survey was designed to be simple and intuitive, requiring no prior technical knowledge, and was administered anonymously.

In total, 25 valid responses were collected. The findings indicate that the majority of users hold negative attitudes toward existing software-bridge-based agents, expressing reluctance to employ such methods in daily life (17 out of 25). Concerns were primarily centered on privacy and security risks (18 out of 25), as well as issues related to platform compatibility and usability (21 out of 25). Conversely, most users expressed a strong expectation that domestic intelligent robots should possess the capability to perform smartphone operation tasks (20 out of 25), with only a very small minority unwilling to delegate such tasks to home robots (1 out of 25). Furthermore, a large proportion of users believed that such an assistant would significantly enhance everyday convenience (22 out of 25). This user study further substantiates the value of See-Control in offering a complementary pathway for MLLM-based smartphone operation agents, particularly in broadening the design space for assistive human-computer interaction, enhancing accessibility support, and fostering trustworthy in-home automation.

## 5 Dataset

The See-Control dataset represents the first systematic effort to collect annotated data to support research on the Embodied Smartphone Operation task, capturing the episode history generated by the agent in a structured manner. As shown in Fig. 1, the dataset comprises ten components, each of which is detailed in Table 5. The variable *IsStepCorrect* is determined by the state transition following each action, whereas *IsFinalSuccess* is evaluated based on the overall success or failure of the task upon completion. Both of these variables undergo a rigorous double verification process by humans to ensure the high quality and reliability of the dataset.

**Table 5: Description of Attributes in the Dataset.**

Attribute	Description
Screenshot	Screenshot of the smartphone display
Instruction	Task instruction provided by the user
Observation	Agent’s observation of the current screen state
Thought	Agent’s reasoning process for completing the task given the current screenshot and task instruction
Action	Abstract action decided by the agent, e.g., “open App (Chrome)”
Action Hardware	Actual hardware action executed by the robotic arm, e.g., “tap at (176, 1450)”
Gui Bboxes	Bounding boxes of all interactive elements detected by the visual perception module
Bbox Type	Categorical label for each bounding box, identifying the element type (e.g., icon or text)
IsStepCorrect	Whether the current step was performed correctly
IsFinalSuccess	Whether the overall task was completed successfully

This dataset is expected to support three primary applications. First, it facilitates the training of MLLMs with enhanced GUI understanding. The inclusion of screenshots and their corresponding GUI bboxes enables the development of MLLMs capable of directly predicting the pixel coordinates of interactable elements, eliminating the need for additional visual perception modules. Second, the action sequences enable the training of Vision-Language-Action (VLA) models for direct robotic control, further reducing latency. Third, the dataset includes both successful and unsuccessful attempts, offering a diverse set of positive and negative examples. Each action step is annotated with success or failure labels, and the overall task outcome is documented. These detailed annotations provide a rich source of labeled data for training Process Reward Models (PRMs), which can enhance the model’s reasoning capabilities through test-time scaling, further improving model performance.

## 6 Limitations and Future Work

While See-Control demonstrates the effectiveness of a novel embodied approach to smartphone interaction, it also faces several limitations. First, due to hardware constraints, the current design of See-Control supports only a simplified action space, limited to single-touch operations while excluding advanced controls such as multi-touch and complex gestures. This restriction may undermine the effectiveness of the agent in more complex interaction scenarios. Second, the latency inherent to MLLMs persists. In tasks with rapidly changing UIs, such as games, the combination of an MLLM with a visual perception module still suffers from model invocation delays, which may lead to execution errors due to dynamic environmental changes.

Addressing these limitations requires both hardware and algorithmic enhancements. Our current prototype intentionally uses a simple, low-DoF arm to establish a clear baseline and isolate core challenges in visual grounding, UI reasoning, and policy execution. A natural next step is to investigate dexterous end-effectors (multi-finger hands with compliant control and force sensing) and richer action spaces (precise multi-touch gestures, long-press, drag-and-drop), alongside tighter perception-action loops via end-to-end Vision Language Action (VLA) training and on-device inference for latency and privacy. We anticipate that advancing along these axes—dexterity, robustness, and efficiency—will enable embodied smartphone agents to interoperate with traditional app agents, letting systems fluidly choose the safest and most reliable pathway (software bridge vs. physical manipulation) for a given user, task, and environment.

## 7 Conclusion

In summary, Embodied Smartphone Operation (ESO) agents offer a complementary path, rather than a replacement, for MLLM-based smartphone operation agents. Software-based approaches, such as those using the Android Debug Bridge (ADB), remain effective for development and controlled settings, while our embodied route targets users and scenarios where safety, privacy, and cross-platform deployment are paramount, especially in domestic contexts where robots already act in the physical world. By formalizing the ESO problem and releasing *See-Control*—a framework with a benchmark,



baseline agent, and dataset—we provide the community with a reproducible scaffold to study perception-to-action pipelines that "see and touch" smartphones as people do, without privileged access and wired connections, and can be transferred to any touch-enabled device. This framing broadens the design space for assistive HCI, accessibility support, and trustworthy in-home automation.

## References

- [1] Saaket Agashe, Kyle Wong, Vincent Tu, Jiachen Yang, Ang Li, and Xin Eric Wang. 2025. Agent s2: A compositional generalist-specialist framework for computer use agents. *arXiv preprint arXiv:2504.00906* (2025).
- [2] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-VL: A Versatile Vision-Language Model for Understanding, Localization, Text Reading, and Beyond. *arXiv preprint arXiv:2308.12966* (2023).
- [3] Jingxuan Chen, Derek Yuen, Bin Xie, Yuhao Yang, Gongwei Chen, Zhihao Wu, Li Yixing, Xurui Zhou, Weiwen Liu, Shuai Wang, et al. 2024. Spa-bench: A comprehensive benchmark for smartphone agent evaluation. In *NeurIPS 2024 Workshop on Open-World Agents*.
- [4] Allen Cypher and Daniel Conrad Halbert. 1993. *Watch what I do: programming by demonstration*. MIT press.
- [5] Shihan Deng, Weikai Xu, Hongda Sun, Wei Liu, Tao Tan, Liujianfeng Liujianfeng, Ang Li, Jian Luan, Bin Wang, Rui Yan, et al. 2024. Mobile-Bench: An Evaluation Benchmark for LLM-based Mobile Agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 8813–8831.
- [6] Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. 2024. Gpt-4o system card. *arXiv preprint arXiv:2410.21276* (2024).
- [7] Ehsan Latif, Ramviyas Parasuraman, and Xiaoming Zhai. 2024. Physicsassistant: An llm-powered interactive learning robot for physics lab investigations. In *2024 33rd IEEE International Conference on Robot and Human Interactive Communication (ROMAN)*. IEEE, 864–871.
- [8] Liunan Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiyu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, et al. 2022. Grounded language-image pre-training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 10965–10975.
- [9] Toby Jia-Jun Li, Amos Azaria, and Brad A Myers. 2017. SUGILITE: creating multimodal smartphone automation by demonstration. In *Proceedings of the 2017 CHI conference on human factors in computing systems*. 6038–6049.
- [10] Yanda Li, Chi Zhang, Wanqi Yang, Bin Fu, Pei Cheng, Xin Chen, Ling Chen, and Yunchao Wei. 2024. Appagent v2: Advanced agent for flexible mobile interactions. *arXiv preprint arXiv:2408.11824* (2024).
- [11] Yanda Li, Chi Zhang, Wanqi Yang, Bin Fu, Pei Cheng, Xin Chen, Ling Chen, and Yunchao Wei. 2024. AppAgent v2: Advanced Agent for Flexible Mobile Interactions. *arXiv:2408.11824 [cs.HC]* <https://arxiv.org/abs/2408.11824>
- [12] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Qing Jiang, Chunyuan Li, Jianwei Yang, Hang Su, et al. 2024. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. In *European conference on computer vision*. Springer, 38–55.
- [13] Pranav Putta, Edmund Mills, Naman Garg, Sumeet Motwani, Chelsea Finn, Divyansh Garg, and Rafael Rafailov. 2024. Agent Q: Advanced Reasoning and Learning for Autonomous AI Agents. *arXiv:2408.07199 [cs.AI]* <https://arxiv.org/abs/2408.07199>
- [14] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*. PMLR, 8748–8763.
- [15] Christopher Rawles, Sarah Clinckemaele, Yifan Chang, Jonathan Waltz, Gabrielle Lau, Marybeth Fair, Alice Li, William E Bishop, Wei Li, Folawiyoy Campbell-Ajala, et al. [n. d.]. AndroidWorld: A Dynamic Benchmarking Environment for Autonomous Agents. In *The Thirteenth International Conference on Learning Representations*.
- [16] Alborz Rezazadeh Sereshkeh, Gary Leung, Krish Perumal, Caleb Phillips, Minfan Zhang, Afsaneh Fazly, and Iqbal Mohamed. 2020. VASTA: a vision and language-assisted smartphone task automation system. In *Proceedings of the 25th international conference on intelligent user interfaces*. 22–32.
- [17] Zirui Song, Yaohang Li, Meng Fang, Yanda Li, Zhenhao Chen, Zecheng Shi, Yuan Huang, Xiuying Chen, and Ling Chen. 2024. MMAC-Copilot: Multi-modal Agent Collaboration Operating Copilot. *arXiv preprint arXiv:2404.18074* (2024).
- [18] Qwen Team. 2025. Qwen2.5-VL. <https://qwenlm.github.io/blog/qwen2.5-vl/>
- [19] Daniel Toyama, Philippe Hamel, Anita Gergely, Gheorghe Comanici, Amelia Glaese, Zafarali Ahmed, Tyler Jackson, Shihl Mourad, and Doina Precup. 2021. AndroidEnv: A Reinforcement Learning Platform for Android. *arXiv:2105.13231 [cs.LG]* <https://arxiv.org/abs/2105.13231>
- [20] Junyang Wang, Haiyang Xu, Haitao Jia, Xi Zhang, Ming Yan, Weizhou Shen, Ji Zhang, Fei Huang, and Jitao Sang. 2024. Mobile-agent-v2: Mobile device operation assistant with effective navigation via multi-agent collaboration. *Advances in Neural Information Processing Systems* 37 (2024), 2686–2710.
- [21] Junyang Wang, Haiyang Xu, Jiabo Ye, Ming Yan, Weizhou Shen, Ji Zhang, Fei Huang, and Jitao Sang. [n. d.]. Mobile-Agent: Autonomous Multi-Modal Mobile Device Agent with Visual Perception. In *ICLR 2024 Workshop on Large Language Model (LLM) Agents*.
- [22] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024. Qwen2-VL: Enhancing Vision-Language Model’s Perception of the World at Any Resolution. *arXiv preprint arXiv:2409.12191* (2024).
- [23] Ziwei Wang, Weizhi Chen, Leyang Yang, Sheng Zhou, Shengchu Zhao, Hanbei Zhan, Jiongchao Jin, Liangcheng Li, Zirui Shao, and Jiajun Bu. 2025. Mp-gui: Modality perception with mllms for gui understanding. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 29711–29721.
- [24] Zhenhailong Wang, Haiyang Xu, Junyang Wang, Xi Zhang, Ming Yan, Ji Zhang, Fei Huang, and Heng Ji. 2025. Mobile-Agent-E: Self-Evolving Mobile Assistant for Complex Tasks. *arXiv preprint arXiv:2501.11733* (2025).
- [25] Hao Wen, Yuanhui Li, Guohong Liu, Shanhui Zhao, Tao Yu, Toby Jia-Jun Li, Shiqi Jiang, Yunhao Liu, Yaqin Zhang, and Yunxin Liu. 2024. Autodroid: Llm-powered task automation in android. In *Proceedings of the 30th Annual International Conference on Mobile Computing and Networking*. 543–557.
- [26] Hao Wen, Shizuo Tian, Borislav Pavlov, Wenjie Du, Yixuan Li, Ge Chang, Shanhui Zhao, Jiacheng Liu, Yunxin Liu, Ya-Qin Zhang, et al. 2024. AutoDroid-V2: Boosting SLM-based GUI Agents via Code Generation. *arXiv preprint arXiv:2412.18116* (2024).
- [27] Jianwei Yang, Hao Zhang, Feng Li, Xueyan Zou, Chunyuan Li, and Jianfeng Gao. 2023. Set-of-Mark Prompting Unleashes Extraordinary Visual Grounding in GPT-4V. *arXiv:2310.11441 [cs.CV]* <https://arxiv.org/abs/2310.11441>
- [28] Yuhao Yang, Yue Wang, Dongxu Li, Ziyang Luo, Bei Chen, Chao Huang, and Junnan Li. [n. d.]. Aria-UI: Visual Grounding for GUI Instructions. In *ICLR 2025 Workshop on Foundation Models in the Wild*.
- [29] Sriram Yenamandra, Arun Ramachandran, Karmesh Yadav, Austin S Wang, Mukul Khanna, Theophile Gervet, Tsung-Yen Yang, Vidhi Jain, Alexander Clegg, John M Turner, et al. [n. d.]. HomeRobot: Open-Vocabulary Mobile Manipulation. In *7th Annual Conference on Robot Learning*.
- [30] Chi Zhang, Zhao Yang, Jiaxuan Liu, Yanda Li, Yucheng Han, Xin Chen, Zebiao Huang, Bin Fu, and Gang Yu. 2025. Appagent: Multimodal agents as smartphone users. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems*. 1–20.
- [31] Danyang Zhang, Hongshen Xu, Zihan Zhao, Lu Chen, Ruisheng Cao, and Kai Yu. 2023. Mobile-env: an evaluation platform and benchmark for LLM-GUI interaction. *arXiv preprint arXiv:2305.08144* (2023).
- [32] Jiayi Zhang, Chuang Zhao, Yihan Zhao, Zhaoyang Yu, Ming He, and Jianping Fan. 2024. Mobileexperts: A dynamic tool-enabled agent team in mobile devices. *arXiv preprint arXiv:2407.03913* (2024).
- [33] Xiaoyi Zhang, Anne Spencer Ross, and James Fogarty. 2018. Robust annotation of mobile application interfaces in methods for accessibility repair and enhancement. In *Proceedings of the 31st Annual ACM Symposium on User Interface Software and Technology*. 609–621.
- [34] Haoyu Zhao, Wenhang Ge, and Yingcong Chen. 2024. LLM-Optic: Unveiling the Capabilities of Large Language Models for Universal Visual Grounding. *arXiv:2405.17104 [cs.CV]* <https://arxiv.org/abs/2405.17104>

## A Benchmark Details

### A.1 APPS

After conducting a thorough review of existing benchmarks and agent frameworks for smartphone operations, we identified a target set of 27 widely-used smartphone apps. The selection of these applications was based on their relevance to real-world usage scenarios, with a comprehensive description provided in Table 6.

### A.2 Tasks

As demonstrated in Sec. 3, the benchmark consists of 155 tasks, categorized into 140 single-app tasks and 15 cross-app tasks. The detailed information for these tasks is provided in Table 7 to Table 13.

**Table 6: Categorized App List with Descriptions.**

Category	App name	Description
Comm&Social	Facebook	A social networking platform to connect with friends, share updates, and join communities.
	Gmail	Google's email service offering secure and efficient email management.
	Instagram	A photo and video-sharing social networking platform.
	LinkedIn	A professional networking platform for career development and business connections.
	Reddit	A community-driven platform for discussions, news, and content sharing.
	X (Twitter)	A microblogging platform for real-time updates, news, and social interactions.
Lifestyle	Deliveroo	A food delivery app offering meals from local restaurants.
	Yelp	A platform for discovering and reviewing local businesses, including restaurants and services.
News&Reading	BBC	A news app providing global and local news coverage from the BBC.
	Quora	A question-and-answer platform where users can ask and answer questions on various topics.
Prod&Tools	Chrome	A fast and secure web browser by Google.
	Files	A file management app for organizing and accessing files on your device.
	Microsoft OneNote	A note-taking app for capturing ideas, notes, and to-do lists.
	Zoom	A video conferencing app for virtual meetings and webinars.
SystemApps	Calculator	A simple app for performing basic and advanced calculations.
	Clock	An app for setting alarms, timers, and checking the time.
	Settings	A system app for managing device settings and configurations.
	Contacts	An app for managing and organizing your contact information.
Travel&Nav	Airbnb	A platform for booking unique accommodations and experiences worldwide.
	Booking	A travel app for booking hotels, flights, and rental cars.
	Expedia	A comprehensive travel app for planning and booking trips.
Media&Entmt	ESPN	A sports app for live scores, news, and video highlights.
	Spotify	A music streaming app offering millions of songs and podcasts.
	TikTok	A short-form video app for creating and sharing entertaining content.
	YouTube	A video-sharing platform for watching and uploading videos.
Shop&Fin	Amazon	An e-commerce app for shopping a wide range of products online.
	Temu	A shopping app offering affordable products across various categories.



**Table 7: Single-App Task Instructions (Standard Task Set) - 1.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
Comm&Social	Facebook	1	2	Navigate to settings.
		2	6	Navigate to settings. Disallow notifications for Birthdays.
		3	11	Navigate to settings. Disallow notifications for Marketplace from Email and SMS. Disallow notifications for Memories from Email and SMS.
	Gmail	1	2	Navigate to settings.
		2	6	Navigate to settings. Check current setting for notifications. Turn off notification for Attachments.
		3	11	Navigate to settings. Check current setting for notifications. Turn off notification for Miscellaneous. Disable 'notification dot'. Return to Inbox.
Lifestyle	Yelp	1	2	Get the search results for nearby restaurants.
		2	5	Get the search results for nearby restaurants. Filter to include only Chinese restaurants that offer takeout. Sort them by distance.
		3	10	Get the search results for nearby restaurants. Filter to include only Chinese restaurants that offer takeout. Sort them by distance. Select one result. Filter for 5-star reviews.
News&Reading	BBC	1	3	Navigate to 'Innovation' section. Select 'Technology' tab. Open any news article.
		2	10	Go to app settings. Change the Text size to 'Smaller'. Navigate to 'Innovation' section. Select 'Technology' tab. Open any news article.
		3	15	Go to app settings. Change the Text size to 'Larger'. Navigate to 'Business' block. Select 'Technology of Business' tab. Open any news article. Save this article. Go to Saved Items to confirm the article was added.
	Quora	1	3	Discover any Space. Follow that space.
		2	7	Discover any Space. Follow that space. Go to questions in the space. Filter unanswered questions. Follow one question.
		3	11	Discover any Technology Spaces. Follow that space. Also follow one of the suggested spaces. Turn off notification for the suggested space. Follow one of the contributors of the suggested space.
Prod&Tools	Files	1	3	Go to the 'DCIM' folder in the internal storage.

**Table 8: Single-App Task Instructions (Standard Task Set) - 2.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
SystemApps	Calculator	1	4	Get the result for '1+1'.
		2	10	Get the result for 'log(20)+ln(e)'.
		3	14	Get the result for 'log(20)+ln(e)'. Clear the results. Get the result for factorial 7.
	Clock	1	4	Set an alarm for 8am.
		2	8	Set an alarm for 9am on weekdays.
		3	15	Set an alarm for 10am on weekdays. Disable vibration for this alarm. Set another alarm for 11am on weekends.
		1	2	Add current time at London (UK) to clock.
		2	6	Set Home time zone to 'Hong Kong'.
		3	12	Add current time at Melbourne (Australia) to clock. Change style to Analog for clock. Change style to Analog for screen saver.
	Settings	1	1	Check the current screen timeout.
		2	3	Check the current screen timeout. Set it to 5 minutes.
		3	7	Check the current screen timeout. Set it to 10 minutes. Then turn the dark theme on.
Travel&Nav	Booking	1	3	Navigate to app settings.
		2	7	Navigate to app settings. Change Temperature to 'Degrees in Celsius'. Change Units to 'Metric (km, m)'.
		3	12	Navigate to app settings. Change Currency to 'Pound Sterling'. Disable all notifications.
	Google Maps	1	3	Get the search results for nearby hotel rooms.
		2	7	Get the search results for nearby hotel rooms. Filter the results to show only those that can accommodate 4 adults.
		3	10	Get the search results for nearby hotel rooms. Filter the results to show only those that can accommodate 4 adults. Further filter the results with ratings higher than 4.
		1	3	Get the search results for nearby gas stations.
		2	6	Get the search results for a nearby gas station that is open now. Get a driving route to it.
		3	12	Get the search results for a nearby gas station that is open now. Get a driving route with the gas station as the first stop. Set McDonald's as the final destination.

**Table 9: Single-App Task Instructions (Challenging Task Set) - 1.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
Comm&Social	Facebook	1	3	Create a new post saying 'Hello World!'.
		2	5	Create a new Public post saying 'Morning!'. Change to black background.
		3	10	Create a new Public post saying 'Bonne Nuit'. Add the location as Eiffel Tower.
	Gmail	1	5	Draft an email to agent.benchmark.2024@gmail.com asking them about their new paper.
		2	9	Send an email to agent.benchmark.2024@gmail.com asking them about their new paper. Navigate to the Sent tab. Check the email details for confirmation after sending.
		3	11	Draft an email to agent.benchmark.2024@gmail.com asking them about their new paper. Schedule it to be sent tomorrow morning. Navigate to the Scheduled tab. Check the email details for confirmation for confirmation after scheduling.
	Instagram	1	4	Get the search results for 'Messi'.
		2	6	Get the search results for 'Cristiano Ronaldo'. Follow one account.
		3	10	Get the search results for 'Minions'. Follow one account. Set to get all notifications when they goes live. Turn on notifications for their posts.
		1	3	Navigate to the page to edit my profile.
		2	10	Navigate to the page to edit my profile. Add bio 'Hello World!'. Change pronouns to 'it'.
		3	17	Navigate to the page to edit my profile. Add link 'https://github.com'. Change gender to Custom 'Them'. Switch to private account.
	LinkedIn	1	4	Get the search results for 'OpenAI'. Follow their page.
		2	7	Get the search results for 'Huawei'. Follow their page. Filter the search results to Groups. Join one of the Huawei groups.
		3	12	Get the search results for 'Huawei HKRC'. Follow their page. Leave a 'Cheers!' comment on one of its posts. Like the post. Repost the post instantly. View the repost to confirm.
		1	4	Get the search results for 'Engineer' job.
		2	7	Get the search results for 'Engineer' job in Spain.
		3	10	Get the search results for 'Engineer' jobs in Spain. Save one of the jobs. Confirm it is saved in My Jobs.
	Reddit	1	4	Get the search results for 'r/worldnews'. Join the group.
		2	8	Get the search results for 'r/PremierLeague'. Filter posts for Liverpool. Join the group. Click on one of the posts.
		3	11	Get the search results for 'r/BlackMythWukong'. Join the group. Set community alerts to frequent. Click on one of the posts.
	X	1	3	Draft a post with the content 'Written by Agent1'.
		2	9	Create a post with the content 'Written by Agent2'. Tag '#animalcrossing'. Post it. Check it from the profile.
		3	12	Create a post with the content 'Written by Agent3'. Tag '#animalcrossing'. Post it. Check it from the profile. Then Like it. Reply to it with 'Amazing post'.
		1	5	Search for the account @Mayday EN. Follow it.
		2	8	Search for the account @Nintendo. Follow it. Search its post about 'Super Mario'.
		3	15	Search for the account @animalcrossing. Follow it. Search its post about 'Timmy and Tommy'. Repost one result. Check it from the profile for confirmation.

**Table 10: Single-App Task Instructions (Challenging Task Set) - 2.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
Lifestyle	Deliveroo	1	2	Get the search results for McDonald's.
		2	5	Get the search results for McDonald's. Enter a McDonald's restaurant. Search for fries there.
		3	10	Get the search results for McDonald's. Enter a McDonald's restaurant. Search for fries there. Add a small fries to the basket. Add two medium fries to the basket. View the basket for confirmation.
		2	5	Get the search results for McDonald's. Enter two different McDonald's restaurant.
		3	7	Get the search results for McDonald's. Enter a McDonald's restaurant. Go back and search for KFC. Enter a KFC restaurant.
		3	12	Get the search results for McDonald's. Enter a McDonald's restaurant. Search for fries there. Add a small fries to the basket. Go back and search for KFC. Enter a KFC restaurant. Search for fries there. Add a small fries to the basket.
		1	3	Check Account details.
		2	5	Check Account details. Return to home page. Get the search results for Starbucks.
		3	12	Get the search results for Starbucks. Enter a Starbucks restaurant. Add Starbucks to Favourites. Return to home page. Check Favourites.
	Yelp	1	2	Get the search results for Burgers.
		2	5	Get the search results for Chips. Get the search results for Burgers.
		3	12	Get the search results for Chips. Check one of the restaurants. Save to collection. Get the search results for Burgers.
Media&Entmt	ESPN	1	3	Get the search results for 'Klay Thompson'.
		2	5	Get the search results for 'Klay Thompson'. See all the articles. Open one of the articles.
		3	11	Get the search results for 'Klay Thompson'. See all the articles. Open one of the articles. Return to the player's search results. Select the player. Turn on player news notification. Follow the player.
	Spotify	1	3	Get the search results for the artist Taylor Swift.
		2	6	Get the search results for the artist Taylor Swift. Enter her artist page. Shuffle play her playlist.
		3	15	Get the search results for the song 'Love Story' by Taylor Swift. Add this song to the new playlist namely 'Agent Playlist'. Then add another song 'The Scientist' by Coldplay to the same playlist. Check the playlist for confirmation.
	TikTok	1	3	Get the search results for videos about pet cats.
		2	8	Get the search results for videos about pet cats. Comment on a video with 'Such a cute cat.'
		3	13	Get the search results for videos about pet cats. Comment on a video with 'Such a cute cat.' Swipe through another two videos and like them.
	YouTube	1	4	Get the search results for the channel '@Tesla'. Subscribe to the channel.
		2	8	Get the search results for the channel '@BMW'. Subscribe to the channel. Get the search results for the channel '@Mercedes'. Subscribe to the channel.
		3	12	Get the search results for the channel '@Google'. Subscribe to the channel. Get the search results for the channel '@Microsoft'. Subscribe to the channel. Navigate to the Subscriptions tab. Show all subscriptions. Sort the subscriptions from A to Z.
		1	3	Get the search results for videos about LeBron James.
		2	10	Get the search results for videos about LeBron James. Filter videos under 4 minutes.
		3	14	Get the search results for videos about LeBron James. Filter videos under 4 minutes. Select any one of the results. Leave a comment 'great performance!'.

**Table 11: Single-App Task Instructions (Challenging Task Set) - 3.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
News&Reading	Quora	1	3	Get the search results for 'OpenAI'.
		2	6	Get the search results for 'OpenAI'. Filter to show only questions.
		3	11	Get the search results for 'OpenAI'. Filter to show only questions. Select one question or answer from the results to see more details. Add a comment 'Worth thinking' to the answer.
		1	3	Go to Notifications. Check settings for push notifications.
		2	8	Go to Notifications. Check settings for push notifications. Turn off notification from 'Quora Digest' and 'Shares'.
		3	11	Go to Notifications. Check settings for push notifications. Turn off notification from 'Quora Digest'. Return to home. Upvote one of the contents.
		1	4	Get the search results for 'We talk about books'. Return to home.
		2	6	Get the search results for 'We talk about books'. Enter 'We talk about books' space. Follow the space. Read one of the posts.
		3	10	Get the search results for 'We talk about books'. Follow 'We talk about books' space. Follow the space. Read one of the posts. Follow the post. Return to home. Check 'Following' tab.
	BBC	1	3	Navigate to 'More'. Get the search results for 'Trump'.
		2	9	Navigate to 'More'. Get the search results for 'Trump'. Enter one of the results. Save this article. Go back to search result. Get the search results for 'Elon Mask'.
		3	14	Navigate to 'More'. Get the search results for 'Trump'. Enter one of the results. Save this article. Go back to search result. Get the search results for 'Elon Mask'. Enter one of the results. Save this article. Go to Saved Items to confirm the articles were added.
Prod&Tools	Chrome	1	3	Get the search results for Taylor Swift.
		2	10	Get the search results for Taylor Swift. Go to her Wikipedia page. Add it to bookmarks. Check the Bookmarks for confirmation.
		3	16	Get the search results for Taylor Swift. Go to her Wikipedia page. Add it to bookmarks. Move this bookmark to Reading List. Check the Reading List for confirmation.
	Files	2	7	Go to the 'DCIM' folder in the internal storage. Create a subfolder named 'Agent created'.
		3	18	Go to the 'DCIM' folder in the internal storage. Create a subfolder named 'Agent created 2'. Create another subfolder named 'Agent created 3'. Then move the folder 'Agent created 2' into the 'Documents' folder in the internal storage.
	Microsoft OneNote	1	4	Create a new page with title 'Benchmark' and content 'Test Agent'.
		2	7	Create a new page with title 'Benchmark2' and content TODO 'AppAgent' and 'Mobile Agent'.
		3	11	Create a new notebook 'test'. Create a new section 'prompts' in 'test' notebook. Enter section 'prompts' for confirmation.

**Table 12: Single-App Task Instructions (Challenging Task Set) - 5.**

Task Category	App Involved	Task Level	Golden Step	Task Instruction
Shop&Fin	Amazon	1	3	Get the search results for 'sunglasses'.
		2	8	Get the search results for 'sunglasses'. Filter with 'kids'. Add one result to cart. Confirm that this item is in the cart.
		3	11	Get the search results for 'goggles'. Filter with 'adult'. Add one result to cart. Confirm that this item is in the cart. Compare with similar items. Add one of the similar items to cart.
		1	4	Get the search results for 'gaming mouse'. Check details of one result.
		2	6	Get the search results for 'gaming mouse'. Check details of two results.
		3	10	Get the search results for 'gaming mouse'. Check details of one result. Go to personal info. Check Amazon prime plan details.
	Temu	1	3	Get the search results for gaming headset.
		2	7	Get the search results for gaming headset. Sort the result by the lowest price to highest. Add one to my shopping cart. Confirm that this item is in the cart.
		3	12	Get the search results for gaming mouse. Filter items priced above 10. Add one to cart. Confirm that this item is in the cart.
SystemApps	Calendar	1	5	Check the upcoming 31 October. Click on the event for that day.
		2	9	Set up an all-day event titled 'Haircut' on the 16th of any month.
		3	14	Set up an event titled 'Dental Check' on the 17th of any month. Set the time to from 7pm to 9pm.
	Contacts	1	7	Create a contact named 'Agent'. The phone number is +44 1234 567 890.
		2	11	Create a contact named 'Agent Two'. The phone number is +44 1234 567 890. The email is benchmark@gmail.com
		3	15	Modify the last name of one of the contacts to 'Three'. Update the label for the contact's phone number to Work. Set the company to 'Huawei'. Add an email agent.benchmark.2024@gmail.com. Label the email as Work.
Travel&Nav	Airbnb	2	8	Get the search results for stay tonight near 'wembley stadium' for 1 adult.
		3	13	Get the search results for stay tonight near 'wembley stadium' for 1 adult. Add one result to wishlist. Confirm that this item is in the wishlist.
	Booking	1	5	Get the search results for stays in Berlin. Select any date, rooms and guests.
		2	9	Navigate to Flights section. Select any date. Choose a flight from Manchester Airport to CDG Paris. Get the search results for a round trip.
		3	15	Navigate to Flights section. Select one way flight. Choose the 1st of any month as the flight date. Get the search results from Shanghai to London.
	Expedia	1	4	Check stays in Rome. The dates do not matter. Get the search results for 1 room and 2 people.
		2	8	Check stays in Paris. Choose from 25th to 28th any month. Get the search results for 1 room for 2 people.
		3	12	Check stays in Hong Kong. Choose from 25th to 28th any month. Get the search results for 1 room for 2 people. Filter hotels with parking.
		1	7	Check things to do in Paris. Get the search results for 25th to 28th of any month.
		2	11	Check things to do in Rome. Get the search results for 26th to 29th of any month. Save it to my trips.
		3	13	Check things to do in Paris. Get the search results for 25th to 28th of any month. Save it to my trips. Confirm that by checking the saved Paris trip.

**Table 13: Cross-App Task Instructions.**

Task Category	App Involved	Golden Step	Task Instruction
General Tool	Clock, Setting	12	In the Settings app, enable 'Data Saver' mode. Open the Clock app and set an alarm for 6:00 AM.
	Keep Notes, LinkedIn	12	Use the LinkedIn app to search for a customer service representative position. Select a job, open Keep Notes, create a new note, record the company's name, and set the note's title to 'customer service representative'.
Information Management	Facebook, Setting	17	Open Facebook, search for tropical pictures, save one picture to your phone, go to the Wallpaper section in the Settings app, and set the saved picture as your wallpaper.
	Calendar, Chrome	16	Using Chrome, search for the date of the next Winter Olympics opening ceremony and then set a reminder for that date in your Calendar.
	Spotify, Chrome	13	Open Chrome, search for the top Country songs of 2023, identify a song from the search results, then switch to Spotify and add that song to your playlist.
Media Entertainment	Clock, Youtube	11	Search for a relaxing soundscape video on YouTube, use the Clock app to set a timer for 3 hours, then go back to YouTube and play the video.
Multi Apps	Quora, eBay, Chrome	20	Utilize Chrome to search for a biography book, then use Quora to read reviews about the book, and finally add the book to the watchlist on eBay.
	Clock, Chrome, Instagram	20	Organize a movie night by choosing a horror film using Chrome, sending an invitation to one of your friends via Instagram, and setting a reminder in the Clock app for 8:35 PM on Sunday.
	Clock, WhatsApp, Zoom	23	Arrange a business meeting using Zoom, copy the sharing text, go to WhatsApp, send the copied text to a contact, set an alarm using the Clock app at the meeting time.
Social Sharing	X, Facebook	20	Use the social media platform X to post a photo, copy the link to your post, then open Facebook and send the link to a friend.
	BBC News, Gmail	10	Use the BBC News app to search for Artificial Intelligence news, read an article, share it via Gmail, send to agent.benchmark.2024@gmail.com.
	Spotify, Facebook	19	Listen to a Reggaeton album on Spotify, then share the album's name with a friend on Facebook.
Web Shopping	eBay, Facebook	15	Search for 'Circe by Madeline Miller' on Facebook, read one of the posts, head over to eBay, search for the book, and add it to the watchlist.
	Amazon, Temu	15	Investigate the prices for Catan board game across Amazon and Temu, then proceed to add the cheaper option into your cart.
	Airbnb, Instagram	19	Use Instagram to search for an itinerary for Venice, Italy, and then proceed to Airbnb, book accommodations at Venice, Italy.