

# GENERATION IS REQUIRED FOR DATA-EFFICIENT PERCEPTION

Jack Brady<sup>1,2,3</sup> Bernhard Schölkopf<sup>1,2,3</sup>

Thomas Kipf<sup>5</sup> Simon Buchholz<sup>†1,2</sup> Wieland Brendel<sup>†1,2,3</sup>

<sup>1</sup> Max Planck Institute for Intelligent Systems, Tübingen <sup>2</sup> Tübingen AI Center

<sup>3</sup> ELLIS Institute, Tübingen <sup>4</sup> Google DeepMind

## ABSTRACT

It has been hypothesized that human-level visual perception requires a *generative* approach in which internal representations result from inverting a *decoder*. Yet today’s most successful vision models are *non-generative*, relying on an *encoder* that maps images to representations without decoder inversion. This raises the question of whether generation is, in fact, necessary for machines to achieve human-level visual perception. To address this, we study whether generative and non-generative methods can achieve *compositional generalization*, a hallmark of human perception. Under a compositional data generating process, we formalize the inductive biases required to guarantee compositional generalization in decoder-based (generative) and encoder-based (non-generative) methods. We then show theoretically that enforcing these inductive biases on encoders is generally infeasible using regularization or architectural constraints. In contrast, for generative methods, the inductive biases can be enforced straightforwardly, thereby enabling compositional generalization by constraining a decoder and inverting it. We highlight how this inversion can be performed efficiently, either online through gradient-based search or offline through generative replay. We examine the empirical implications of our theory by training a range of generative and non-generative methods on photorealistic image datasets. We find that, without the necessary inductive biases, non-generative methods often fail to generalize compositionally and require large-scale pretraining or added supervision to improve generalization. By comparison, generative methods yield significant improvements in compositional generalization, without requiring additional data, by leveraging suitable inductive biases on a decoder along with search and replay.

## 1 INTRODUCTION

Perceiving the visual world requires an internal representation of visual input. Two opposing views exist for how such representations should be constructed. The **generative** view posits that representations result from inverting a *decoder* to recover the latent variables that generate an image (Friston and Stephan, 2007; Hinton, 2007; Olshausen, 2014; von Helmholtz, 1867). Conversely, the **non-generative** view holds that representations result from an *encoder* that directly maps images to latent variables without inverting a decoder (Gibson, 1979; LeCun, 2022; Yamins et al., 2014). A core problem in AI is to understand which of these paradigms should be adopted to build machines with *human-level visual perception*.

In recent years, consensus around this problem has shifted, following breakthroughs in non-generative methods for representation learning (Caron et al., 2021; Oquab et al., 2024; Radford et al., 2021; Tschannen et al., 2025). These methods, trained with self- or weak supervision, now enable unprecedented performance on perceptual tasks such as object recognition (Siméoni et al., 2025) and image captioning (Beyer et al., 2024; Fan et al., 2025). This progress has given rise to a common assumption that non-generative methods provide the most promising path toward human-level visual perception, while generative approaches are not necessary (Balestriero and LeCun, 2024).

Correspondence to: jack.brady@tue.mpg.de. <sup>†</sup>Joint senior author.

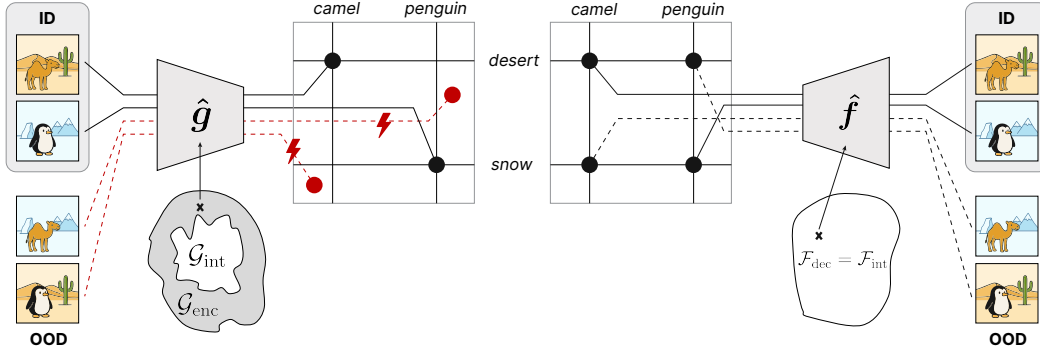


Figure 1: **Generative vs. non-generative compositional generalization.** We assume in-domain (ID) and out-of-domain (OOD) images arise from a latent variable model through an unknown compositional generator  $\mathbf{f} \in \mathcal{F}_{\text{int}}$ , with inverse  $\mathbf{g} \in \mathcal{G}_{\text{int}}$ . Guaranteeing compositional generalization for a generative approach requires constraining a *decoder* such that  $\hat{\mathbf{f}} \in \mathcal{F}_{\text{int}}$ , and for a non-generative approach, an encoder such that  $\hat{\mathbf{g}} \in \mathcal{G}_{\text{int}}$  (Sec. 2). We show theoretically in (Sec. 3) that placing such constraints on an encoder is generally infeasible with inductive biases while for a decoder it is straightforward. Empirically, this tends to manifest in an encoder yielding incorrect representations for OOD images (Sec. 5.1). In contrast, a decoder is able to correctly generate such images enabling compositional generalization through inversion (Sec. 4, 5.2).

Yet, despite their remarkable performance, current non-generative methods fall short in another key pillar of human visual perception: *data efficiency*. Specifically, these methods rely on web-scale datasets in which different visual concepts are encountered across diverse contexts, with high frequency (Udandarao et al., 2024), and often with language supervision (Zhang et al., 2024). In contrast, human children achieve robust visual perception through much more constrained data, encountering concepts only a handful of times, mainly in the same settings (e.g., the home), and with little supervision (Lake et al., 2017; Tenenbaum et al., 2011). To reach this level of data efficiency, it has been conjectured across several disciplines (Kilbertus et al., 2018; Lake et al., 2015; Peters et al., 2024) that a generative approach may be necessary. This raises a key question: Can non-generative approaches to perception also achieve human-level data efficiency, or is generation required?

In this work, we approach this question by analyzing, both in theory and practice, whether generative and non-generative methods can achieve *compositional generalization* (Fodor and Pylyshyn, 1988; Greff et al., 2020). Compositional generalization is the ability to perceive out-of-domain (OOD) scenes containing unseen combinations of concepts, e.g., a dog in the park after only seeing dogs in the house. It is thus essential for realizing the data efficiency of human perception.

**Theoretical Analysis.** Under the compositional data generating process of Brady et al. (2025), we formalize the inductive biases required to *guarantee* compositional generalization for decoder-based (*generative*) and encoder-based (*non-generative*) methods (Sec. 2). We then show that enforcing these inductive biases on encoders is generally infeasible, since doing so requires knowledge of the geometry of OOD regions of the data manifold, which is unknown a priori (Sec. 3.1). In contrast, the biases required for decoders are independent of the data manifold and can be enforced through regularization or architectural design. Compositional generalization is then realized by inverting the decoder, which can be done efficiently in-domain (ID) via an autoencoder, and OOD via gradient-based search (Sec. 4.1) and generative replay (Sec. 4.2). Taken together, these results suggest that compositional generalization cannot be achieved in non-generative methods through inductive bias, but can be in generative methods through constraining and inverting a decoder.

**Empirical Analysis.** In Sec. 5, we examine the implications of this finding empirically by training a range of generative and non-generative methods on photorealistic image datasets (Bordes et al., 2023) across different ID and OOD splits. Without the necessary inductive biases, non-generative methods generally yield poor OOD performance when trained from scratch or with limited pre-training, and improvements require larger-scale pretraining or added supervision. By comparison, generative methods can achieve significant improvements OOD, without requiring additional data, by imposing suitable inductive biases on a decoder and leveraging search and replay.

## 2 PROBLEM SETUP

**Perception.** We begin by formalizing *visual perception*. To this end, we assume that images  $x \in \mathcal{X} \subset \mathbb{R}^{d_x}$  arise from a latent variable model. Specifically, we assume  $x$  is generated from a latent vector  $z \in \mathcal{Z} := \mathbb{R}^{d_z}$  by a diffeomorphic generator  $f : \mathcal{Z} \rightarrow \mathcal{X}$ , i.e.,  $x = f(z)$ . Visual concepts in  $x$  (e.g. “camel” and “desert” in Fig. 1) are modelled as  $K$  distinct *slots* of latents  $z_k \in \mathbb{R}^m$  such that  $z = (z_1, \dots, z_K)$  (Brady et al., 2025). Now, assume we have a representation of an image  $\hat{z} = \phi(x)$ , where  $\phi : \mathbb{R}^{d_x} \rightarrow \mathcal{Z}$ . We define perception as the ability to invert the generator  $f$  via  $\phi$  to recover the slots  $z_k$  that generated  $x$ . In general, recovering  $z_k$  exactly is impossible. Thus, we only require that  $\phi$  inverts  $f$  up to re-parameterizations and permutations of the slots. Formally, let  $h_\pi$  be a function composed of slot-wise bijections  $h_k : \mathbb{R}^m \rightarrow \mathbb{R}^m$  and permutations  $\pi$ , i.e.,  $h_\pi(z) := \{h_k(z_{\pi(k)})\}_{k=1}^K$ . Perception on a set  $\mathcal{Z}^S \subseteq \mathcal{Z}$  requires that there exist an  $h_\pi$  such that

$$\forall z \in \mathcal{Z}^S, \phi(f(z)) = h_\pi(z). \quad (2.1)$$

Eq. (2.1) takes the perspective of perception as an inverse problem (Tenenbaum et al., 2011), but with respect to the ground-truth generator  $f$ . This contrasts with a task-based view (Yamins and DiCarlo, 2016) where perception is defined with respect to solving a downstream task. We note that the task-based view can be framed as a special case of Eq. (2.1), by treating task-specific predictions as the latent variables to be recovered by  $\phi$ . Moreover, if a representation satisfying Eq. (2.1) is learned, downstream tasks such as object classification can be solved via a simple readout applied independently to each inferred slot  $\hat{z}_k$  (see Sec. 5).

**Generative and non-generative approaches.** We now characterize the *generative* and *non-generative* approaches to perception. For the generative approach, representations are obtained by inverting a learned *decoder*  $\hat{f} : \mathcal{Z} \rightarrow \mathbb{R}^{d_x}$ , i.e.,  $\phi(x) = \hat{f}^{-1}(x)$ . For this to satisfy Eq. (2.1), the decoder  $\hat{f}$  must *identify* the ground-truth generator  $f$  such that for  $z \in \mathcal{Z}$

$$\hat{f}(h_\pi(z)) = f(z). \quad (2.2)$$

Alternatively, for the non-generative approach, a representation is defined as  $\phi(x) = \hat{g}(x)$ , where  $\hat{g} : \mathbb{R}^{d_x} \rightarrow \mathcal{Z}$  is a learned *encoder* which is *not* constructed to invert a decoder  $\hat{f}$ . For this to satisfy Eq. (2.1),  $\hat{g}$  must identify the inverse generator  $g := f^{-1}$  such that for  $x \in \mathcal{X}$

$$\hat{g}(x) = h_\pi(g(x)). \quad (2.3)$$

We emphasize that the difference between generative and non-generative approaches is not whether an encoder or decoder is used. Instead, it is whether a representation satisfying Eq. (2.1) is obtained by learning an approximation  $\hat{f}$  of the ground-truth generator (Eq. (2.2)) and then inverting this model, or by learning an approximation  $\hat{g}$  of the inverse generator directly (Eq. (2.3)).

**Compositional generalization.** We now formalize *compositional generalization*. Informally, compositional generalization is the ability to perceive OOD images containing unseen concept combinations (e.g. “penguin” and “desert” in Fig. 1). To formalize this, we assume observed images  $\mathcal{X}_{\text{ID}} \subset \mathcal{X}$  arise from only a subset of possible concept combinations  $\mathcal{Z}_{\text{ID}} \subset \mathcal{Z}$ , i.e.,  $\mathcal{X}_{\text{ID}} := f(\mathcal{Z}_{\text{ID}})$  (see Fig. 2). OOD concept combinations  $\mathcal{Z}_{\text{OOD}}$  are defined as the set of all unseen combinations of slots

$$\mathcal{Z}_{\text{OOD}} := \{\mathcal{Z}_1 \times \mathcal{Z}_2 \times \dots \times \mathcal{Z}_K\} \setminus \mathcal{Z}_{\text{ID}} \quad \text{with} \quad \mathcal{Z}_k := \{z_k \in \mathbb{R}^m \mid z \in \mathcal{Z}_{\text{ID}}\}, \quad (2.4)$$

which give rise to OOD images  $\mathcal{X}_{\text{OOD}} := f(\mathcal{Z}_{\text{OOD}})$  (Fig. 2). Assuming Eq. (2.1) is satisfied on  $\mathcal{Z}_{\text{ID}}$ , compositional generalization is achieved if Eq. (2.1) it is also satisfied OOD, for all  $z \in \mathcal{Z}_{\text{OOD}}$ .

**The problem of OOD identifiability.** Without restrictions on the ground-truth generator  $f$ , compositional generalization, using a generative or non-generative approach, is an ill-posed problem. Specifically, consider two generators  $f^1, f^2 \in \mathcal{F}$  such that on  $\mathcal{Z}_{\text{ID}}$ ,  $f^1 \circ h_\pi = f^2$ , but on  $\mathcal{Z}_{\text{OOD}}$ ,  $f^1 \circ h_\pi \neq f^2$ . In this case, identifying the ground-truth  $f$  or its inverse, out-of-domain, is impossible since there is no way to distinguish these generators from in-domain data. Thus, for compositional generalization to be possible,  $f$  must belong to a function class  $\mathcal{F}$  such that for all  $f^1, f^2 \in \mathcal{F}$

$$\forall z \in \mathcal{Z}_{\text{ID}}, f^1(h_\pi(z)) = f^2(z) \implies \forall z \in \mathcal{Z}_{\text{OOD}}, f^1(h_\pi(z)) = f^2(z), \quad (2.5)$$

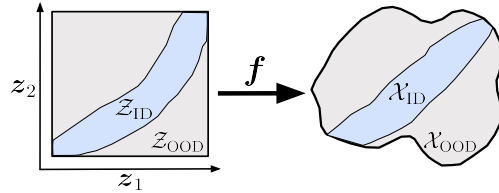


Figure 2: Visualization of a data generating process with in- and out-of-domain regions.

which equivalently implies that for all inverses  $g^1, g^2 \in \mathcal{G} := \{f^{-1} \mid f \in \mathcal{F}\}$

$$\forall x \in \mathcal{X}_{\text{ID}}, h_\pi(g^1(x)) = g^2(x) \implies \forall x \in \mathcal{X}_{\text{OOD}}, h_\pi(g^1(x)) = g^2(x). \quad (2.6)$$

**Further assumptions on  $f$ .** Under our current assumptions,  $\mathcal{F}$  consist of all diffeomorphisms from  $\mathcal{Z}$  to  $\mathcal{X}$ . This function class is far too large to satisfy Eq. (2.5). Thus, further assumptions are required. Recently, Brady et al. (2025, Thm. 4.4) proved that diffeomorphisms (on their image) with the following form will satisfy Eq. (2.5)

$$f(z) = \sum_{k=1}^K f^k(z_k) + \sum_{\alpha: |\alpha| \leq n} c_\alpha z^\alpha, \quad (2.7)$$

where  $n \in \mathbb{N}$ ,  $c_\alpha \in \mathbb{R}^{d_x}$ , and  $\alpha \in \mathbb{N}_0^{d_z}$  is a *multi-index*. This function class, denoted  $\mathcal{F}_{\text{int}}$ , was introduced to model concepts with varying degrees of interaction  $n$ . For example, when  $n = 1$ , the second-sum on the RHS vanishes and concepts can only interact additively (Lachapelle et al., 2023). For  $n > 1$  concepts can interact explicitly via polynomial functions of components from different slots. This aims to capture more complex concept interactions such as between objects and backgrounds. Such functions thus offer a flexible model of visual concepts, and are the largest function class shown to satisfy (Eq. (2.5)). For these reasons, we assume that ground-truth generators  $f$  belong to  $\mathcal{F}_{\text{int}}$ , and inverse generators  $g$  to  $\mathcal{G}_{\text{int}} := \{f^{-1} \mid f \in \mathcal{F}_{\text{int}}\}$ .

**Inductive biases for compositional generalization.** Under this generative process, we can now formalize what is required to guarantee compositional generalization using both a generative and non-generative approach. To this end, we assume that Equations 2.2 and 2.3 are satisfied in-domain, for a decoder  $\hat{f}$  and encoder  $\hat{g}$ , respectively. Since ground-truth generators  $\mathcal{F}_{\text{int}}$  and inverses  $\mathcal{G}_{\text{int}}$  satisfy Equations 2.5 and 2.6, compositional generalization is guaranteed in theory by restricting the decoder class out-of-domain such that  $\hat{f} \in \mathcal{F}_{\text{int}}$  and, similarly, the encoder class such that  $\hat{g} \in \mathcal{G}_{\text{int}}$ . In practice, however, such restrictions on a model’s out-of-domain behavior must come from inductive biases such as architectural design or regularization. Whether it is possible to formulate such inductive biases on a decoder to ensure  $\hat{f} \in \mathcal{F}_{\text{int}}$  or on an encoder to ensure  $\hat{g} \in \mathcal{G}_{\text{int}}$  depends critically on the structural properties of these ground-truth function classes.

### 3 THEORETICAL ANALYSIS

In this section, we theoretically analyze the structure of  $\mathcal{F}_{\text{int}}$  and  $\mathcal{G}_{\text{int}}$  to understand whether a model can be constrained to these classes with inductive biases such as architecture design or regularization.

**Structure of  $\mathcal{F}_{\text{int}}$ .** Generators in  $\mathcal{F}_{\text{int}}$  are defined as diffeomorphisms which take the form of Eq. (2.7). Consequently, to enforce  $\hat{f} \in \mathcal{F}_{\text{int}}$ , we must constrain a decoder to match this form. This can be done in a straightforward manner via architecture design. For example, the first term on the RHS of Eq. (2.7) can be parameterized as the sum of slot-wise neural networks and the second term using learned coefficients for  $c_\alpha$ . Furthermore, we highlight that functions of the form in Eq. (2.7) can equivalently be expressed as having block-diagonal derivative matrices  $D^{n+1}f(z)$  (Brady et al., 2025; Lachapelle et al., 2023). Specifically, if  $n = 1$ , then the Hessian  $D^2f$  has the structure that for any two slots  $z_k$  and  $z_l$ ,

$$\forall 1 \leq k \neq l \leq K, \quad D_{z_k} D_{z_l} f(z) = 0. \quad (3.1)$$

For  $n > 1$ , analogous conditions hold for higher-order derivatives (Brady et al., 2025). Thus, we can also enforce that  $\hat{f} \in \mathcal{F}_{\text{int}}$  for a decoder  $\hat{f}$  via regularization. For example, when  $n = 1$ , we can use the following regularizer (with similar expressions for higher-order derivatives when  $n > 1$ )

$$\mathcal{R}(\hat{f}, z) = \sum_{k \neq l \in [K]} \left\| D_{z_k, z_l}^2 \hat{f}(z) \right\|. \quad (3.2)$$

---

A *multi-index* is an ordered tuple  $\alpha = (\alpha_1, \alpha_2, \dots, \alpha_d)$  of non-negative integers  $\alpha_i \in \mathbb{N}_0$ , with operations  $|\alpha| := \alpha_1 + \alpha_2 + \dots + \alpha_d$ , and  $z^\alpha := z_1^{\alpha_1} z_2^{\alpha_2} \dots z_d^{\alpha_d}$ .

### 3.1 STRUCTURE OF $\mathcal{G}_{\text{int}}$ .

We now investigate the structure of inverse generators in  $\mathcal{G}_{\text{int}}$ . For simplicity, we present results for  $n = 1$ ; similar statements can in principle be derived for higher order derivatives for the case  $n > 1$ . We first note that inverse generators  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  do not admit an analytical form similar to Eq. (2.7). Thus, understanding their structure requires analyzing finer-grained properties of these functions. To this end, we investigate their derivatives. We also study whether we can find architectures with an inductive bias towards  $\mathcal{G}_{\text{int}}$ , but delegate this to Appendix A.2.

We will first assume that the observed dimension  $d_x$  equals the ground-truth latent dimension  $d_z$  such that  $\mathcal{X} = \mathcal{Z}$ . In this case, we show that, similar to generators in  $\mathcal{F}_{\text{int}}$ , inverse generators in  $\mathcal{G}_{\text{int}}$  have a structured Jacobian and Hessian. Specifically, we prove the following result.

**Lemma 3.1.** *Let  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  for  $n = m = 1$  and  $d_x = d_z$ . Then  $\mathbf{g}$  has the property that for  $\mathbf{x} \in \mathcal{X}$*

$$(D\mathbf{g})^{-\top}(\mathbf{x})D^2\mathbf{g}_s(\mathbf{x})(D\mathbf{g})^{-1}(\mathbf{x}) \in \text{Diag}(d_x) \quad (3.3)$$

*is a diagonal matrix for  $s \in [d_z]$ . Further, if  $\mathbf{g}$  is a diffeomorphism satisfying Eq. (3.3) then  $\mathbf{g} \in \mathcal{G}_{\text{int}}$ .*

Thus, when  $\mathcal{X} = \mathcal{Z}$ , enforcing that  $\hat{\mathbf{g}} \in \mathcal{G}_{\text{int}}$  requires constraining an encoder according to Eq. (3.3). This is achievable, for instance, through regularization on the derivatives of  $\hat{\mathbf{g}}$  analogous to Eq. (3.2).

This setting, however, is not applicable to image data since images typically lie in a manifold embedded in a higher-dimensional ambient space  $\mathbb{R}^{d_x}$ . We therefore consider the more practical case where  $d_x$  is larger than the ground-truth latent dimension  $d_z$ . Specifically, we assume  $d_x \geq d_z^3$ . In this case, we first prove that the aforementioned structure on  $D\mathbf{g}$  and  $D^2\mathbf{g}$  is no longer present.

**Theorem 3.2.** *Assume that  $d_x \geq d_z^3$ . Let  $\mathbf{B}_l \in \mathbb{R}^{d_x \times d_x}$  be symmetric matrices for  $1 \leq l \leq d_z$ . Then there is for any  $\mathbf{x}_0 \in \mathbb{R}^{d_x}$  and for almost every  $\mathbf{A} \in \mathbb{R}^{d_z \times d_x}$  a generator  $\mathbf{f} \in \mathcal{F}_{\text{int}}$  with a (left)-inverse  $\mathbf{g} \in \mathcal{G}_{\text{int}}$ , such that  $\mathbf{f}(0) = \mathbf{x}_0$  and  $D\mathbf{g}(\mathbf{x}_0) = \mathbf{A}$  and  $D^2\mathbf{g}_l(\mathbf{x}_0) = \mathbf{B}_l$  for  $1 \leq l \leq d_z$ .*

Thus, when  $d_x \gg d_z$ ,  $D^2\mathbf{g}$  and  $D\mathbf{g}$  can be arbitrary matrices (up to a set of measure 0). We emphasize that this result applies to  $\mathcal{F}_{\text{int}}$  with arbitrary interaction degree  $n \geq 1$  and any slot dimensions. However, the structure expressed in Eq. (3.3) does not vanish entirely from  $\mathbf{g}$ . Instead, it persists, but only for the restriction of  $\mathbf{g}$  to the data manifold  $\mathcal{X}$ . Specifically, the constraint Eq. (3.3) holds more generally for  $n = m = 1$  when  $D\mathbf{g}$  is projected on the tangent space  $T_{\mathbf{x}}\mathcal{X}$  of the data manifold, i.e.,

$$\left((D\mathbf{g}(\mathbf{x})\Pi_{T_{\mathbf{x}}\mathcal{X}})^+\right)^\top(\mathbf{z})D^2\mathbf{g}_s(\mathbf{x})(D\mathbf{g}(\mathbf{x})\Pi_{T_{\mathbf{x}}\mathcal{X}})^+ \in \text{Diag}(d_z) \quad (3.4)$$

where  $\Pi_{T_{\mathbf{x}}\mathcal{X}}$  denotes the orthogonal projection on the tangent space (see Lemma A.4 for details).

Constraining an encoder such that  $\hat{\mathbf{g}} \in \mathcal{G}_{\text{int}}$  thus requires enforcing this structure on  $\hat{\mathbf{g}}$ . This is challenging because the constraints depend on the geometry of the data manifold  $\mathcal{X}$ . Enforcing such constraints is thus ill-posed since the geometry of out-of-domain regions  $\mathcal{X}_{\text{OOD}} \subset \mathcal{X}$  is unobserved. This suggests that constraining an encoder through approaches such as architectural design or regularization is infeasible, as any such method would necessarily be data-dependent as well as implicitly assume knowledge of  $\mathcal{X}_{\text{OOD}}$ .

We contrast this with the reverse direction for  $\mathbf{f} \in \mathcal{F}_{\text{int}}$ . In this case, the structure to be enforced (see Eq. (3.1)) is not manifold-dependent but is always aligned with the global coordinate axes (Fig. 3, right). This allows for a universal procedure to constrain a decoder to  $\mathcal{F}_{\text{int}}$ , rather than a manifold-dependent one (Fig. 3, left). Moreover, such constraints can also be applied in OOD regions, since the manifold  $\mathcal{Z}_{\text{ID}}$  extends in a Cartesian fashion and its structure is therefore known.

**Special case of  $n = 0$ .** We briefly discuss the case of functions in  $\mathcal{F}_{\text{int}}$  when  $n = 0$ . These functions, introduced by Brady et al. (2023), are a special case of  $n = 1$  with the additional, more restrictive condition  $|D_{\mathbf{z}_k}\mathbf{f}_i(\mathbf{z})| \cdot |D_{\mathbf{z}_l}\mathbf{f}_i(\mathbf{z})| = 0$  for each  $i \in [d_x]$ . In other words, each pixel  $i$  depends only on a single slot and no interactions (such as occlusions) between objects are possible. In this case, we can find a left inverse  $\mathbf{g}$  of  $\mathbf{f} \in \mathcal{F}_{\text{int}}^{n=0}$  (for any  $d_x \geq d_z$ ) whose Jacobian satisfies the sparsity

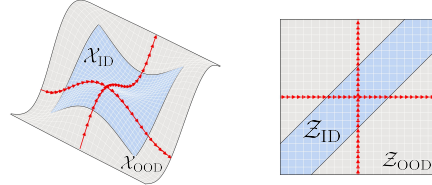


Figure 3: Structure of a data manifold  $\mathcal{X}$  and latent manifold  $\mathcal{Z}$ .

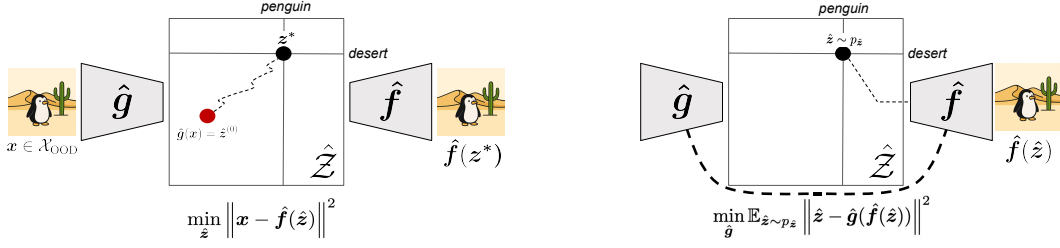


Figure 4: **Approaches for inverting a generator out-of-domain.** *Left.* Visualization of gradient-based search to invert a decoder  $\hat{f}$  out-of-domain, with initialization given by an encoder  $\hat{g}$ . *Right.* Visualization of generative replay in which an encoder is trained on OOD images generated by a decoder.

constraint  $|D_{x_i} g_k| \cdot |D_{x_j} g_l| = 0$  for  $l \neq k$ . This additional structure can thus be leveraged to restrict  $\mathcal{G}_{\text{enc}}$ . However, this remains challenging in practice because the sparsity pattern (i.e., which slots  $z_l$  depends on which pixel  $x_i$ ) is not known a-priori. In Section 5, we study whether concepts satisfying  $n = 0$  can empirically enable compositional generalization for non-generative approaches.

**Takeaways.** Our results suggest that it is generally not feasible to constrain an encoder such that  $\hat{g} \in \mathcal{G}_{\text{int}}$ . This means that there can exist encoders  $\hat{g} \in \mathcal{G}_{\text{enc}}$  that satisfy Eq. (2.3) ID, but fail to generalize this behavior OOD (see Fig. 1). In practice, this does not necessarily imply that optimization will always recover such an encoder. However, we lack a principled means to prevent this. Thus, for non-generative methods, whether compositional generalization occurs depends on whether the optimization process happens to avoid converging to encoders that do not generalize OOD. In contrast, generative methods can avoid such solutions by construction, through appropriate inductive biases on a decoder. We investigate the impact of this asymmetry empirically in Sec. 5.

## 4 SEARCH AND REPLAY

Our results in Sec. 3 suggest that ensuring compositional generalization through inductive biases requires a generative approach, i.e., inverting a learned decoder  $\hat{f}$ . If a decoder admits an explicit inverse, this inversion is trivial. For image data, however, constructing such a decoder is challenging as this generally requires that  $\mathcal{X} = \mathbb{R}^{d_x}$  (Papamakarios et al., 2021). Consequently, inverting  $\hat{f}$  requires solving an inference problem: given an image  $x$ , we must find a latent  $z^*$  such that

$$x = \hat{f}(z^*). \quad (4.1)$$

In this section, we explore strategies for solving this inference problem efficiently.

**Inversion on  $\mathcal{X}_{\text{ID}}$ .** For in-domain images, i.e.  $x \in \mathcal{X}_{\text{ID}}$ , inverting a decoder  $\hat{f}$  to obtain  $z^*$  can be done directly by training an *autoencoder*. Specifically, we can leverage an encoder  $\hat{g}$  to invert  $\hat{f}$  in-domain by minimizing the reconstruction objective

$$\min_{\hat{f}, \hat{g}} \mathbb{E}_{x \sim \mathcal{X}_{\text{ID}}} \|x - \hat{f}(\hat{g}(x))\|^2. \quad (4.2)$$

Thus, for images  $x \in \mathcal{X}_{\text{ID}}$ ,  $z^*$  (Eq. (4.1)) can be obtained directly as the output of the encoder. For out-of-domain images, however, minimizing Eq. (4.2) is not an option since  $x \in \mathcal{X}_{\text{OOD}}$  is unobserved. Thus, to efficiently solve Eq. (4.1) on  $\mathcal{X}_{\text{OOD}}$ , other strategies are required. We explore two such strategies: gradient-based search (Sec. 4.1) and generative replay (Sec. 4.2).

### 4.1 GRADIENT-BASED SEARCH.

We note that the inference problem in Eq. (4.1) can be expressed as an optimization problem, i.e.,

$$z^* = \arg \min_{\hat{z}} \|x - \hat{f}(\hat{z})\|^2. \quad (4.3)$$

Thus, for OOD images  $x \in \mathcal{X}_{\text{OOD}}$ , we can recover  $z^*$  *online* by solving Eq. (4.3) using *gradient-based optimization*. The efficiency of this, however, depends on the initialization  $\hat{z}^{(0)}$ . If  $\hat{z}^{(0)}$  is far from the optimum, many gradient steps are required, leading to slow or suboptimal convergence.

To mitigate this, we can leverage the encoder trained on  $\mathcal{X}_{\text{ID}}$  to provide an initial prediction for  $z^*$  such that  $\hat{z}^{(0)} = \hat{g}(x)$  and then optimize Eq. (4.3) (see Fig. 4, left). Intuitively, the encoder gives a fast “System 1” guess that constrains the space for slower, “System 2” reasoning (Kahneman, 2011; Prabhudesai et al., 2023a), where “reasoning” corresponds to gradient-based search (LeCun, 2022).

#### 4.2 GENERATIVE REPLAY

For out-of-domain images, Eq. (4.1) can also be solved in an *offline* manner by leveraging *generative replay* (Schwartenbeck et al., 2023; Wiedemer et al., 2024). Recall that images  $x \in \mathcal{X}_{\text{OOD}}$  are generated by  $f$  as combinations of ground-truth slots  $z_k$ . Since the decoder  $\hat{f}$  identifies  $f$  up to slot-wise transformations, images  $x \in \mathcal{X}_{\text{OOD}}$  can likewise be generated by re-combining inferred slots  $\hat{z}_k$ . Concretely, this can be achieved by sampling a latent  $\hat{z}$  from a distribution  $p_{\hat{z}}$  with independent slot-wise marginals and decoding them with  $\hat{f}$  such that  $\hat{f}(\hat{z}) \in \mathcal{X}_{\text{OOD}}$ . We can then solve Eq. (4.1) out-of-domain by training an encoder  $\hat{g}$  on these samples such that  $\hat{g}(\hat{f}(\hat{z})) = \hat{z}$  (see Fig. 4, right). This is captured by the following objective function (Wiedemer et al., 2024)

$$\min_{\hat{g}} \mathbb{E}_{\hat{z} \sim p_{\hat{z}}} \left\| \hat{z} - \hat{g}(\hat{f}(\hat{z})) \right\|^2. \quad (4.4)$$

## 5 EXPERIMENTS

In this section, we conduct an experimental study to assess (i) the extent to which compositional generalization emerges in non-generative methods without the necessary inductive biases § 5.1 and (ii) the extent to which generative methods, which leverage the inductive bias of a decoder, can achieve superior compositional generalization through gradient-based search and generative replay § 5.2.

**Datasets.** To evaluate compositional generalization, we require datasets that can be partitioned into ID and OOD regions containing unseen concept combinations. To this end, we leverage PUG (Bordes et al., 2023), which, to the best of our knowledge, is the most visually complex dataset offering such controllability. Each image consists of a background and one or two animals, drawn from 10 and 32 categories, respectively. Using PUG, we construct three different ID/OOD datasets (see Fig. 5). In *PUG-Background*, OOD images contain unseen combinations of animals and backgrounds; in *PUG-Texture*, unseen combinations of animals and textures; and in *PUG-Object*, unseen combinations of animals.


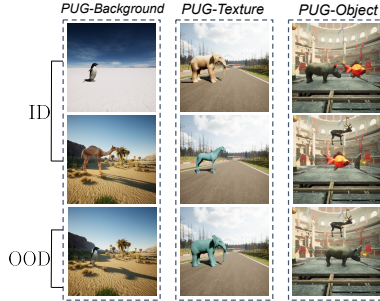


Figure 5: ID and OOD images from each dataset used in our experiments.

**Encoders.** To map images to latent slots, we use encoders composed of two modules. First, images are divided into patches and processed by a Vision Transformer (ViT) (Dosovitskiy et al., 2020). Then, a *slot encoder* queries the resulting patch embeddings via cross-attention to produce a set of slots. We implement the slot encoder using either a cross-attention Transformer with self-attention between slots (Vaswani et al., 2017) or a Slot Attention module (Locatello et al., 2020). The slot encoder is always trained from scratch, while the ViT is either trained from scratch (ViT-Small) or initialized from the following pretrained models: DINOv1 (Caron et al., 2021), I-JEPA (Assran et al., 2023), DINOv2 (Oquab et al., 2024), CLIP (Radford et al., 2021), and SigLIP2 (Tschannen et al., 2025). These models are then optionally fine-tuned using a LoRA adapter (Hu et al., 2022).

**Decoders.** To map latent slots to images, we use a cross-attention Transformer, where each pixel queries the slots to produce its output value (Sajjadi et al., 2022; van Steenkiste et al., 2024). Following Brady et al. (2025), we encourage this decoder to match Eq. (2.7) by regularizing the interactions between slots to be minimal. We achieve this by regularizing the attention weights of the model such that pixels are discouraged from attending to more than one slot (see § B.1 for details).

**Metrics.** To measure whether a model’s learned slots enable compositional generalization, we train a linear readout on ID slots to predict the animal and background labels associated with each ground-truth slot. We use a single shared readout across slots and resolve slot-label assignments using the Hungarian algorithm (Kuhn, 1955). Compositional generalization is then quantified as the readout’s accuracy on OOD images.

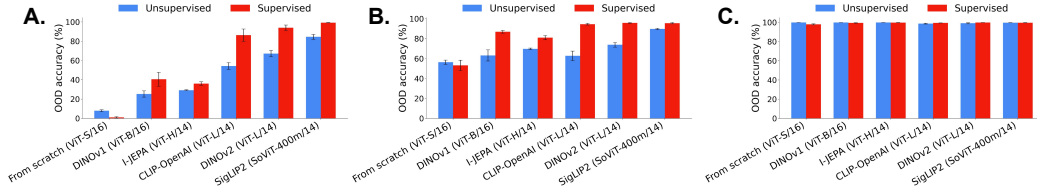

**Figure 6: OOD performance for non-generative methods.** We report OOD performance across three dataset splits for non-generative methods trained with and without supervision and with differing ViTs. On PUG-Background (A.), we see that strong OOD performance generally emerges only for ViTs with large scale pretraining such as SigLIP2 and is otherwise poor. We see a similar trend on PUG-Texture (B.), though OOD performance is generally higher across models. On PUG-Object (C.), concepts do not interact, such that  $\mathcal{G}_{\text{int}}$  is more constrained (Sec. 3.1). This structure is sufficient for all models to generalize OOD.

## 5.1 NON-GENERATIVE METHODS

**Setup.** We train non-generative methods on each dataset using unsupervised and supervised losses. In the unsupervised setting, we train encoders jointly with the regularized Transformer decoder using a VAE loss (Kingma and Welling, 2014). Although encoders are trained to invert the decoder ID, the method is non-generative out-of-domain because the encoder is not designed to invert the decoder OOD. In the supervised setting, we train an encoder-only classifier to predict animal and background labels from slots. All models achieve essentially perfect ID accuracy ( $\sim 99.8\%$ ). Thus, we only report OOD accuracy. To this end, we report results for the configuration of slot encoder and fine-tuning strategy that yielded the highest OOD scores.

**Results.** On PUG-Background (Fig. 6 A.), we observe that unsupervised non-generative methods trained from scratch or pretrained on relatively small corpora (e.g., DINOv1 or I-JEPA on ImageNet) yield poor OOD performance. A similar pattern appears on PUG-Texture (Fig. 6 B.), though it is slightly less pronounced. OOD accuracy generally improves when using ViTs pretrained at larger scale, such as DINOv2 or SigLIP2, as well as when the encoder is trained with additional supervised data. In both cases, however, these OOD improvements rely on an increase in data scale.

In Fig. 6 C., we report results on PUG-Object. In this case, the OOD concept combinations do not interact since animals never occlude. This then corresponds to the special case of  $n = 0$  in § 3.1 in which  $\mathcal{G}_{\text{int}}$  has a simpler structure. While we do not explicitly enforce this structure on encoders, we observe near-perfect OOD accuracy, indicating that such structure makes compositional generalization fundamentally easier for non-generative methods.


## 5.2 GENERATIVE METHODS

**Setup.** We take the unsupervised VAEs trained in § 5.1 and apply search § 4.1 and replay § 4.2 to invert the decoder OOD. For replay, we generate OOD images by randomly sampling combinations of ID slots following Wiedemer et al. (2024) and optimize the encoder on these generations using Eq. (4.4). For search, we use the trained encoder to provide an initial representation which we then optimize using Eq. (4.3) with Adam (Kingma and Ba, 2015). For further details, see § B.1.

**Results.** On PUG-Background (Fig. 7 A.), we observe a significant increase in OOD accuracy when training encoders with replay across all ViTs, with further improvement when additionally using search. On PUG-Texture (Fig. 7 B.), replay cannot be applied, since in our setup, slots are designed to capture objects and backgrounds, and therefore cannot be trivially recomposed to generate novel animal-texture combinations. However, leveraging search yields a clear improvement in OOD performance across all models. Since all non-generative methods already achieve near-perfect OOD performance on PUG-Object, we do not report results for this dataset.

## 6 RELATED WORK

**Limitations of non-generative methods for compositional generalization.** Several empirical studies have shown limitations in compositional generalization for non-generative methods trained using natural language supervision (Assouel et al., 2025; Lewis et al., 2022; Ma et al., 2023; Tong

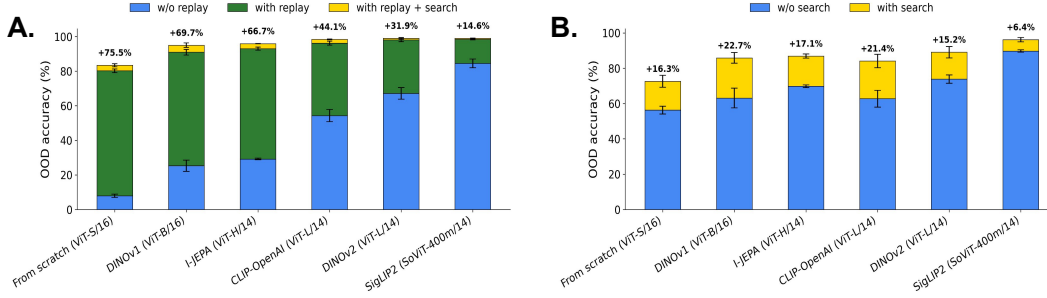

**Figure 7: OOD performance for generative methods.** We report OOD performance on PUG-Background and PUG-Texture for unsupervised VAEs which leverage replay (Sec. 4.2) and search (Sec. 4.1) trained with differing ViT encoders. On PUG-Background (A.), we observe a significant increase in OOD performance using replay and additional gains through search. On PUG-Texture (B.) we also see a noticeable increase in OOD performance across all models when using search.

et al., 2024; West et al., 2024; Yuksekgonul et al., 2022). These works generally posit that poor generalization arises from issues with standard contrastive language-image training objectives. In contrast, our theoretical and empirical contributions suggest that such issues are more fundamental, arising from the structure of the inverses of inverse generators  $\mathcal{G}_{\text{int}}$ .

**Generative approaches for improving generalization.** The idea that a generative approach can enable compositional generalization has long been advocated in the cognitive science community (Lake et al., 2015; 2017; Tenenbaum et al., 2011). Empirical realizations of this idea have recently been shown for diffusion models repurposed as classifiers (Jeong et al., 2025; Wang et al., 2025). Further (Prabhudesai et al., 2023a;b), showed that inverting a generative model with mechanisms similar to gradient-based search (Sec. 4.1) improves object-decomposition for OOD images and enhances the robustness of classifiers. Recent work explored training encoder-only models using synthetically generated data similar to Sec. 4.2, showing improvements in representations (Fan et al., 2025; Tian et al., 2023) and compositional generalization (Assouel et al., 2022; Jung et al., 2024; Wiedemer et al., 2024). Our work provides a theoretical motivation for these approaches by highlighting challenges in achieving compositional generalization using non-generative methods.

**Causal and anti-causal learning.** Our theoretical contribution relates to ideas in the field of causality. A key heuristic in this area posits that the factorization  $P(\text{cause})P(\text{effect}|\text{cause})$  is, in general, less complex than the reverse factorization  $P(\text{effect})P(\text{cause}|\text{effect})$  (Janzing and Schölkopf, 2010; Sun et al., 2006; 2008). It was conjectured by Kilbertus et al. (2018) that this principle indicates generalization is typically easier to achieve in the causal direction than in the anti-causal direction. Moreover, they propose an abstract version of the search procedure (Sec. 4.1). The present paper can be seen as providing a formal justification for these ideas through theoretical insights on the structure of generators  $f$  (the causal direction) and their inverses  $g$  (the anti-causal direction).

## 7 DISCUSSION

**Limitations.** Our theory is limited to generators which belong to  $\mathcal{F}_{\text{int}}$ . We studied this function class as it provides a suitable model of visual data and is the largest class which enables OOD identifiability. However, these results may, in principle, fail to generalize to function classes associated with other settings, where non-generative strategies may be effective. Additionally, while our experiments leverage photorealistic data, they focus on concepts in simple settings which do not fully capture the complexity of real world data. To this end, an important future question is to understand how to create benchmarks to evaluate compositional generalization in a rigorous manner on data at a more realistic scale.

**Conclusion.** In this work, we sought a principled understanding of whether compositional generalization should be pursued through generative or non-generative approaches. Theoretically, we showed that for non-generative methods, enforcing the structure needed to guarantee compositionality tends to be infeasible. As a result, generalization is determined largely by the optimization process rather than by principled guarantees. Empirically, we observed that methods optimized from

scratch or with little pretraining data tend to fail at compositional generalization, while larger-scale pretrained models improve OOD performance at the cost of data efficiency. By contrast, generative approaches can directly enforce constraints for compositional generalization which manifest in significant gains in OOD performance in practice. While scaling such generative approaches to more challenging settings remains an open problem, we hope our findings will inspire renewed interest in this direction.

**Acknowledgments** We thank Thaddäus Wiedmer and Julius von Kügelgen for helpful advice and discussions.

This work was supported by the German Federal Ministry of Education and Research (BMBF): Tübingen AI Center, FKZ: 01IS18039A, 01IS18039B. WB acknowledges financial support via an Emmy Noether Grant funded by the German Research Foundation (DFG) under grant no. BR 6382/1-1 and via the Open Philanthropy Foundation funded by the Good Ventures Foundation. WB is a member of the Machine Learning Cluster of Excellence, EXC number 2064/1 – Project number 390727645. This work utilized compute resources at the Tübingen Machine Learning Cloud, DFG FKZ INST 37/1057-1 FUGG.

## REFERENCES

- R. Assouel, P. Rodriguez, P. Taslakian, D. Vazquez, and Y. Bengio. Object-centric compositional imagination for visual abstract reasoning. In *ICLR2022 Workshop on the Elements of Reasoning: Objects, Structure and Causality*, 2022. [Cited on p. 9.]
- R. Assouel, P. Astolfi, F. Bordes, M. Drozdal, and A. Romero-Soriano. Object-centric binding in contrastive language-image pretraining. *arXiv preprint arXiv:2502.14113*, 2025. [Cited on p. 8.]
- M. Assran, Q. Duval, I. Misra, P. Bojanowski, P. Vincent, M. Rabbat, Y. LeCun, and N. Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15619–15629, 2023. [Cited on p. 7.]
- R. Balestrierio and Y. LeCun. How learning by reconstruction produces uninformative features for perception. In *Forty-first International Conference on Machine Learning*, 2024. [Cited on p. 1.]
- L. Beyer, A. Steiner, A. S. Pinto, A. Kolesnikov, X. Wang, D. Salz, M. Neumann, I. Alabdulmohsin, M. Tschannen, E. Bugliarello, et al. Paligemma: A versatile 3b vlm for transfer. *arXiv preprint arXiv:2407.07726*, 2024. [Cited on p. 1.]
- F. Bordes, S. Shekhar, M. Ibrahim, D. Bouchacourt, P. Vincent, and A. Morcos. Pug: Photorealistic and semantically controllable synthetic data for representation learning. *Advances in Neural Information Processing Systems*, 36:45020–45054, 2023. [Cited on p. 2, 7, and 23.]
- J. Brady, R. S. Zimmermann, Y. Sharma, B. Schölkopf, J. von Kügelgen, and W. Brendel. Provably learning object-centric representations. In *International Conference on Machine Learning*, pages 3038–3062. PMLR, 2023. [Cited on p. 5.]
- J. Brady, J. von Kügelgen, S. Lachapelle, S. Buchholz, T. Kipf, and W. Brendel. Interaction asymmetry: A general principle for learning composable abstractions. In *The Thirteenth International Conference on Learning Representations*, 2025. [Cited on p. 2, 3, 4, 7, and 23.]
- M. Caron, H. Touvron, I. Misra, H. Jégou, J. Mairal, P. Bojanowski, and A. Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 9650–9660, 2021. [Cited on p. 1 and 7.]
- A. Dittadi, S. S. Papa, M. De Vita, B. Schölkopf, O. Winther, and F. Locatello. Generalization and robustness implications in object-centric learning. In *International Conference on Machine Learning*, pages 5221–5285. PMLR, 2022. [Cited on p. 23.]
- A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020. [Cited on p. 7.]
- D. Fan, S. Tong, J. Zhu, K. Sinha, Z. Liu, X. Chen, M. Rabbat, N. Ballas, Y. LeCun, A. Bar, et al. Scaling language-free visual representation learning. *arXiv preprint arXiv:2504.01017*, 2025. [Cited on p. 1 and 9.]
- J. A. Fodor and Z. W. Pylyshyn. Connectionism and cognitive architecture: A critical analysis. *Cognition*, 28(1):3–71, 1988. [Cited on p. 2.]
- K. J. Friston and K. E. Stephan. Free-energy and the brain. *Synthese*, 159(3):417–458, 2007. [Cited on p. 1.]
- J. J. Gibson. The ecological approach to visual perception. 1979. [Cited on p. 1.]
- Y. Grandvalet and Y. Bengio. Semi-supervised learning by entropy minimization. In L. Saul, Y. Weiss, and L. Bottou, editors, *Advances in Neural Information Processing Systems*, volume 17. MIT Press, 2004. [Cited on p. 24.]
- K. Greff, S. Van Steenkiste, and J. Schmidhuber. On the binding problem in artificial neural networks. *arXiv preprint arXiv:2012.05208*, 2020. [Cited on p. 2.]
- G. E. Hinton. To recognize shapes, first learn to generate images. *Progress in brain research*, 165: 535–547, 2007. [Cited on p. 1.]

- E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, W. Chen, et al. Lora: Low-rank adaptation of large language models. *ICLR*, 1(2):3, 2022. [Cited on p. 7.]
- D. Janzing and B. Schölkopf. Causal inference using the algorithmic markov condition. *IEEE Transactions on Information Theory*, 56(10):5168–5194, Oct. 2010. [Cited on p. 9.]
- Y. Jeong, A. Uselis, S. J. Oh, and A. Rohrbach. Diffusion classifiers understand compositionality, but conditions apply. *arXiv preprint arXiv:2505.17955*, 2, 2025. [Cited on p. 9.]
- W. Jung, J. Yoo, S. Ahn, and S. Hong. Learning to compose: Improving object centric learning by injecting compositionality. In *The Twelfth International Conference on Learning Representations*, 2024. [Cited on p. 9.]
- D. Kahneman. Thinking, fast and slow. *Farrar, Straus and Giroux*, 2011. [Cited on p. 7.]
- N. Kilbertus, G. Parascandolo, and B. Schölkopf. Generalization in anti-causal learning. *arXiv preprint arXiv:1812.00524*, 2018. [Cited on p. 2 and 9.]
- D. P. Kingma and J. Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015. [Cited on p. 8 and 23.]
- D. P. Kingma and M. Welling. Auto-encoding variational bayes. In *International Conference on Learning Representations*, 2014. [Cited on p. 8.]
- H. W. Kuhn. The hungarian method for the assignment problem. *Naval Research Logistics Quarterly*, 2:83–97, 1955. [Cited on p. 7.]
- S. Lachapelle, D. Mahajan, I. Mitliagkas, and S. Lacoste-Julien. Additive decoders for latent variables identification and cartesian-product extrapolation. In *Advances in Neural Information Processing Systems*, volume 36, 2023. [Cited on p. 4.]
- B. M. Lake, R. Salakhutdinov, and J. B. Tenenbaum. Human-level concept learning through probabilistic program induction. *Science*, 350(6266):1332–1338, 2015. [Cited on p. 2 and 9.]
- B. M. Lake, T. D. Ullman, J. B. Tenenbaum, and S. J. Gershman. Building machines that learn and think like people. *Behavioral and brain sciences*, 40:e253, 2017. [Cited on p. 2 and 9.]
- Y. LeCun. A path towards autonomous machine intelligence version 0.9.2, 2022-06-27. *OpenReview*, pages 1–62, 2022. [Cited on p. 1 and 7.]
- M. Lewis, N. V. Nayak, P. Yu, Q. Yu, J. Merullo, S. H. Bach, and E. Pavlick. Does clip bind concepts? probing compositionality in large image models. *arXiv preprint arXiv:2212.10537*, 2022. [Cited on p. 8.]
- F. Locatello, D. Weissenborn, T. Unterthiner, A. Mahendran, G. Heigold, J. Uszkoreit, A. Dosovitskiy, and T. Kipf. Object-centric learning with slot attention. In *Advances in Neural Information Processing Systems*, volume 33, pages 11525–11538, 2020. [Cited on p. 7 and 23.]
- Z. Ma, J. Hong, M. O. Gul, M. Gandhi, I. Gao, and R. Krishna. Crepe: Can vision-language foundation models reason compositionally? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10910–10921, 2023. [Cited on p. 8.]
- B. A. Olshausen. Perception as an inference problem. *The cognitive neurosciences*, pages 295–304, 2014. [Cited on p. 1.]
- M. Oquab, T. Darcet, T. Moutakanni, H. V. Vo, M. Szafraniec, V. Khalidov, P. Fernandez, D. HAZIZA, F. Massa, A. El-Nouby, M. Assran, N. Ballas, W. Galuba, R. Howes, P.-Y. Huang, S.-W. Li, I. Misra, M. Rabbat, V. Sharma, G. Synnaeve, H. Xu, H. Jegou, J. Mairal, P. Labatut, A. Joulin, and P. Bojanowski. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. [Cited on p. 1 and 7.]
- G. Papamakarios, E. Nalisnick, D. J. Rezende, S. Mohamed, and B. Lakshminarayanan. Normalizing flows for probabilistic modeling and inference. *Journal of Machine Learning Research*, 22(57):1–64, 2021. [Cited on p. 6.]

- B. Peters, J. J. DiCarlo, T. Gureckis, R. Haefner, L. Isik, J. Tenenbaum, T. Konkle, T. Naselaris, K. Stachenfeld, Z. Tavares, et al. How does the primate brain combine generative and discriminative computations in vision? *ArXiv*, pages arXiv-2401, 2024. [Cited on p. 2.]
- M. Prabhudesai, A. Goyal, S. Paul, S. Van Steenkiste, M. S. Sajjadi, G. Aggarwal, T. Kipf, D. Pathak, and K. Fragkiadaki. Test-time adaptation with slot-centric models. In *International Conference on Machine Learning*, pages 28151–28166. PMLR, 2023a. [Cited on p. 7 and 9.]
- M. Prabhudesai, T.-W. Ke, A. Li, D. Pathak, and K. Fragkiadaki. Diffusion-tta: Test-time adaptation of discriminative models via generative feedback. *Advances in Neural Information Processing Systems*, 36:17567–17583, 2023b. [Cited on p. 9.]
- A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021. [Cited on p. 1 and 7.]
- M. S. Sajjadi, H. Meyer, E. Pot, U. Bergmann, K. Greff, N. Radwan, S. Vora, M. Lučić, D. Duckworth, A. Dosovitskiy, et al. Scene representation transformer: Geometry-free novel view synthesis through set-latent scene representations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6229–6238, 2022. [Cited on p. 7 and 23.]
- P. Schwartenbeck, A. Baram, Y. Liu, S. Mark, T. Muller, R. Dolan, M. Botvinick, Z. Kurth-Nelson, and T. Behrens. Generative replay underlies compositional inference in the hippocampal-prefrontal circuit. *Cell*, 186(22):4885–4897, 2023. [Cited on p. 7.]
- O. Siméoni, H. V. Vo, M. Seitzer, F. Baldassarre, M. Oquab, C. Jose, V. Khalidov, M. Szafraniec, S. Yi, M. Ramamonjisoa, et al. Dinov3. *arXiv preprint arXiv:2508.10104*, 2025. [Cited on p. 1.]
- X. Sun, D. Janzing, and B. Schölkopf. Causal inference by choosing graphs with most plausible markov kernels. In *Proceedings of the 9th International Symposium on Artificial Intelligence and Mathematics*, pages 1–11. Max-Planck-Gesellschaft, Jan. 2006. [Cited on p. 9.]
- X. Sun, D. Janzing, and B. Schölkopf. Causal reasoning by evaluating the complexity of conditional densities with kernel methods. *Neurocomputing*, 71(7-9):1248–1256, Mar. 2008. [Cited on p. 9.]
- J. B. Tenenbaum, C. Kemp, T. L. Griffiths, and N. D. Goodman. How to grow a mind: Statistics, structure, and abstraction. *Science*, 331(6022):1279–1285, 2011. [Cited on p. 2, 3, and 9.]
- Y. Tian, L. Fan, P. Isola, H. Chang, and D. Krishnan. Stablerep: Synthetic images from text-to-image models make strong visual representation learners. *Advances in Neural Information Processing Systems*, 36:48382–48402, 2023. [Cited on p. 9.]
- S. Tong, Z. Liu, Y. Zhai, Y. Ma, Y. LeCun, and S. Xie. Eyes wide shut? exploring the visual shortcomings of multimodal llms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9568–9578, 2024. [Cited on p. 8.]
- M. Tschannen, A. Gritsenko, X. Wang, M. F. Naeem, I. Alabdulmohsin, N. Parthasarathy, T. Evans, L. Beyer, Y. Xia, B. Mustafa, et al. Siglip 2: Multilingual vision-language encoders with improved semantic understanding, localization, and dense features. *arXiv preprint arXiv:2502.14786*, 2025. [Cited on p. 1 and 7.]
- V. Udandaraao, A. Prabhu, A. Ghosh, Y. Sharma, P. Torr, A. Bibi, S. Albanie, and M. Bethge. No” zero-shot” without exponential data: Pretraining concept frequency determines multimodal model performance. *Advances in Neural Information Processing Systems*, 37:61735–61792, 2024. [Cited on p. 2.]
- S. van Steenkiste, D. Zoran, Y. Yang, Y. Rubanova, R. Kabra, C. Doersch, D. Gokay, E. Pot, K. Greff, D. Hudson, et al. Moving off-the-grid: Scene-grounded video representations. *Advances in Neural Information Processing Systems*, 37:124319–124346, 2024. [Cited on p. 7 and 23.]
- A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30, 2017. [Cited on p. 7.]
- H. von Helmholtz. *Handbuch der physiologischen Optik*, volume 3. Voss, 1867. [Cited on p. 1.]

- Y. Wang, J. Dauwels, and Y. Du. Compositional scene understanding through inverse generative modeling. In *Forty-second International Conference on Machine Learning*, 2025. [Cited on p. 9.]
- P. West, X. Lu, N. Dziri, F. Brahman, L. Li, J. D. Hwang, L. Jiang, J. Fisher, A. Ravichander, K. Chandu, B. Newman, P. W. Koh, A. Ettinger, and Y. Choi. The generative AI paradox: “what it can create, it may not understand”. In *The Twelfth International Conference on Learning Representations*, 2024. [Cited on p. 9.]
- T. Wiedemer, J. Brady, A. Panfilov, A. Juhos, M. Bethge, and W. Brendel. Provable compositional generalization for object-centric learning. In *International Conference on Learning Representations*, 2024. [Cited on p. 7, 8, 9, and 24.]
- D. Yamins, H. Hong, C. F. Cadieu, E. A. Solomon, D. Seibert, and J. J. DiCarlo. Performance-optimized hierarchical models predict neural responses in higher visual cortex. *Proceedings of the National Academy of Sciences*, 111:8619 – 8624, 2014. [Cited on p. 1.]
- D. L. Yamins and J. J. DiCarlo. Using goal-driven deep learning models to understand sensory cortex. *Nature neuroscience*, 19(3):356–365, 2016. [Cited on p. 3.]
- M. Yuksekgonul, F. Bianchi, P. Kalluri, D. Jurafsky, and J. Zou. When and why vision-language models behave like bags-of-words, and what to do about it? *arXiv preprint arXiv:2210.01936*, 2022. [Cited on p. 9.]
- J. Zhang, J. Huang, S. Jin, and S. Lu. Vision-language models for vision tasks: A survey. *IEEE transactions on pattern analysis and machine intelligence*, 46(8):5625–5644, 2024. [Cited on p. 2.]

# Appendices

## Table of Contents

<b>A Proofs</b>	<b>15</b>
A.1 Structure of $\mathcal{G}_{\text{int}}$	15
A.2 Constraining $\mathcal{G}_{\text{enc}}$ by architecture	19
<b>B Additional Experimental details</b>	<b>23</b>
B.1 Models	23
B.2 Training Objectives	23

**Use of Language Models** Large language models (LLMs) were employed exclusively during the final stages of manuscript preparation for the purpose of refining language, grammar, and readability. They were not used for generating ideas, conducting analysis, or contributing to the substantive content of this work.

## A PROOFS

In this section we collect the proofs of the results in the paper and some additional background material. First, in Section A.1 we investigate the local restrictions that  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  need to satisfy. Similarly we investigate in Section A.2 whether we can enforce  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  by architectural constraints. Let us, however, first introduce a notation for a subset of  $\mathcal{F}_{\text{int}}$ .

**Definition A.1** (Additive functions). We denote the function class of coordinate-wise additive functions  $\mathbf{f} : \mathbb{R}^{d_z} \rightarrow \mathbb{R}^{d_x}$  by  $\mathcal{F}_{\text{add}}$ . They can be expressed as

$$\mathbf{f}(\mathbf{x}) = \sum_{i=1}^{d_z} \mathbf{f}_i(\mathbf{x}_i) \quad (\text{A.1})$$

where  $\mathbf{f}_i : \mathbb{R} \rightarrow \mathbb{R}^{d_x}$ .

Clearly  $\mathcal{F}_{\text{add}}$  agrees with  $\mathcal{F}_{\text{int}}$  for  $n = m = 1$ , i.e., interactions of first order and blocks of dimension 1 and generally  $\mathcal{F}_{\text{add}} \subset \mathcal{F}_{\text{int}}$  for  $n \geq 1$  (higher order interactions and larger blocks are more flexible).

### A.1 STRUCTURE OF $\mathcal{G}_{\text{int}}$

As discussed in the main text, we can enforce  $\mathbf{f} \in \mathcal{F}_{\text{int}}$  by enforcing that certain derivatives of  $\mathbf{f}$  vanish (see equation 3.2). We now study to what extent this generalizes to functions  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  that are left inverses of such functions.

**The key relation.** The key relation that we need for the proofs below is that if  $\mathbf{g} \circ \mathbf{f}(\mathbf{z}) = \mathbf{z}$  for two functions  $\mathbf{f} : \mathbb{R}^{d_z} \rightarrow \mathbb{R}^{d_x}$  and  $\mathbf{g} : \mathbb{R}^{d_x} \rightarrow \mathbb{R}^{d_z}$ , then for every  $s \in [d_z]$

$$D\mathbf{f}^\top(\mathbf{z})D^2\mathbf{g}_s(\mathbf{f}(\mathbf{z}))D\mathbf{f}(\mathbf{z}) + \sum_{k=1}^{d_x} (\partial_k \mathbf{g}_s)(\mathbf{f}(\mathbf{z}))D^2\mathbf{f}_k(\mathbf{z}) = 0. \quad (\text{A.2})$$

This relation follows by straightforward calculation, indeed we find using the chain rule

$$\begin{aligned} \partial_i \partial_j \mathbf{g}_s(\mathbf{f}(\mathbf{z})) &= \partial_i \left( \sum_{k=1}^{d_x} \partial_j \mathbf{f}_k(\mathbf{z}) (\partial_k \mathbf{g}_s)(\mathbf{f}(\mathbf{z})) \right) \\ &= \sum_{k,l=1}^{d_x} \partial_j \mathbf{f}_k(\mathbf{z}) \partial_i \mathbf{f}_l(\mathbf{z}) (\partial_k \partial_l \mathbf{g}_s)(\mathbf{f}(\mathbf{z})) + \sum_{k=1}^{d_x} \partial_i \partial_j \mathbf{f}_k(\mathbf{z}) (\partial_k \mathbf{g}_s)(\mathbf{f}(\mathbf{z})) \end{aligned} \quad (\text{A.3})$$

which is equation A.2 after rewriting the relation in matrix form.

**Restrictions for  $d_x = d_z$ .** We now prove Lemma 3.1 showing that for  $d_x = d_z$ , i.e., for equal dimension of latent space and data it is possible to find a local constraint for the inverses of additive functions  $\mathbf{f} \in \mathcal{F}_{\text{add}}$ .

**Lemma 3.1.** *Let  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  for  $n = m = 1$  and  $d_x = d_z$ . Then  $\mathbf{g}$  has the property that for  $\mathbf{x} \in \mathcal{X}$*

$$(D\mathbf{g})^{-\top}(\mathbf{x})D^2\mathbf{g}_s(\mathbf{x})(D\mathbf{g})^{-1}(\mathbf{x}) \in \text{Diag}(d_x) \quad (3.3)$$

*is a diagonal matrix for  $s \in [d_z]$ . Further, if  $\mathbf{g}$  is a diffeomorphism satisfying Eq. (3.3) then  $\mathbf{g} \in \mathcal{G}_{\text{int}}$ .*

**Remark A.2.** For higher dimensional slots there is a natural generalization, namely, the expression  $D\mathbf{g}^{-\top}D^2\mathbf{g}_sD\mathbf{g}^{-1}$  has a block diagonal structure.

*Proof.* Note that  $\mathbf{g} \circ \mathbf{f}(\mathbf{z}) = \mathbf{z}$  implies  $\text{Id}_{d_z} = (D\mathbf{g} \circ \mathbf{f})D\mathbf{f}$  and thus  $D\mathbf{f}(\mathbf{z}) = (D\mathbf{g})^{-1}(\mathbf{f}(\mathbf{z}))$ . Therefore, we find using equation A.2

$$(D\mathbf{g})^{-\top}(\mathbf{f}(\mathbf{z}))D^2\mathbf{g}_s(\mathbf{f}(\mathbf{z}))(D\mathbf{g})^{-1}(\mathbf{f}(\mathbf{z})) = -\sum_{k=1}^{d_x}(\partial_k\mathbf{g}_s)(\mathbf{f}(\mathbf{z}))D^2\mathbf{f}_k(\mathbf{z}) \in \text{Diag}(d_z). \quad (\text{A.4})$$

where we used that  $\mathbf{f} \in \mathcal{F}_{\text{add}}$  implies that the off-diagonal entries of  $D^2\mathbf{f}$  vanish. This implies the first part of the statement. For the reverse statement, we apply equation A.2 to  $\mathbf{f} \circ \mathbf{g}(\mathbf{x}) = \mathbf{x}$  (here we use  $d_z = d_x$ ) and we find that

$$0 = (D\mathbf{g})^{\top}(\mathbf{x})D^2\mathbf{f}_s(\mathbf{g}(\mathbf{x}))D\mathbf{g}(\mathbf{x}) + \sum_{k=1}^{d_z}(\partial_k\mathbf{f}_s)(\mathbf{g}(\mathbf{x}))D^2\mathbf{g}_k(\mathbf{x}). \quad (\text{A.5})$$

We multiply this relation from the left and right by  $(D\mathbf{g})^{-\top}(\mathbf{x})$  and  $(D\mathbf{g})^{-1}(\mathbf{x})$  respectively (the inverses exist by assumption) and we find

$$D^2\mathbf{f}_s(\mathbf{g}(\mathbf{x})) = -\sum_{k=1}^{d_z}(\partial_k\mathbf{f}_s)(\mathbf{g}(\mathbf{x}))(D\mathbf{g})^{-\top}(\mathbf{x})D^2\mathbf{g}_k(\mathbf{x})(D\mathbf{g})^{-1}(\mathbf{x}) \in \text{Diag}(d_z). \quad (\text{A.6})$$

Here we used the assumption equation 3.3 to conclude that the right hand side is diagonal. Therefore  $\mathbf{f}$  has a diagonal Hessian which implies that it is additive.  $\square$

The previous statement can be generalized to the general case  $d_x > d_z$ . The crucial ingredient is the following simple and standard lemma.

**Lemma A.3.** *Let  $\mathbf{A} \in \mathbb{R}^{d_1 \times d_2}$  and  $\mathbf{B} \in \mathbb{R}^{d_2 \times d_1}$  two matrices with  $d_2 \geq d_1$  and assume that  $\mathbf{AB} = \mathbf{1}_{d_1 \times d_1}$ . Then  $\mathbf{B} = (\mathbf{A}\Pi)^+$  where  $\Pi$  denotes the orthogonal projection onto  $\text{Range}(\mathbf{B})$  and  $(\cdot)^+$  the Moore-Penrose inverse of a matrix.*

*Proof.* We check that  $\mathbf{B}$  satisfies the Moore-Penrose axioms ( $\mathbf{MM}^+\mathbf{M} = \mathbf{M}$ ,  $\mathbf{M}^+\mathbf{MM}^+ = \mathbf{M}^+$ ,  $\mathbf{M}^+\mathbf{M}$  and  $\mathbf{MM}^+$  are Hermitian). We find

$$\mathbf{A}\Pi\mathbf{B}\mathbf{A}\Pi = \mathbf{A}\mathbf{B}\mathbf{A}\Pi = \mathbf{A}\Pi \quad (\text{A.7})$$

where we used  $\Pi\mathbf{B} = \mathbf{B}$  by definition of  $\Pi$ . Similarly, we obtain

$$\mathbf{B}\mathbf{A}\Pi\mathbf{B} = \Pi\mathbf{B} = \mathbf{B}. \quad (\text{A.8})$$

Next we claim that

$$\mathbf{B}\mathbf{A}\Pi = \Pi \quad (\text{A.9})$$

which is Hermitian. Consider  $\mathbf{v} \in \mathbb{R}^{d_2}$  then by definition of  $\Pi$  there is  $\mathbf{w} \in \mathbb{R}^{d_1}$  such that  $\mathbf{B}\mathbf{w} = \Pi\mathbf{v}$  and thus

$$\mathbf{B}\mathbf{A}\Pi\mathbf{v} = \mathbf{B}\mathbf{A}\mathbf{B}\mathbf{w} = \mathbf{B}\mathbf{w} = \Pi\mathbf{v}. \quad (\text{A.10})$$

Finally, we find

$$\mathbf{A}\Pi\mathbf{B} = \mathbf{AB} = \mathbf{1}_{d_1 \times d_1}. \quad (\text{A.11})$$

$\square$

We have the following generalization of Lemma 3.1.

**Lemma A.4.** *Let  $\mathbf{f} \in \mathcal{F}_{\text{add}}$  and  $\mathbf{g}$  a left-inverse of  $\mathbf{f}$ . Then  $\mathbf{g}$  has the property that for  $\mathbf{x} \in \mathcal{X}$*

$$\left( (D\mathbf{g}(\mathbf{x})\Pi_{T_{\mathbf{x}}\mathcal{X}})^+ \right)^\top (\mathbf{z}) D^2 \mathbf{g}_s(\mathbf{x}) (D\mathbf{g}(\mathbf{x})\Pi_{T_{\mathbf{x}}\mathcal{X}})^+ \in \text{Diag}(d_z) \quad (\text{A.12})$$

*is a diagonal matrix for  $s \in [d_z]$ . Here, we denote by  $\Pi_{T_{\mathbf{x}}\mathcal{X}}$  the orthogonal projection on the tangent space at  $\mathbf{x}$ .*

*Proof.* Starting from equation A.2 we find that for  $\mathbf{f} \in \mathcal{F}_{\text{add}}$  we get

$$D\mathbf{f}^\top(\mathbf{z}) D^2 \mathbf{g}_s(\mathbf{f}(\mathbf{z})) D\mathbf{f}(\mathbf{z}) \in \text{Diag}(d_z). \quad (\text{A.13})$$

Applying Lemma A.3 we find

$$D\mathbf{f}(\mathbf{z}) = (D\mathbf{g}(\mathbf{f}(\mathbf{z}))\Pi_{T_{\mathbf{f}(\mathbf{z})}\mathcal{X}})^+ \quad (\text{A.14})$$

because the range of  $D\mathbf{f}$  is the tangent space of the data manifold. Therefore we conclude that for  $\mathbf{x} \in \mathcal{X}$  the relation equation A.12 indeed holds.  $\square$

**Regularization for  $d_x > d_z$ .** In this paragraph we investigate the local restrictions that  $\mathbf{g} \in \mathcal{G}_{\text{int}}$  need to satisfy, and in particular we prove Theorem 3.2. The proof of Theorem 3.2 requires two lemmas as a key ingredient, which state that the crucial constraint on the second derivative stated in equation A.2 can be satisfied for a suitable choice of  $\mathbf{M} = D\mathbf{f}(0)$  and  $D^2 \mathbf{f}(0)$  for given matrices  $\mathbf{B}_s$  corresponding to the Hessian of  $\mathbf{g}$  and almost every matrix  $\mathbf{A}$  (corresponding to the Jacobian of  $\mathbf{g}$ ). The first lemma establishes the existence of  $\mathbf{M}$  such that first term in equation A.2 (given by  $\mathbf{M}^\top \mathbf{B}_s \mathbf{M}$  is diagonal for all  $s$ . The second lemma constructs suitable second derivatives  $D^2 \mathbf{f}$  so that the relation equation A.2 also holds for the diagonal entries.

**Lemma A.5.** *Assume  $d_x \geq d_z^3$ . For all symmetric matrices  $\mathbf{B}_s \in \mathbb{R}^{d_x \times d_x}$  for  $s \in [d_z]$ , and almost every  $\mathbf{A} \in \mathbb{R}^{d_z \times d_x}$  there is a matrix  $\mathbf{M} \in \mathbb{R}^{d_x \times d_z}$  such that  $\mathbf{M}^\top \mathbf{B}_s \mathbf{M} \in \text{Diag}(d_z)$  for  $s \in [d_z]$  and  $\mathbf{A}\mathbf{M} = \text{Id}_{d_z}$ .*

*Remark A.6.* 1. Counting parameters and equations, we find that  $\mathbf{M}$  has  $d_z d_x$  parameters and (by symmetry of  $\mathbf{B}_s$ ) there are

$$d_z \cdot \frac{d_z(d_z - 1)}{2} + d_z^2 = \frac{d_z^2(d_z + 1)}{2} \quad (\text{A.15})$$

equations. So, generally, we expect the result to hold for  $d_x \geq d_z(d_z + 1)/2$ .

2. On the other hand, the result does not hold for every  $\mathbf{A}$  with maximal rank. Indeed, there can be a non-trivial null set of full rank matrices  $\mathbf{A}$  such that the result does not hold. E.g., consider  $d_z = 2$ ,  $\mathbf{A} \in \mathbb{R}^{d_z \times d_x}$  such that all entries of  $\mathbf{A}$  are zero except  $\mathbf{A}_{1,1} = \mathbf{A}_{2,2} = 1$ . Moreover,  $\mathbf{B}_1$  has all entries zero except  $(\mathbf{B}_1)_{1,2} = (\mathbf{B}_1)_{2,1} = 1$ . Then  $\mathbf{A}\mathbf{M} = \text{Id}_{d_z}$  implies that  $\mathbf{M}_{1,1} = \mathbf{M}_{2,2} = 1$ , and  $\mathbf{M}_{1,2} = \mathbf{M}_{2,1} = 0$ . But then we find  $\mathbf{M}_{:,1}^\top \mathbf{B}_1 \mathbf{M}_{:,2} = (\mathbf{B}_1)_{1,2} = 1 \neq 0$ .

*Proof.* We inductively construct  $d_z$  linear subspaces  $V_i \subset \mathbb{R}^{d_x}$  such that  $\dim(V_i) = d_z$  and

$$(\mathbf{v}^i)^\top \mathbf{B}_s \mathbf{v}^j = 0 \quad (\text{A.16})$$

for  $\mathbf{v}^i \in V_i$ ,  $\mathbf{v}^j \in V_j$  and  $i \neq j$ . We pick  $V_1$  arbitrarily. Then, given a basis  $\mathbf{v}^{i,1}, \dots, \mathbf{v}^{i,d_z}$  of  $V_i$  for  $i \leq j$  we select  $V_{j+1} \subset \ker \mathbf{T}_j$  where  $\mathbf{T}_j : \mathbb{R}^{d_x} \rightarrow \mathbb{R}^{d_z \cdot j}$  given by  $(\mathbf{T}_j \mathbf{v})_{s,(k,i)} = (\mathbf{v}^{i,k})^\top \mathbf{B}_s \mathbf{v}$  (here it is convenient to identify  $[d_z^2 \cdot j]$  with  $[d_z] \times ([d_z] \times [j])$ ). By assumption  $d_x - d_z^2 \cdot j \geq d_x - d_z^2 \cdot (d_z - 1) \geq d_z$  and therefore  $\dim \ker \mathbf{T}_j \geq d_z$  and we can find a suitable subspace  $V_{j+1} \subset \ker \mathbf{T}_j$ . Given a matrix  $\mathbf{A} = (\mathbf{a}^1, \dots, \mathbf{a}^{d_z})^\top \in \mathbb{R}^{d_z \times d_x}$ , we want to find  $\mathbf{w}^i \in V_i$  so that  $\mathbf{M} = (\mathbf{w}^1, \dots, \mathbf{w}^{d_z})$  satisfies  $\mathbf{A}\mathbf{M} = \text{Id}_{d_z}$ . Equivalently  $\mathbf{A}\mathbf{w}^i = \mathbf{e}^i$ , where  $\mathbf{e}^i$  denotes the  $i$ -th standard basis vector. We expand into the basis of  $V_i$ , i.e.,  $\mathbf{w}^i = \sum_j \lambda_j^i \mathbf{v}^{i,j}$  and find the equivalent relation

$$\mathbf{A}\mathbf{w}^i = (\mathbf{a}^1, \dots, \mathbf{a}^{d_z})^\top (\mathbf{v}^{i,1}, \dots, \mathbf{v}^{i,d_z}) \boldsymbol{\lambda}^i = \mathbf{e}^i. \quad (\text{A.17})$$

Since the second matrix has maximal rank ( $(v^{i,k})_{1 \leq k \leq d_z}$  is a basis of  $V_i$ ), we find that for almost all  $A$  the matrix product is invertible, and a solution  $\lambda^i$  exists and thus a suitable  $w^i$  exists. To see this, we can assume that the basis  $v^{i,\cdot}$  is an orthonormal basis and expand  $a_i$  in this basis (and an irrelevant orthogonal complement). We conclude that for almost all  $A$  such a  $w^i$  exists. Since the union of null-sets is a null-set the same statement holds for almost all  $A$  for all  $i$  at the same time and therefore we find a matrix  $M$  such that  $AM = \text{Id}_{d_z}$  and, moreover,  $(w^i)^\top B_s w^j = 0$  because this holds for all  $w^i \in V_i$  and  $w^j \in V_j$ .  $\square$

We now construct the diagonal matrices that will later correspond to  $D^2 f_s$ .

**Lemma A.7.** *Assume  $d_x \geq d_z$ . Given  $A \in \mathbb{R}^{d_z \times d_x}$  of maximal rank and diagonal matrices  $D^1, \dots, D^{d_z} \in \mathbb{R}^{d_z \times d_z}$  we can find diagonal matrices  $\Lambda^1, \dots, \Lambda^{d_x} \in \mathbb{R}^{d_z \times d_z}$  such that for all  $s \in [d_z]$*

$$D^s = - \sum_{i=1}^{d_x} A_{s,i} \Lambda^i. \quad (\text{A.18})$$

*Proof.* The proof is straightforward as soon as one observes that this is a linear equation for the diagonal entries of  $\Lambda^i$ . Indeed, denoting by  $\lambda = (\Lambda_{11}^1, \dots, \Lambda_{d_z, d_z}^1, \dots, \Lambda_{d_z, d_z}^{d_x})^\top \in \mathbb{R}^{d_z \cdot d_x}$  the vector containing all diagonal entries of the matrices  $\Lambda^i$  and similarly  $d = (D_{11}^1, \dots, D_{d_z, d_z}^1, \dots, D_{d_z, d_z}^{d_z})^\top \in \mathbb{R}^{d_z^2}$  for the diagonal entries of  $D^s$ . Then we can rewrite equation A.18 as follows using the Kronecker product  $\otimes$

$$(A \otimes \text{Id}_{d_z}) \lambda = -d. \quad (\text{A.19})$$

Now the rank of the matrix  $A \otimes \text{Id}_{d_z}$  is the product of the ranks, i.e.,  $d_z \min(d_x, d_z) = d_z^2 \leq d_x d_z$  and thus a solution  $\lambda$  exists.  $\square$

With these technical lemmas at hand, we can prove the theorem which we now restate for convenience of the reader.

**Theorem 3.2.** *Assume that  $d_x \geq d_z^3$ . Let  $B_l \in \mathbb{R}^{d_x \times d_x}$  be symmetric matrices for  $1 \leq l \leq d_z$ . Then there is for any  $x_0 \in \mathbb{R}^{d_x}$  and for almost every  $A \in \mathbb{R}^{d_z \times d_x}$  a generator  $f \in \mathcal{F}_{\text{int}}$  with a (left)-inverse  $g \in \mathcal{G}_{\text{int}}$ , such that  $f(0) = x_0$  and  $Dg(x_0) = A$  and  $D^2 g_l(x_0) = B_l$  for  $1 \leq l \leq d_z$ .*

*Proof of Theorem 3.2.* Clearly we can assume that  $x_0 = 0$ . The key idea is that if we can ensure that equation A.2 holds for  $z = 0$  we can extend  $f$  and  $g$  such that  $g \circ f(z) = z$  and  $f \in \mathcal{F}_{\text{add}}$ . To achieve this, we first apply Lemma A.5 and then find a matrix  $M$  such that  $AM = \text{Id}_{d_z}$  and  $M^\top B_s M \in \text{Diag}(d_z)$ . Then we apply Lemma A.7 and find matrices  $\Lambda^i$  such that

$$M^\top B_s M + \sum_{i=1}^{d_x} A_{s,i} \Lambda^i = 0. \quad (\text{A.20})$$

Now we pick a function  $f \in \mathcal{F}_{\text{add}}$  such that  $f(0) = 0$ ,  $Df(0) = M$  and  $D^2 f_i = \Lambda^i$ . Clearly, this is possible because  $\Lambda^i$  are diagonal, e.g., we can locally use a quadratic polynomial to achieve this. The next step is to construct a function  $g$  such that  $g \circ f(z) = z$ . Using standard techniques (partition of unity) it is sufficient to construct this locally and then extend it globally. First, we consider  $\bar{\phi} : \Omega \subset \mathbb{R}^{d_x} \times \mathbb{R}^{d_x}$  such that  $\bar{\phi}(f(z)) = (z, 0)$  for  $z \in \Omega$  (e.g., by the existence of tubular neighborhoods). We call the composition of  $\bar{\phi}$  with the projection on the first  $d_z$  components  $\phi$ . Then we define

$$g(x) = Ax + \frac{1}{2} \begin{pmatrix} x^\top B_1 x \\ \vdots \\ x^\top B_{d_z} x \end{pmatrix} + h(\phi(x)) \quad (\text{A.21})$$

where  $h$  is given by

$$h(z) = h(\phi(f(z))) = z - Af(z) - \frac{1}{2} \begin{pmatrix} f(z)^\top B_1 f(z) \\ \vdots \\ f(z)^\top B_{d_z} f(z) \end{pmatrix} \quad (\text{A.22})$$

We can calculate

$$\mathbf{g}(\mathbf{f}(\mathbf{z})) = \mathbf{z} \quad (\text{A.23})$$

so  $\mathbf{g}$  is indeed a left-inverse of  $\mathbf{f}$ . Taking the derivative of this equation at 0 we obtain

$$D\mathbf{h}(0) = \text{Id}_{d_z} - \mathbf{A}(D\mathbf{f}(0)) + 0 = \text{Id}_{d_z} - \mathbf{A}\mathbf{M} = 0. \quad (\text{A.24})$$

For the second derivative we get

$$D^2\mathbf{h}_s(0) = -\sum_{i=1}^{d_x} \mathbf{A}_{s,i} D^2\mathbf{f}_i(\mathbf{z}) - D\mathbf{f}(0)^\top \mathbf{B}_s D\mathbf{f}(0) = -\sum_{i=1}^{d_x} \mathbf{A}_{s,i} \mathbf{\Lambda}^i + \mathbf{M}^\top \mathbf{B}_s \mathbf{M} = 0. \quad (\text{A.25})$$

Here we used for the derivative of the quadratic term that the contribution where the derivative hits one  $\mathbf{f}(\mathbf{z})$  twice vanishes since  $\mathbf{f}(0) = 0$ . Finally, we can now evaluate

$$D\mathbf{g}(0) = \mathbf{A} + D\mathbf{h}(\phi(0)) = \mathbf{A} + D\mathbf{h}(0) = \mathbf{A} \quad (\text{A.26})$$

and

$$D^2\mathbf{g}_s(0) = \mathbf{B}_s + D^2\mathbf{h}_s \circ \phi = \mathbf{B}_s \quad (\text{A.27})$$

where  $D^2\mathbf{h}_s \circ \phi = 0$  follows from the chain rule and  $D\mathbf{h}(0) = 0$  and  $D^2\mathbf{h}(0) = 0$ .  $\square$

## A.2 CONSTRAINING $\mathcal{G}_{\text{enc}}$ BY ARCHITECTURE

In this section we discuss results showing that it is challenging to construct practical function classes  $\mathcal{G}_{\text{enc}}$  which are sufficiently expressive so that they contain a left-inverse for each  $\mathbf{f} \in \mathcal{F}_{\text{int}}$ . As explained before, the main challenge is that setting  $\mathcal{G}_{\text{enc}} = \mathcal{G}_{\text{int}}$  is in principle sufficient to ensure identifiability and out of distribution generalization. So we need to make additional assumptions on  $\mathcal{G}_{\text{enc}}$  that function classes used in widely applied algorithms satisfy which then ensure that  $\mathcal{G}_{\text{enc}}$  is very expressive preventing that equation 2.6 holds. We will make the assumption that  $\mathcal{G}_{\text{enc}}$  has a linear structure, i.e.,  $\mathbf{g}_1 + \mathbf{g}_2 \in \mathcal{G}_{\text{enc}}$  if  $\mathbf{g}_1, \mathbf{g}_2 \in \mathcal{G}_{\text{enc}}$ . This is clearly satisfied when  $\mathcal{G}_{\text{enc}}$  is a vector space (e.g., this assumption is satisfied for linear or kernel methods, or when learning a linear head on a fixed representation). For functions implemented by neural networks with fixed architecture this is in general not true. However, it does apply to infinite width limits of fixed architectures (this does not generally imply universal approximation properties when the architecture is sparse, e.g., we use slot-wise neural networks for the forward direction which cannot approximate interactions  $\mathbf{x}_1\mathbf{x}_2$  even at infinite width). Note that large width is also generally required to make neural networks sufficiently expressive because for fixed width neural networks implement a parametric function class while  $\mathcal{F}_{\text{int}}$  is non-parametric. We then show that such a function class  $\mathcal{G}_{\text{enc}}$  does not have a useful inductive bias.

**Architecture constraints for  $d_x = d_z$ .** We first consider the simpler case  $d_x = d_z$  where  $\mathbf{f}$  is bijective on the codomain (and not only on its image).

Our main result here is that  $\mathcal{G}_{\text{enc}}$  has the universal approximation property when  $\mathcal{G}_{\text{enc}} \supset \mathcal{F}_{\text{add}}^{-1}$  and  $\mathcal{G}_{\text{enc}}$  is closed under addition.

**Theorem A.8.** Assume  $d_x = d_z = d$ . Consider an encoder function class  $\mathcal{G}_{\text{enc}}$  with the following two properties:

1. The class  $\mathcal{G}_{\text{enc}}$  is closed under addition, i.e., for  $\mathbf{g}_1, \mathbf{g}_2 \in \mathcal{G}_{\text{enc}}$  also  $\mathbf{g}_1 + \mathbf{g}_2 \in \mathcal{G}_{\text{enc}}$ .
2. The function class  $\mathcal{G}_{\text{enc}}$  is expressive enough such that it contains all inverses of additive functions, i.e.,  $\mathcal{F}_{\text{add}}^{-1} \subset \mathcal{G}_{\text{enc}}$ .

Then  $\mathcal{G}_{\text{enc}}$  is dense in the space of all continuous functions on all compact subset of  $\mathbb{R}^{d_x}$ .

Since  $\mathcal{F}_{\text{add}} \subset \mathcal{F}_{\text{int}}$  for  $n \geq 1$  and any  $m$  we directly get the following corollary.

**Corollary A.9.** Assume  $d_x = d_z = d$  and the encoder function class  $\mathcal{G}_{\text{enc}}$  is closed under addition and satisfies  $\mathcal{G}_{\text{int}} \subset \mathcal{G}_{\text{enc}}$ . Then  $\mathcal{G}_{\text{enc}}$  is dense in the space of all continuous functions on all compact subset of  $\mathbb{R}^{d_x}$ .

The takeaway from these results is that it is challenging to find natural function classes  $\mathcal{G}_{\text{enc}}$  so that  $\mathcal{G}_{\text{enc}} \supset \mathcal{G}_{\text{int}}$  (sufficient expressivity) but  $\mathcal{G}_{\text{enc}}$  is not much larger than  $\mathcal{G}_{\text{int}}$ . Therefore, learning only encoders from  $\mathcal{G}_{\text{enc}}$  does not provide a strong inductive bias towards the inverse of the ground truth decoder and out of distribution generalization.

*Proof of Theorem A.8.* The general strategy is to prove that the conditions imply that all maps  $\mathbf{g}$  where  $\mathbf{g}_j$  (the  $j$ -th coordinate of  $\mathbf{g}$ ) is any polynomial and  $\mathbf{g}_i = 0$  for  $i \neq j$  are contained in  $\mathcal{G}_{\text{enc}}$ . This will end the proof because polynomials are dense in the scalar valued continuous functions, and we can then apply this result coordinate-wise using the additive structure.

**Step 1:** Vector space structure of  $\mathcal{G}_{\text{enc}}$ . We now show that we can scale certain functions in  $\mathcal{G}_{\text{enc}}$ . Denote for  $\lambda \neq 0$  by  $M_\lambda$  the multiplication map  $z \rightarrow \lambda z$ . Then  $\mathbf{f} \circ M_\lambda \in \mathcal{F}_{\text{add}}$  if  $\mathbf{f} \in \mathcal{F}_{\text{add}}$ . Since  $(\mathbf{f} \circ M_\lambda)^{-1} = \lambda^{-1} \mathbf{f}^{-1}$  we conclude that scalar multiples of  $\mathbf{f}^{-1}$  are in  $\mathcal{F}_{\text{add}}^{-1}$  and the first assumption then implies that the vector space  $V$  generated by  $\mathbf{f}^{-1}$  for  $\mathbf{f} \in \mathcal{F}_{\text{add}}$  is contained in  $\mathcal{G}_{\text{enc}}$ .

**Step 2:** We show that the monomials  $x_i^k$  are contained in  $\mathcal{G}_{\text{enc}}$ . Consider the map  $\mathbf{f} \in \mathcal{F}_{\text{add}}$  where  $\mathbf{x} = \mathbf{f}(\mathbf{z})$  has coordinates

$$\begin{aligned} x_1 &= z_2^k + z_1 \\ x_i &= z_i \quad \text{for } d \geq i \geq 2. \end{aligned} \tag{A.28}$$

This is clearly an additive function with inverse

$$\begin{aligned} z_1 &= x_1 - x_2^k \\ z_i &= x_i \quad \text{for } d \geq i \geq 2. \end{aligned} \tag{A.29}$$

Similarly, we consider

$$\begin{aligned} x_1 &= -(-z_2)^k - z_1 \\ x_i &= -z_i \quad \text{for } d \geq i \geq 2. \end{aligned} \tag{A.30}$$

with inverse

$$\begin{aligned} z_1 &= -x_1 - x_2^k \\ z_i &= -x_i \quad \text{for } d \geq i \geq 2. \end{aligned} \tag{A.31}$$

Summing these two functions, we find that the function  $\mathbf{g}$  with

$$\mathbf{g}_i(\mathbf{x}) = -2\delta_{1i}x_1^k \tag{A.32}$$

satisfies  $\mathbf{g} \in \mathcal{G}_{\text{enc}}$ . By permutation of the outputs and inputs (and scaling) we find that all functions  $\mathbf{g}$  with  $\mathbf{g}_i(\mathbf{x}) = \delta_{ij}x_l^k$  are in  $\mathcal{G}_{\text{enc}}$  for all  $j, l \in [d]$  and  $k \in \mathbb{N}$ .

**Step 3:** Now we show with a similar argument that more generally functions of the form  $\mathbf{g}_j(\mathbf{x}) = \delta_{jl}(\sum_{i=1}^d \alpha_i x_i)^k$  for all coefficients  $\alpha_i$  and all  $1 \leq l \leq d$  are in  $\mathcal{G}_{\text{enc}}$ . If only one  $\alpha_i$  is non-zero we have shown this before, so we can assume that at least two  $\alpha_i$  are non-zero and without loss of generality we assume that  $\alpha_i$  for  $1 \leq i \leq k$  are non-zero where  $2 \leq k \leq d$ . Then we consider the additive map  $\mathbf{g}$  which satisfies for  $\mathbf{x} = \mathbf{g}(\mathbf{z})$

$$\begin{aligned} x_1 &= \frac{1}{\alpha_1} \left( z_1^k + z_1 - \sum_{i=2}^k z_i \right), \\ x_2 &= \frac{1}{\alpha_2} (z_2 - z_1^k), \\ x_i &= \frac{1}{\alpha_i} z_i \quad \text{for } 3 \leq i \leq k, \\ x_i &= z_i \quad \text{for } k < i \leq d. \end{aligned} \tag{A.33}$$

Then we observe that

$$\sum_{i=1}^k \alpha_i x_i = z_1 \tag{A.34}$$

and thus the inverse is given by

$$\begin{aligned}
z_1 &= \sum_{i=1}^k \alpha_i x_i, \\
z_2 &= \alpha_2 x_2 + \left( \sum_{i=1}^k \alpha_i x_i \right)^k, \\
z_i &= \alpha_i x_i \quad \text{for } 3 \leq i \leq k \\
z_i &= x_i \quad \text{for } d \geq i > k.
\end{aligned} \tag{A.35}$$

Similarly, we find that the inverse of the additive map given in coordinates by

$$\begin{aligned}
x_1 &= \frac{1}{\alpha_1} \left( -(-z_1)^k - z_1 + \sum_{i=2}^k z_i \right), \\
x_2 &= \frac{1}{\alpha_2} (-z_2 + (-z_1)^k), \\
x_i &= -\frac{1}{\alpha_i} z_i \quad \text{for } 3 \leq i \leq k, \\
x_i &= z_i \quad \text{for } k < i \leq d.
\end{aligned} \tag{A.36}$$

can be written as (note  $\sum_{i=1}^k \alpha_i x_i = -z_1$ )

$$\begin{aligned}
z_1 &= -\sum_{i=1}^k \alpha_i x_i, \\
z_2 &= -\alpha_2 x_2 + \left( \sum_{i=1}^k \alpha_i x_i \right)^k, \\
z_i &= -\alpha_i x_i \quad \text{for } 3 \leq i \leq k \\
z_i &= -z_i \quad \text{for } d \geq i > k.
\end{aligned} \tag{A.37}$$

Summing the two inverses in equation A.33 and equation A.37 we find that the map  $g$  given by  $g_j(x) = 2\delta_{j2} \left( \sum_{i=1}^k \alpha_i x_i \right)^k$  is in  $\mathcal{G}_{\text{enc}}$  and by permuting the indices and scaling we find that all maps of the form

$$g_j(x) = \delta_{jl} \left( \sum_{i=1}^k \alpha_i x_i \right)^k \tag{A.38}$$

are in  $\mathcal{G}_{\text{enc}}$ . Using Lemma A.10 stated below we infer that indeed all multinomial polynomials are in  $\mathcal{G}_{\text{enc}}$  and this ends the proof in light of the Stone-Weierstrass Theorem.  $\square$

The following technical but standard lemma was used in the proof of Theorem A.8.

**Lemma A.10.** *Consider the space of functions  $g_\alpha : \mathbb{R}^d \rightarrow \mathbb{R}$  for  $\alpha \in \mathbb{R}^d$  given by*

$$g_\alpha(x) = \left( \sum_{i=1}^d \alpha_i x_i \right)^k. \tag{A.39}$$

*Then the vector space generated by the functions  $g_\alpha$  is the space of all  $k$ -homogeneous polynomials.*

*Proof.* This is a general version of the well known polarization identity, namely

$$(x_1 + x_2)^2 - (x_1 - x_2)^2 = 4x_1 x_2. \tag{A.40}$$

For completeness we sketch the full proof. Denote the generated space by  $V$ . Let  $\phi_j(x)$  be linear functions for  $1 \leq j \leq k$ , i.e.,  $\phi_j(x) = \sum_{i=1}^d \alpha_i^j x_i$  for some  $\alpha_i^j$ . Then using the multinomial expansion we find

$$\begin{aligned}
& \sum_{(\epsilon_1, \dots, \epsilon_k) \in \{-1, 1\}^k} \left( \prod_{j=1}^k \epsilon_j \right) \left( \sum_{j=1}^k \epsilon_j \phi_j \right)^k \\
&= \sum_{(\epsilon_1, \dots, \epsilon_k) \in \{-1, 1\}^k} \left( \prod_{j=1}^k \epsilon_j \right) \sum_{\gamma_1 + \dots + \gamma_k = k} \frac{k!}{\gamma_1! \dots \gamma_k!} \prod_{j=1}^k \phi_j^{\gamma_j} \\
&= \sum_{(\epsilon_1, \dots, \epsilon_k) \in \{-1, 1\}^k} \left( \prod_{j=1}^k \epsilon_j \right) \sum_{\gamma_1 + \dots + \gamma_k = k} \frac{k!}{\gamma_1! \dots \gamma_k!} \prod_{j=1}^k (\epsilon_j \phi_j)^{\gamma_j} \\
&= \sum_{\gamma_1 + \dots + \gamma_k = k} \frac{k!}{\gamma_1! \dots \gamma_k!} \prod_{j=1}^k \phi_j^{\gamma_j} \prod_{j=1}^k \sum_{\epsilon_j \in \{-1, 1\}} \epsilon_j^{\gamma_j + 1}.
\end{aligned} \tag{A.41}$$

Now the last sum is 0 for  $\gamma_j$  even and 2 for  $\gamma_j$  odd. So the only non-zero term corresponds to all  $\gamma_j$  odd and thus  $\gamma_j = 1$  for all  $j$  and therefore

$$\sum_{(\epsilon_1, \dots, \epsilon_k) \in \{-1, 1\}^k} \left( \prod_{j=1}^k \epsilon_j \right) \left( \sum_{j=1}^k \epsilon_j \alpha_j \right)^k = 2^k k! \prod_{j=1}^k \phi_j \in V. \tag{A.42}$$

Clearly this implies that the monomials  $\prod_{i=1}^d x_i^{\beta_i}$  with  $\beta_i \geq 0$  and  $\sum_{i=1}^d \beta_i = k$  are generated by the functions  $g_\alpha$  (pick  $\phi_j(x) = x_i$  for  $\beta_i$  of the  $\phi_j$ ).  $\square$

**Architectural constraints for  $d_x > d_z$ .** The case  $d_x > d_z$  is more challenging because the data manifold is then a submanifold and even if we know that there is a  $g \in \mathcal{G}_{\text{enc}}$  inverting  $f$  on the data manifold (i.e.,  $\mathcal{G}_{\text{enc}}$  is sufficiently expressive) this provides (essentially) no information about  $g$  away from  $\mathcal{X} = f(\mathcal{Z})$  and the data manifolds for different generators are unrelated. However, we can leverage the result for  $d_x = d_z$  to obtain a weaker version in the general case. Here we make the additional assumption that  $\mathcal{G}_{\text{enc}}$  is closed under coordinate projections in the sense that  $\tilde{g} \in \mathcal{G}_{\text{enc}}$  if  $\tilde{g}(x) = g(x_I, \mathbf{0}_{[d_x] \setminus I})$  for some index set  $I \subset [d_x]$  and  $g \in \mathcal{G}_{\text{enc}}$ . Note that this is naturally satisfied for neural networks where we can remove the influence of a coordinate by zeroing its outgoing weights.

**Corollary A.11.** *Assume that  $\mathcal{G}_{\text{enc}}$  is a class of encoder functions such that  $\mathcal{G}_{\text{enc}}$  is closed under addition and coordinate projections and sufficiently expressive, i.e., for every  $f \in \mathcal{F}_{\text{int}}$  there is  $g \in \mathcal{G}_{\text{enc}}$  such that  $g \circ f = \text{id}$ . Let  $f \in \mathcal{F}_{\text{int}}$  be such that  $f_I$  is a diffeomorphism (on its image) for some  $I$  with  $|I| = d_z$ . Then  $\mathcal{G}_{\text{enc}} \circ f$  is dense in all continuous functions  $C(K, \mathbb{R}^{d_z})$  for every compact  $K \subset \mathbb{R}^{d_z}$ , i.e., essentially arbitrary representations can be learned using function in  $\mathcal{G}_{\text{enc}}$ .*

*Proof.* Consider a set  $I \subset [d_z]$ . Then the restrictions  $f_I$  of functions  $f \in \mathcal{F}_{\text{int}}$  such that  $f_{I^c}(z) = \mathbf{0}$  (i.e., functions that vanish in all but  $d_z$  coordinates) are in bijection to functions in  $\mathcal{F}_{\text{int}}$  mapping  $\mathbb{R}^{d_z} \rightarrow \mathbb{R}^{d_z}$ . Applying Theorem A.8 we therefore find that the set of functions  $z_I \rightarrow g(z_I, \mathbf{0}_{I^c})$  for  $g \in \mathcal{G}_{\text{enc}}$  is dense in the continuous functions defined on any compact set  $K'$ . It is convenient to introduce the shorthand  $\tilde{g}$  for the function  $z_I \rightarrow g(z_I, \mathbf{0}_{I^c})$  by  $\tilde{g}$ . Then we can restate the density statement before as follows: Given any continuous function  $h : K \rightarrow \mathbb{R}^{d_z}$  we can find for any  $\epsilon > 0$  a  $g \in \mathcal{G}_{\text{enc}}$  so that  $\|\tilde{g} - h \circ (f_I)^{-1}\| < \epsilon$  on the compact set  $K' = f_I(K)$  (here we use that  $f_I$  is bijective on its image to invert it). Using that  $\mathcal{G}_{\text{enc}}$  is closed under coordinate projections we can find  $\tilde{g}$  is in  $\mathcal{G}_{\text{enc}}$  and satisfies

$$\begin{aligned}
\max_{z \in K} \|\tilde{g}f(z) - h(z)\|_\infty &= \|g(f_I(z), \mathbf{0}_{I^c}) - h \circ (f_I)^{-1} \circ f_I(z)\|_\infty \\
&= \|\tilde{g}(f_I(z)) - h \circ (f_I)^{-1}(f_I(z))\|_\infty \\
&\leq \max_{x_I \in K'} \|\tilde{g}(x_I) - h \circ (f_I)^{-1}(x_I)\|_\infty.
\end{aligned} \tag{A.43}$$

This ends the proof. □

While the previous corollary makes the strong assumption that  $f_I$  is globally bijective we note that this is generally true at least locally. Moreover, we can patch such representations due to the additive structure. Therefore, it seems unlikely that a function class  $\mathcal{G}_{\text{enc}}$  satisfying the following three constraints exists: First, the function class  $\mathcal{G}_{\text{enc}}$  is expressive enough, i.e., it contains left inverses for all  $f \in \mathcal{F}_{\text{int}}$ . Secondly,  $\mathcal{G}_{\text{enc}}$  is not too expressive so it provides a useful inductive bias towards  $\mathcal{G}_{\text{int}}$ . And finally,  $\mathcal{G}_{\text{enc}}$  can be efficiently parametrized and used for optimization.

## B ADDITIONAL EXPERIMENTAL DETAILS

**Datasets.** We create datasets for our experiments in Sec. 5 based on the PUG: Animals dataset (Bordes et al., 2023). This data consists of 43,520 high-resolution images which we resize to  $224 \times 224 \times 3$ . To create PUG-Background, we create an OOD set containing 32,000 images which consist of unseen combinations of animal category and backgrounds, e.g., penguin in a desert in Fig. 5, and a corresponding ID set containing 11,520 images. For PUG-Texture, the OOD set contains 16,000 images consisting of unseen combinations of animal and texture/color, e.g. blue elephant in Fig. 5, and the ID set contains 27,520 images. Lastly, for PUG-Object, the ID and OOD set both contain 21,760 images. The OOD set here consist of unseen combinations of animal categories, e.g., rhinoceros and caribou in in Fig. 5.

### B.1 MODELS

**ViTs.** The exact architecture for the six different pretrained ViTs used in our experiments can be seen in Fig. 6. When fine tuning these models with a LORA adapter, we use a rank of 16, a scaling factor of 32, and a dropout value of 0.1.

**Slot encoders.** We use either a Transformer or Slot Attention model for the slot encoder in Sec. 5. Both models consist of 5 layers and use 3 slots of dimension 64. We use 4 attention heads in the Transformer.

**Decoders.** All decoders in our experiments use the cross-attention Transformer from Brady et al. (2025); Sajjadi et al. (2022); van Steenkiste et al. (2024). In this model, slots are first projected by a 2 layer slot-wise MLP with a hidden dimension of 2064 and then passed through 2 layers of a cross-attention Transformer with pixel queries. Pixels are tokenized using a 2 layer MLP with a hidden dimension of 720. The pixel outputs of the cross-attention Transformer are mapped to have a channel dimension of 3 using a 3 layer MLP with a hidden dimension of 360. The attention weights  $A$  in this model are regularized such that pixels are encouraged to attend to at most one slot using the regularizer introduced by Brady et al. (2025):

$$\mathcal{L}_{\text{interact}} := \mathbb{E} \sum_{l \in [d_x]} \sum_{j \in [K]} \sum_{k=j+1}^K A_{l,j} A_{l,k} \quad (\text{B.1})$$

For all experiments, we weight this regularizer using a value of 0.01.

### B.2 TRAINING OBJECTIVES

**Supervised models.** We train all supervised models for 100000 iterations across 3 random seeds using a batch size of 64, with the Adam optimizer (Kingma and Ba, 2015) and a learning rate of  $1e-4$ .

**VAEs.** We train all unsupervised VAE models for 300000 iterations across 3 random seeds using a batch size of 32, with the Adam optimizer (Kingma and Ba, 2015) and a learning rate of  $5e-4$ , which is decayed by a factor of .1 throughout training and warmed up for the first 10000 iterations. We use a value of either 0.005 or 0.001 for the hyperparameter  $\beta$  on the KL loss.

**Readout.** In our unsupervised experiments, we train a linear readout on learned slots for 7500 iterations. To resolve the permutation between inferred and ground-truth slots we rely on on the Hungarian matching procedure used in Dittadi et al. (2022); Locatello et al. (2020).

**Gradient-based search.** When performing gradient based search in our experiments, we optimize Eq. 4.3 using Adam with a learning rate of .001. We optimize for either 300 or 500 iterations on PUG-Background and 700 iterations on PUG-Texture. To further aid in optimization we add an additional regularizer to the optimization procedure which minimizes the entropy of the logits under the classifier. This aims to ensure that the search procedure yields latent slots which are within the set of slots which the classifier has already observed. We use a value of either 10 or 50 for this loss. We note that a similar loss was used for semi-supervised learning in [Grandvalet and Bengio \(2004\)](#).

**Generative replay.** For our experiments using generative replay, we generate OOD data by following the procedure in [Wiedemer et al. \(2024\)](#) in which ID slots are randomly shuffled to create novel OOD compositions. We train an encoder on batches of 64 OOD samples for 15000 iterations with a learning rate of  $5e-4$ .

**Compute.** We train all models using 2 NVIDIA A100 GPUs. Total training time was approximately 1500 GPU hours.