

# Binary and Non-Binary Self-Dual Sequences and Maximum Period Single-Track Gray Codes

Tuvi Etzion

Dept. of Computer Science  
Technion-Israel Institute of Technology  
Haifa 3200003, Israel  
email: etzion@cs.technion.ac.il

**Abstract**—Binary self-dual sequences have been considered and analyzed throughout the years, and they were used for various applications. Motivated by a construction for single-track Gray codes, we examine the structure and recursive constructions for binary and non-binary self-dual sequences. The feedback shift registers that generate such sequences are discussed. The connections between these sequences and maximum period single-track codes are discussed. Maximum period non-binary single-track Gray codes of length  $p^t$  and period  $p^{p^t}$  are constructed. These are the first infinite families of maximum period codes presented in the literature.

## I. INTRODUCTION

A binary self-dual sequence is a cyclic sequence that is invariant under complement. Such sequences are generated by a feedback shift register known as the complemented cycling register. They were extensively studied in the fundamental book of shift registers [11] and also in a new monograph [7]. They were also considered, for example, in [6], [13], [17]. These sequences have found many applications, e.g., in constructions of de Bruijn sequences with minimal complexity [1], [5], in constructions of single-track Gray codes [9], in constructions of covering sequences [3], in constructions of de Bruijn array codes [8], and finally in constructions of balanced nearly-perfect covering codes [2].

Motivated by these applications and mainly by single-track Gray codes, we are trying to find properties of these sequences, to construct them recursively and efficiently, and to order them for the construction of single-track Gray codes. The Gray code, which we consider, will be only for maximum period codes. This will restrict some of the parameters of the self-dual sequences. We consider the generalization of such sequences over a non-binary alphabet, where a non-binary self-dual sequence is a sequence that is invariant under the addition of a nonzero constant to all the elements of the sequence.

The rest of this paper is organized as follows. In Section II, the background, necessary definitions, and some known results will be presented. Section III introduces binary self-dual sequences, especially with the connection to maximum period binary single-track Gray codes. The discussion will aim to generalize the known results on sequences whose length is a power of two. Section IV considers the generalization of binary self-dual sequences to non-binary self-dual sequences. Their recursive construction, properties, and enumeration will be considered. In Section V, the generalization of binary single-track Gray codes to non-binary single-track Gray codes

will be considered. Such codes of maximum period are constructed for length  $p^t$  and period  $p^{p^t}$ , where  $p$  is an odd prime. A short conclusion will be given in Section VI.

## II. PRELIMINARIES

In this section, we provide the basic definitions and results that are used throughout our exposition. We also present some background for our work.

A binary cyclic sequence  $S = [s_1 s_2 \dots s_k]$  has **length**  $k$  if it has  $k$  digits. A binary cyclic sequence  $S = [s_1 s_2 \dots s_k]$  is called a **self-dual sequence** (in short, SDS) if it is equal to its complement. If there is no periodicity in the sequences, then it can be represented as  $S = [X, \bar{X}]$  where  $X$  is a binary word of length  $k/2$ , and  $\bar{X}$  is the binary complement of  $X$ .

A **feedback shift register** of order  $n$  (in short, an  $\text{FSR}_n$ ) has  $2^n$  **states**, represented by the set of  $2^n$  binary words of length  $n$ . A register has  $n$  cells, which are binary storage elements, where each cell stores at each stage one of the bits of the current state  $x = (x_1, x_2, \dots, x_n)$ . An  $\text{FSR}_n$  is depicted in Fig. 1.

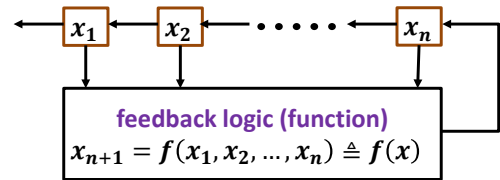


Fig. 1. Feedback shift register of order  $n$ .

The most relevant  $\text{FSR}_n$  for our exposition, denoted by  $\text{CCR}_n$  for the **complemented cycling register** of order  $n$ , has the feedback function

$$f(x_1, x_2, \dots, x_n) = x_1 + 1.$$

The consecutive values obtained from  $x_{n+1}$  (until the initial state is repeated), starting with any initial state is the sequence generated by the register. The  $\text{CCR}_n$  generates all the SDSs whose length is a divisor of  $2n$  and no other sequences. The **period** of a sequence  $S = [s_1 s_2 \dots s_k]$  is the length of the shortest word  $X$  for which  $S = [X, X, \dots, X]$ . If the  $\text{FSR}_n$  is linear, then it can also be represented by a polynomial of degree  $n$  over the binary field.

The number of sequences of the  $\text{CCR}_n$  was presented in [11].

*Theorem 1:* For each positive integer  $n$ , the number of sequences generated by the  $\text{CCR}_n$  is

$$Z^*(n) = \frac{1}{2n} \sum_{\substack{d|n \\ d \text{ odd}}} \phi(d) \cdot 2^{n/d}.$$

Let  $\text{SD}(n)$  denote the number of SDSs of period  $n$ . The following connection between the number of sequences generated by the  $\text{CCR}_n$  and the number of SDSs of various periods was proved in [6].

*Lemma 1:* For each positive integer  $n$

$$Z^*(n) = \sum_{\substack{d|2n \\ d \nmid n}} \text{SD}(d).$$

Of special interest are SDSs whose length is a power of 2. For these sequences, we have the following interesting phenomena (see Chapter 5 in [7]).

*Theorem 2:* All the sequences generated by the polynomial  $(1+x)^{2^n+1}$  and not generated by the polynomial  $(1+x)^{2^n}$  are all the SDSs of period  $2^{n+1}$ . These sequences are exactly the sequences generated by the  $\text{CCR}_{2^n}$ .

Two operators play an important role in our exposition. The shift operator  $\mathbf{E}$  is defined on a cyclic sequence as follows:

$$\mathbf{E}[s_1 s_2 \cdots s_k] = [s_2 \cdots s_k s_1].$$

The second operator  $\mathbf{D}$  defined first in [13] on a cyclic sequence as follows:

$$\begin{aligned} \mathbf{D}[s_1, s_2, \dots, s_k] &= [s_2 - s_1, s_3 - s_2, \dots, s_k - s_{k-1}, s_1 - s_k] \\ &= (\mathbf{E} - \mathbf{1})[s_1, s_2, \dots, s_k]. \end{aligned}$$

The operator  $\mathbf{D}$  has an inverse operator  $\mathbf{D}^{-1}$ . If  $S$  is a binary sequence of period  $k$  and even weight, then  $\mathbf{D}^{-1}S$  contains two sequences of period  $k$ , where one is the complement of the other. If  $S$  is a binary sequence of period  $k$  and odd weight, then  $\mathbf{D}^{-1}S$  is an SDS of period  $2k$ . The operator  $\mathbf{D}$  and its inverse can be used a few times, i.e.,

$$\mathbf{D}^r = \mathbf{D}(\mathbf{D}^{r-1}), \quad \mathbf{D}^{-r} = \mathbf{D}^{-1}(\mathbf{D}^{-r+1}), \quad \text{where } r \geq 2.$$

Of special interest is  $\mathbf{D}^{-2^n}S$ , where  $S$  is a binary sequence of period  $2^{n+1}$ . If  $S = [X, Y]$ , where  $X$  and  $Y$  are words of length  $2^n$ , then

$$\mathbf{D}^{-2^n}S = \mathbf{D}^{-2^n}[X, Y] = [Z, X + Z, X + Z + Y, Z + Y],$$

where  $Z$  can be any sequence of length  $2^n$ . There are  $2^{2^n-1}$  distinct cyclic sequences generated in this way (if  $Z$  is replaced by  $Z + X + Y$  the same sequence is obtained). If  $Y = \bar{X}$  then

$$\mathbf{D}^{-2^n}[X, \bar{X}] = [Z, X + Z, \bar{Z}, X + \bar{Z}].$$

This induces a simple and efficient method to generate all the SDSs of length  $2^{n+2}$  from the SDSs of period  $2^{n+1}$ . This method was used, for example, in [5], [9].

Finally, we define single-track Gray codes, which are the main motivation for the current exposition. A length  $n$ , Period  $P$ , **single-track Gray code** (in short, STGC) is a list of  $P$  distinct binary words of length  $n$ , such that every two consecutive words, including the last and the first, differ in

exactly one position. When looking at the list as a  $P \times n$  array (or an  $n \times P$  array), each column (row, respectively) of the array is a cyclic shift of the first column (row, respectively). These codes were defined first by Hiltgen, Paterson, and Brandestini [12] and considered later in [9], [10], [15], [16], [18], [19] for their theoretical value and for their various applications. Gray codes are subject to extensive research, and an excellent survey on them is presented in [14].

It was proved in [12] that  $2n$  must divide  $P$ , which restricts the possible values of  $P$ . A **maximum period** STGC is such a code for which  $2^n - P < 2n$ , i.e., there cannot be such a code of length  $n$  and a larger period. To obtain codes with large periods, the two constructions presented in the following two theorems are used.

*Theorem 3:* Let  $S_0, S_1, \dots, S_{r-1}$  be  $r$  binary pairwise inequivalent sequences (under cyclic shift) of period  $n$ , such that for each  $i$ ,  $0 \leq i < r-1$ ,  $S_i$  and  $S_{i+1}$  differ in exactly one coordinate. If there also exists an integer  $\ell$ , where  $\text{g.c.d.}(\ell, n) = 1$ , such that  $S_{r-1}$  and  $\mathbf{E}^\ell S_0$  differ in exactly one coordinate, then the following words (read row by row) form a length  $n$ , period  $nr$  STGC.

$$\begin{array}{cccc} S_0 & S_1 & \cdots & S_{r-1} \\ \mathbf{E}^\ell S_0 & \mathbf{E}^\ell S_1 & \cdots & \mathbf{E}^\ell S_{r-1} \\ \mathbf{E}^{2\ell} S_0 & \mathbf{E}^{2\ell} S_1 & \cdots & \mathbf{E}^{2\ell} S_{r-1} \\ \vdots & \vdots & \vdots & \vdots \\ \mathbf{E}^{(n-1)\ell} S_0 & \mathbf{E}^{(n-1)\ell} S_1 & \cdots & \mathbf{E}^{(n-1)\ell} S_{r-1} \end{array}.$$

*Theorem 4:* Let  $S_0, S_1, \dots, S_{r-1}$  be  $r$  binary self-dual pairwise inequivalent sequences of period  $2n$ . For each  $i$ ,  $0 \leq i \leq r-1$ , let  $S_i = [s_i^0, s_i^1, \dots, s_i^{2^n-1}]$  and define

$$\mathbf{F}^j S_i = [s_i^j, s_i^{j+1}, \dots, s_i^{j+n-1}],$$

where superscripts are taken modulo  $2n$ .

If for each  $0 \leq i < r-1$ ,  $S_i$  and  $S_{i+1}$  differ in exactly two coordinates, and there also exists an integer  $\ell$ , where  $\text{g.c.d.}(\ell, 2n) = 1$ , such that  $S_{r-1}$  and  $\mathbf{E}^\ell S_0$  differ in exactly two coordinates, then the following words form a length  $n$ , period  $2nr$  STGC.

$$\begin{array}{cccc} \mathbf{F}^0 S_0 & \mathbf{F}^0 S_1 & \cdots & \mathbf{F}^0 S_{r-1} \\ \mathbf{F}^\ell S_0 & \mathbf{F}^\ell S_1 & \cdots & \mathbf{F}^\ell S_{r-1} \\ \mathbf{F}^{2\ell} S_0 & \mathbf{F}^{2\ell} S_1 & \cdots & \mathbf{F}^{2\ell} S_{r-1} \\ \vdots & \vdots & \vdots & \vdots \\ \mathbf{F}^{(2n-1)\ell} S_0 & \mathbf{F}^{(2n-1)\ell} S_1 & \cdots & \mathbf{F}^{(2n-1)\ell} S_{r-1} \end{array}.$$

It was proved in [16] that there is no maximum period STGC of length  $2^t$  and period  $2^{2^t}$ ,  $t > 1$ . An STGC of length  $2^t$  and period  $2^{2^t} - 2^{t+1}$  was constructed in [9]. Non-binary STGCs of length  $p^m$  and period  $p^{p^m}$  are discussed in Section V. These are the only possible maximum period STGCs that contain all the words of the given length. For each odd prime  $p$ , we might have a maximum period STGC of length  $p$  and period  $2^p - 2$ . Such codes are known to exist for all primes up to  $p = 19$  [4], and they are constructed using the construction of Theorem 3, but they can also be obtained by the construction of Theorem 4. Maximum period STGC using these theorems can also be obtained for  $n = 9$  and  $n = 25$ . For

other values of  $n$ , the construction of Theorem 3 cannot yield a maximum period STGCs. The situation for the construction of Theorem 4 is quite different. If  $n = 2p$ , then there is exactly one sequence of period 4 and  $\frac{2^{2p}-4}{4p}$  sequences of period  $4p$  generated by the  $\text{CCR}_{2p}$ . It might be possible, in this case, to use the construction of Theorem 4 to generate a maximum period STGC. If  $n = 4p$ , then there are exactly two sequences of period 8 and  $\frac{2^{4p}-16}{8p}$  sequences of period  $8p$  generated by the  $\text{CCR}_{4p}$ . It might be possible, in this case, to use the construction of Theorem 4 to generate a maximum period STGC. If  $n = 8p$ , then there are exactly sixteen sequences of period 16 and  $\frac{2^{8p}-256}{16p}$  sequences of period  $16p$  generated by the  $\text{CCR}_{8p}$  and it might be possible to use the construction of Theorem 4 to generate a maximum period STGC when  $p > 16$ . The same process can be analyzed for  $n = 2^i p$ ,  $i \geq 1$ .

### III. BINARY SELF-DUAL SEQUENCES

The operation  $\mathbf{D}^{2^n} = (\mathbf{E} + 1)^{2^n}$  and its inverse are associated with the sequences generated by the polynomial  $(x + 1)^{2^n}$ . They are generalized for binary sequences whose length is not a power of 2 in the following way. Let  $\Delta_m$  be the following operator defined on binary sequences whose length is  $rm$ . Let  $S = [X_1, X_2, \dots, X_r]$  be a binary sequence, where  $X_i$ ,  $1 \leq i \leq r$ , is a word of length of length  $m$ . The operator  $\Delta_m$  is defined on  $S$  as (note that plus and minus are the same in the binary field)

$$\Delta_m S = [X_1 + X_2, X_2 + X_3, \dots, X_r + X_1]$$

and its inverse  $\Delta_m^{-1}$  is defined on  $S$  as

$$\Delta_m^{-1} S = [Y, Y + X_1, Y + X_1 + X_2, \dots, Y + \sum_{i=1}^{r-1} X_i]$$

if  $\sum_{i=1}^r X_i$  is the all-zero word, where  $Y$  can be any binary word of length  $m$ . If  $\sum_{i=1}^r X_i = Z \neq \mathbf{0}$  (the all-zero word), then

$$\Delta_m^{-1} S = [Y, Y + X_1, Y + X_1 + X_2, \dots, Y + \sum_{i=1}^{r-1} X_i,$$

$$Y + Z, Y + Z + X_1, Y + Z + X_1 + X_2, \dots, Y + Z + \sum_{i=1}^{r-1} X_i].$$

If  $\mathcal{S}$  is a set of sequences, then we define  $\Delta_m \mathcal{S}$  to be the set  $\{\Delta_m T : T \in \mathcal{S}\}$ . and  $\Delta_m^{-1} \mathcal{S}$  is the set  $\{\Delta_m^{-1} T : T \in \mathcal{S}\}$ . It is readily verified that for any sequence  $S$  of length  $rm$  we have that  $\Delta_m(\Delta_m^{-1} S) = S$ .

*Theorem 5:* If  $\mathcal{S}$  is the set of SDSs generated by the  $\text{CCR}_n$ ,  $n = 2^i p$ ,  $i \geq 1$ , then  $\Delta_{2^i p}^{-1} \mathcal{S}$  is the set of SDSs generated by the  $\text{CCR}_{n'}$ ,  $n' = 2^{i+1} p$ .

*Proof:* An SDS of length  $4n$  (might be of a smaller period) generated by the  $\text{CCR}_{2n}$  can be written in the form  $[X, Y, \bar{X}, \bar{Y}]$ , where the length of  $X$  and  $Y$  is  $n$ . Hence  $\Delta_n[X, Y, \bar{X}, \bar{Y}] = [X + Y, Y + \bar{X}, \bar{X} + \bar{Y}, \bar{Y} + X] = [X + Y, Y + \bar{X}]$  has length  $2n$  and it is an SDS generated by the  $\text{CCR}_n$ .

An SDS of length  $2n$  generated by the  $\text{CCR}_n$  can be written in the form  $[X, \bar{X}]$ , where the length of  $X$  is  $n$ . Hence,  $\Delta_n^{-1}[X, \bar{X}] = [Y, X + Y, \bar{Y}, X + \bar{Y}]$ , where  $Y$  is any sequence of length  $n$ , has length  $4n$  and it is an SDS generated by the  $\text{CCR}_{2n}$ . ■

*Example 1:* There are two SDSs generated by the  $\text{CCR}_3$ ,  $[000111]$  and  $[01]$ . By applying  $\Delta_3^{-1}$  on these two sequences, the six sequences of the  $\text{CCR}_6$  are obtained. Four sequences of period 12

$$\begin{array}{cc} [000 \ 000 \ 111 \ 111] & [001 \ 001 \ 110 \ 110] \\ [010 \ 010 \ 101 \ 101] & [011 \ 011 \ 100 \ 100] \end{array}$$

are obtained by applying  $\Delta_3^{-1}$  on  $[000111]$ . One sequence of period 12,  $[000 \ 010 \ 111 \ 101]$ , and one sequence of period 4,  $[0011]$ , are obtained by applying  $\Delta_3^{-1}$  on  $[01]$ .

We can continue and apply  $\Delta_6^{-1}$  on these 6 SDSs of the  $\text{CCR}_6$ . By applying  $\Delta_6^{-1}$  on the five sequences of period 12, we obtain 160 SDSs of period 24, which are generated by the  $\text{CCR}_{12}$ . By applying  $\Delta_6^{-1}$  on the sequence  $[0011]$  we obtain the two SDSs  $[00001111]$  and  $[00101101]$  of period 8 and ten SDSs of period 24, all generated by the  $\text{CCR}_{12}$ .

The results obtained in Example 1 can be proved in general.

*Theorem 6:* The  $\text{CCR}_n$ ,  $n = 2^i p$ , generates  $2^{2^i - i - 1}$  SDSs of period  $2^{i+1}$  and  $\frac{2^{2^i p} - 2^{2^{i+1}}}{2^{i+1} p}$  SDSs of period  $2^{i+1} p$ .

The recurrence of Theorem 5 and the enumeration of Theorem 6 and Example 1 can be further generalized and analyzed. From the  $\frac{2^{2^{i+1} p} - 2^{2^{i+2}}}{2^{i+2} p}$  SDSs of period  $2^{i+2} p$  only  $\frac{2^{2^i(p+1)} - 2^{2^{i+1}}}{2^{i+2} p}$  are generated from SDSs of period  $2^{i+1}$ , where each such sequence of period  $2^{i+2} p$  can be generated using any one of  $p$  different words of length  $2^i p - 1$ . It can be analyzed which words of length  $2^i p - 1$  yield SDSs of period  $2^{i+2}$ .

This analysis of these SDSs is analogous to the analysis of SDSs whose period is a power of 2, which led to the construction of STGC of length  $2^t$  and period  $2^{2^t} - 2^{t+1}$  is [9]. We further hope that it can lead to constructions of covering sequences as was done in [3] and covering codes as in [2].

### IV. NON-BINARY SELF-DUAL SEQUENCES

Non-binary self-dual sequences were hardly considered. We generalize the definition of the  $\text{CCR}_n$  for an  $\text{FSR}_n$  over  $\mathbb{Z}_m$ . The  $m\text{-CCR}_n$  is an  $\text{FSR}_n$  over  $\mathbb{Z}_m$  with feedback function

$$f(x_1, x_2, \dots, x_n) = x_1 + 1,$$

where  $x_i \in \mathbb{Z}_m$ ,  $1 \leq i \leq n$ , and the computation is performed modulo  $m$ . The function can also be taken as  $f(x_1, x_2, \dots, x_n) = x_1 + r$ , where  $r$  is relatively prime to  $m$ , but it will not affect the properties of the generated sequences. The enumerations of the number of sequences of the  $\text{CCR}_n$  can be generalized. For example, we have the following generalizations of Theorem 1 and Lemma 1.

*Theorem 7:* For each positive integer  $n$ , the number of sequences generated by the  $m\text{-CCR}_n$  is

$$\frac{1}{mn} \sum_{\substack{d|n \\ d \equiv 1 \pmod{m}}} \phi(d) \cdot m^{n/d}.$$

The period of a binary SDS generated by the  $\text{CCR}_n$  is any integer  $d$ , where  $d$  divides  $2n$  but does not divide  $n$ . This is generalized for the  $m\text{-CCR}_n$  as follows.

**Lemma 2:** Let  $\text{SD}_m(n)$  denote the number of SDSs of period  $n$  over  $\mathbb{Z}_m$ . The number of sequences generated by the  $m\text{-CCR}_n$  is

$$\sum_{\substack{d|mn \\ d \nmid n \\ d|n-\frac{d}{m}}} \text{SD}(d).$$

Let  $[X \ X+1 \ X+2]$  be an SDS of period  $3^n$  over  $\mathbb{Z}_3$ , where  $X$  is a word of length  $3^{n-1}$  over  $\mathbb{Z}_3$ . Let  $Z$  be a word of length  $3^{n-1}$  over  $\mathbb{Z}_3$  that starts with *zero* and let  $Y$  be a word of length  $3^{n-1}$  over  $\mathbb{Z}_3$ .

**Lemma 3:** The sequence  $[V, V+1, V+2]$  (a bold integer is a sequence with only this integer), where  $V = (Z, Z+Y, Z+2Y+X)$ , is an SDS of period  $3^{n+1}$  over  $\mathbb{Z}_3$ . Each different choice of  $Z$  and  $Y$  yields a distinct SDS. Each SDS sequence of period  $3^{n+1}$  over  $\mathbb{Z}_3$  is constructed in this way.

*Proof:* The proof has similarity to that of Theorem 5 with one major exception. By the definition of  $\mathbf{D}^{-1}$  we have that

$$\mathbf{D}^{-3^{n-1}}[X, X+1, X+2] = [Y, Y+X, Y+2X+1]$$

and

$$\mathbf{D}^{-3^{n-1}}[Y, Y+X, Y+2X+1] = [V, V+1, V+2],$$

where  $V = (Z, Z+Y, Z+2Y+X)$ . Note, that since either  $V$  or  $V+1$  or  $V+2$  starts with a *zero*, it was sufficient to consider for  $Z$  only those words of length  $3^{n-1}$  that start with a *zero*.

Clearly,  $S = [V, V+1, V+2]$  is a SDS and for each sequence of period  $3^{n+1}$  of this form we have that

$$\mathbf{D}^{3^{n-1}}(\mathbf{D}^{3^{n-1}}S) = [X, X+1, X+2].$$

The sequence  $[X, X+1, X+2]$  is an SDS of period  $3^n$ .

This implies that each SDS sequence of length  $3^{n+1}$  is constructed in this way. Now, a simple enumeration shows that each different choice of  $Z$  and  $Y$  yields a distinct SDS. ■

The same technique and expression presented in Lemma 3 for  $\mathbb{Z}_3$ , can be applied for any alphabet  $\mathbb{Z}_m$ , where  $m$  is a prime. For example, if  $m = 5$ , then we start with a SDS Let  $S = [X, X+1, X+2, X+3, X+4]$  over  $\mathbb{Z}_5$ , where  $X$  is of length  $5^{n-1}$ . Let  $Y_1, Y_2$ , and  $Y_3$  be words of length  $5^{n-1}$  and let  $Z$  be a word of length  $5^{n-1}$  that starts with a *zero*. From  $S, Y_1, Y_2, Y_3$ , and  $Z$ , we form the SDS  $[V, V+1, V+2, V+3, V+4]$ , where

$$V = (Z, Z+Y_3, Z+2Y_3+Y_2,$$

$$Z+3Y_3+3Y_2+Y_1, Z+4Y_3+Y_2+4Y_1+X) \quad (1)$$

is a word of length  $5^n$  over  $\mathbb{Z}_5$ . Generally, when an SDS over a prime alphabet  $\mathbb{Z}_p$  is constructed recursively, these expressions in the construction, as the one presented in (1), are associated with the top  $p$  rows of Pascal's triangle, where the entries of the triangle are taken modulo  $p$ .

## V. NON-BINARY SINGLE-TRACK GRAY CODES

In this section, we present and discuss the ordering of non-binary SDSs for the construction of maximum period non-binary STGCs. The requirement is that every two consecutive codewords will differ in exactly one coordinate. If it was also required that the difference in this coordinate between the second and the first of these two consecutive codewords is a given constant  $\delta$ , then it was proved in [16] that such an STGC exists only for binary codewords of length 2. Theorem 3 is readily generalized for sequences over  $\mathbb{Z}_m$  without any modification. Theorem 4 is generalized to  $\mathbb{Z}_m$  with a simple modification as follows.

**Theorem 8:** Let  $S_0, S_1, \dots, S_{r-1}$  be  $r$  binary self-dual pairwise inequivalent full-order SDSs of length  $mn$  over  $\mathbb{Z}_m$ . If for each  $i$ ,  $0 \leq i < r-1$ ,  $S_i$  and  $S_{i+1}$  differ in exactly two coordinates, and there also exists an integer  $\ell$ , where  $\text{g.c.d.}(\ell, mn) = 1$ , such that  $S_{r-1}$  and  $\mathbf{E}^\ell S_0$  differ in exactly  $m$  coordinates, then the following words form a length  $n$ , period  $mnr$  STGC.

$$\begin{array}{cccc} \mathbf{F}^0 S_0 & \mathbf{F}^0 S_1 & \dots & \mathbf{F}^0 S_{r-1} \\ \mathbf{F}^\ell S_0 & \mathbf{F}^\ell S_1 & \dots & \mathbf{F}^\ell S_{r-1} \\ \mathbf{F}^{2\ell} S_0 & \mathbf{F}^{2\ell} S_1 & \dots & \mathbf{F}^{2\ell} S_{r-1} \\ \vdots & \vdots & \vdots & \vdots \\ \mathbf{F}^{(mn-1)\ell} S_0 & \mathbf{F}^{(mn-1)\ell} S_1 & \dots & \mathbf{F}^{(mn-1)\ell} S_{r-1} \end{array}$$

**Example 2:** For  $m = 3$  and  $n = 3$ , there are three SDSs of length 9 which contain each word of length three over  $\mathbb{Z}_3$  exactly once. These three sequences are the first three columns of the following array. The other 27 columns of the first three rows form an  $3 \times 27$  array, which is a length 3 period 27 STGC over  $\mathbb{Z}_3$ . Each column of the  $9 \times 27$  array after the first three columns is the associated sequence in the required shift. Note that also each of the other rows of this  $9 \times 27$  array is an SDS.

001	001122222	112200000	220011111
011	011111001	122222112	200000220
000	000220011	111001122	222112200
112	112200000	220011111	001122222
122	122222112	200000220	011111001
111	111001122	222112200	000220011
220	220011111	001122222	112200000
200	200000220	011111001	122222112
222	222112200	000220011	111001122

■ We consider now another construction of the  $m^{m-2}$  SDSs of length  $m^2$  over  $\mathbb{Z}_m$ . This construction will present us an easier way to form an STGC of length  $m$  and period  $m^m$ . Such an STGC will be used as a seed for the recursive construction for an STGC of length  $p^t$  with period  $p^{p^t}$ , where  $p$  is an odd prime. We can order the SDSs of length  $m^2$  lexicographically such that the first  $m$  digits will start with a *zero* and the sum of these digits will be 0 modulo  $m$ . This simple ordering contains  $m^{m-2}$  sequences of length  $m^2$ . Each word of length  $m$  over  $\mathbb{Z}_m$  is a subsequence of exactly one of these sequences. Now, we use Theorem 8 to form an STGC.

But there is a simpler way to form such an STGC. The first  $m$  digits (and clearly  $m+1$  digits) determine the whole

SDS. Let  $\mathcal{T}$  be the ordered list of these  $m + 1$  digits in the STGC. Assume that the first such  $m + 1$  digits in a word of  $\mathcal{T}$  are  $0x_2x_3 \dots x_m1$ . Consider now the differences  $x_2, x_3 - x_2, x_4 - x_3, \dots, x_m - x_{m-1}, 1 - x_m$  in this word. Each word of length  $m + 1$  in  $\mathcal{T}$  defines a unique such sequence of differences. The sum of these differences is 1 modulo  $m$ .

We order this set of differences lexicographically. In this order, there are  $m^{m-1}$  sequences of differences of length  $m$ , where the sum of the differences in each sequence is 1 modulo  $m$ . Note that two sequences of differences are associated with the same SDS if and only if one is a cyclic shift of the other. From all possible  $m$  cyclic shifts, only one sequence of differences is taken. For each sequence of differences, there are  $m$  distinct cyclic shifts since the sum 1 modulo  $m$  of the differences implies that there is no periodicity in a sequence of differences.

Therefore, there are  $m^{m-2}$  cyclic sequences of differences in the final set of differences. This set of sequences containing the differences is ordered in a way that every two consecutive sequences (including the last and the first) have an identical subsequence of length  $m - 2$ . These subsequences imply that in the corresponding SDSs of length  $m^2$ , the  $m^2$  subsequences of length  $m$  can be paired in a way that each pair differs in exactly one coordinate.

*Example 3:* For  $n = 4$  and  $m = 4$ , the 16 sequences of differences are ordered in the following  $4 \times 16$  array such that every two consecutive columns have an identical subsequence of length 2.

```
0012232331111100
1111001120021123
0222333322130332
0210033222333000
```

Each sequence of differences is translated to a word of length 5, which is extended to an SDS of length 16. These SDSs are the columns of the following  $16 \times 16$  array. The top four rows in this array form the arrangement of the 16 SDSs to satisfy the conditions of Theorem 8. This arrangement leads to an STGC of length 4 and period 256.

```
0032211000000000
0000003331111100
1111000011132223
133333333222111
-----
1103322111111111
111111000222211
2222111122203330
2000000000333222
-----
2210033222222222
222221113333322
333322233310001
311111111000333
-----
332110033333333
3333332220000033
0000333300021112
022222222111000
```

The next step is to construct a maximum period STGC for words whose length is  $m^t$ , where  $t > 1$ . Such a recursive construction will be given when  $m$  is an odd prime. For such an arrangement, it is required that the arrangement described in Theorem 8 will have an additional property. For each  $i$ ,  $1 \leq i \leq n$ , there are two consecutive words in the list that differ in position  $i$ . Such a requirement can be guaranteed either by seeds for a recursive construction or by using the recursion. The recursive construction has several steps, and it is a modification for the construction of binary STGC of length  $2^t$  and period  $2^{t+1} - 2^{t+1}$  as was described in [9].

For example we consider  $m = 3$ , and construct the SDS  $[V, V + 1, V + 2]$  of period  $3^{n+1}$ , from the SDS  $[X, X + 1, X + 2]$ , where  $V = (Z, Z + Y, Z + 2Y + X)$ , as proved in Lemma 3. The words  $Z$  and  $Y$  are of length  $3^{n-1}$ , where  $Z$  is any word over  $\mathbb{Z}_3$  that starts with a *zero* and  $Y$  is any word over  $\mathbb{Z}_3$ .

When  $Z$  and  $Y$  are fixed, then for  $X$  we are using the component  $X$  from  $[X, X + 1, X + 2]$  of all the sequences of the STGC of length  $3^n$  and period  $3^{3^n}$ . The outcome is a component which will form an STGC of length  $3^{n+1}$  and period  $3^{3^n}$ .

The next step is more complicated, and in this step, we combine all the components into one maximum period STGC of length  $3^n$  and period  $3^{3^n}$ . For two components which share the same  $Z$  and differ in position  $i$  modulo  $n$  of  $Y$ , the  $X$ 's used will also differ in the  $i$ -th position in a way that the only part of  $V$  in which the two SDSs differ is in one coordinate of  $Z + Y$ .

If two components differ in the  $i$ -th position of  $Z$ , then the chosen  $Y$ 's will differ in the same coordinate in such a way that both sequences will have the same values in  $Z + Y$ . The chosen  $X$ 's might be the same or also differ in the  $i$ -th coordinate such that they will have the same value in  $Z + 2Y + X$  and they will only differ in one position in  $Z$  (in the part  $V = (Z, Z + Y, Z + 2Y + X)$ ).

The last step is to guarantee in this recursive construction that for each  $i$ ,  $1 \leq i \leq n$ , there are two consecutive words in the list that differ in position  $i$ . The details for this and the other steps of the long proof of correctness will be presented in the full version of this paper.

The same procedure will work for any given prime  $p$ , but the merging of the components will become more evolved. For example, when  $p = 5$  we will have to consider  $Z$ ,  $Y_1$ ,  $Y_2$ , and  $Y_3$  (see the discussion at the end of Section IV). Having the right seeds for  $p = 3$  and  $p = 5$ , an STGC of length  $p^t$  and period  $p^{p^t}$  was constructed for each  $t \geq 1$ .

## VI. CONCLUSION AND FUTURE WORK

Properties and recursive constructions of binary and non-binary SDSs were considered. The connection between these sequences and constructions of maximum period STGCs was described, and some guideline for the construction of such codes is given. The first nontrivial families of maximum period STGCs were presented. For lack of space, other properties and proofs for some of the results that are presented are omitted. These properties, proofs, and problems for future research will be discussed in the full version of this paper.

## REFERENCES

- [1] S. R. BLACKBURN, T. ETZION, AND K. G. PATERSON, *Permutation polynomials, de Bruijn sequences and linear complexity*, *J. of Combin. Theory, Ser. A*, 76 (1996) 55–82.
- [2] A. BORUCHOVSKY, T. ETZION, AND R. M. ROTH, *On nearly perfect covering codes*, *IEEE Trans. on Infor. Theory*, 71 (1984) 2494–2504.
- [3] Y. M. CHEE, T. ETZION, H. TA, AND V. K. VU, *Construction of covering sequences and 2D-sequences*, *Designs, Codes, and Crypto.*, doi.org/10.1007/s10623-025-01726-5.
- [4] T. ETZION, *Construction of de Bruijn sequences of minimal complexity, in Sequences, subsequences, and consequences*, of *Lecture Notes in Comp. Sci.*, 4893 (2007) 129–133.
- [5] T. ETZION AND A. LEMPEL, *Construction of de Bruijn sequences of minimal complexity*, *IEEE Trans. on Infor. Theory*, 30 (1984) 705–709.
- [6] T. ETZION, *Self-dual sequences*, *J. of Combin. Theory, Ser. A*, 44 (1987) 288–298.
- [7] T. ETZION, *Sequences and the de Bruijn Graph: Properties, Constructions, and Applications*, London, UK; San Diego, US, Cambridge, US: Elsevier, 2024.
- [8] T. ETZION, *On de Bruijn array codes – Part I: Nonlinear codes*, *IEEE Trans. on Infor. Theory*, 71 (2025) 1434–1449.
- [9] T. ETZION AND K. G. PATERSON, *Near optimal single-track Gray codes*, *IEEE Trans. on Infor. Theory*, 42 (1996) 779–789.
- [10] A. FAKHRI AND A. M. LIVANI, *A mixed-integer linear programming model for generating single-track Gray codes*, *IEEE Trans. Instrum. Meas.*, 72 (2023) 1–8.
- [11] S. W. GOLOMB, *Shift Register Sequences*, San Francisco, CA: Holden Day, 1967; 2nd revised edition, Laguna Hills, CA: Aegean Park, 1980; 3rd revised edition, World Scientific, Singapore 2017.
- [12] A. P. HILTGEN, K. G. PATERSON, AND M. BRANDESTINI, *Single-track Gray codes*, *IEEE Trans. on Infor. Theory*, 42 (1996) 1555–1561.
- [13] A. LEMPEL, *On a homomorphism of the de Bruijn graph and its applications to the design of feedback shift registers*, *IEEE Trans. Comput.*, 19 (1970) 1204–1209.
- [14] T. MÜTZE, *Combinatorial Gray codes — an updated survey*, *arxiv:2202.01280v3*.
- [15] W. QIU-HUA, W. YUAN-YUAN, S. YING, AND Y. SHOU-WANG, *A novel miniature absolute metal rotary encoder based on single-track periodic Gray code*, in *Proc. 2nd Int. Conf. Instrum., Meas., Comput., Commun. Control*, 18 (2012) 399–402.
- [16] M. SCHWARTZ AND T. ETZION, *The structure of single-track Gray codes*, *IEEE Trans. on Infor. Theory*, 45 (1999) 2383–2396.
- [17] A. E. WALKER, *Non-linear recursive sequences*, *Canad. J. Math.*, 11 (1959) 1204–1209.
- [18] S. Q. YAN, S. LIU, J. J. WANG, Y. H. LIU, Y. A. LIU, AND X. Y. ZHANG, *A low-power 8-bit spintronic rotary encoder with single-track Gray code based on spin-hall effect-driven domain wall motion*, *IEEE Trans. Magnetics*, 61 (2025).
- [19] F. ZHANG, H. ZHU, K. BIAN, P. LIU, AND J. ZHANG, *Absolute position coding method for angular sensor—single-track Gray code*, *Sensors*, 18 (2018).