

HybridFlow: Adaptive Task Scheduling for Fast and Token-Efficient LLM Inference in Edge-Cloud Collaboration

Jiangwen Dong¹ Jiayu Li² Wanyu Lin^{1,2}

Abstract

Large language models (LLMs) exhibit impressive reasoning and problem-solving abilities, yet their substantial inference latency and token consumption pose major challenges for real-time deployment on resource-limited edge devices. Recent efforts toward edge–cloud collaboration have attempted to mitigate this issue, but most existing methods adopt coarse-grained task allocation strategies—assigning entire queries either to the edge or the cloud. Such rigid partitioning fails to exploit fine-grained reasoning parallelism and often leads to redundant computation and inefficient resource utilization. To this end, we propose **HybridFlow**, a resource-adaptive inference framework that enables fast and token-efficient collaborative reasoning between edge and cloud LLMs. HybridFlow operates in two stages: (1) *task decomposition and parallel execution*, which dynamically splits a complex query into interdependent subtasks that can execute as soon as their dependencies are resolved; and (2) *resource-aware subtask routing*, where a learned router adaptively assigns each subtask to the edge or cloud model according to predicted utility gains and real-time budget states. Comprehensive evaluations on GPQA, MMLU-Pro, AIME, and LiveBench-Reasoning demonstrate that HybridFlow effectively reduces end-to-end inference time and overall token usage while maintaining competitive accuracy.

1. Introduction

Large language models (LLMs) have demonstrated exceptional capabilities in a wide range of tasks, particularly in domains requiring multi-step reasoning, complex decision-making, and problem-solving (Guo et al., 2025; Lin et al., 2025; Xiong et al., 2024; Yu et al., 2025). Their unprecedented scale allows them to generalize well across various domains, providing strong performance in tasks that demand deep reasoning and sophisticated knowledge.

To mitigate the high inference latency inherent in LLMs, recent approaches have introduced LLM-efficient reasoning methods (Ning et al., 2024; Jin et al., 2025). These methods typically decompose tasks into multiple subtasks and utilize fine-grained execution pipelines to accelerate inference, improving both speed and efficiency without significantly compromising performance.

However, the large scale and complexity of LLMs come with substantial drawbacks: high inference latency, significant memory consumption, and expensive API costs when accessed via the cloud (Yuan et al., 2025; Jiang et al., 2025). These limitations present serious challenges for latency-sensitive and resource-constrained applications, such as those running on mobile devices or edge devices, where the primary objective is to achieve the required accuracy under strict latency and cost constraints, rather than maximizing accuracy in isolation (Ye et al., 2025; Tian et al., 2025).

A natural response to this challenge is to replace LLMs with small models (SMs), which offer lower cost and faster response times due to their lightweight design, such as quantization and model distillation, making them suitable for on-device deployment (Wang et al., 2024a; Qu et al., 2025). However, the naive “SM-only” substitution is constrained by the limited parameter capacity of SMs, which impairs their ability to handle tasks that require deep reasoning or broad knowledge. Conversely, relying solely on cloud-LLM solutions reintroduces the high costs that edge devices seek to avoid. This presents a clear dilemma: how can we combine the strengths of both SMs and LLMs to achieve high accuracy within edge budgets?

The edge-cloud collaboration paradigm has emerged as a

¹Department of Data Science and Artificial Intelligence, The Hong Kong Polytechnic University, Hong Kong SAR, China

²Department of Computing, The Hong Kong Polytechnic University, Hong Kong SAR, China. Correspondence to: Wanyu Lin <wan-yu.lin@polyu.edu.hk>.

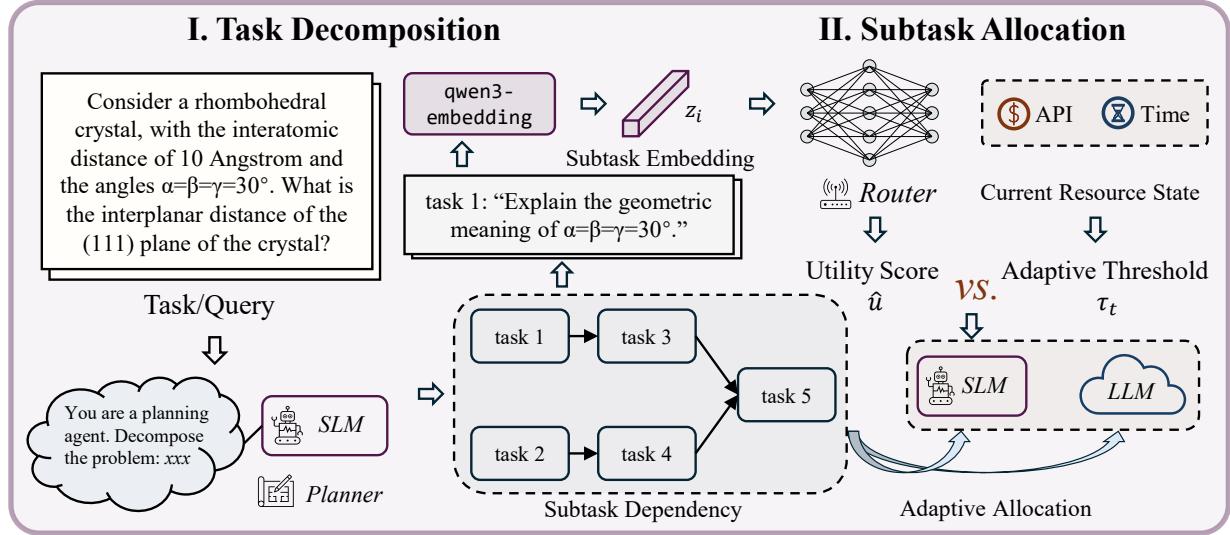


Figure 1. Overview of the **HybridFlow** framework. (I) *Task Decomposition*: The planner decomposes a complex query into a directed acyclic graph of subtasks with explicit dependencies. (II) *Subtask Allocation*: The router encodes each subtask with semantic and resource features, predicts its utility score considering quality, latency, and API cost, and adaptively allocates it to either the edge SLM or the cloud LLM for efficient collaboration.

promising solution, where SMs on the edge collaborate with LLMs in the cloud to balance cost, latency, and accuracy (Yuan et al., 2025; Akhauri et al., 2025). However, existing approaches often rely on coarse-grained task allocation based on predicted task difficulty, without considering real-time resource budgets or subtask interdependencies (Ding et al., 2024; Shao et al., 2025; Chen et al., 2024). This leads to a simplistic allocation of entire queries to either the edge or the cloud, missing opportunities for fine-grained parallelism within complex tasks.

This creates a research gap: *How can we design an edge-cloud collaboration framework that conducts adaptive, resource-aware task scheduling for fast and token-efficient reasoning on complex tasks?*

In this work, we propose **HybridFlow**, an adaptive and utility-based framework for efficient LLM inference. HybridFlow decomposes complex tasks into subtasks, represented as a dependency-aware directed acyclic graph (DAG), and routes these subtasks dynamically to either the edge or cloud models based on a learned benefit-cost utility router¹. This design enables efficient, resource-aware reasoning while optimizing for latency and token consumption under tight resource constraints.

In summary, our work makes the following contributions:

- We propose **HybridFlow**, a novel edge-cloud inference framework that decomposes tasks into multiple sub-

¹In other parts where there is no ambiguity, task and subtask are used interchangeably.

tasks as a DAG and enables fine-grained execution in an edge-cloud collaborative setup. This approach maximizes parallelism and improves inference efficiency.

- We introduce a resource-aware subtask routing mechanism, formulated as an optimization problem, that adaptively allocates each subtask to either the edge or the cloud model based on a benefit-cost utility router. This enables optimal resource usage while meeting latency and API budget constraints.
- We demonstrate the effectiveness of HybridFlow through extensive evaluations on four challenging reasoning benchmarks (GPQA, AIME24, LiveBench-Reasoning, and MMLU-Pro), showing that HybridFlow consistently reduces latency and cloud API costs while maintaining competitive accuracy compared to strong structured reasoning baselines.

2. Related Work

LLM Efficient Reasoning. Chain-of-thought prompting and its variants (Wei et al., 2022; Chen et al., 2025; Li et al., 2025a; Zhang et al., 2025b) improve reasoning accuracy but often increase inference costs due to multiple intermediate steps. Recent approaches, such as structured prompting and reasoning decomposition (Ning et al., 2024; Jin et al., 2025), aim to optimize efficiency by shortening reasoning paths or selectively allocating computation. However, these methods typically focus on optimizing reasoning within a single LLM and do not fully utilize the complementary roles of edge-deployed SMs. Our work fills this gap by

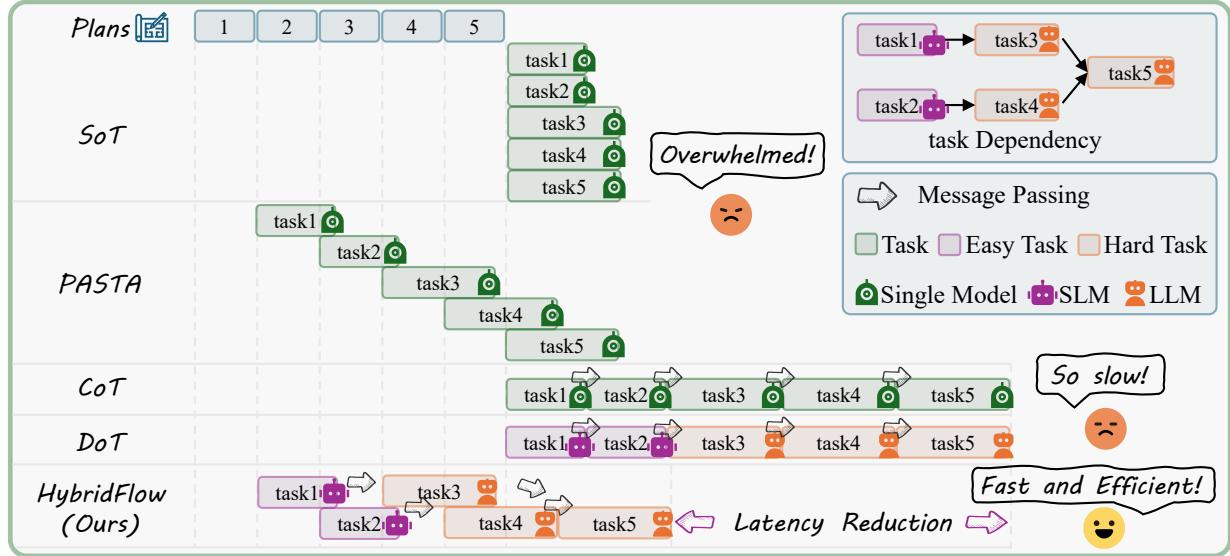


Figure 2. Overview of comparative LLM inference pipeline. **HybridFlow** uniquely integrates dependency-aware planning concurrently with parallel execution. This achieves an optimal balance between speed and reasoning quality by actively exploiting concurrent opportunities within a logically constrained workflow.

proposing a resource-aware collaboration framework that enables efficient reasoning through task decomposition and adaptive subtask allocation under strict latency and budget constraints.

LLM Edge-Cloud Collaboration Paradigms. The edge-cloud collaboration paradigm leverages the strengths of LLMs and smaller, more efficient models. Existing approaches explore delegation or cascade systems, where small models handle simple tasks and offload complex ones to LLMs, or use task decomposition followed by allocation (Wang et al., 2025; Akhauri et al., 2025; Li et al., 2025b; Ding et al., 2024; Shao et al., 2025). However, these methods often overlook resource-aware execution, particularly in optimizing subtask allocation across models. In contrast, our work introduces a resource-aware execution pipeline that dynamically assigns subtasks to edge or cloud models based on predicted utility, enabling more efficient and adaptive collaboration.

3. HybridFlow Framework

HybridFlow enables efficient edge–cloud collaborative inference by combining dependency-aware task planning with cost-aware routing. As illustrated in Fig. 1, the system has two tightly connected components. First, an edge-side planner decomposes a complex query into a set of interdependent subtasks and constructs a task-level DAG, enabling each subtask to execute as soon as its prerequisites are resolved. This exposes fine-grained parallelism and reduces wall-clock latency compared with strictly sequential reasoning. Second,

a resource-aware router assigns each subtask to either the edge model M_{edge} or the cloud LLM M_{cloud} based on its predicted utility and the system’s real-time budget status. By coupling decomposition with budget-constrained routing, HybridFlow explicitly balances accuracy and efficiency.

3.1. Problem Setting

We consider an edge–cloud inference setting in which a small edge model M_{edge} collaborates with a large cloud model M_{cloud} to solve a query Q . The query is decomposed into n subtasks $\{t_1, \dots, t_n\}$, each executable either on M_{edge} or on M_{cloud} . The routing decision for each subtask must trade off the accuracy benefit of using the cloud against its resource cost.

For each subtask t_i , we define:

- Δq_i : expected *accuracy gain* of executing t_i on the cloud instead of the edge;
- Δl_i : additional *latency cost* (in seconds) incurred by cloud execution;
- Δk_i : additional *API usage cost* (in tokens or price units) incurred by cloud execution.

In practice, Δq_i is estimated offline using automatic metrics such as BartScore (Yuan et al., 2021) by comparing cloud and edge outputs against references or high-quality pseudo-labels. This profiling is done once and does not affect online latency.

Algorithm 1 HybridFlow: Adaptive Task Planning and Resource-Aware Routing

Input: User query Q ; global API budget K_{\max}^{global} ; global latency budget L_{\max}^{global}

Output: Final response R

Stage 1: Task Decomposition

$T \leftarrow \text{Decompose}(Q; M_P)$

Construct DAG $G = (T, E)$ and initialize queue \mathcal{Q} with all dependency-free subtasks.

Stage 2: Resource-Aware Routing and Execution

Initialize resource usage $K_{\text{used}} = 0$, $L_{\text{used}} = 0$.

while \mathcal{Q} not empty **do**

 Pop subtask x from \mathcal{Q} .

 Obtain subtask embedding: $z(x) = \text{embedding}(x)$

 Predict utility score $\hat{u}(x) = f_{\theta}(z(x))$.

 Compute adaptive threshold τ_t from current resource usage.

if $\hat{u}(x) > \tau_t$ **then**

$R_x \leftarrow M_{\text{cloud}}(x);$ // Cloud execution
 Update K_{used} and L_{used} .

else

$R_x \leftarrow M_{\text{edge}}(x);$ // Edge execution
 Update L_{used} .

 Append R_x to global context and push newly unblocked subtasks into \mathcal{Q} .

Stage 3: Final Aggregation

Combine all sub-results in topological order to form R .

return R

To place latency and API usage on a common scale, we define a normalized offloading cost.

Definition 3.1 (Normalized Cost). For each subtask t_i , the normalized cost of offloading is

$$c_i = \text{clip}\left(\left(\frac{\Delta l_i}{l_{\max}^{\text{sub}}} + \frac{\Delta k_i}{k_{\max}^{\text{sub}}}\right)/2, 0, 1\right) \in [0, 1], \quad (1)$$

where l_{\max}^{sub} and k_{\max}^{sub} are per-subtask upper bounds on additional latency and API cost. Typically $\Delta l_i \leq l_{\max}^{\text{sub}}$ and $\Delta k_i \leq k_{\max}^{\text{sub}}$, so c_i is bounded and comparable across subtasks.

We use a binary variable $r_i \in \{0, 1\}$ to indicate whether t_i is offloaded to the cloud ($r_i = 1$) or executed on the edge ($r_i = 0$). Intuitively, subtasks with larger Δq_i and smaller c_i are more attractive to offload.

Definition 3.2 (Utility). The *utility* of offloading subtask t_i is the normalized benefit–cost ratio

$$u_i = \text{clip}\left(\frac{\Delta q_i}{c_i + \varepsilon}, 0, 1\right), \quad (2)$$

where $\varepsilon > 0$ is a small constant (e.g., 10^{-4}) for numerical stability and $\text{clip}(\cdot, 0, 1)$ truncates the value to $[0, 1]$. Conceptually, u_i measures the accuracy improvement per unit

normalized resource cost and serves as the ideal offloading score.

Knapsack Formulation. Using these quantities, subtask allocation can be written as a resource-constrained optimization problem. Let $\mathbf{r} = (r_1, \dots, r_n)$ denote the allocation vector. We seek to maximize the total accuracy gain under a normalized resource budget:

$$\max_{\mathbf{r} \in \{0,1\}^n} \sum_{i=1}^n r_i \Delta q_i \quad \text{s.t.} \quad \sum_{i=1}^n r_i c_i \leq C_{\max}, \quad (3)$$

where C_{\max} is the total normalized budget per query. This is exactly a 0–1 knapsack problem: each subtask is an item with value Δq_i and weight c_i under capacity C_{\max} . Viewed through Def. 3.2, an ideal solution prefers subtasks with high utility u_i until the budget is exhausted.

Lagrangian Relaxation. To analyze the structure of this problem, we consider its Lagrangian relaxation. Introducing a Lagrange multiplier $\lambda \geq 0$ for the budget constraint,

$$\mathcal{L}(\mathbf{r}, \lambda) = \sum_{i=1}^n r_i \Delta q_i - \lambda \left(\sum_{i=1}^n r_i c_i - C_{\max} \right) \quad (4)$$

$$= \lambda C_{\max} + \sum_{i=1}^n r_i (\Delta q_i - \lambda c_i). \quad (5)$$

For fixed λ , the relaxed problem decouples across subtasks, and the optimal decision is

$$r_i^*(\lambda) = \arg \max_{r_i \in \{0,1\}} r_i (\Delta q_i - \lambda c_i) \quad (6)$$

$$= \mathbb{I}[\Delta q_i - \lambda c_i > 0] = \mathbb{I}\left[\frac{\Delta q_i}{c_i} > \lambda\right], \quad (7)$$

where $\mathbb{I}[\cdot]$ is the indicator function. Thus, the relaxed optimal policy is a simple *threshold rule*: offload subtasks whose benefit–cost ratio $\Delta q_i/c_i$ exceeds the shadow price λ of resource consumption. In terms of the normalized utility u_i , this corresponds to thresholding u_i at a monotone transform of λ .

Primal–Dual Interpretation. In an online setting, subtasks become available as their dependencies are resolved, and the effective shadow price should adapt to cumulative resource consumption. A standard primal–dual perspective maintains a dual variable λ_t and performs a projected subgradient update on the budget constraint:

$$\lambda_{t+1} = [\lambda_t + \eta (C_{\text{used}} - C_{\max})]_+, \quad (8)$$

where $\eta > 0$ is a step size, C_{used} is the normalized cost used so far, and $[\cdot]_+$ denotes projection onto $[0, \infty)$. As resources are consumed, λ_t increases and the policy becomes more

conservative; when usage is low, λ_t remains small and more subtasks are offloaded.

HybridFlow does not explicitly optimize λ_t during inference, but this analysis motivates the design in Sec. 3.3: we approximate the relaxed Lagrangian policy in Eq. (6) by (i) learning utilities \hat{u}_i that approximate u_i , and (ii) using an adaptive threshold τ_t as a normalized proxy for the dual variable. We also distinguish per-subtask normalization constants $(l_{\max}^{\text{sub}}, k_{\max}^{\text{sub}})$ in Eq. (1) from global budgets $(L_{\max}^{\text{global}}, K_{\max}^{\text{global}})$ that track cumulative latency and API usage over the entire query (see Eq. (13)).

3.2. Task Decomposition and Execution Pipeline

Effective task decomposition forms the backbone of HybridFlow, as it determines both the logical structure and the degree of parallelism in the inference pipeline. Given a query Q , the planner must identify meaningful subtasks and their dependencies so that reasoning remains coherent while supporting concurrent execution on edge and cloud workers. As illustrated in Fig. 2, existing frameworks typically sit at two extremes: approaches such as Skeleton-of-Thought (SoT) (Ning et al., 2024) and PASTA (Jin et al., 2025) aggressively parallelize steps with limited regard for dependencies, while Chain-of-Thought (CoT) (Wei et al., 2022) and Division-of-Thoughts (DoT) (Shao et al., 2025) enforce strictly sequential execution, preserving correctness but incurring high latency.

HybridFlow sidesteps this dilemma by explicitly modeling dependencies while still exploiting available parallelism. We leverage an edge-deployed planner M_P and elicit its behavior with an Explain–Analyze–Generate (EAG) metaprompt (Gu et al., 2025). The prompt guides M_P through three stages: (i) identifying key elements of the query, (ii) analyzing and breaking the query into interrelated subtasks, and (iii) generating a structured representation of the overall solution plan. To make this process robust, we curate high-quality exemplars by evaluating multiple models on 100 queries from s1k (Muennighoff et al., 2025) and selecting examples that exhibit strong logical grounding, clear dependency structure, and substantial parallelization. These exemplars are used as few-shot demonstrations in the planner’s context.

Formally, we write the decomposition process as

$$(T, E) = \text{Decompose}(Q; M_P), \quad (9)$$

where $T = \{t_1, \dots, t_n\}$ is the set of subtasks and $E \subseteq T \times T$ encodes directed prerequisite relations. In practice, M_P outputs an XML-formatted plan whose parent fields are parsed into a task-level DAG $G(Q) = (T, E)$. A scheduler maintains a queue of *ready* subtasks whose parents have completed and dispatches them immediately to either M_{edge} or M_{cloud} according to the routing policy in Sec. 3.3. This

design preserves the explicit dependencies that underpin reliable reasoning while allowing independent subtasks to proceed in parallel, reducing end-to-end latency compared with purely sequential execution. See prompts in Figure 6.

3.3. Utility-based Subtask Routing

The router decides whether to assign a subtask to M_{cloud} by estimating the utility of offloading to the cloud. This mechanism operationalizes the objective in Eq. (3) while accounting for real-time resource usage, acting as a lightweight learned approximation to the 0–1 knapsack problem. Additional optimization details are given in Appendix B.

Utility Estimation. Each subtask t_i is encoded into a semantic embedding z_i using the qwen3-embedding-0.6b model (Zhang et al., 2025a). A lightweight multilayer perceptron (MLP) computes a normalized estimated utility

$$\hat{u}_i = \sigma(f_{\theta}(z_i)) \in (0, 1), \quad (10)$$

where σ is the sigmoid function. The estimate \hat{u}_i is trained to approximate the true utility u_i in Def. 3.2, and thus represents the router’s belief about the benefit–cost desirability of offloading t_i .

Router Training. Supervision is derived by profiling subtasks on both edge and cloud models. The observed accuracy gain Δq_i and normalized cost c_i define the utility target u_i via Def. 3.2. The router is trained with MSE:

$$\mathcal{L}(\theta) = \frac{1}{N} \sum_{i=1}^N (\hat{u}_i - u_i)^2. \quad (11)$$

This amortizes offline profiling into a fast online decision.

Adaptive Thresholding. At inference time, the router compares the predicted utility with an adaptive threshold:

$$r_i = \begin{cases} 1, & \hat{u}_i > \tau_t, \\ 0, & \text{otherwise,} \end{cases} \quad (12)$$

where r_i indicates whether t_i is offloaded to M_{cloud} . The threshold depends on current resource usage:

$$\tau_t = \text{clip}\left(\tau_0 + \frac{k_{\text{used}}}{2K_{\max}^{\text{global}}} + \frac{l_{\text{used}}}{2L_{\max}^{\text{global}}}, 0, 1\right), \quad (13)$$

where τ_0 is a base threshold, k_{used} and l_{used} are the API and latency consumed so far, and K_{\max}^{global} and L_{\max}^{global} are global budgets. As usage grows, τ_t increases and the policy becomes more conservative; when resources are plentiful, τ_t remains low, allowing more offloading.

From the perspective of Sec. 3.1, τ_t plays the role of a normalized *shadow price* for resources, analogous to the dual variable λ_t in Eq. (8). The routing rule

$$r_i = \mathbb{I}[\hat{u}_i > \tau_t]$$

thus serves as an online approximation to the relaxed Lagrangian policy in Eq. (6), implemented via learned utilities and simple budget statistics ($k_{\text{used}}, l_{\text{used}}$).

In summary, HybridFlow formulates edge–cloud collaboration as a utility-driven allocation problem over decomposed subtasks: a dependency-aware planner constructs a task-level DAG, and a learned router approximately solves the knapsack-style allocation in Eq. (3) under global budget constraints. The framework jointly leverages fine-grained parallelism and adaptive thresholding to achieve a favorable balance between accuracy and efficiency. We summarize the notations in Table 4 and outline the full procedure in Algorithm 1.

4. Experiments

4.1. Experiment Setup

Benchmarks. We evaluate **HybridFlow** on four complementary reasoning benchmarks spanning mathematical, scientific, and general domains. *GPQA* (Rein et al., 2024) is a graduate-level scientific QA benchmark requiring deep technical reasoning. *AIME24* contains competition-level math problems that demand symbolic manipulation and multi-step deduction. *MMLU-Pro* (Wang et al., 2024b), an advanced variant of MMLU (Hendrycks et al., 2021), covers 14 college-level subjects to assess broad-domain conceptual reasoning. *LiveBench-Reasoning* (White et al., 2025) introduces real-world distribution shifts, allowing us to evaluate HybridFlow’s robustness and adaptability.

Baselines. We compare **HybridFlow** with representative methods from single-model and edge–cloud collaborative paradigms, as well as a direct prompting baseline. Among single-model approaches, *Chain-of-Thought (CoT)* (Wei et al., 2022) improves multi-step reasoning through intermediate steps, while *Skeleton-of-Thought (SoT)* (Ning et al., 2024) accelerates inference via high-level skeleton generation and parallel expansion. *PASTA* (Jin et al., 2025) enables concurrent generation with asynchronous decoding but may sacrifice reasoning fidelity. For collaborative inference, *HybridLLM* (Ding et al., 2024) routes queries to either the edge or cloud model based on predicted difficulty, optimizing cost and quality. *Division-of-Thought (DoT)* (Shao et al., 2025) decomposes tasks on the edge, assigning subtasks via a difficulty predictor, though it still relies on sequential execution. These baselines represent the key strategies for improving LLM efficiency, providing a comprehensive comparison to HybridFlow’s fine-grained, adaptive routing.

Metrics. We evaluate our framework using three complementary metrics that jointly capture reasoning quality and system efficiency. (i) Acc measures the correctness of reasoning by comparing model outputs with gold answers across all benchmarks. (ii) C_{time} denotes the end-to-end inference latency per query, including decomposition, routing, and execution. (iii) C_{API} quantifies the number of tokens consumed by cloud LLM calls, reflecting token efficiency and cost. Together, these metrics provide a holistic assessment of both performance and resource utilization

Implementation Details. HybridFlow uses a single small model, *Llama3.2-3B*, on the edge device to serve two roles: (i) as the *planner* M_P , which decomposes the input query into a DAG of subtasks, and (ii) as the *edge executor* M_{edge} , which processes subtasks that are not offloaded. Each subtask is encoded into a semantic vector using the pretrained embedding model *qwen3-embedding-0.6b*, and this embedding is fed into the *router*, a lightweight MLP with two hidden layers (approximately 67M parameters) that predicts an offloading utility. The router is trained offline using AdamW (learning rate 1×10^{-4}) to regress onto profiled utility targets. During inference, the router combines its predicted utilities with an adaptive threshold to allocate each subtask to either M_{edge} or the *cloud model* M_{cloud} (GPT-4.1, accessed via API). All edge-side computations, including planning, local execution, and embedding, run on a single NVIDIA RTX 3090 GPU (24GB). All language models operate at a fixed temperature of 0.6 to balance generation diversity and stability.

4.2. Results

Tables 1 and 2 report the accuracy and efficiency of HybridFlow compared with representative single-model and edge–cloud collaborative baselines across GPQA, MMLU-Pro, AIME24, and LiveBench-Reasoning. In Table 1, **bold** highlights the best performance and underline denotes the second-best among all non-Prompt baselines. The same convention applies to Table 2, where lower values of C_{time} and C_{API} indicate better efficiency. Direct Prompt results are shaded and excluded from ranking.

Task decomposition enhances multi-step reasoning performance. Across all benchmarks, methods that explicitly decompose tasks into structured intermediate steps show clear advantages over direct prompting. As shown in Table 1, CoT with GPT-4.1 attains the highest overall accuracy among non-Prompt methods (**58.99%**), confirming the strong benefits of stepwise reasoning. HybridFlow closely follows with an average accuracy of 55.34%, outperforming SoT and PASTA variants while remaining competitive with the strongest single-model reasoning approach. This demonstrates that HybridFlow’s planner produces decomposition

Table 1. Accuracy (%), mean \pm std of HybridFlow and baseline methods across four reasoning benchmarks. Bold denotes the highest accuracy and underline indicates the second-highest among all non-Prompt baselines. Direct Prompt results (shaded) are reference single-model baselines and are excluded from ranking. HybridFlow achieves competitive accuracy while operating under edge–cloud collaboration constraints.

Method	Model	GPQA	MMLU-Pro	AIME24	LiveBench-Reasoning	Avg. (\uparrow)
Direct Prompt	L3B	16.89 \pm 1.05	22.83 \pm 1.31	4.44 \pm 1.57	12 \pm 2.86	14.04
Direct Prompt	G4.1	51.79 \pm 1.17	65.5 \pm 1.47	37.78 \pm 1.57	58.25 \pm 0.75	53.33
CoT (Wei et al., 2022)	L3B	25.54 \pm 1.57	31.67 \pm 0.85	5.56 \pm 1.57	15.6 \pm 1.93	19.59
CoT	G4.1	57.28\pm0.73	72 \pm 0.71	44.42\pm1.59	62.25\pm0.75	58.99
SoT (Ning et al., 2024)	L3B	30.24 \pm 0.34	31.67 \pm 2.87	1.11 \pm 1.57	17.33 \pm 1.89	20.09
SoT	G4.1	<u>56.4\pm0.99</u>	71.8 \pm 1.03	28.89 \pm 1.57	54.5 \pm 1.08	52.90
PASTA (Jin et al., 2025)	L3B	28.67 \pm 2.83	25.84 \pm 2.65	2.22 \pm 1.92	14.75 \pm 1.02	17.87
PASTA	G4.1	41.28 \pm 2.87	75.52\pm1.77	32.1 \pm 1.57	33.33 \pm 1.62	45.56
HybridLLM (Ding et al., 2024)	L3B&G4.1	52.9 \pm 0.94	43 \pm 0.82	22.22 \pm 1.57	36.67 \pm 0.62	38.70
DoT (Shao et al., 2025)	L3B&G4.1	50.54 \pm 3.04	66 \pm 1.63	21.11 \pm 3.14	48.33 \pm 1.89	46.50
HybridFlow (Ours)	L3B&G4.1	53.33 \pm 2.03	<u>72.54\pm0.65</u>	<u>36.67\pm1.57</u>	<u>58.83\pm1.48</u>	<u>55.34</u>

structures that are not only logically aligned with the tasks but also highly executable by collaborating edge and cloud models.

Parallel execution substantially reduces end-to-end latency. HybridFlow’s dependency-aware DAG planning enables fine-grained concurrency during subtask execution. This design significantly reduces wall-clock latency compared to sequential or coarse-grained hybrid pipelines. As reported in Table 2, HybridFlow achieves an average C_{time} of 17.48 s, outperforming HybridLLM (24.45 s) by a large margin and even improving over the sequentially constrained DoT baseline (18.32 s). These results confirm that exploiting parallelism within logically valid execution windows can effectively offset the overhead of multi-step reasoning, leading to faster and more responsive inference.

HybridFlow delivers the best accuracy–efficiency trade-off. While HybridFlow’s accuracy approaches the top-performing CoT with GPT-4.1, it does so with dramatically lower token consumption and latency. Table 2 shows that HybridFlow achieves the lowest average C_{API} (**0.0088**) among all collaborative baselines, indicating high token efficiency in cloud usage. When considering both accuracy and efficiency jointly, HybridFlow consistently dominates alternative hybrid systems: it improves accuracy relative to HybridLLM and DoT while simultaneously reducing latency and API cost. This demonstrates that HybridFlow effectively balances the strengths of edge and cloud models through adaptive routing and parallelized task execution, achieving a superior overall accuracy–efficiency frontier.

4.3. Ablation Study

In this section, we conduct a series of ablation studies to validate the effectiveness of the resource-aware allocation

mechanism of the Router. Our goal is to demonstrate that it is crucial for achieving a balance between latency, cost, and performance.

Router for Subtask Allocation. We evaluate the effectiveness of the proposed **resource-aware router** by comparing it against several deterministic and naive allocation strategies. As shown in Table 3, the results reveal a clear trade-off between accuracy and resource cost. Using only the edge model (*Edge*) yields the lowest accuracy (25.54%) but incurs zero API cost, while delegating all subtasks to the cloud model (*Cloud*) achieves the highest accuracy (57.28%) at the expense of higher latency and API cost ($C_{\text{API}}=0.0185$). A random assignment baseline (*Random*) moderately improves accuracy (46.00%) by occasionally leveraging the cloud model but still wastes resources and fails to adapt to budget constraints. In contrast, our proposed *HybridFlow* router achieves 53.33% accuracy with a comparable API cost ($C_{\text{API}}=0.0075$), demonstrating its ability to intelligently allocate subtasks according to their benefit–cost ratio. This shows that the learned router effectively captures the trade-off between reasoning quality and resource expenditure, achieving near-optimal performance under tight cost budgets.

Offload Ratio between Edge and Cloud. To further investigate the router’s allocation behavior within a single reasoning process, we record the number of subtasks executed on the edge and in the cloud at each subtask position. As illustrated in Figure 3, the offload pattern is highly structured rather than uniform across positions. For the first few subtasks, when the adaptive threshold is low and the resource budget is still largely unused, the router frequently offloads to the cloud, reflecting a preference to invest cloud capacity in early, semantically complex steps that shape the overall solution. As the reasoning progresses, the threshold

Table 2. Efficiency comparison of HybridFlow and baselines on four reasoning benchmarks. Lower values indicate better efficiency for both end-to-end inference time (C_{time} , in seconds) and cloud API cost (C_{API}). Bold denotes the best and underline marks the second-best performance among edge–cloud collaboration baselines. Direct Prompt rows (shaded) serve as reference points and are excluded from ranking. HybridFlow consistently improves latency and cloud usage through dependency-aware parallel execution and adaptive routing.

Method	Model	Metric	GPQA	MMLU-Pro	AIME24	LiveBench-Reasoning	Avg. (↓)
Direct Prompt	L3B	C_{time}	6.61 ± 0.50	7.03 ± 0.64	9.92 ± 1.51	13.34 ± 0.40	9.23
Direct Prompt	G4.1	C_{time}	15.26 ± 1.85	11.77 ± 0.18	50.44 ± 1.64	36.77 ± 1.61	28.56
Direct Prompt	L3B	C_{API}	–	–	–	–	–
Direct Prompt	G4.1	C_{API}	0.0094	0.0060	0.0256	0.0181	0.0148
CoT (Wei et al., 2022)	L3B	C_{time}	11.99 ± 0.25	10.87 ± 0.45	22.76 ± 4.78	14.00 ± 0.17	14.91
CoT	L3B	C_{API}	–	–	–	–	–
CoT	G4.1	C_{time}	18.26 ± 2.49	19.35 ± 0.22	56.70 ± 2.66	29.77 ± 0.79	31.02
CoT	G4.1	C_{API}	0.0185	0.0115	0.0445	0.0330	0.0269
SoT (Ning et al., 2024)	L3B	C_{time}	18.55 ± 0.31	10.95 ± 0.48	15.20 ± 0.85	14.61 ± 0.78	14.83
SoT	L3B	C_{API}	–	–	–	–	–
SoT	G4.1	C_{time}	16.27 ± 1.57	11.43 ± 0.03	29.52 ± 0.56	20.87 ± 0.81	19.52
SoT	G4.1	C_{API}	0.0154	0.0095	0.0328	0.0206	0.0196
PASTA (Jin et al., 2025)	L3B	C_{time}	8.77 ± 1.19	14.15 ± 0.68	12.43 ± 1.24	15.65 ± 0.58	12.75
PASTA	L3B	C_{API}	–	–	–	–	–
PASTA	G4.1	C_{time}	12.21 ± 1.72	8.76 ± 0.76	21.37 ± 1.65	19.14 ± 1.29	15.37
PASTA	G4.1	C_{API}	0.0262	0.0179	0.0474	0.0338	0.0313
HybridLLM (Ding et al., 2024)	L3B&G4.1	C_{time}	15.96 ± 1.74	14.90 ± 0.40	40.11 ± 2.25	26.82 ± 1.65	24.45
HybridLLM	L3B&G4.1	C_{API}	0.0160	0.0050	0.0168	0.0135	0.0128
DoT (Shao et al., 2025)	L3B&G4.1	C_{time}	15.79 ± 0.67	11.00 ± 0.45	29.91 ± 2.50	16.59 ± 0.80	<u>18.32</u>
DoT	L3B&G4.1	C_{API}	<u>0.0078</u>	0.0056	<u>0.0138</u>	0.0087	<u>0.009</u>
HybridFlow (Ours)	L3B&G4.1	C_{time}	15.24 ± 0.30	11.85 ± 0.38	26.40 ± 1.54	16.41 ± 0.59	17.48
HybridFlow (Ours)	L3B&G4.1	C_{API}	0.0075	<u>0.0052</u>	0.0135	<u>0.0091</u>	0.0088

Table 3. Ablation of routing strategies on GPQA. We compare offload rate, accuracy, latency, API cost, normalized total cost, and utility (see Sec. 3 for definitions). HybridFlow achieves the best trade-off between accuracy and cost, the highest utility score.

Method	Offload Rate (%)	Accuracy (%)	Latency (s)	API Cost (\$)	Norm. Cost c (↓)	Utility u (↑)
Edge (Llama3.2-3B)	0	25.54	11.99	0	–	–
Cloud (GPT-4.1)	100	57.28	18.26	0.0185	0.7760	0.4090
Random (Llama3.2-3B + GPT-4.1)	42.1	46.00	15.15	0.0075	0.3455	0.5922
Fixed Threshold ($\tau_0 = 0.5$)	41.18	51.62	15.88	0.0088	0.4145	0.6292
HybridFlow (Ours)	40.48	53.33	15.24	0.0075	0.3500	0.7940

steadily increases, and we observe a clear shift: later sub-tasks are predominantly executed on the edge, with very few cloud calls once the threshold saturates. At the same time, the absolute number of subtasks also decreases at deeper positions, indicating that most plans resolve the main reasoning bottlenecks early. Together, these trends confirm that HybridFlow does not offload subtasks indiscriminately, but instead allocates cloud resources to earlier, high-impact steps and relies on the edge model for downstream, lower-utility subtasks as the budget tightens.

Effect of Fixed Offload Thresholds. To further analyze the router’s behavior, we vary the fixed base threshold τ_0 in Eq. 13 (without dynamic resource adaptation) and measure its effect on accuracy, cost, and efficiency. As shown in

Figure 4 and Table 5, increasing τ_0 makes the router more conservative, progressively reducing both offload rate and normalized cost (from 100% and 0.92 at $\tau_0=0$ to nearly 0 at $\tau_0=1$), while accuracy decreases smoothly from 57.28% to 25.54%. This monotonic trend indicates that the router’s predicted utility scores $\hat{u}_i \in [0, 1]$ are well aligned with the normalized cost scale $c_i \in [0, 1]$, ensuring coherent decision boundaries across thresholds.

Interestingly, the benefit–cost ratio (purple curve) peaks around $\tau_0=0.5$, corresponding to the most balanced regime where accuracy ($\approx 52.61\%$) is maintained at roughly half the total cost ($c=0.45$). As also shown in Table 3, our HybridFlow achieves an even higher benefit–cost ratio (0.6294), indicating that moderate thresholds yield the most efficient trade-off. Overall, the fixed-threshold analysis confirms that

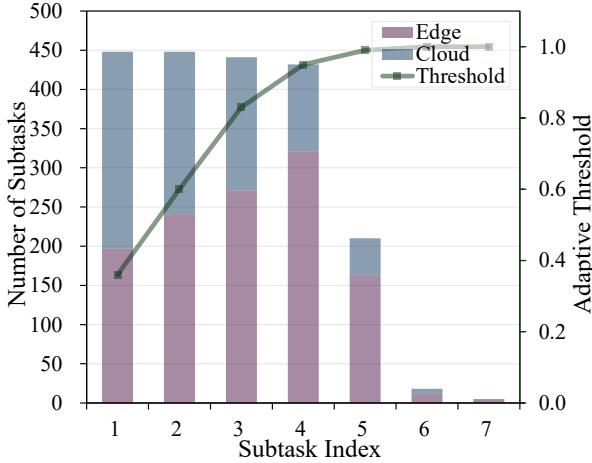


Figure 3. Distribution of executed subtasks between the edge and cloud models across subtask positions on GPQA. Bars show the number of subtasks executed on the edge (purple) and on the cloud (blue) at each subtask index, and the line shows the average adaptive threshold at that position.

the router’s normalized benefit–cost predictions are coherent and interpretable, producing stable and efficient allocations while avoiding the extremes of excessive offloading or underutilization.

5. Conclusion

In this paper, we introduce **HybridFlow**, a resource-adaptive inference framework that formulates fast, token-efficient collaborative reasoning as a sequential decision process. By decomposing complex queries into a dependency-aware DAG, HybridFlow optimizes the reasoning path and facilitates parallel subtask execution. Our resource-aware subtask router, which moves beyond rigid, coarse-grained allocation, enables HybridFlow to adaptively assign subtasks to edge or cloud resources. This process allows the framework to achieve superior performance while balancing inference time, token usage, and real-time budget states. On comprehensive evaluations including GPQA, MMLU-Pro, AIME, and LiveBench-Reasoning, HybridFlow effectively outperforms sequential and coarse-grained baselines, demonstrating significant reductions in both end-to-end latency and overall token consumption. These results demonstrate the promise of our adaptive, parallel-aware routing framework for orchestrating efficient edge-cloud AI.

References

Akhauri, Y., Fei, A., Chang, C.-C., AbouElhamayed, A. F., Li, Y., and Abdelfattah, M. S. Splitreason: Learning to offload reasoning, 2025. URL <https://arxiv.org/abs/2504.16379>.

Chen, D., Zhuang, Y., Zhang, S., Liu, J., Dong, S., and Tang,

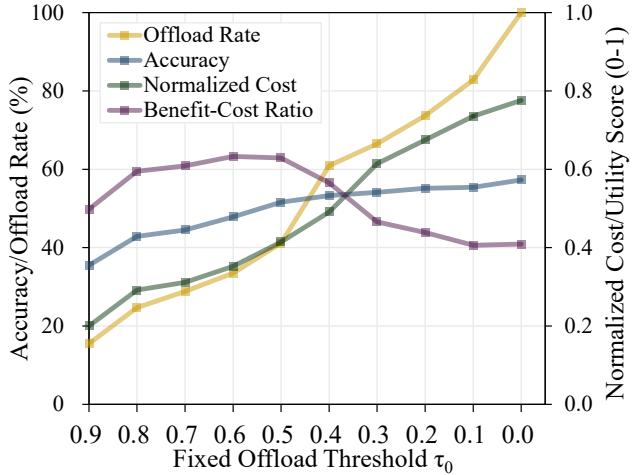


Figure 4. Performance–cost trends under different fixed offload thresholds τ_0 on the GPQA benchmark. Increasing τ_0 makes the router more conservative, leading to lower offload rate and cost but gradually reducing accuracy.

S. Data shunt: Collaboration of small and large models for lower costs and better performance. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp. 11249–11257, 2024.

Chen, Q., Qin, L., Liu, J., Peng, D., Guan, J., Wang, P., Hu, M., Zhou, Y., Gao, T., and Che, W. Towards reasoning era: A survey of long chain-of-thought for reasoning large language models. *arXiv preprint arXiv:2503.09567*, 2025.

Ding, D., Mallick, A., Wang, C., Sim, R., Mukherjee, S., Rühle, V., Lakshmanan, L. V. S., and Awadallah, A. H. Hybrid LLM: Cost-efficient and quality-aware query routing. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=02f3mUtqnM>.

Gu, W., Han, J., Wang, H., Li, X., and Cheng, B. Explain-analyze-generate: A sequential multi-agent collaboration method for complex reasoning. In Rambow, O., Wanner, L., Apidianaki, M., Al-Khalifa, H., Eugenio, B. D., and Schockaert, S. (eds.), *Proceedings of the 31st International Conference on Computational Linguistics*, pp. 7127–7140, Abu Dhabi, UAE, January 2025. Association for Computational Linguistics. URL <https://aclanthology.org/2025.coling-main.475/>.

Guo, M.-H., Xu, J., Zhang, Y., Song, J., Peng, H., Deng, Y.-X., Dong, X., Nakayama, K., Geng, Z., Wang, C., Ni, B., Yang, G.-W., Rao, Y., Peng, H., Hu, H., Wetzstein, G., and min Hu, S. RBench: Graduate-level multi-disciplinary benchmarks for LLM & MLLM complex reasoning eval-

uation. In *Forty-second International Conference on Machine Learning*, 2025.

Hendrycks, D., Burns, C., Basart, S., Zou, A., Mazeika, M., Song, D., and Steinhardt, J. Measuring massive multitask language understanding. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=d7KBjmI3GmQ>.

Jiang, Y., Fu, F., Yao, X., Wang, T., Cui, B., Klimovic, A., and Yoneki, E. Thunderserve: High-performance and cost-efficient llm serving in cloud environments. *arXiv preprint arXiv:2502.09334*, 2025.

Jin, T., Cheng, E. Y., Ankner, Z., Saunshi, N., Elias, B. M., Yazdanbakhsh, A., Ragan-Kelley, J., Subramanian, S., and Carbin, M. Learning to keep a promise: Scaling language model decoding parallelism with learned asynchronous decoding. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=ZfX43ZZRZR>.

Li, J., Li, G., Li, Y., and Jin, Z. Structured chain-of-thought prompting for code generation. *ACM Transactions on Software Engineering and Methodology*, 34(2): 1–23, 2025a.

Li, S., Raghuram, V. C., Khattab, O., Hirschberg, J., and Yu, Z. Papillon: Privacy preservation from internet-based and local language model ensembles. In *North American Chapter of the Association for Computational Linguistics*, 2024. URL <https://api.semanticscholar.org/CorpusID:273507551>.

Li, S., Raghuram, V. C., Khattab, O., Hirschberg, J., and Yu, Z. PAPILLON: Privacy preservation from Internet-based and local language model ensembles. In Chiruzzo, L., Ritter, A., and Wang, L. (eds.), *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 3371–3390, Albuquerque, New Mexico, April 2025b. Association for Computational Linguistics. ISBN 979-8-89176-189-6. doi: 10.18653/v1/2025.nacl-long.173. URL <https://aclanthology.org/2025.nacl-long.173/>.

Lin, H., Wang, X., Yan, R., Huang, B., Ye, H., Zhu, J., Wang, Z., Zou, J., Ma, J., and Liang, Y. Generative evaluation of complex reasoning in large language models. *arXiv preprint arXiv:2504.02810*, 2025.

Meta AI. Introducing meta llama 3: The most capable openly available llm to date. <https://ai.meta.com/blog/meta-llama-3/>, April 2024. Accessed: 2025-09-24.

Muennighoff, N., Yang, Z., Shi, W., Li, X. L., Li, F.-F., Hajishirzi, H., Zettlemoyer, L. S., Liang, P., Candès, E. J., and Hashimoto, T. s1: Simple test-time scaling. *ArXiv*, abs/2501.19393, 2025. URL <https://api.semanticscholar.org/CorpusID:276079693>.

Ning, X., Lin, Z., Zhou, Z., Wang, Z., Yang, H., and Wang, Y. Skeleton-of-thought: Prompting LLMs for efficient parallel generation. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=mcVgBbNCm9>.

OpenAI. Introducing gpt-5. <https://openai.com/index/introducing-gpt-5/>, August 2025. Accessed: 2025-09-24.

Qu, G., Chen, Q., Wei, W., Lin, Z., Chen, X., and Huang, K. Mobile edge intelligence for large language models: A contemporary survey. *IEEE Communications Surveys & Tutorials*, 2025.

Rein, D., Hou, B. L., Stickland, A. C., Petty, J., Pang, R. Y., Dirani, J., Michael, J., and Bowman, S. R. Gpqa: A graduate-level google-proof q&a benchmark. In *First Conference on Language Modeling*, 2024.

Shao, C., Hu, X., Lin, Y., and Xu, F. Division-of-thoughts: Harnessing hybrid language model synergy for efficient on-device agents. In *Proceedings of the ACM on Web Conference 2025*, pp. 1822–1833, 2025.

Tian, C., Qin, X., Tam, K., Li, L., Wang, Z., Zhao, Y., Zhang, M., and Xu, C. Clone: Customizing llms for efficient latency-aware inference at the edge. *arXiv preprint arXiv:2506.02847*, 2025.

Wang, F., Zhang, Z., Zhang, X., Wu, Z., Mo, T., Lu, Q., Wang, W., Li, R., Xu, J., Tang, X., et al. A comprehensive survey of small language models in the era of large language models: Techniques, enhancements, applications, collaboration with llms, and trustworthiness. *arXiv preprint arXiv:2411.03350*, 2024a.

Wang, S., Tan, Z., Chen, Z., Zhou, S., Chen, T., and Li, J. Anymac: Cascading flexible multi-agent collaboration via next-agent prediction. *arXiv preprint arXiv:2506.17784*, 2025.

Wang, Y., Ma, X., Zhang, G., Ni, Y., Chandra, A., Guo, S., Ren, W., Arulraj, A., He, X., Jiang, Z., et al. Mmlu-pro: A more robust and challenging multi-task language understanding benchmark. *arXiv preprint arXiv:2406.01574*, 2024b.

Wei, J., Wang, X., Schuurmans, D., Bosma, M., Xia, F., Chi, E., Le, Q. V., Zhou, D., et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in*

neural information processing systems, 35:24824–24837, 2022.

Information Processing Systems, 2023. URL <https://openreview.net/forum?id=KBMOOkmX2he>.

White, C., Dooley, S., Roberts, M., Pal, A., Feuer, B., Jain, S., Shwartz-Ziv, R., Jain, N., Saifullah, K., Dey, S., Shubh-Agrawal, Sandha, S. S., Naidu, S. V., Hegde, C., LeCun, Y., Goldstein, T., Neiswanger, W., and Goldblum, M. Livebench: A challenging, contamination-limited LLM benchmark. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=sKYHBTaxVa>.

Xiong, S., Payani, A., Kompella, R., and Fekri, F. Large language models can learn temporal reasoning. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 10452–10470, 2024.

Ye, S., Ouyang, B., Zeng, L., Qian, T., Chu, X., Tang, J., and Chen, X. Jupiter: Fast and resource-efficient collaborative inference of generative llms on edge devices. In *IEEE INFOCOM 2025-IEEE Conference on Computer Communications*, pp. 1–10. IEEE, 2025.

Yu, Y., Zhang, Y., Zhang, D., Liang, X., Zhang, H., Zhang, X., Khademi, M., Awadalla, H. H., Wang, J., Yang, Y., and Wei, F. Chain-of-reasoning: Towards unified mathematical reasoning in large language models via a multi-paradigm perspective. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 24914–24937, July 2025.

Yuan, W., Neubig, G., and Liu, P. Bartscore: Evaluating generated text as text generation. *Advances in neural information processing systems*, 34:27263–27277, 2021.

Yuan, Z., Sun, W., Liu, Y., Zhou, H., Zhou, R., Li, Y., Zhang, Z., Song, W., Huang, Y., Jia, H., et al. Efficientllm: Efficiency in large language models. *arXiv preprint arXiv:2505.13840*, 2025.

Zhang, Y., Li, M., Long, D., Zhang, X., Lin, H., Yang, B., Xie, P., Yang, A., Liu, D., Lin, J., et al. Qwen3 embedding: Advancing text embedding and reranking through foundation models. *arXiv preprint arXiv:2506.05176*, 2025a.

Zhang, Z., Yao, Y., Zhang, A., Tang, X., Ma, X., He, Z., Wang, Y., Gerstein, M., Wang, R., Liu, G., et al. Igniting language intelligence: The hitchhiker’s guide from chain-of-thought reasoning to language agents. *ACM Computing Surveys*, 57(8):1–39, 2025b.

Zhou, C., Liu, P., Xu, P., Iyer, S., Sun, J., Mao, Y., Ma, X., Efrat, A., Yu, P., YU, L., Zhang, S., Ghosh, G., Lewis, M., Zettlemoyer, L., and Levy, O. LIMA: Less is more for alignment. In *Thirty-seventh Conference on Neural*

A. Notations

Table 4. Notations and definitions used in HybridFlow.

Notation	Definition
Q	User-issued query.
M_{edge}	Small edge model used for local inference.
M_{cloud}	Large cloud LLM accessed via API.
M_P	Edge-deployed planner model (Llama3.2–3B).
$T = \{t_i\}_{i=1}^n$	Set of subtasks produced from query Q .
E	Directed edge set encoding prerequisite relations between subtasks.
$G(Q) = (T, E)$	Task-level decomposition DAG for query Q .
n	Number of subtasks in the decomposition.
Δq_i	Expected accuracy gain of executing t_i on M_{cloud} vs. M_{edge} .
Δl_i	Additional latency cost (seconds) of executing t_i on M_{cloud} .
Δk_i	Additional API usage cost (tokens or price units) of executing t_i on M_{cloud} .
l_{\max}^{sub}	Per-subtask upper bound on additional latency for normalization.
k_{\max}^{sub}	Per-subtask upper bound on additional API cost for normalization.
c_i	Normalized cost of offloading t_i [Eq. (1)].
r_i	Routing decision for t_i : 1 if offloaded to M_{cloud} , 0 otherwise.
$\mathbf{r} = (r_1, \dots, r_n)$	Routing vector for all subtasks of a query.
C_{\max}	Total normalized resource budget for a query [Eq. (3)].
u_i	Utility (normalized benefit–cost ratio) of offloading t_i [Def. 3.2].
ε	Small positive constant (e.g., 10^{-4}) for numerical stability in u_i .
K_{\max}^{global}	Global API usage budget over the entire query.
L_{\max}^{global}	Global latency budget over the entire query.
k_{used}	Cumulative API usage consumed so far during inference.
l_{used}	Cumulative latency incurred so far during inference.
τ_0	Base routing threshold.
τ_t	Adaptive routing threshold at time t [Eq. (13)].
z_i	Semantic embedding of subtask t_i .
f_{θ}	Router network parameterized by θ .
\hat{u}_i	Predicted utility of offloading t_i .
$\sigma(\cdot)$	Sigmoid activation function used in the router.
$\mathcal{L}(\theta)$	Training loss for the router parameters θ .
N	Number of profiled subtasks used for router training.
\mathcal{Q}	Scheduler queue of <i>ready</i> subtasks in the DAG.

B. Optimization View of HybridFlow

This section provides a rigorous optimization formulation of the HybridFlow routing problem and establishes the theoretical underpinnings of the utility-based router introduced in Sec. 3.3. We formalize the allocation problem as a 0–1 knapsack problem, derive its Lagrangian relaxation, and show how the adaptive threshold mechanism used in HybridFlow naturally emerges as a primal–dual update for this relaxation.

B.1. 0–1 Knapsack Formulation

For a query decomposed into subtasks $T = \{t_1, \dots, t_n\}$, recall that Δq_i is the accuracy gain from offloading t_i to the cloud, $c_i \in [0, 1]$ is the normalized resource cost, and $r_i \in \{0, 1\}$ indicates whether t_i is offloaded. Let $C_{\max} \in [0, 1]$ denote the normalized per-query resource budget.

The routing problem in Sec. 3.3 can be written as:

$$\begin{aligned} \max_{\mathbf{r} \in \{0,1\}^n} \quad & \sum_{i=1}^n r_i \Delta q_i \\ \text{s.t.} \quad & \sum_{i=1}^n r_i c_i \leq C_{\max}, \end{aligned} \tag{14}$$

which is exactly the *0–1 knapsack problem*, with each subtask t_i corresponding to an item of value Δq_i and weight c_i . This formulation provides both: (i) a principled objective for allocation, and (ii) an optimal oracle via dynamic programming for evaluation.

B.2. Lagrangian Relaxation

We obtain a continuous relaxation of the knapsack by dualizing the budget constraint. Introducing a Lagrange multiplier $\lambda \geq 0$, the Lagrangian becomes:

$$\mathcal{L}(\mathbf{r}, \lambda) = \sum_{i=1}^n r_i \Delta q_i - \lambda \left(\sum_{i=1}^n r_i c_i - C_{\max} \right). \tag{15}$$

Expanding the expression yields:

$$\mathcal{L}(\mathbf{r}, \lambda) = \lambda C_{\max} + \sum_{i=1}^n r_i (\Delta q_i - \lambda c_i). \tag{16}$$

For a fixed λ , the optimization decomposes across subtasks:

$$r_i^*(\lambda) = \arg \max_{r_i \in \{0,1\}} r_i (\Delta q_i - \lambda c_i) = \mathbb{I}[\Delta q_i - \lambda c_i > 0], \tag{17}$$

where $\mathbb{I}[\cdot]$ is the indicator function.

Thus the relaxed problem prescribes the following thresholding rule:

$$\text{Offload } t_i \iff \frac{\Delta q_i}{c_i} > \lambda. \tag{18}$$

Here λ plays the role of a *shadow price* of resource consumption: subtasks with benefit–cost ratio above λ should be offloaded.

B.3. Primal–Dual Dynamics and Adaptive Thresholding

HybridFlow performs *online* allocation as subtasks become ready. A natural approach is to maintain a time-varying estimate of the shadow price λ_t and update it based on cumulative consumption. A standard primal–dual update for the constraint $\sum_i r_i c_i \leq C_{\max}$ is:

$$\lambda_{t+1} = [\lambda_t + \eta(C_{\text{used}} - C_{\max})]_+, \tag{19}$$

where $\eta > 0$ is a step size and $[\cdot]_+$ denotes projection onto $[0, \infty)$.

HybridFlow’s adaptive threshold in Eq. (13) of the main text,

$$\tau_t = \text{clip} \left(\tau_0 + \frac{k_{\text{used}}}{2K_{\max}^{\text{global}}} + \frac{l_{\text{used}}}{2L_{\max}^{\text{global}}}, 0, 1 \right), \tag{20}$$

is precisely an instance of a primal–dual update:

- the additive terms track *dual pressure* from API cost and latency,
- the clipping corresponds to projected dual ascent,

- the threshold τ_t plays the role of the shadow price λ_t in Eq. (18).

Thus HybridFlow’s routing rule,

$$\hat{u}_i > \tau_t \iff \frac{\Delta q_i}{c_i} \gtrsim \lambda_t, \quad (21)$$

is an online approximation to the Lagrangian decision rule in Eq. (17).

B.4. Learned Approximation to the Optimal Policy

HybridFlow does not observe Δq_i or c_i at inference time. Instead it uses learned utility estimates $\hat{u}_i \approx u_i$ obtained from a lightweight MLP. Under mild smoothness assumptions on the embedding mapping and the true utility function, the resulting allocation rule

$$r_i = \mathbb{I}[\hat{u}_i > \tau_t] \quad (22)$$

approximates the relaxed knapsack-optimal policy while ensuring online compliance with global resource budgets. The adaptive threshold thereby provides principled control over budget usage without requiring explicit dynamic programming.

B.5. Implications

This optimization analysis yields several insights:

- **Interpretability:** Each routing decision reduces to comparing a predicted marginal utility with a time-varying shadow price.
- **Optimality Structure:** The DP oracle defines an upper bound for achievable allocation quality; HybridFlow’s router approximates this solution in a computationally lightweight manner.
- **Budget Compliance:** The adaptive threshold implements a projected dual ascent rule, increasing conservativeness as resource usage grows.
- **Scalability:** Because the relaxed problem is decomposable, HybridFlow can make routing decisions independently across subtasks while preserving global budget coherence.

This provides a principled foundation for the design of HybridFlow’s routing mechanism and clarifies its connection to classical combinatorial optimization.

C. Implementation Details

Subtasks and decomposition DAG. Given an input query Q , HybridFlow represents a reasoning plan as a directed acyclic graph (DAG) $G(Q) = (T, E)$, where $T = \{t_1, \dots, t_n\}$ is the set of subtasks and $E \subseteq T \times T$ encodes prerequisite relations.

Definition C.1 (Subtask). A subtask is a tuple

$$t_i = (d_i, P_i, \tau_i),$$

where (i) d_i is a natural-language description of the operation to be performed (e.g., “Check whether the inverse property holds”), (ii) $P_i \subseteq \{1, \dots, n\} \setminus \{i\}$ is the index set of its prerequisite subtasks, and (iii) $\tau_i \in \{\text{EXPLAIN}, \text{ANALYZE}, \text{GENERATE}\}$ is a role label that follows the Explain–Analyze–Generate (EAG) metaprompt structure.

For convenience, we write $t_j \rightarrow t_i$ whenever $j \in P_i$. The edge set is then $E = \{(t_j, t_i) : j \in P_i, i = 1, \dots, n\}$.

Definition C.2 (Valid decomposition). A decomposition of Q is a DAG $G(Q) = (T, E)$ with $T = \{t_i\}_{i=1}^n$ that satisfies:

1. (Acyclicity) $G(Q)$ is acyclic.
2. (Rooted plan) There exists a unique root node t_{root} with $P_{\text{root}} = \emptyset$ and $\tau_{\text{root}} = \text{EXPLAIN}$.
3. (Reachability) Every subtask is reachable from the root: for all i , there exists a directed path $t_{\text{root}} \rightsquigarrow t_i$.

4. (Well-formed outputs) At least one node is labeled GENERATE, and every GENERATE node has no outgoing edges (i.e., it is a sink in $G(Q)$).

5. (Size constraint) The number of subtasks is bounded by a constant $n \leq n_{\max}$ (we use $n_{\max} = 7$ in experiments), which controls planner overhead.

We denote by $\mathcal{G}(Q)$ the set of all valid decompositions for query Q .

The planner M_P induces a (stochastic) mapping

$$\text{Decompose} : Q \mapsto G(Q) \in \mathcal{G}(Q),$$

implemented as a prompt-based generation of an XML-formatted plan followed by a deterministic parsing and validation procedure.

To train the proposed resource-aware router, we construct an offline profiling dataset from 3,000 sampled queries drawn from two benchmarks: MMLU-Pro (different from the main test samples) and Math500 (covering general knowledge reasoning, targeting structured, multi-step reasoning). For each query, we perform the complete pipeline of task decomposition, subtask allocation, and execution using both the edge and cloud models. During this process, we record the response quality, inference latency, and API cost for each subtask.

Quality and Cost Estimation. For every subtask t_i , we estimate the *accuracy gap* between the edge and cloud models using BartScore (Yuan et al., 2021), which provides a differentiable approximation of textual quality alignment. Let Δq_i denote the expected quality improvement when offloaded to the cloud, and $(\Delta l_i, \Delta k_i)$ represent the additional latency and API cost, respectively. We define the normalized cost term as:

$$c_i = \frac{1}{2} \cdot \frac{\Delta l_i}{10} + \frac{1}{2} \cdot \frac{\Delta k_i}{0.02}, \quad (23)$$

where the constants 10 and 0.02 correspond to the normalization scales of latency (seconds) and API cost (\$), ensuring $c_i \in [0, 1]$ across all profiled subtasks.

Training Objective. Each subtask is annotated with its measured $(\Delta q_i, \Delta l_i, \Delta k_i)$ values, and the corresponding target utility score is computed as:

$$s_i = \text{clip}\left(\frac{\Delta q_i}{c_i + \varepsilon}, 0, 1\right), \quad (24)$$

where ε prevents division by zero and s_i reflects the normalized benefit–cost ratio. The router model f_θ is trained to regress this target utility from the subtask embedding z_i via a mean-squared loss:

$$\mathcal{L}(\theta) = \frac{1}{N} \sum_{i=1}^N (f_\theta(z_i) - s_i)^2. \quad (25)$$

This offline training enables the router to approximate the benefit–cost trade-off without requiring online supervision during inference.

Adaptive Threshold Configuration. At inference time, the router compares its predicted utility \hat{s}_i against an adaptive threshold τ_t to decide whether to offload a subtask. The threshold evolves with real-time resource usage as:

$$\tau_t = \text{clip}\left(\tau_0 + \frac{k_{\text{used}}}{2K_{\max}} + \frac{l_{\text{used}}}{2L_{\max}}, 0, 1\right), \quad (26)$$

where k_{used} and l_{used} are the cumulative API and latency costs consumed so far. We empirically set $\tau_0 = 0.2$, $K_{\max} = 0.02$, and $L_{\max} = 20$ based on preliminary tuning across all benchmarks. This configuration ensures that the router starts with a balanced offloading policy and becomes progressively more conservative as resources are consumed, maintaining overall cost efficiency without degrading reasoning quality.

Table 5. Performance–cost trends under different fixed offload thresholds τ_0 on the GPQA benchmark.

Threshold	Offload Rate (%)	Accuracy (%)	Latency (s)	API Cost (\$)	Normalized Cost (↓)	Utility (↑)
1	0.00	25.54	11.99	0	N/A	N/A
0.9	15.51	35.51	13.89	0.0042	0.2000	0.4985
0.8	24.67	42.89	14.87	0.0059	0.2915	0.5952
0.7	28.85	44.51	15.02	0.0064	0.3115	0.6090
0.6	33.51	47.85	15.39	0.0073	0.3525	0.6329
0.5	41.18	51.62	15.88	0.0088	0.4145	0.6292
0.4	60.95	53.29	16.56	0.0105	0.4910	0.5652
0.3	66.51	54.13	17.87	0.0128	0.6140	0.4656
0.2	73.70	55.14	18.29	0.0144	0.6750	0.4385
0.1	82.84	55.41	18.35	0.0167	0.7355	0.4061
0	100.00	57.28	18.26	0.0185	0.7760	0.4090

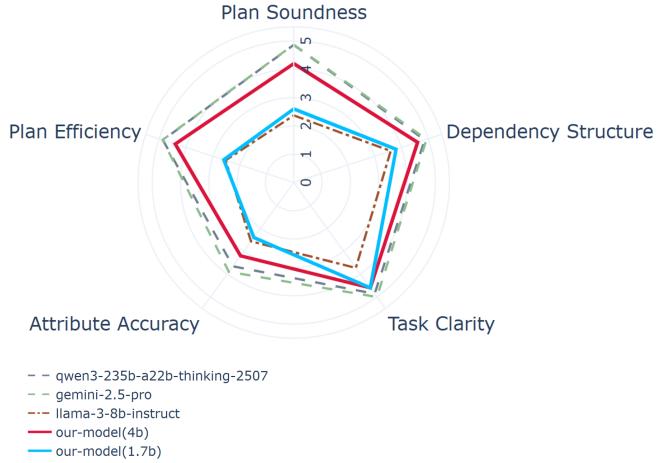


Figure 5. Results of our planner evaluation, assessing models on five key dimensions of task decomposition quality. We compare our two models (4B and 1.7B) against several leading standalone models, including Qwen3-235B-a22b-thinking-2507, Gemini-2.5-Pro, and Llama-3-8B-Instruct.

Summary. Through this profiling-based training and normalization procedure, the router learns a unified utility function that generalizes across different task domains and cost settings. It enables HybridFlow to make consistent, cost-aware routing decisions that align closely with the optimization objective in Eq. 3.

D. Supplementary Experiments

To formally assess the quality of a generated plan, we introduce a dual-faceted evaluation framework that moves beyond singular metrics like final task accuracy. A superior Planner’s quality is a function of both the intrinsic soundness of its generated plan and the extrinsic success of the Executor models in executing that plan. The absence of such a comprehensive metric in prior work makes objective comparison and targeted improvement of planning capabilities difficult. Our framework is designed to quantitatively measure these two facets, serving as the foundation for our subsequent data curation and model training efforts.

First, we assess the Intrinsic Plan Quality, which evaluates the machine-executable plan itself. This is judged across five key dimensions:

- **Plan Soundness & Decomposition:** This metric assesses whether the plan correctly and logically breaks down the problem. A flawed decomposition invalidates the entire solution strategy and is thus a primary point of evaluation.

- **Dependency Structure & Flow:** We evaluate the correctness of the task dependency graph. A logical dependency flow is crucial for maximizing parallelism and ensuring the correct context is passed between steps.
- **Task Clarity & Executability:** This dimension measures if each task is an unambiguous operational instruction suitable for an AI executor. Vague or poorly formulated tasks lead to poor downstream results.
- **Attribute Accuracy:** We judge the Planner’s estimation of Difficulty and Token attributes. Accurate estimations are vital for the efficient dynamic allocation of models by the Router.
- **Plan Relevance & Efficiency:** This checks for redundant or irrelevant steps. A high-quality plan must be lean, purposeful and free of wasted computations.

Second, we measure the Extrinsic Execution Performance, which evaluates the efficacy of the execution models when acting upon the instructions provided by the Planner. This directly links plan quality to downstream performance and is assessed on the following five dimensions:

- **Instruction Following & Adherence:** This metric assesses how well the Executor model adheres to the specific constraints and instructions of the assigned sub-task.
- **Effective Use of Context:** We evaluate whether the model correctly utilizes the provided results from prior, dependent steps to inform its own execution.
- **Correctness & Factual Accuracy:** This measures the factual and logical accuracy of the model’s response, serving as the primary measure of successful task completion.
- **Clarity & Machine Usability:** We judge whether the Executor’s output is clear, well-structured, and easily parsable for use in subsequent steps.
- **Relevance & Conciseness:** This assesses if the model’s response is concise and strictly relevant to the task, avoiding conversational filler or extraneous information.

Together, this dual-evaluation framework provides a comprehensive and structured methodology for analyzing both the plan and its real-world impact, enabling a systematic approach to enhancing the planning capabilities essential for effective hybrid model collaboration.

Recent advancements in enhancing Large Language Model (LLM) efficiency have increasingly focused on task decomposition. Prominent works such as SoT (Ning et al., 2024), DoT (Shao et al., 2025), and PASTA (Jin et al., 2025) exemplify this approach by leveraging parallel processing to improve time efficiency. However, these methods collectively raise two critical, unaddressed questions. First, **the field lacks a formal, quantitative methodology for measuring the intrinsic “quality” of the resulting plan itself**, making the comparison and optimization of planning capabilities difficult. Second, **it remains unknown whether this complex planning capability can be distilled from elite large models into a small model**.

We argue that addressing the second question is crucial for achieving efficient and scalable collaborative reasoning. If planning capabilities can be successfully distilled, a small model could undertake the core role of task decomposition. This would not only dramatically reduce latency and minimize API costs, yielding a cost-efficient, low-latency solution for complex reasoning, but it would also unlock new possibilities for edge deployment and even privacy-preserving scenarios (Li et al., 2024) where planning occurs locally. Therefore, the motivation for our work is twofold: first, through our Planner, we aim to establish a framework that can systematically evaluate plan quality; and second, we seek to demonstrate the feasibility of distilling this advanced capability from large to small models.

Distillation of Planning Capabilities Recent studies have demonstrated that substantial performance gains can be achieved by fine-tuning models on small, high-quality datasets (Zhou et al., 2023; Muennighoff et al., 2025). This paradigm raises a critical research question for our work: **Can the sophisticated planning capabilities inherent in elite large models be effectively distilled into a small model using a similarly curated, high-quality dataset?**

This question is motivated by a significant performance gap observed in our own benchmark results (Table 1). We found that the intrinsic planning ability of small models, such as Llama-3-8B (Meta AI, 2024), is substantially inferior to that of

state-of-the-art large models like GPT-5 (OpenAI, 2025). Bridging this gap is crucial for creating efficient and scalable collaborative systems.

To create this dataset, we developed a meticulous, benchmark-driven curation process. First, we used our Planner Evaluation Metric to identify top-performing LLMs. We then curated a set of “good” and “flawed” plan exemplars from their outputs to serve as didactic examples in a sophisticated meta-prompt. This prompt was used to guide a top-tier generative model to produce high-quality plans for the problems in the s1k dataset (Muennighoff et al., 2025).

We first evaluate the **effectiveness of the Planner**. This includes two aspects: the improvement in planning quality brought by Supervised Fine-Tuning (SFT), and the parallelization advantages introduced by task decomposition.

Table 6. Planner Performance Comparison
Worker: Llama3.2-3B, Dataset:GPQA

Planner	Avg. Steps	R_{comp}	C_{time}	Acc
Llama3.2-3B base	5.84	10.71	10.81	20.00
Llama3.2-3B SFT	6.12	34.3	11.59	22.00

Effectiveness of SFT: As shown in Table 6, our SFT Planner achieves an accuracy of 22.00% on GPQA, outperforming the planner based on the Llama3.2-3B base model (20.00% accuracy). This demonstrates the effectiveness of our distillation and fine-tuning process in generating high-quality, logically sound plans.

Parallelization Advantage: At the same time, Table 6 shows the SFT Planner achieves a 34.3% compression ratio. The compression ratio R_{comp} is defined as follows:

$$R_{comp} = (n - L_{crit})/n, \quad (27)$$

where n is the total number of steps and L_{crit} is the critical path length. This indicates that a significant number of steps within the tasks can be parallelized. HybridFlow’s DAG decomposition aims to strike a balance between two extremes: **fully sequential execution** ($R_{comp} = 0$) and **fully parallel execution** ($R_{comp} = (n - 1)/n$). Our method ensures accuracy by preserving critical dependencies while leveraging parallelization to significantly reduce end-to-end latency (C_{time}), making it faster than purely sequential execution.

You are a precise planning agent. Decompose the user's task into a sequence of concrete, easy-to-solve sub_problems. Use high-level EAG-style roles implicitly (Explain → Analyze → Generate), but keep each sub_problem as a single sentence question.

Plan Structure: EAG framework

- **Explain:** To assist the following agents, what is your understanding of the question after reviewing it, focusing only on essential information and filtering out all irrelevant details
- **Analyze:** Break down the problem into the smallest possible, independent sub_tasks to solve the problem. These steps should rely on the "Explain" step or other completed analysis steps.
- **Generate:** After reviewing the original question and the thoughts of previous agents, generate the final answer to the question.

XML Plan Constraints:

- **id:** A unique integer (must be < 7 steps)
- **desc:** The question for executor AI
- **depends_on:** ID(s) of prerequisite steps (comma-separated if multiple)

Return ONLY the XML plan as final output. No additional text.

Examples:

```
<Plan>      <Step ID="1" Task="Explain: What is the set (real numbers) and the
operation (multiplication) in question, and what is the core assertion (that it's
not a group) that needs to be verified?" Rely="" />      <Step ID="2" Task="Analyze:
Check the closure property: Is multiplication a binary operation on the set of
all real numbers?" Rely="1" />      <Step ID="3" Task="Analyze: Check the associative
property: Is multiplication of real numbers associative?" Rely="1" />      <Step ID="4"
Task="Analyze: Check the identity property: Is there an identity element for
multiplication in the set of real numbers?" Rely="1" />      <Step ID="5" Task="Analyze:
Check the inverse property: Does every element in the set of real numbers have a
multiplicative inverse?" Rely="1" />      <Step ID="6" Task="Generate: After reviewing
the original question and the thoughts of previous agents, what is the final
answer to the question?" Rely="2,3,4,5" /></Plan>

<Plan>  <Step ID="1" Task="Explain: What is the base field, what are the adjoined
elements (sqrt(2), sqrt(3), sqrt(18)), and what is the required final output
format?" Rely="" />  <Step ID="2" Task="Analyze: What is the minimal polynomial
for sqrt(2) over Q, and what is the degree [Q(sqrt(2)) : Q]?" Rely="1" />  ...
(truncated for brevity) ... <Step ID="8" Task="Generate: Based on the final degree
calculated in Step 7, what is the correct option letter and its corresponding
content?" Rely="1,7" /></Plan>

<Plan>  <Step ID="1" Task="Explain: What is the set (real numbers), the operation
(multiplication), and the required output (option letter and content)?" Rely="" />
... (truncated for brevity) ... <Step ID="6" Task="Generate: Based on the
analysis of the group axioms in steps 2-5, which option correctly identifies
the reason this is not a group, and what is the final option letter and content?" Rely="2,3,4,5" /></Plan>
```

Now is your turn:

Figure 6. Planner prompt for task decomposition.

Original Question:

"Given a reaction starting with 4,5-dimethylcyclohex-4-ene-1,2-dicarbonitrile and forming 2,3-dimethylbuta-1,3-diene and maleonitrile. Explain why adding maleic anhydride causes the reaction to shift more to the right.
A. Maleic anhydride converts into 4,5-dimethylcyclohex-4-ene-1,2-dicarbonitrile and this causes the equilibrium to shift towards reactants.
B. Maleic anhydride reacts with 4,5-dimethylcyclohex-4-ene-1,2-dicarbonitrile and addition of a reactant causes the equilibrium to shift towards products.
C. Maleic anhydride reacts with 2,3-dimethylbuta-1,3-diene and removal of a product causes the equilibrium to shift towards products.
D. Maleic anhydride converts into maleonitrile and addition of a product causes the equilibrium to shift towards products."

Task Decomposition and Execution:

```
"subtasks": [{  
  "id": "1",  
  "desc": "Explain: list the reactants, products, and the effect of adding maleic anhydride on the reaction.",  
  "depends_on": [],  
  "model_type": "cloud",  
  "answer": "Reactants: 4,5-dimethylcyclohex-4-ene-1,2-dicarbonitrile \nProducts: 2,3-dimethylbuta-1,3-diene and maleonitrile \nEffect of adding maleic anhydride: It reacts with one of the products, removing it from the equilibrium and shifting the reaction towards the products side."  
, {  
  "id": "2",  
  "desc": "Analyze: describe the reaction mechanism and equilibrium shift caused by maleic anhydride.",  
  "depends_on": ["1"],  
  "model_type": "edge",  
  "answer": "Sub-problem 2 answer: \nMaleic anhydride reacts with 2,3-dimethylbuta-1,3-diene, forming maleonitrile and a dienol. The removal of maleonitrile from the equilibrium causes the reaction to shift more towards the product 2,3-dimethylbuta-1,3-diene, resulting in an increased yield of the desired product."  
, {  
  "id": "3",  
  "desc": "Analyze: evaluate the effect of maleic anhydride conversion to maleonitrile on the reaction equilibrium.",  
  "depends_on": ["1", "2"],  
  "model_type": "cloud",  
  "answer": "The conversion of maleic anhydride to maleonitrile effectively removes maleonitrile, a product of the original reaction, from the equilibrium mixture. According to Le Chatelier's principle, removing a product shifts the equilibrium towards the products side to compensate. Therefore, this conversion drives the reaction forward, increasing the formation of 2,3-dimethylbuta-1,3-diene and maleonitrile.\n\nFinal answer: C. Maleic anhydride reacts with 2,3-dimethylbuta-1,3-diene and removal of a product causes the equilibrium to shift towards products."  
, {  
  "id": "4",  
  "desc": "Generate: select the correct answer based on the analysis.",  
  "depends_on": ["1", "2", "3"],  
  "model_type": "edge",  
  "answer": "Based on the analysis, the correct answer is:\n\nC. Maleic anhydride reacts with 2,3-dimethylbuta-1,3-diene and removal of a product causes the equilibrium to shift towards products.\n\nThis is because maleic anhydride reacts with 2,3-dimethylbuta-1,3-diene to form maleonitrile and a dienol, and the removal of maleonitrile from the equilibrium causes the reaction to shift more towards the product 2,3-dimethylbuta-1,3-diene."  
}]
```

Final Answer:

"C. Maleic anhydride reacts with 2,3-dimethylbuta-1,3-diene and removal of a product causes the equilibrium to shift towards products."

Figure 7. HybridFlow case study.